

ASX Announcement

7 February 2024

## Burley intersects additional spodumene bearing dykes at Chubb Lithium Project in Quebec

### HIGHLIGHTS

- **Additional spodumene bearing pegmatite dykes intersected to the East and West of the Main Dyke at Chubb Central.**

○ 9.1m at 1.6% Li <sub>2</sub> O	Main	CLP-23-055
○ 6.9m at 1.4% Li <sub>2</sub> O	Main	CLP-23-067
○ 6.4m at 1.5% Li <sub>2</sub> O	Main	CLP-23-040
○ 7.0m at 1.2% Li <sub>2</sub> O	Main	CLP-23-045
○ 6.1m at 1.2% Li <sub>2</sub> O and 6.1m at 1.0% Li <sub>2</sub> O	West	CLP-23-065
○ 4.4m at 1.5% Li <sub>2</sub> O	Main	CLP-23-069
○ 3.9m at 1.5% Li <sub>2</sub> O and 4.5m at 1.0% Li <sub>2</sub> O	West	CLP-23-043
○ 3.0m at 1.7% Li <sub>2</sub> O and 3.6m at 1.0% Li <sub>2</sub> O	West/Main	CLP-23-066
- **Main Dyke demonstrated over 600m of strike length and remains open 'down-plunge'.**
- **Intersections of the valuable caesium mineral pollucite in two holes 60m apart, remain open.**

Burley Minerals Limited (ASX: BUR, "Burley" or "the Company") is pleased to update the market with new assay data from drilling at its 100%-held Chubb Lithium Project, located 25km from the Val d'Or mining hub. Quebec, Canada.

Drill logs and core photos had provisionally identified intersections of spodumene in recently discovered pegmatite dykes to the East and West of Chubb's Main Dyke, which now are interpreted as members of a parallel 'stacked dyke' system.

Spodumene bearing pegmatite was intersected in holes CLP-057 and CLP-058, the newly identified Eastern Dyke. Hole CLP-065 intersected 6.1m at 1.2% Li<sub>2</sub>O and 6.1m at 1.0% Li<sub>2</sub>O, in the southernmost hole in Western Dyke, suggesting that spodumene mineralisation is broadening and is still open. Details of these and other significant intersections are listed in Table 1.

Holes CLP-063 and CLP-066, the southernmost holes in the Main Dyke, intersected 2.6m at 1.2% Li<sub>2</sub>O and 11 m at 1.7% Li<sub>2</sub>O, confirming that spodumene mineralisation exceeds a strike length of 600 m, and is still open at depth.

Furthermore, assay results from hole CLP-063 returned caesium values of 2.4% over 4m. This confirms the initial identification of pollucite by a company geologist, and subsequent mineral mapping using LIBS scanning technology<sup>1</sup>. Pollucite mineralisation has now been intersected in two holes, CLP-038 and CLP-063, which are more than 60 m apart.

<sup>1</sup> Refer to Burley Mineral's ASX announcement dated 12 December 2023.

**Burley Minerals’ Managing Director and CEO, Stewart McCallion commented:**

“We are thrilled to discover additional spodumene-bearing pegmatite dykes within the Chubb Central Mineralised Zone. As our exploration program advances, more mineralised dykes have been identified and the extent of mineralisation has grown materially since drilling commenced in April 2023.

“We are also very pleased that the assay results from CLP-063 have confirmed the presence of the caesium bearing mineral pollucite in the Main Dyke, indicating an extremely evolved LCT pegmatite system, and which has the potential to add significant value to the Project.”

The Company has completed approximately 13,000 m of drilling at the Chubb Project since April of 2023.



**Figure 1: Core from Hole CLP-065 with 6.1m at 1.2% Li<sub>2</sub>O between 16 and 22m being the southernmost hole in the Western Dyke.**



**Figure 2: Core from Hole CLP-065 with 6.1m at 1.0% Li<sub>2</sub>O between 29 and 33m being the southern extension of the Western Dykes.**



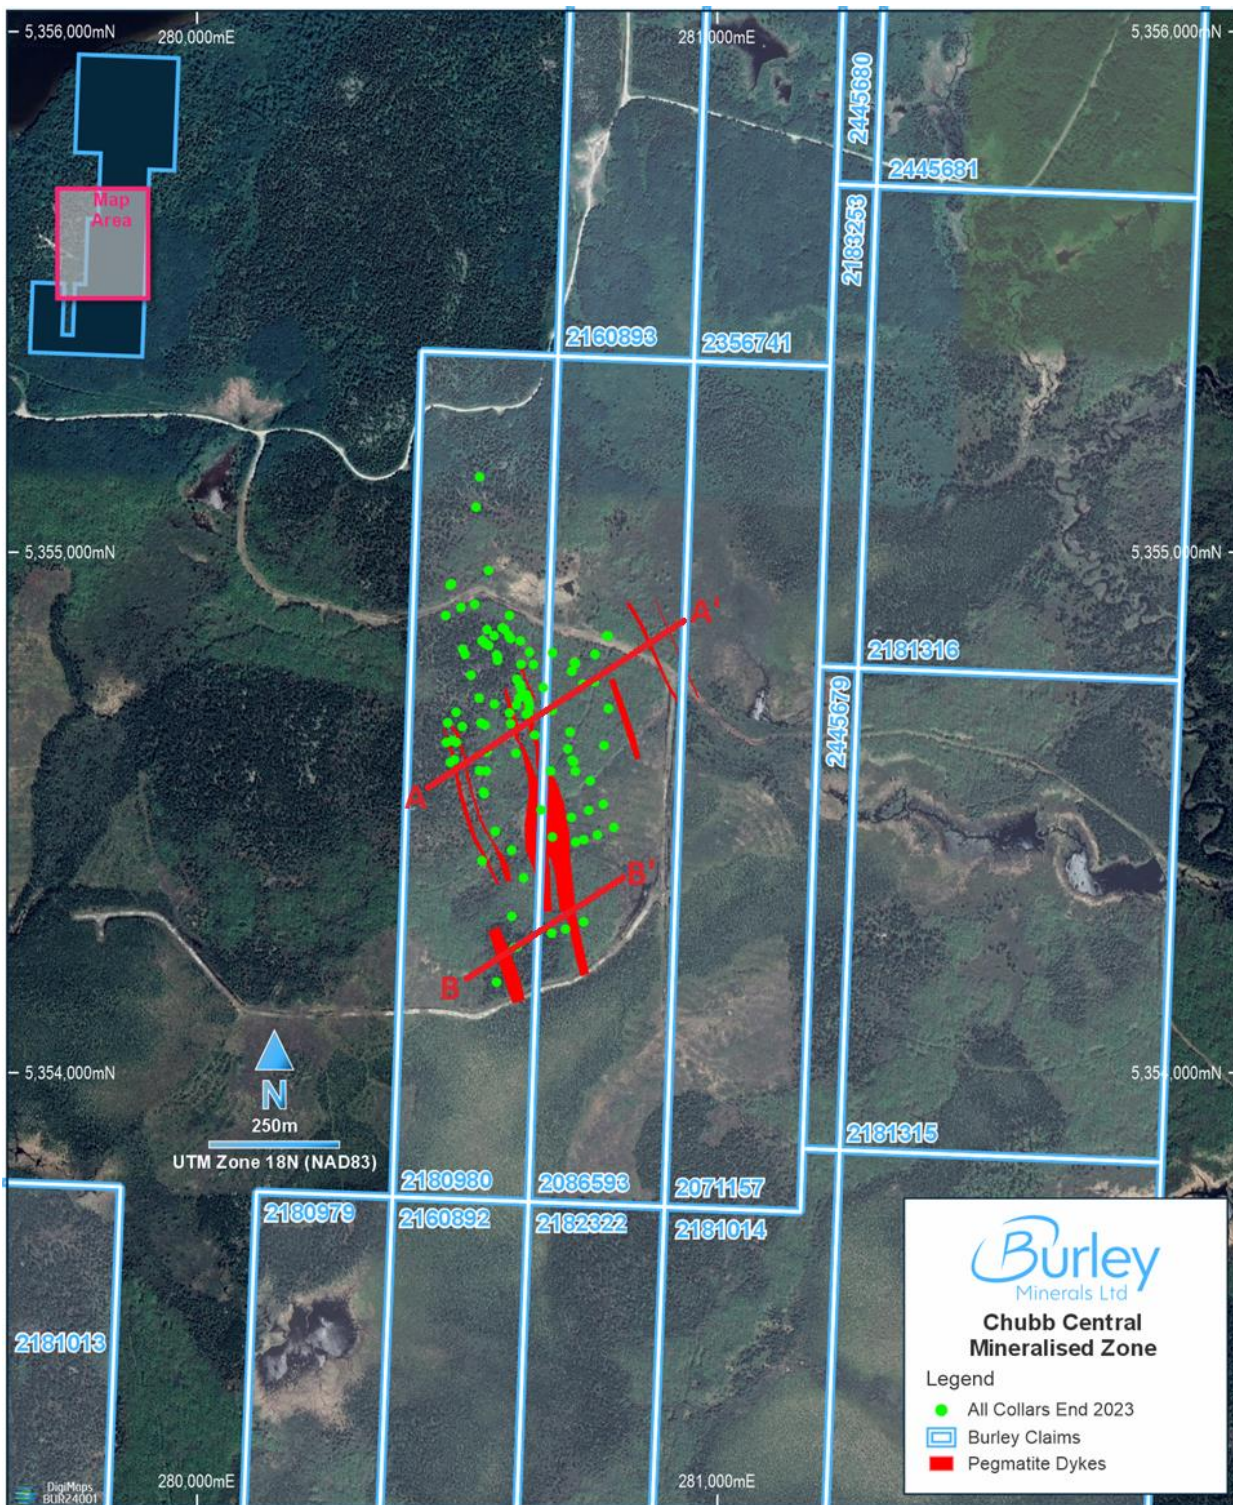


Figure 3: Plan view of the Chubb Central Mineralised Zone confirms multiple spodumene dearing dykes with over 600m of strike length.

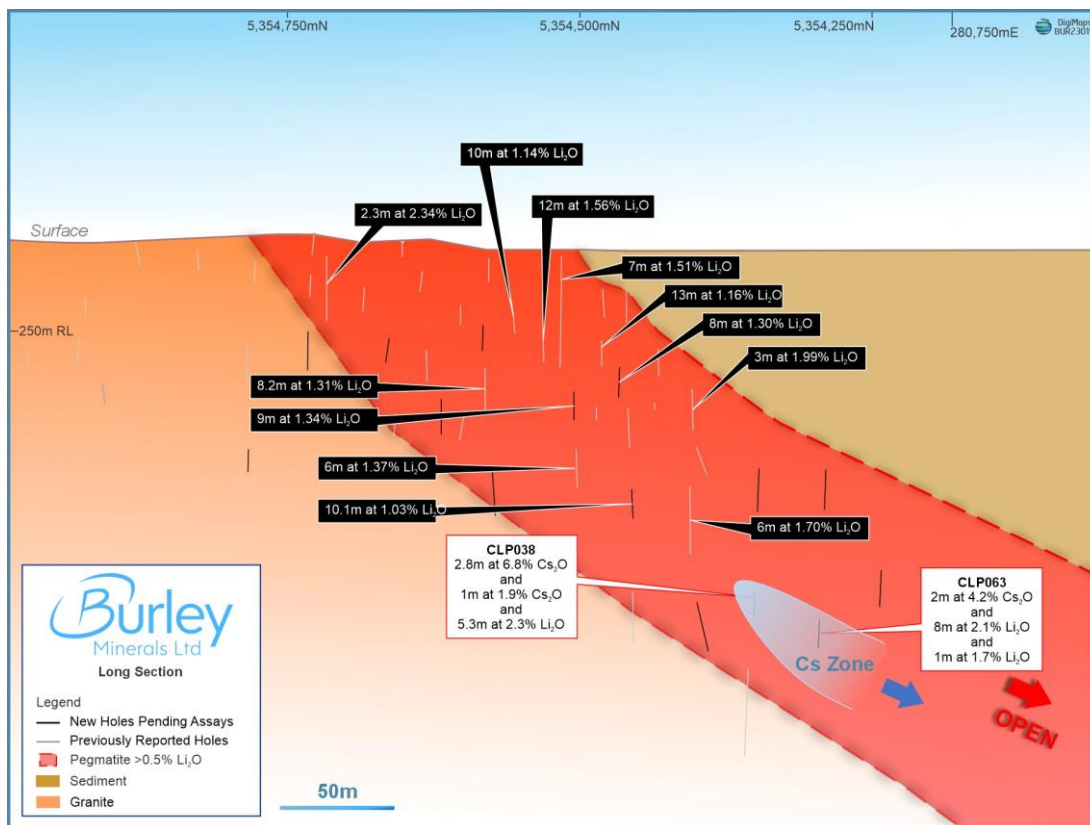


Figure 4: Long section of the Main Dyke with Li and Cs intercepts showing 600m of mineralisation that is still open down plunge.

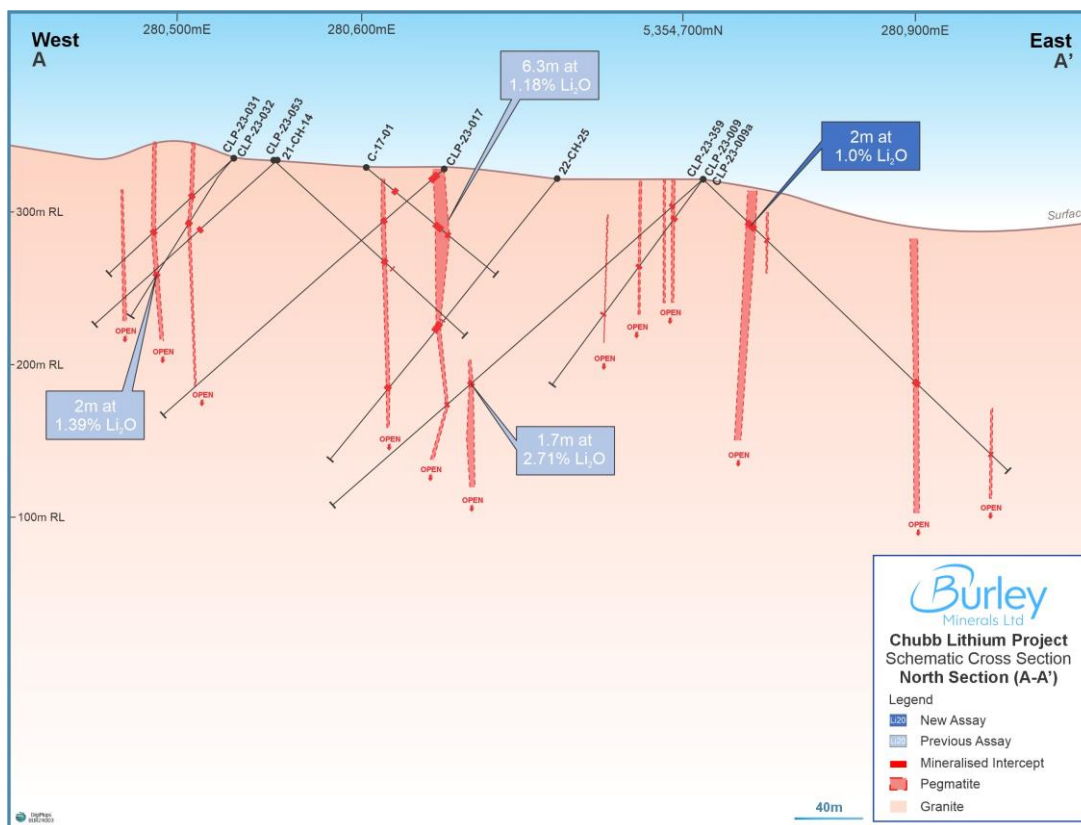


Figure 5: Cross Section A - A' showing multiple spodumene bearing dykes.



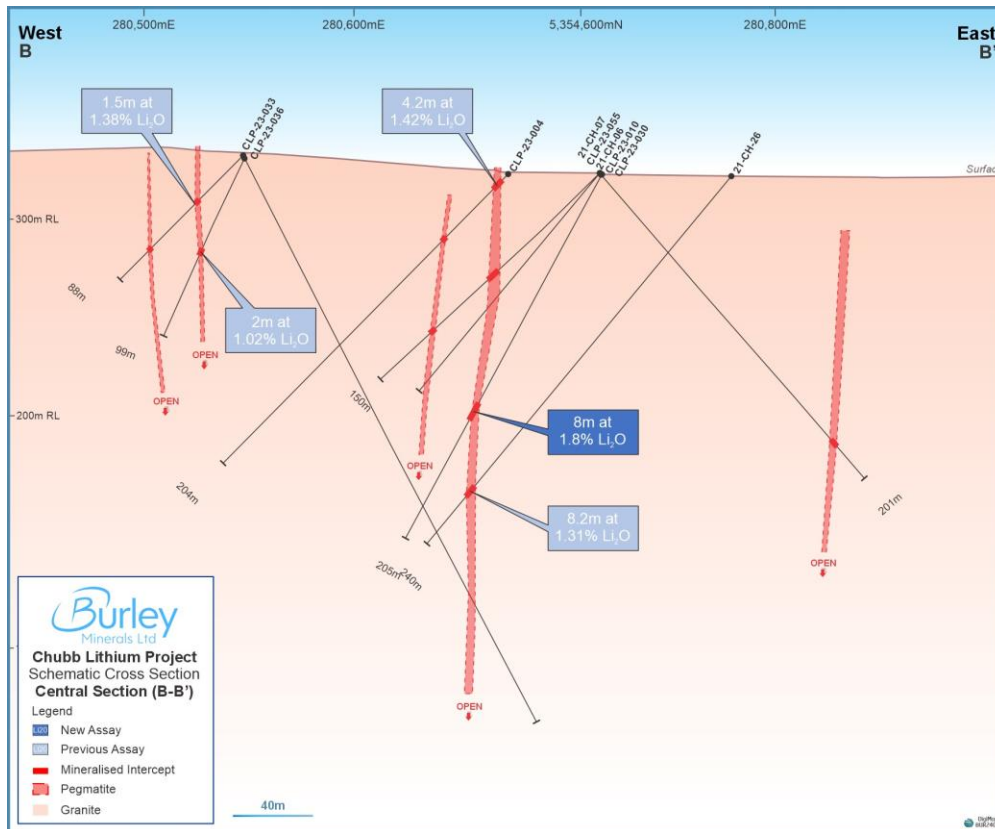


Figure 6: Cross Section B - B' showing multiple spodumene bearing dykes.

Table 1: Summary of latest significant Lithium Assay Results

Hole-ID	From (m)	To (m)	Length (m)	Li <sub>2</sub> O (%)
CLP-23-033	65.7	68.2	2.5	1.0%
CLP-23-036	52.0	54.0	2.0	1.0%
CLP-23-039	218.7	222.0	3.3	1.0%
CLP-23-040	146.6	153.0	6.4	1.5%
CLP-23-043	231.0	235.5	4.5	1.0%
CLP-23-043	251.0	254.9	3.9	1.5%
CLP-23-045	173.2	180.2	7.0	1.2%
CLP-23-055	79.0	88.1	9.1	1.6%
CLP-23-057	93.0	95.0	2.0	1.4%
CLP-23-058	113	114	1.0	1.5%
CLP-23-059	40	42	2.0	1.0%
CLP-23-065	16.0	22.1	6.1	1.2%
CLP-23-065	29.3	35.4	6.1	1.0%
CLP-23-066	68.2	71.1	2.9	1.7%
CLP-23-066	327.3	329.9	3.6	1.0%
CLP-23-067	12.2	13.1	0.9	1.5%
CLP-23-067	13.7	20.6	6.9	1.4%
CLP-23-068	10.0	11.0	1.0	1.5%
CLP-23-069	9.2	13.6	4.4	1.5%
CLP-23-070	13.7	15.5	1.8	1.1%

**Table 2: Summary of Significant Lithium and Caesium Assay Results**

Hole-ID	From (m)	To (m)	Length (m)	Li <sub>2</sub> O (%)	Cs <sub>2</sub> O (%)
CLP-23-038	313.0	318.3	5.3	2.3%	
CLP-23-038	313.8	316.6	2.8		6.8%
CLP-23-063	333.0	344.0	11.0	1.6%	
CLP-23-063	337.0	341.0	4.0		2.4%

**Previously report Chubb Central drilling results include<sup>2</sup>:**

- 10.1m at 1.03% Li<sub>2</sub>O from 170m CLP08a
- 9m at 1.34% Li<sub>2</sub>O from 92m CLP003
- 7m at 1.51% Li<sub>2</sub>O from 48.36m GPT001
- 6m at 1.70% Li<sub>2</sub>O from 250m CLP028
- 6m at 1.37% Li<sub>2</sub>O from 221m CLP027
- 4m at 1.42% Li<sub>2</sub>O from 6m CLP004
- 3m at 1.99% Li<sub>2</sub>O from 168m CLP025
- 2m at 1.93% Li<sub>2</sub>O from 49m CLP017
- 8.2m at 1.31% Li<sub>2</sub>O from 130.4m including 4.2m at 1.93% Li<sub>2</sub>O CLP010
- 7.7m at 1.30% Li<sub>2</sub>O from 80.1m including 3.0m at 1.81% Li<sub>2</sub>O CLP008
- 4.0m at 1.23% Li<sub>2</sub>O from 58.8m CLP007

<sup>2</sup> See ASX announcements dated 6 June 2023, 3 July 2023, and 30 October 2023.

## About Burley Minerals Limited

Burley Minerals Ltd (**ASX: BUR**) is a well-funded, ASX-listed, Perth-based minerals explorer with lithium and iron ore projects, located within the World-Class Tier-1 provinces of Québec, Canada and Western Australia. Burley acquired 100% ownership of the Chubb Lithium Project in Québec, Canada, and the Gascoyne Lithium Projects in Western Australia, in February 2023.

The Chubb Lithium Project is located 25 km north of the mining community of Val d'Or in the heart of the world-class lithium province of Québec, Canada with a total area of 1,509 hectares. The Chubb Project is centred within the Manneville Deformation Corridor, which hosts Canada's only operating lithium mine, the North America Lithium Operation (NAL). The NAL is owned by Sayona Mining Ltd (ASX: SYA) and Piedmont Lithium Inc, with Mineral Resources of 58Mt at 1.23% Li<sub>2</sub>O<sup>3</sup> reported, plus a number of other emerging projects including the Authier Lithium Project, with resources of 17Mt at 1.01 % Li<sub>2</sub>O reported<sup>4</sup>. The recommissioned NAL plant is located 10km north-east of the Chubb Lithium Project, with first production having commenced in the March 2023 Quarter<sup>5</sup>.

Prior to Burley acquiring the Chubb Lithium Project, 43 diamond drill holes for 5,460m of drilling had been completed across the Project, however these have tested only 2 of the 35 Mineral Claims acquired. Burley is well-funded to continue exploration after completing a C\$3.0M 'flow-through' capital raising initiative in May 2023, to fund exploration activities on its Canadian lithium projects.

In Western Australia, Burley also owns a 70% interest in the Yerecoin Iron Project, located approximately 120km northeast of Perth, and which has a JORC 2012 compliant Inferred and Indicated Mineral Resource of 246.7Mt capable of producing a concentrate at >68% Fe<sup>6</sup>.

Burley also has the Cane Bore and Broad Flat Wells Iron Ore Projects in the world class Hamersley Iron Ore Province. The Cane Bore Prospect has 28kms of remnant outcropping Channel Iron Deposit (CID) mineralisation which on average is 400m wide.

More recently, Burley announced the acquisition of approximately 1,100 km<sup>2</sup> in Manitoba, Canada<sup>7</sup> which includes five lithium projects within the same greenstone belt as other world-class lithium deposits.

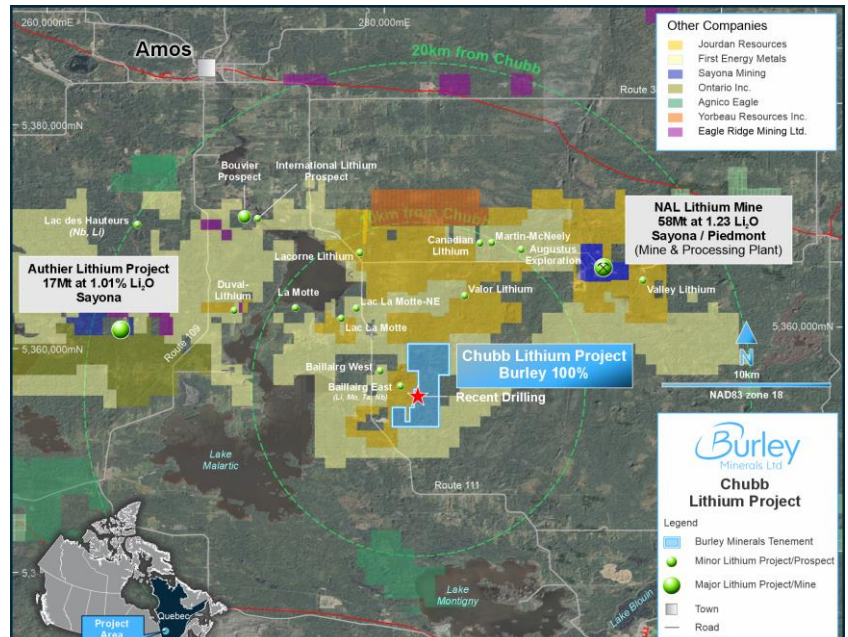


Figure 7. Location map of the Chubb Project showing proximity to the NAL lithium mine and other lithium deposits and prospects.

<sup>3</sup> Refer to Sayona Mining's ASX Release dated 14 April 2023

<sup>4</sup> Refer to Sayona Mining's ASX Release dated 14 April 2023.

<sup>5</sup> Refer to Sayona Mining's ASX Release dated 28 April 2023.

<sup>6</sup> Refer to Burley Minerals Ltd Prospectus dated 27 May 2021 Section 10 for the Independent Technical Assessment Report.

<sup>7</sup> Refer to Burley Mineral's ASX announcement dated 29 December 2023.

This announcement has been authorised for release by the Board of Directors.

For further information, please contact:

**Bryan Dixon**

Non-Executive Chairman

Burley Minerals Limited

[bryan@burleyminerals.com.au](mailto:bryan@burleyminerals.com.au)

**Stewart McCallion**

Managing Director & CEO

Burley Minerals Limited

[stewart@burleyminerals.com.au](mailto:stewart@burleyminerals.com.au)

**Alex Cowie**

NWR Communications

+61 412 952 610

[alexc@nwrcommunications.com.au](mailto:alexc@nwrcommunications.com.au)

### Competent Person's Statement

The information in this announcement that relates to lithium and LCT pegmatite exploration results is based on and fairly represents information and supporting documentation supplied to Mr David Crook, who is a member of The Australasian Institute of Mining and Metallurgy (AusIMM) and the Australian Institute of Geoscientists (AIG). Mr Crook is a consultant to Burley Minerals and is a non-executive Director of the Company. Mr Crook has sufficient experience relevant to the style of mineralisation under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Crook consents to the inclusion in this announcement of the matters based on this information in the form and context in which it appears.

The Yerecoin Main and South Mineral Resource Estimate was reported in 2014 under the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". The Mineral Resource Estimate was detailed in refer to Prospectus dated 27 May 2021 Section 10 for the Independent Technical Assessment Report. Burley confirms that it is not aware of any new information or data that materially affects the information included in this announcement regarding the mineral resources and that all material assumptions and technical parameters underpinning the estimates continue to apply and have not materially changed.

### Caution Regarding Forward-Looking Information

This announcement may include forward-looking statements regarding Burley Mineral Limited. Forward-looking statements are only predictions and are subject to risks, uncertainties and assumptions which are outside the control of Burley. Actual values, results or events may be materially different to those expressed or implied in this document. Given these uncertainties, recipients are cautioned not to place reliance on forward looking statements. Any forward-looking statements in this document speak only at the date of issue of this ASX Release. Subject to any continuing obligations under applicable law, Burley does not undertake any obligation to update or revise any information or any of the forward-looking statements in this announcement or any changes in events, conditions, or circumstances on which any such forward looking statement is based.



**APPENDIX 1: DRILL HOLE TABLE - ALL INTERVALS ARE DOWN-HOLE INTERVALS.**

**Table 3: Chubb Central Drill Callar Coordinates for Reported Holes**

Hole ID	Easting	Northing	RL	Depth	Dip	Azimuth
CLP-23-033	280548	5354542	332	88	-45	248
CLP-23-036	280549	5354542	332	99	-65	248
CLP-23-037	280601	5354305	322	501	-70	70
CLP-23-038	280602	5354305	322	339	-70	71
CLP-23-039	280602	5354305	322	297	-60	70
CLP-23-040	280602	5354433	321	183	-52	69
CLP-23-041	280545	5354411	322	279	-56	69
CLP-23-042	280546	5354411	322	414	-66	70
CLP-23-043	280545	5354411	322	270	-50	95
CLP-23-044	280546	5354411	322	418	-65	95
CLP-23-045	280571	5354468	323	237	-51	70
CLP-23-046	280553	5354584	333	231	-50	250
CLP-23-052	280548	5354544	332	321	-60	70
CLP-23-053	280552	5354620	334	159	-46	62
CLP-23-054	280568	5354713	335	170.2	-60	70
CLP-23-055	280717	5354604	321	141	-50	250
CLP-23-056	280781	5354843	322	360	-46	249
CLP-23-057	280785	5354844	323	300	-45	69
CLP-23-058	280784	5354844	323	252	-55	69
CLP-23-059	280785	5354704	321	258.45	-45	70
CLP-23-060	280738	5354295	321	66	-45	70
CLP-23-061	280703	5354280	321	120	-55	70
CLP-23-062	280678	5354273	321	177	-60	70
CLP-23-063	280611	5354246	321	366	-70	70
CLP-23-064	280611	5354246	321	294	-60	70
CLP-23-065	280606	5354245	321	252	-45	250
CLP-23-066	280572	5354178	320	405	-60	70
CLP-23-067	280648	5354607	327	25.5	-45	70
CLP-23-067a	280648	5354607	327	14	-45	70
CLP-23-068	280629	5354694	331	22.5	-45	70
CLP-23-068a	280633	5354695	331	12	-45	70
CLP-23-069	280617	5354763	337	19.5	-45	70
CLP-23-070	280584	5354859	330	33	-45	70

## JORC Code, 2012 Edition – Table 1 report

### Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

<i>Criteria</i>	<i>JORC Code explanation</i>	<i>Commentary</i>
<b>Criteria</b>	<b>JORC Code explanation</b>	<b>Commentary</b>
<b>Sampling techniques</b>	<p><i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i></p> <p><i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i></p> <p><i>Aspects of the determination of mineralisation that are Material to the Public Report.</i></p> <p><i>In cases where ‘industry standard’ work has been done this would be relatively simple (eg ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i></p>	<ul style="list-style-type: none"> <li>• NQ core samples from holes drilled from surface</li> <li>• QAQC comprising suitable standards (Certified Reference Material “CRM”) and sourced blank material were inserted at nominal rates inside the sample sequence. The standards reported within acceptable limits.</li> <li>• Samples are considered ‘fit for purpose’, being to detect anomalous metal elements.</li> <li>• Half core samples dictated by geology vary in length and weight up to a maximum sample length of 1.2m.</li> </ul>
<b>Drilling techniques</b>	<p><i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i></p>	<ul style="list-style-type: none"> <li>• Standard surface diamond drilling to recover NQ size core.</li> <li>• Core was orientated and surveyed downhole at 50m intervals.</li> </ul>
<b>Drill sample recovery</b>	<p><i>Method of recording and assessing core and chip sample recoveries and results assessed.</i></p> <p><i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i></p> <p><i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i></p>	<ul style="list-style-type: none"> <li>• Diamond core recovery was measured for each run and calculated as a percentage of the drilled interval.</li> <li>• Core recovery was generally high with fresh rock from near surface</li> <li>• Because the sample recoveries are assumed to be high, any possible relationship between sample recovery and grade has not been investigated.</li> </ul>

Criteria	JORC Code explanation	Commentary
<b>Logging</b>	<p>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</p> <p>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</p> <p>The total length and percentage of the relevant intersections logged.</p>	<ul style="list-style-type: none"> <li>• All core was geologically logged for lithology and mineralisation which has been recorded in the geology table of the drillhole database.</li> <li>• Geological logging is of qualitative and descriptive in nature.</li> <li>• The entire length of each hole has been geologically logged and photographed.</li> </ul>
<b>Sub-sampling techniques and sample preparation</b>	<p>If core, whether cut or sawn and whether quarter, half or all core taken.</p> <p>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</p> <p>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</p> <p>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</p> <p>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</p> <p>Whether sample sizes are appropriate to the grain size of the material being sampled.</p>	<ul style="list-style-type: none"> <li>• Core was cut in half by diamond saw with one half retained as reference and one half sent for assay.</li> <li>• All core processing was carried out by Service provider, MNG and stored in their facility.</li> <li>• All samples were submitted to SGS and prepared according to the PREP-89 protocol which involves, core to be crushed to 75% passing 2mm, riffle split off 250g, then pulverized and split to better than 85% passing 75 microns.</li> <li>• QA/QC programme has CRMs and blanks inserted into the analytical sequence at the rate of 5 per hundred.</li> </ul>
<b>Quality of assay data and laboratory tests</b>	<p>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</p> <p>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</p> <p>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</p>	<ul style="list-style-type: none"> <li>• All samples were submitted for a 56-element suite to SGS laboratory having both ISO9001:2008 and ISO/IEC 17025 accreditation.</li> <li>• SGS protocol GE_ICM91A50 was used for core and is specific to lithium testing and associated elements in Pegmatites, as such it is considered fit for purpose. Over limit Si values were obtained using XRF72 borate fusion.</li> <li>• No geophysical tools, handheld XRF or spectrometers were used.</li> <li>• Internal SGS QAQC passed internal protocol and inserted standards were generally within 1STD. All blanks remained under detection limits confirming no contamination was introduced through the laboratory process.</li> </ul>
<b>Verification of sampling and assaying</b>	<p>The verification of significant intersections by either independent or alternative company personnel.</p> <p>The use of twinned holes.</p> <p>Documentation of primary data, data entry procedures, data verification, data storage</p>	<ul style="list-style-type: none"> <li>• Verification of the exploration processes and significant drill intersections table was undertaken by David Crook, a non-executive director of the Company and the Competent Person for this report.</li> <li>• No holes were twinned at this stage of drilling.</li> <li>• There were no other adjustments made to the data, other than to convert Li to Li<sub>2</sub>O</li> </ul>



Criteria	JORC Code explanation	Commentary
	<p>(physical and electronic) protocols.</p> <p>Discuss any adjustment to assay data.</p>	<p>using a factor of 2.1527.</p>
<b>Location of data points</b>	<p>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</p> <p>Specification of the grid system used.</p> <p>Quality and adequacy of topographic control.</p>	<ul style="list-style-type: none"> <li>• The hole collars were positioned using handheld GPS</li> <li>• The rock chip sample and pXRF mineral vectors locations were positioned using handheld GPS.</li> <li>• Each location has been marked in the field by a wood pole and a follow up survey is intended using an RTK system.</li> <li>• The grid system used is UTM NAD83 (zone 18)</li> </ul>
<b>Data spacing and distribution</b>	<p>Data spacing for reporting of Exploration Results.</p> <p>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</p> <p>Whether sample compositing has been applied.</p>	<ul style="list-style-type: none"> <li>• Drill holes are spaced approximately 50m in section and plan.</li> <li>• Sample and pXRF mineral vectors spacing is appropriate for regional (Quebec) exploration results.</li> <li>• No resource estimation has been made.</li> <li>• No sample compositing was applied.</li> </ul>
<b>Orientation of data in relation to geological structure</b>	<p>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</p> <p>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</p>	<ul style="list-style-type: none"> <li>• Drill lines are orientated approximately at right angles to the current interpreted strike of the targeted mineralization.</li> <li>• No bias is considered to have been introduced by the existing sampling orientation</li> </ul>
<b>Sample security</b>	<p>The measures taken to ensure sample security.</p>	<ul style="list-style-type: none"> <li>• Samples were bagged and sealed on site, sample bags were grouped by batched of 15 -20 and put into shipping bags that were again sealed and transported directly to SGS lab by MNG technicians.</li> </ul>
<b>Audits or reviews</b>	<p>The results of any audits or reviews of sampling techniques and data.</p>	<ul style="list-style-type: none"> <li>• Sampling and assaying techniques are considered to be industry standard.</li> <li>• At this stage of exploration, no external audits or reviews have been undertaken.</li> </ul>

## Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<b>Mineral tenement and land tenure status</b>	<p>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</p> <p>The security of the tenure held at the time of reporting along with any known impediments to obtaining a license to operate in the area.</p>	<p>The drill hole data reported within this announcement is from the Chubb property is 100% owned by Lithium Chubb Inc. a 100% owned subsidiary of Burley Minerals Ltd..</p> <p>The Chubb property is made up of 35 claims in one block totaling 1,509ha, located in NTS 32c05, in La Corne and Vassan townships, 28km NNW of Val-d'Or</p> <p>A 2.5% Net Smelter Royalty over the Chubb Lithium Project.</p> <p>First nation title claims sit with the Abitibi Winni First Nation Council.</p>
<b>Exploration done by other parties</b>	Acknowledgment and appraisal of exploration by other parties.	43 holes for 5,722m has previously been completed at the Chubb Central Prospect. No previous drilling has been completed outside of Chubb Central. All material data has been previously reported.
<b>Geology</b>	Deposit type, geological setting and style of mineralisation.	<p>Pegmatites of the Chubb Project are of spodumene bearing quartz-albite LCT (Lithium Caesium Tantalum) pegmatite family of rocks. The pegmatite dykes have intruded into a suite of mafic and felsic rocks.</p> <p>Outcropping pegmatites have been identified at the Chubb North prospect which show fertility indicators consistent with LCT (Lithium Cesium Tantalum) pegmatite family of rocks.</p>
<b>Drill hole Information</b>	<p>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</p> <p>easting and northing of the drill hole collar</p> <p>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</p> <p>dip and azimuth of the hole</p> <p>down hole length and interception depth</p> <p>hole length.</p> <p>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</p>	<p>Refer to Appendix 1 of this announcement.</p> <p>Refer also to Appendix 1 of the announcement dated 3 July 2023.</p>

Criteria	JORC Code explanation	Commentary
<b>Data aggregation methods</b>	<p><i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i></p> <p><i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i></p> <p><i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i></p>	<p><i>All assay results are reported as received from SGS laboratories except Li<sub>2</sub>O, where a stoichiometric conversion factor of 2.1527 has been applied to convert Li to Li<sub>2</sub>O</i></p> <p><i>No metal equivalent values have been reported.</i></p>
<b>Relationship between mineralisation widths and intercept lengths</b>	<p><i>These relationships are particularly important in the reporting of Exploration Results.</i></p> <p><i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i></p> <p><i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i></p>	<p><i>Downhole lengths are reported in Appendix 1.</i></p> <p><i>Current interpretation suggests the pegmatite dykes are sub vertical.</i></p>
<b>Diagrams</b>	<p><i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i></p>	<p><i>Refer to maps in this report.</i></p>
<b>Balanced reporting</b>	<p><i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i></p>	<p><i>Comprehensive reporting of drilling results have been provided in Appendix 1.</i></p>
<b>Other substantive exploration data</b>	<p><i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i></p>	<p><i>All meaningful and material exploration data has been reported.</i></p>
<b>Further work</b>	<p><i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i></p> <p><i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i></p>	<p><i>Work that is currently underway or remains outstanding includes:</i></p> <p><i>Additional assay results from the completed diamond drilling.</i></p> <p><i>Field mapping of the Chubb tenure.</i></p> <p><i>Follow up drilling if remaining assay results are encouraging.</i></p>