

ASX ANNOUNCEMENT

24 August 2021

ASX: BSX

Blackstone Intersects 375m of Nickel Sulfide from 2m

375m nickel sulfide intersection further demonstrates the large bulk tonnage potential of the Ban Phuc disseminated (DSS) deposit

Blackstone Minerals Limited ("Blackstone" or the "Company") is pleased to provide results from the final infill drill program at the Ban Phuc DSS deposit at its Ta Khoa Nickel - Copper-PGE Project in Northern Vietnam. (refer Figure 1, Table 1, Table 2 & Appendix 1).

Current reporting includes some of the best broad DSS intersections at Ban Phuc:

BP20-55	374.7m @ 0.30% Ni, 0.01% Cu, 0.01% Co & 0.07g/t PGE¹ from 2.0m
incl.	49.0m @ 0.45% Ni, 0.04% Cu, 0.01% Co & 0.17g/t PGE ¹ from 2.0m
BP20-57	211.38m @ 0.43% Ni, 0.03% Cu, 0.01% Co & 0.13g/t PGE¹ from 111.62m
incl.	52.24m @ 0.74% Ni, 0.11% Cu, 0.01% Co & 0.31g/t PGE ¹ from 241.0m
BP21-17	156.25m @ 0.50% Ni, 0.07% Cu, 0.01% Co & 0.15g/t PGE¹ from 79.75m
incl.	31.05m @ 0.75% Ni, 0.14% Cu, 0.01% Co & 0.26g/t PGE ¹ from 83.75m
BP21-31	169.0m @ 0.43% Ni, 0.04% Cu, 0.01% Co & 0.15g/t PGE¹ from 62.0m
incl.	10.3m @ 1.13% Ni, 0.18% Cu, 0.02% Co & 0.48g/t PGE ¹ from 98.0m
BP21-35	52.0m @ 0.79% Ni, 0.10% Cu, 0.01% Co & 0.26g/t PGE¹ from 22.0m
incl.	30.0m @ 1.10% Ni, 0.14% Cu, 0.02% Co & 0.41g/t PGE ¹ from 40.0m

¹ Platinum (Pt) + Palladium (Pd) + Gold (Au)

- The Ban Phuc DSS deposit will underpin the Upstream Business Unit (UBU) PFS due later this calendar year
- Successful completion of the final infill drilling program is aimed at increasing the confidence of the existing JORC resource:
 - Indicated Mineral Resource of 44.3Mt @ 0.52% Ni for 229kt Ni; and
 - Inferred Mineral Resource of 14.3Mt @ 0.35% Ni for 50Kt Ni
(refer ASX announcement 18 October 2020)
- The Company will assess mining scenarios as part of the UBU PFS. Results from the final infill drilling program bode well for the potential to increase mining inventory at Ban Phuc, as compared to the Company's Scoping Study (refer ASX announcement 18 October 2020).

Blackstone Minerals' Managing Director Scott Williamson commented:

"The high tenor of results from the final infill drilling program increases the confidence of the resource at Ban Phuc, and the mine plan that will underpin Blackstone's UBU PFS. In the relatively short amount of time since acquiring the Ta Khoa Nickel - Copper - PGE Project, Blackstone has been able to define a large, disseminated sulfide deposit which considerably adds to the security of supply for the Company's vertically integrated downstream refinery."

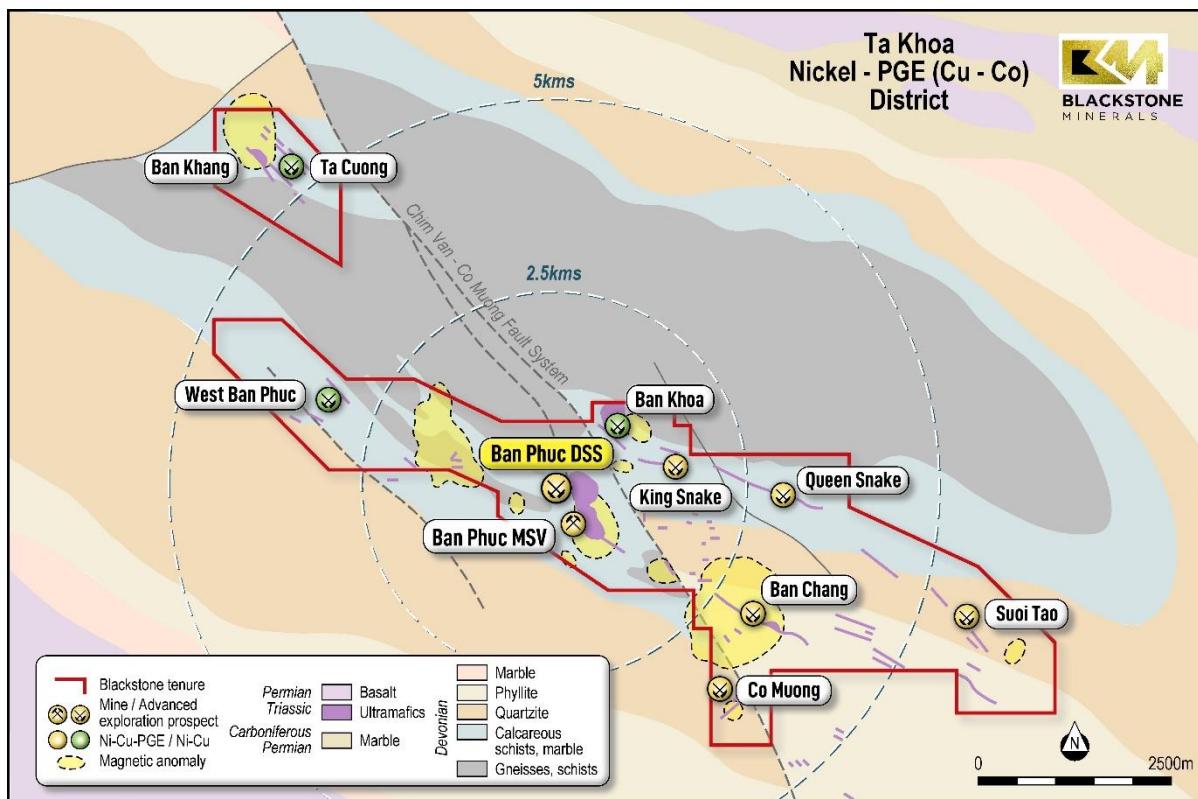


Figure 1. Ta Khoa Nickel-PGE (Cu-Co) district

Ban Phuc

Results from the final infill drilling program at the Ban Phuc deposit will be incorporated into an updated resource estimate and form the basis of an updated mine plan to be included in the upcoming UBU PFS.

Significant results from the final infill drilling program at Ban Phuc include (also refer Figures 2&3):

BP20-53	22.25m @ 0.33% Ni, 0.02% Cu, 0.01% Co & 0.06g/t PGE ¹ from 90.8m and incl.	157.6m @ 0.35% Ni, 0.03% Cu, 0.01% Co & 0.09g/t PGE ¹ from 120.4m 32.8m @ 0.50% Ni, 0.07% Cu, 0.01% Co & 0.11g/t PGE ¹ from 127.9m
BP20-54	60.0m @ 0.45% Ni, 0.08% Cu, 0.01% Co & 0.09g/t PGE ¹ from 9.5m incl.	26.5m @ 0.62% Ni, 0.12% Cu, 0.01% Co & 0.14g/t PGE ¹ from 9.5m
BP20-55	374.7m @ 0.30% Ni, 0.01% Cu, 0.01% Co & 0.07g/t PGE ¹ from 2.0m incl.	49.0m @ 0.45% Ni, 0.04% Cu, 0.01% Co & 0.17g/t PGE ¹ from 2.0m
BP20-56	205.8m @ 0.33% Ni, 0.01% Cu, 0.01% Co & 0.05g/t PGE ¹ from 81.2m incl.	10.5m @ 1.00% Ni, 0.16% Cu, 0.02% Co & 0.48g/t PGE ¹ from 273.0m
BP20-57	211.38m @ 0.43% Ni, 0.03% Cu, 0.01% Co & 0.13g/t PGE ¹ from 111.62m incl.	52.24m @ 0.74% Ni, 0.11% Cu, 0.01% Co & 0.31g/t PGE ¹ from 241.0m Incl.
BP21-03	6.0m @ 1.46% Ni, 0.24% Cu, 0.01% Co & 0.52g/t PGE ¹ from 243.6m 166.0m @ 0.31% Ni, 0.02% Cu, 0.01% Co & 0.07g/t PGE ¹ from 71.45m incl.	47.1m @ 0.40% Ni, 0.05% Cu, 0.01% Co & 0.16g/t PGE ¹ from 109.9m
BP21-04	216.0m @ 0.33% Ni, 0.01% Cu, 0.01% Co & 0.04g/t PGE ¹ from 24.0m and incl.	19.9m @ 0.45% Ni, 0.04% Cu, 0.01% Co & 0.16g/t PGE ¹ from 286.7m 9.2m @ 0.63% Ni, 0.06% Cu, 0.01% Co & 0.28g/t PGE ¹ from 297.4m
BP21-17	156.25m @ 0.50% Ni, 0.07% Cu, 0.01% Co & 0.15g/t PGE ¹ from 79.75m incl.	31.05m @ 0.75% Ni, 0.14% Cu, 0.01% Co & 0.26g/t PGE ¹ from 83.75m and
BP21-24	32.2m @ 0.72% Ni, 0.10% Cu, 0.01% Co & 0.25g/t PGE ¹ from 201.0m 104.4m @ 0.54% Ni, 0.07% Cu, 0.01% Co & 0.13g/t PGE ¹ from 143.7m incl.	14.0m @ 1.21% Ni, 0.21% Cu, 0.02% Co & 0.28g/t PGE ¹ from 172.5m
BP21-31	169.0m @ 0.43% Ni, 0.04% Cu, 0.01% Co & 0.15g/t PGE ¹ from 62.0m incl.	10.3m @ 1.13% Ni, 0.18% Cu, 0.02% Co & 0.48g/t PGE ¹ from 98.0m and
BP21-35	23.4m @ 0.76% Ni, 0.12% Cu, 0.02% Co & 0.38g/t PGE ¹ from 172.5m 52.0m @ 0.79% Ni, 0.10% Cu, 0.01% Co & 0.26g/t PGE ¹ from 22.0m incl.	30.0m @ 1.10% Ni, 0.14% Cu, 0.02% Co & 0.41g/t PGE ¹ from 40.0m
BP21-39	52.0m @ 0.79% Ni, 0.10% Cu, 0.01% Co & 0.26g/t PGE ¹ from 22.0m incl.	91.65m @ 0.39% Ni, 0.04% Cu, 0.01% Co & 0.07g/t PGE ¹ from 99.35m 11.4m @ 0.71% Ni, 0.10% Cu, 0.01% Co & 0.18g/t PGE ¹ from 169.0m

¹ Platinum (Pt) + Palladium (Pd) + Gold (Au)

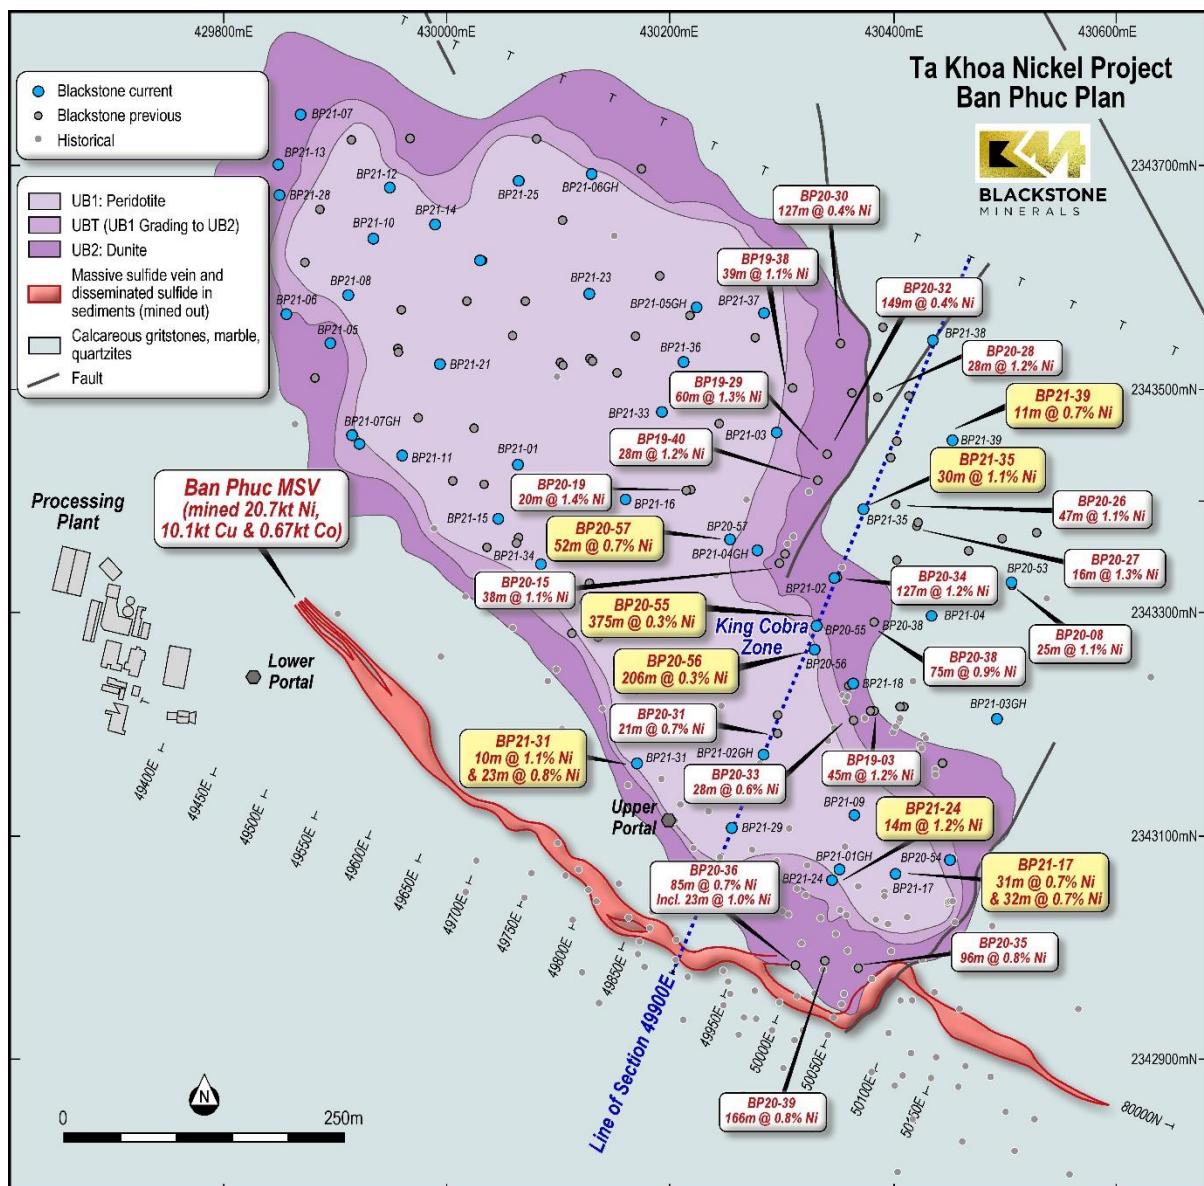


Figure 2. Ban Phuc Plan View

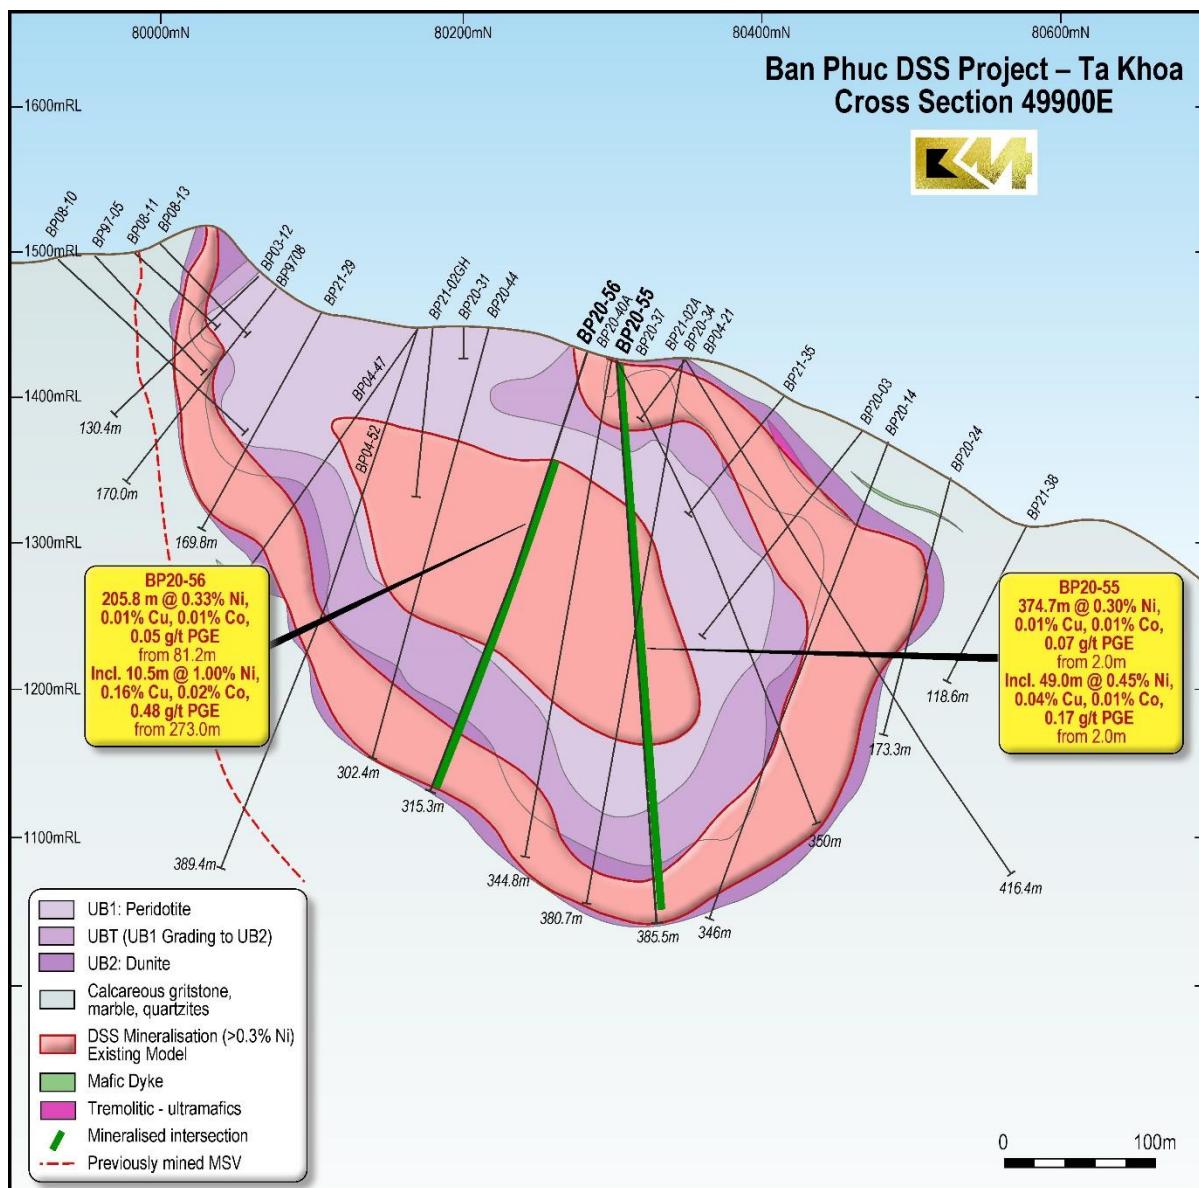


Figure 3. Ban Phuc Cross Section 49900E highlighting the broad mineralised intersections for BP20-55/56

Authorised by the Managing Director on behalf of the Board of Blackstone Minerals Limited.

For more information please contact

Scott Williamson

Managing Director
+61 8 9425 5217
scott@blackstoneminerals.com.au

Dhanu Anandarasa

Manager Corporate Development
+61 8 9425 5217
dhanu@blackstoneminerals.com.au


Patrick Chang

Head of Corporate Development
+61 8 9425 5217
patrick@blackstoneminerals.com.au

About Blackstone

Blackstone Minerals Ltd (ASX: BSX / OTCQX: BLSTF / FRA: B9S) is focused on building an integrated upstream and downstream battery metals processing business in Vietnam that produces Nickel: Cobalt: Manganese (NCM) Precursor products for Asia's growing Lithium-ion battery industry (refer Figure 4)

Figure 4 -Ta Khoa Project Snapshot

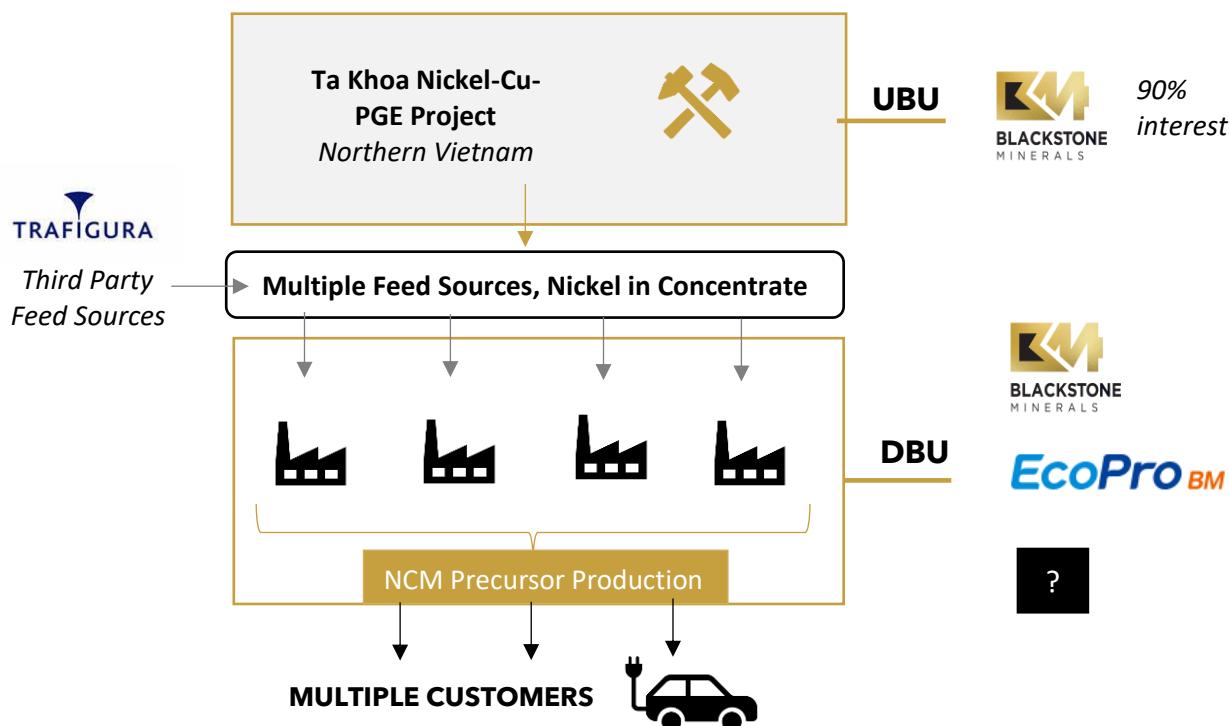

The Company owns a 90% interest in the Ta Khoa Nickel-Copper-PGE Project. The Ta Khoa Project is located 160km west of Hanoi in the Son La Province of Vietnam and includes an existing modern nickel mine built to Australian standards which is currently under care and maintenance (refer Figure 5). The Ban Phuc nickel mine successfully operated as a mechanised underground nickel mine from 2013 to 2016.

In October 2020, the Company completed a Scoping Study which investigated mining the Ban Phuc Disseminated nickel sulfide ore body (upstream) and the construction of a 200ktpa downstream refinery (refer to ASX announcement of 14 October 2020, including for the full details of the Company's Mineral Resource Estimate at Ban Phuc).

Building on the outcomes of the Scoping Study, the Company has since completed a technically and economically robust Pre-feasibility Study for its Downstream Business Unit (DBU) which sees expanded downstream capacity. This is based on the Ta Khoa refinery being designed to process 400ktpa of nickel concentrate, supplied from the Ta Khoa Nickel - Cu - PGE mine as well as third party concentrate.

The Company is continuing to advance a PFS for the UBU. The UBU PFS will contemplate the option to mine several higher-grade massive sulfide vein (MSV) deposits, which has the potential to reduce initial upfront capital requirements for the UBU by enabling the Company to restart the existing Ban Phuc Concentrator (450ktpa).

By combining the Company's existing mineral inventory (Ban Phuc Disseminated Sulfide - DSS), exploration potential presented by high priority targets such as Ban Chang, King Snake, and Ta Cuong, and the ability to source third party concentrate, Blackstone will be able to increase the scale of its downstream business to cater to the rising demand for downstream nickel products.



Figure 5. Ta Khoa Nickel-Cu-PGE Project Location

Competent Person Statement

The information in this report that relates to Exploration Results and Exploration Targets is based on information compiled by Mr Andrew Radonjic, a Director and Technical Consultant of the company, who is a Member of The Australasian Institute of Mining and Metallurgy. Mr Andrew Radonjic has sufficient experience which is relevant to the style of mineralisation and type of deposits under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Andrew Radonjic consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

The information in this report that relates to Mineral Resource Estimation in respect of the Ta Khoa Nickel Project is based on information compiled by BM Geological Services (BMGS) under the supervision of Andrew Bewsher, a director of BMGS and Member of the Australian Institute of Geoscientists with over 21 years of experience in the mining and exploration industry in Australia and Vietnam in a multitude of commodities including nickel, copper and precious metals. Mr Bewsher has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Bewsher consents to the inclusion of the Mineral Resource Estimate in this report on that information in the form and context in which it appears.

The Company confirms that all material assumptions and parameters underpinning the Mineral Resource Estimates as reported within the Scoping Study in market announcement dated 14 October 2020 continue to apply and have not materially changed, and that it is not aware of any new information or data that materially affects the information that has been included in this announcement.

Forward Looking Statements

This report contains certain forward-looking statements. The words "expect", "forecast", "should", "projected", "could", "may", "predict", "plan", "will" and other similar expressions are intended to identify forward looking statements. Indications of, and guidance on, future earnings, cash flow costs and financial position and performance are also forward-looking statements. Forward looking statements, opinions and estimates included in this announcement are based on assumptions and contingencies which are subject to change without notice, as are statements about market and industry trends, which are based on interpretations of current market conditions. Forward looking statements are provided as a general guide only and should not be relied on as a guarantee of future performance. Forward looking statements may be affected by a range of variables that could cause actual results or trends to differ materially. These variations, if materially adverse, may affect the timing or the feasibility of the development of the Ta Khoa Nickel Project.

The project development schedule assumes the completion for the Downstream Business Unit of a Definitive Feasibility Study (DFS) by mid-2022. A PFS & DFS for the Upstream Business Unit is assumed to be completed in 2021 and 2022 respectively. Development approvals and investment permits will be sought from the relevant Vietnamese authorities concurrent to studies being completed. Delays in any one of these key activities could result in a delay to the commencement of construction (planned for early 2023). This could lead on to a delay to first production, currently planned for 2024. It is expected that the

Company's stakeholder and community engagement programs will reduce the risk of project delays. Please note these dates are indicative only.

The JORC-compliant Mineral Resource estimate forms the basis for the Scoping Study in the market announcement dated 14 October 2020. Over the life of mine considered in the Scoping Study, 83% of the processed Mineral Resource originates from Indicated Mineral Resources and 17% from Inferred Mineral Resources; 76% of the processed Mineral Resource during the payback period will be from Indicated Mineral Resources. The viability of the development scenario envisaged in the Scoping Study therefore does not depend on Inferred Mineral Resources. There is a low level of geological confidence associated with Inferred Mineral Resources and there is no certainty that further exploration work will result in the determination of Indicated Mineral Resources or that the production target itself will be realised. The Inferred Mineral Resources are not the determining factors in project viability. Please refer to the Cautionary Statement in the Scoping Study market announcement dated 14 October 2020.

Table 1

New Ban Phuc drill hole locations, orientations and mineralised intersections (down hole positions & lengths are shown).

* PGE = Pt+Pd+Au. Complete assay interval data in Table 2.

All coordinates UTM Zone48N WGS84, Surveys by Leica 1203+ total station system.

Project Area	Hole	East UTM 48N WGS84	North UTM 48N WGS84	RLm UTM 48N WGS84	Azimuth (°)	Dip (°)	End of hole (meters)	From (m)	To (m)	Interval (m)	Ni (%)	Cu (%)	Co (%)	Pt + Pd + Au (g/t)	Pt (g/t)	Pd (g/t)	Au (g/t)	Recovery (%)
Ban Phuc	BP20-53	430506.19	2343327.24	328.65	202.25	-67	293.5	90.8	113.05	22.25	0.33	0.02	0.01	0.06	0.03	0.03	<0.01	100
Ban Phuc	and							120.4	278	157.6	0.35	0.03	0.01	0.09	0.04	0.04	0.01	100
Ban Phuc	including							127.9	160.7	32.8	0.5	0.07	0.01	0.11	0.04	0.05	0.02	100
Ban Phuc	BP20-54	430455.08	2343085.43	431.17	22.25	-60	163.3	9.5	69.5	60	0.45	0.08	0.01	0.09	0.04	0.04	0.01	82
Ban Phuc	including							9.5	36	26.5	0.62	0.12	0.01	0.14	0.06	0.06	0.02	87
Ban Phuc	BP20-55	430330.96	2343289.27	424.72	22.26	-85	385.5	2	376.7	374.7	0.3	0.01	0.01	0.07	0.03	0.03	0.01	100
Ban Phuc	including							2	51	49	0.45	0.04	0.01	0.17	0.08	0.07	0.02	100
Ban Phuc	BP20-56	430329.71	2343267.42	425.37	202.26	-71	315.3	81.2	287	205.8	0.33	0.01	0.01	0.05	0.03	0.02	0.01	100
Ban Phuc	including							273	283.5	10.5	1	0.16	0.02	0.48	0.18	0.24	0.06	100
Ban Phuc	BP20-57	430251.68	2343367	432.68	202.26	-76.2	335.4	111.62	323	211.38	0.43	0.03	0.01	0.13	0.05	0.06	0.02	99
Ban Phuc	including							241	293.24	52.24	0.74	0.11	0.01	0.31	0.12	0.15	0.04	100
Ban Phuc	including							243.6	249.6	6	1.46	0.24	0.01	0.52	0.22	0.23	0.08	100
Ban Phuc	BP21-01	430064.07	2343433.64	375.797	22.26	-65.3	245.9	196.4	235.1	38.7	0.41	0.03	0.01	0.13	0.05	0.06	0.02	100
Ban Phuc	BP21-02A	430346.21	2343331.4	424.33	202.26	-80	380.7	9.3	41.2	31.9	0.6	0.07	0.01	0.15	0.07	0.07	0.02	100
Ban Phuc	including							21.3	30.1	8.8	1.03	0.17	0.02	0.18	0.07	0.08	0.03	100
Ban Phuc	and							116.6	201.9	85.3	0.27	<0.01	0.01	0.03	0.02	0.01	<0.01	99
Ban Phuc	and							327.7	361	33.3	0.32	0.02	0.01	0.05	0.02	0.02	0.01	100
Ban Phuc	BP21-03	430297.68	2343462.18	377.51	22.26	-83.3	250	71.45	237.45	166	0.31	0.02	0.01	0.07	0.03	0.03	0.01	100
Ban Phuc	including							109.9	157	47.1	0.4	0.05	0.01	0.16	0.06	0.07	0.03	100
Ban Phuc	BP21-04	430435.62	2343297.88	373.25	202.26	-60	319.3	24	240	216	0.33	0.01	0.01	0.04	0.02	0.02	<0.01	99
Ban Phuc	and							286.7	306.6	19.9	0.45	0.04	0.01	0.16	0.07	0.07	0.02	100
Ban Phuc	including							297.4	306.6	9.2	0.63	0.06	0.01	0.28	0.12	0.13	0.03	100
Ban Phuc	BP21-05	429895.05	2343543.72	339.7	22.26	-90	82.8	3	46	43	0.31	0.01	0.01	0.07	0.03	0.03	0.01	96
Ban Phuc	BP21-05GH	430224.61	2343576.93	372.06	22.25	-50.4	186	49.5	95.55	46.05	0.34	0.04	0.01	0.08	0.03	0.04	0.01	91
Ban Phuc	including							49.5	66	16.5	0.42	0.07	0.01	0.12	0.05	0.05	0.02	94
Ban Phuc	BP21-06	429856.18	2343569.87	339.15	22.26	-90	57.3	3.5	28	24.5	0.32	0.02	0.01	0.05	0.02	0.02	0.01	96
Ban Phuc	BP21-06GH	430129.68	2343695.68	354.53	22.25	-65	126	1.7	42.5	40.8	0.62	0.1	0.01	0.13	0.05	0.06	0.02	89
Ban Phuc	including							1.7	15.5	13.8	1.01	0.17	0.01	0.19	0.07	0.08	0.04	88
Ban Phuc	BP21-07	429869.48	2343748.41	343.31	22.26	-90	71	3	53.7	50.7	0.47	0.06	0.01	0.15	0.06	0.06	0.03	94
Ban Phuc	including							3	17	14	0.79	0.13	0.02	0.34	0.14	0.14	0.06	96
Ban Phuc	BP21-07GH	429918.83	2343455.5	346.94	202.25	-80.7	100	41.3	56.2	14.9	0.4	0.08	0.01	0.09	0.03	0.04	0.02	100
Ban Phuc	BP21-08	429911.24	2343586.8	332.08	22.26	-90	82.9	44.9	76.4	31.5	0.28	0.02	0.01	0.05	0.02	0.02	0.01	100

Project Area	Hole	East UTM 48N WGS84	North UTM 48N WGS84	RLm UTM 48N WGS84	Azimuth (°)	Dip (°)	End of hole (meters)	From (m)	To (m)	Interval (m)	Ni (%)	Cu (%)	Co (%)	Pt + Pd + Au (g/t)	Pt (g/t)	Pd (g/t)	Au (g/t)	Recovery (%)
Ban Phuc	BP21-08GH	430063.8	2343434.71	375.79	202.25	-85	201	105.7	162.15	56.45	0.56	0.06	0.01	0.36	0.15	0.18	0.03	99
Ban Phuc	including							127.85	149	21.15	0.92	0.13	0.02	0.72	0.29	0.37	0.06	97
Ban Phuc	BP21-09	430365.82	2343120.06	481.42	202.26	-71.5	335.9	260.9	325.4	64.5	0.42	0.03	0.01	0.11	0.04	0.05	0.02	100
Ban Phuc	including							299.5	312.2	12.7	0.72	0.04	0.01	0.27	0.1	0.12	0.05	100
Ban Phuc	BP21-10	429934.33	2343636.83	305.88	22.26	-90	63.8	31.5	51.55	20.05	0.3	0.01	0.01	0.05	0.02	0.02	0.01	100
Ban Phuc	BP21-11	429959.83	2343442.25	355.58	202.26	-80	93	49.7	85.85	36.15	0.7	0.08	0.01	0.32	0.12	0.16	0.04	100
Ban Phuc	including							49.7	64.4	14.7	1.07	0.13	0.01	0.63	0.24	0.31	0.08	100
Ban Phuc	BP21-12	429949.64	2343682.78	299.38	22.26	-90	67.4	8.3	51.3	43	0.49	0.06	0.01	0.25	0.1	0.12	0.03	96
Ban Phuc	including							8.3	20.45	12.15	0.89	0.12	0.01	0.66	0.26	0.33	0.07	85
Ban Phuc	BP21-13	429848.08	2343704.04	351.51	22.26	-90	72.7	27	43.9	16.9	0.35	0.06	0.01	0.08	0.03	0.04	0.01	100
Ban Phuc	BP21-14	429990.13	2343648.98	304.34	22.26	-75	72.3	24.7	60.3	35.6	0.42	0.05	0.01	0.22	0.09	0.11	0.02	100
Ban Phuc	including							26.7	32.6	5.9	0.85	0.12	0.02	0.88	0.38	0.45	0.05	100
Ban Phuc	BP21-15	430045.84	2343386.73	371.83	22.26	-85.4	158.6	87	155.8	68.8	0.5	0.05	0.01	0.21	0.09	0.1	0.02	100
Ban Phuc	including							126.5	136	9.5	1.15	0.23	0.02	0.63	0.24	0.33	0.06	100
Ban Phuc	BP21-16	430161.17	2343403.54	414.32	202.26	-70	219	169.85	204	34.15	0.49	0.04	0.01	0.19	0.08	0.09	0.02	100
Ban Phuc	including							172.55	178.85	6.3	1.07	0.11	0.02	0.57	0.23	0.28	0.06	100
Ban Phuc	BP21-17	430402.62	2343067.94	470.3	22.26	-60.4	260	79.75	236	156.25	0.5	0.07	0.01	0.15	0.06	0.07	0.02	100
Ban Phuc	including							83.75	114.8	31.05	0.75	0.14	0.01	0.26	0.11	0.12	0.03	100
Ban Phuc	and							201	233.2	32.2	0.72	0.1	0.01	0.25	0.1	0.11	0.04	99
Ban Phuc	BP21-18	430364.52	2343237.38	421.99	202.26	-72.2	322.8	35	95	60	0.33	0.02	0.01	0.08	0.03	0.04	0.01	99
Ban Phuc	and							280	309.2	29.2	0.33	0.04	0.01	0.07	0.03	0.03	0.01	100
Ban Phuc	BP21-19	429913.2	2343461.35	346.85	22.26	-75	75	35.7	51.3	15.6	0.36	0.03	0.01	0.1	0.04	0.05	0.01	94
Ban Phuc	BP21-20	430031.77	2343615.17	323.29	202.26	-80.5	108	68	96	28	0.45	0.04	0.01	0.18	0.08	0.08	0.02	100
Ban Phuc	including							75.6	84.6	9	0.6	0.09	0.01	0.17	0.06	0.08	0.03	100
Ban Phuc	BP21-21	429993.81	2343525.03	364.7	202.26	-84.7	129.8	71	107.1	36.1	0.46	0.04	0.01	0.15	0.06	0.07	0.02	100
Ban Phuc	including							76.4	80.9	4.5	1.44	0.2	0.01	0.71	0.29	0.32	0.1	100
Ban Phuc	BP21-22	430030.71	2343616.53	323.13	22.26	-55.2	106.1	61.2	96.8	35.6	0.4	0.02	0.01	0.16	0.07	0.08	0.01	99
Ban Phuc	including							67.15	71.5	4.35	0.85	0.1	0.01	0.53	0.23	0.24	0.06	100
Ban Phuc	BP21-23	430129.06	2343587.13	349.49	22.26	-74.6	149.1	81.7	137.7	56	0.44	0.06	0.01	0.13	0.05	0.06	0.02	100
Ban Phuc	BP21-24	430344.6	2343062.45	498.37	22.26	-55.7	305.8	143.7	248.1	104.4	0.54	0.07	0.01	0.13	0.05	0.06	0.02	100
Ban Phuc	including							172.5	186.5	14	1.21	0.21	0.02	0.28	0.11	0.12	0.05	100
Ban Phuc	BP21-25	430064.05	2343689.86	320.81	22.26	-85	73.5	38.4	68.3	29.9	0.32	0.03	0.01	0.06	0.02	0.03	0.01	99
Ban Phuc	BP21-26	430384.91	2343292.12	394.35	22.26	-80	353.8	8.9	91	82.1	0.44	0.05	0.01	0.08	0.03	0.04	0.01	97
Ban Phuc	including							43	49.5	6.5	1.04	0.2	0.03	0.19	0.07	0.09	0.03	100
Ban Phuc	and							284	340.55	56.55	0.34	0.02	0.01	0.12	0.05	0.06	0.01	99
Ban Phuc	including							289	294.6	5.6	0.63	0.08	0.01	0.37	0.14	0.18	0.05	100

Project Area	Hole	East UTM 48N WGS84	North UTM 48N WGS84	RLm UTM 48N WGS84	Azimuth (°)	Dip (°)	End of hole (meters)	From (m)	To (m)	Interval (m)	Ni (%)	Cu (%)	Co (%)	Pt + Pd + Au (g/t)	Pt (g/t)	Pd (g/t)	Au (g/t)	Recovery (%)
Ban Phuc	BP21-27	430364.92	2343237.74	422.27	22.26	-89.7	385	71	100.95	29.95	0.31	0.03	0.01	0.05	0.02	0.02	0.01	95
Ban Phuc	and							348.65	376.4	27.75	0.41	0.03	0.01	0.11	0.05	0.05	0.01	100
Ban Phuc	including							368.55	374.5	5.95	0.64	0.09	0.02	0.26	0.12	0.12	0.02	100
Ban Phuc	BP21-28	429850.5	2343676.71	354.55	202.26	-60	87.7	49.9	83	33.1	0.24	0.01	0.01	0.02	0.01	0.01	<0.01	97
Ban Phuc	BP21-29	430254.74	2343110.02	455.33	202.26	-60.3	169.8	101	152.25	51.25	0.31	0.01	0.01	0.04	0.02	0.02	<0.01	100
Ban Phuc	BP21-30	429807.28	2343609.96	373.85	22.26	-89.7	64.3	8	30	22	0.37	0.03	0.01	0.11	0.05	0.05	0.01	100
Ban Phuc	BP21-31	430169.23	2343168.7	414.87	22.26	-75	241.7	62	231	169	0.43	0.04	0.01	0.15	0.06	0.07	0.02	100
Ban Phuc	including							98	108.3	10.3	1.13	0.18	0.02	0.48	0.17	0.26	0.05	100
Ban Phuc	and							172.5	195.9	23.4	0.76	0.12	0.02	0.38	0.14	0.19	0.05	100
Ban Phuc	BP21-32	430169.46	2343167.26	414.81	202.25	-70.3	77.8	38.4	49.8	11.4	0.27	0.01	0.01	0.04	0.02	0.02	<0.01	100
Ban Phuc	BP21-33	430192.89	2343481.15	372.83	202.25	-87.5	228	144.4	214.75	70.35	0.37	0.03	0.01	0.13	0.06	0.06	0.01	98
Ban Phuc	including							173	185	12	0.78	0.13	0.01	0.51	0.22	0.24	0.05	100
Ban Phuc	BP21-34	430083.86	2343346.03	387.63	202.25	-57.3	113	67	105.7	38.7	0.61	0.05	0.01	0.33	0.13	0.17	0.03	100
Ban Phuc	including							91.4	105.7	14.3	1.17	0.13	0.02	0.82	0.31	0.44	0.07	100
Ban Phuc	BP21-35	430374.12	2343393.24	397.6	202.25	-54.3	98.3	22	74	52	0.79	0.1	0.01	0.26	0.11	0.12	0.03	100
Ban Phuc	including							40	70	30	1.1	0.14	0.02	0.41	0.17	0.19	0.05	100
Ban Phuc	BP21-36	430211.54	2343525.46	363.95	22.25	-75.2	182.2	141	168.9	27.9	0.31	0.01	0.01	0.08	0.03	0.04	0.01	100
Ban Phuc	BP21-37	430284.32	2343571.97	327.06	22.25	-45	55	15	46.2	31.2	0.42	0.05	0.01	0.07	0.03	0.03	0.01	85
Ban Phuc	BP21-38	430435.81	2343543.9	313.33	202.25	-64	118.6			NSI								
Ban Phuc	BP21-39	430454.03	2343457.63	381	202.25	-60.7	222.1	99.35	191	91.65	0.39	0.04	0.01	0.07	0.03	0.03	0.01	99
Ban Phuc	including							169	180.4	11.4	0.71	0.1	0.01	0.18	0.07	0.08	0.03	100

Table 2

Drill hole assays, preparation by SGS, Hai Phong, assays by ALS Geochemistry, Perth (see *Appendix One for assay methods*). Note: na denotes assay result not available (element was not determined), < - below the detection of the test performed.

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP20-53	30	32.4	2.4	100	67	126	10	<0.005	0.001	0.065
BP20-53	32.4	32.7	0.3	100	70	905	24	0.017	0.063	0.197
BP20-53	32.7	33.7	1	100	58	246	11	<0.005	0.001	0.094
BP20-53	87.7	88.75	1.05	100	565	42	43	<0.005	0.003	<0.001
BP20-53	88.75	90.8	2.05	100	1520	178	78	0.005	0.009	0.001
BP20-53	90.8	91.9	1.1	100	3890	194	136	0.028	0.023	0.003
BP20-53	91.9	93.45	1.55	100	2490	286	121	0.014	0.015	0.001
BP20-53	93.45	95.45	2	100	2710	44	107	0.012	0.012	0.003
BP20-53	95.45	97.6	2.15	100	2280	10	101	0.017	0.014	0.003
BP20-53	97.6	99.3	1.7	100	3340	209	127	0.064	0.068	0.002
BP20-53	99.3	100.7	1.4	100	4200	375	156	0.024	0.034	0.004
BP20-53	100.7	103	2.3	100	5250	361	161	0.062	0.066	0.012
BP20-53	103	105	2	100	3790	110	102	0.048	0.048	0.005
BP20-53	105	106.4	1.4	100	4250	42	110	0.048	0.067	0.006
BP20-53	106.4	107.4	1	100	2900	15	98	0.033	0.032	0.005
BP20-53	107.4	109.4	2	100	2380	52	85	0.01	0.006	0.002
BP20-53	109.4	111.4	2	100	2920	50	103	0.025	0.022	0.004
BP20-53	111.4	113.05	1.65	100	3090	237	117	0.01	0.019	0.005
BP20-53	113.05	114.05	1	100	339	610	28	<0.005	0.002	<0.001
BP20-53	119.3	120.4	1.1	100	1020	523	68	<0.005	0.004	<0.001
BP20-53	120.4	122	1.6	100	2540	270	110	0.012	0.013	0.001
BP20-53	122	124.15	2.15	100	2410	746	111	0.017	0.02	0.002
BP20-53	124.15	125.3	1.15	100	3620	259	163	0.031	0.026	0.003
BP20-53	125.3	127.9	2.6	100	3190	408	150	0.03	0.022	0.002
BP20-53	127.9	130	2.1	100	6020	689	181	0.06	0.054	0.004
BP20-53	130	131.7	1.7	100	5640	472	169	0.042	0.043	0.004
BP20-53	131.7	133.7	2	100	6710	399	192	0.04	0.04	0.008
BP20-53	133.7	135.1	1.4	100	5330	483	167	0.033	0.031	0.004
BP20-53	135.1	136.4	1.3	100	664	585	58	<0.005	<0.001	<0.001
BP20-53	136.4	137.5	1.1	100	2530	251	108	0.01	0.017	0.002
BP20-53	137.5	139.5	2	100	4060	223	140	0.012	0.016	0.005
BP20-53	139.5	140.8	1.3	100	3220	464	119	0.01	0.015	0.003
BP20-53	140.8	142.5	1.7	100	3450	158	114	0.025	0.024	0.004
BP20-53	142.5	144.2	1.7	100	3820	172	118	0.026	0.024	0.009
BP20-53	144.2	146.5	2.3	100	6070	1200	155	0.055	0.07	0.035
BP20-53	146.5	148.6	2.1	100	4890	1090	147	0.027	0.033	0.034
BP20-53	148.6	149.8	1.2	100	3110	173	112	0.013	0.015	0.009
BP20-53	149.8	152	2.2	100	7050	1540	183	0.058	0.061	0.031
BP20-53	152	154.2	2.2	100	8470	1900	179	0.039	0.042	0.042
BP20-53	154.2	156.2	2	100	4540	528	115	0.098	0.111	0.016
BP20-53	156.2	158.2	2	100	3160	30	103	0.049	0.065	0.003
BP20-53	158.2	159.2	1	100	4880	423	110	0.044	0.052	0.013
BP20-53	159.2	160.7	1.5	100	6540	1220	121	0.096	0.165	0.035
BP20-53	160.7	162.7	2	100	5510	635	112	0.164	0.189	0.021
BP20-53	162.7	164	1.3	100	4890	322	113	0.093	0.125	0.01
BP20-53	164	166	2	100	3240	20	99	0.008	0.003	0.003
BP20-53	166	168	2	100	3130	9	89	0.015	0.007	0.002
BP20-53	168	169.3	1.3	100	2790	17	104	0.065	0.079	0.004
BP20-53	169.3	169.9	0.6	100	366	55	27	<0.005	<0.001	0.004
BP20-53	169.9	171	1.1	100	3140	27	117	0.047	0.071	0.003
BP20-53	171	173	2	100	3240	5	119	0.035	0.061	0.002
BP20-53	173	175	2	100	2940	7	78	0.008	0.017	0.002
BP20-53	175	177	2	100	3020	6	89	0.105	0.099	0.003
BP20-53	177	179	2	100	2650	12	81	0.009	0.002	0.002
BP20-53	179	181	2	100	2490	9	87	<0.005	<0.001	0.001
BP20-53	181	183	2	100	2760	8	82	<0.005	<0.001	0.002
BP20-53	183	185	2	100	2600	2	100	<0.005	0.001	0.002
BP20-53	185	187	2	100	2730	6	88	<0.005	<0.001	0.001
BP20-53	187	189	2	100	2610	12	87	<0.005	<0.001	0.001
BP20-53	189	191	2	100	2570	6	89	<0.005	0.001	0.001
BP20-53	191	193	2	100	2760	3	84	<0.005	<0.001	0.001
BP20-53	193	195	2	100	2830	7	84	<0.005	<0.001	0.002
BP20-53	195	197	2	100	2780	20	86	<0.005	<0.001	0.001
BP20-53	197	199	2	100	2770	12	93	<0.005	<0.001	0.001
BP20-53	199	201.1	2.1	100	2920	8	91	<0.005	<0.001	0.001
BP20-53	201.1	202.1	1	100	355	15	33	<0.005	<0.001	0.002

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP20-53	202.1	204	1.9	100	2700	4	96	<0.005	<0.001	0.002
BP20-53	204	206	2	100	2850	4	90	<0.005	<0.001	0.001
BP20-53	206	207.9	1.9	100	2770	24	88	0.067	0.002	<0.001
BP20-53	207.9	210	2.1	100	2790	7	86	0.045	0.002	0.001
BP20-53	210	212	2	100	2790	3	85	0.022	0.003	<0.001
BP20-53	212	214	2	100	2530	12	77	0.027	0.003	0.001
BP20-53	214	216	2	100	2580	6	79	0.069	0.003	0.001
BP20-53	216	218	2	100	2820	11	92	0.022	0.008	0.001
BP20-53	218	220	2	100	2710	11	86	0.014	0.001	0.004
BP20-53	220	222	2	100	2280	37	76	0.007	0.002	0.001
BP20-53	222	224	2	100	2930	18	86	0.022	0.032	0.016
BP20-53	224	226	2	100	3430	8	80	0.017	0.012	0.015
BP20-53	226	227	1	100	3590	5	65	0.03	0.058	0.02
BP20-53	227	228.85	1.85	100	3340	53	84	0.093	0.067	0.012
BP20-53	228.85	229.5	0.65	100	722	547	60	<0.005	0.001	0.001
BP20-53	229.5	231.15	1.65	100	2680	30	73	0.062	0.054	0.005
BP20-53	231.15	232.5	1.35	100	12150	971	181	0.257	0.361	0.032
BP20-53	232.5	233.8	1.3	100	5270	361	118	0.104	0.136	0.011
BP20-53	233.8	235	1.2	100	1970	27	76	0.005	0.011	0.001
BP20-53	235	237	2	100	2560	4	92	<0.005	0.004	0.001
BP20-53	237	239	2	100	2580	4	102	<0.005	0.006	0.003
BP20-53	239	241	2	100	2570	4	87	<0.005	0.002	0.002
BP20-53	241	243	2	100	2950	4	90	0.019	0.019	0.003
BP20-53	243	245	2	100	2790	3	87	<0.005	0.003	0.003
BP20-53	245	247	2	100	2790	3	82	<0.005	0.001	0.005
BP20-53	247	249	2	100	2920	4	81	<0.005	0.002	0.002
BP20-53	249	250.7	1.7	100	2910	3	80	0.041	0.002	0.004
BP20-53	250.7	252.7	2	100	3100	59	86	0.019	0.028	0.012
BP20-53	252.7	253.5	0.8	100	7030	901	172	0.129	0.182	0.086
BP20-53	253.5	255	1.5	100	7340	474	185	0.094	0.124	0.046
BP20-53	255	256.2	1.2	100	5480	709	180	0.076	0.071	0.047
BP20-53	256.2	258	1.8	100	3020	276	149	0.014	0.021	0.021
BP20-53	258	259.1	1.1	100	4300	1700	184	0.034	0.036	0.089
BP20-53	259.1	261.1	2	100	3160	148	141	0.015	0.012	0.007
BP20-53	261.1	263	1.9	100	3160	250	112	0.037	0.051	0.002
BP20-53	263	265	2	100	879	21	36	0.028	0.01	<0.001
BP20-53	265	266.8	1.8	100	2780	7	129	0.015	0.019	0.011
BP20-53	266.8	269	2.2	100	6990	826	157	0.297	0.322	0.023
BP20-53	269	271	2	100	3440	333	143	0.038	0.044	0.003
BP20-53	271	273	2	100	2620	193	105	0.017	0.02	0.001
BP20-53	273	274.65	1.65	100	3670	873	157	0.045	0.046	0.004
BP20-53	274.65	276.4	1.75	100	1260	730	90	0.008	0.015	<0.001
BP20-53	276.4	278	1.6	100	3320	605	142	0.072	0.082	<0.001
BP20-53	278	278.7	0.7	100	248	1130	61	<0.005	0.004	<0.001
BP20-53	278.7	280.7	2	100	1980	80	105	<0.005	0.004	<0.001
BP20-53	280.7	282	1.3	100	2120	224	98	0.008	0.014	<0.001
BP20-53	282	284.1	2.1	100	2520	211	109	0.015	0.016	<0.001
BP20-53	284.1	285.1	1	100	198	103	15	<0.005	0.003	<0.001
BP20-54	9.5	11.5	2	100	6750	1100	150	0.101	0.094	0.024
BP20-54	11.5	13.6	2.1	100	6110	853	134	0.116	0.089	0.015
BP20-54	14.3	16	1.7	100	5360	732	147	0.04	0.05	0.008
BP20-54	17	19.7	2.7	100	7270	2390	169	0.057	0.053	0.021
BP20-54	20.2	22	1.8	100	7470	1830	151	0.074	0.07	0.017
BP20-54	22.5	24.8	2.3	100	6100	1330	139	0.043	0.051	0.024
BP20-54	25.6	27.7	2.1	100	6650	1010	169	0.05	0.05	0.023
BP20-54	27.7	29.5	1.8	100	6430	1210	126	0.074	0.047	0.015
BP20-54	29.5	31.65	2.15	100	5650	1020	120	0.058	0.045	0.012
BP20-54	31.65	34	2.35	100	4030	465	123	0.024	0.025	0.01
BP20-54	34	36	2	100	6770	1140	185	0.081	0.066	0.027
BP20-54	36.4	37.4	1	100	4460	509	112	0.031	0.031	0.007
BP20-54	38	40.3	2.3	100	4260	338	118	0.024	0.022	0.01
BP20-54	40.5	43	2.5	100	4940	491	113	0.018	0.024	0.01
BP20-54	43.5	46	2.5	100	2870	441	101	0.011	0.016	0.003
BP20-54	46.6	49.2	2.6	100	2140	184	83	0.101	0.075	0.003
BP20-54	50.2	52.6	2.4	100	914	157	88	<0.005	0.006	0.001
BP20-54	53.3	55.4	2.1	100	1640	302	121	0.006	0.01	0.001
BP20-54	56	57	1	100	2100	514	132	0.009	0.011	0.001
BP20-54	57.4	59.4	2	100	2770	155	111	0.017	0.017	0.002
BP20-54	60.3	61	0.7	100	2460	135	116	0.011	0.014	0.001
BP20-54	61	62.6	1.6	100	3510	1450	184	0.019	0.027	0.002
BP20-54	63	64.6	1.6	100	4070	591	176	0.025	0.032	0.004
BP20-54	65	67	2	100	2580	452	147	0.012	0.011	0.002
BP20-54	67.6	69.5	1.9	100	2390	460	125	0.011	0.021	0.003
BP20-54	70	72	2	100	1620	212	92	0.006	0.01	0.001
BP20-54	72	74	2	100	1470	209	74	0.005	0.011	0.002

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP20-54	74.5	75.5	1	100	200	150	24	<0.005	0.006	0.001
BP20-54	84.9	85.9	1	100	101	123	10	<0.005	0.002	0.001
BP20-54	85.9	86.7	0.8	100	147	1440	80	<0.005	0.003	0.011
BP20-54	86.7	87.4	0.7	100	59	36	5	<0.005	0.003	0.001
BP20-55	2	4	2	100	5950	824	149	0.048	0.053	0.01
BP20-55	4	6	2	100	5830	1250	93	0.039	0.033	0.009
BP20-55	6	8	2	100	3750	83	122	0.034	0.036	0.008
BP20-55	8	10	2	100	3410	143	85	0.045	0.037	0.005
BP20-55	10	12	2	100	3870	82	103	0.027	0.027	0.007
BP20-55	12	14	2	100	3570	350	100	0.026	0.026	0.007
BP20-55	14	16	2	100	3220	56	94	0.021	0.025	0.003
BP20-55	16	18	2	100	3510	301	93	0.022	0.033	0.003
BP20-55	18	20	2	100	2780	117	97	0.016	0.023	0.005
BP20-55	20	22	2	100	3260	136	92	0.049	0.039	0.005
BP20-55	22	24	2	100	3530	58	95	0.051	0.069	0.004
BP20-55	24	26	2	100	3790	77	100	0.018	0.029	0.003
BP20-55	26	28	2	100	2840	32	108	0.008	0.012	0.003
BP20-55	28	30	2	100	4480	283	111	0.094	0.101	0.014
BP20-55	30	32	2	100	3130	48	103	<0.005	0.017	0.003
BP20-55	32	34	2	100	3360	46	97	0.038	0.035	0.004
BP20-55	34	36	2	100	4900	429	102	0.024	0.029	0.019
BP20-55	36	38	2	100	2760	274	78	0.015	0.019	0.01
BP20-55	38	40	2	100	3200	15	98	0.038	0.032	0.002
BP20-55	40	42	2	100	3250	16	97	0.009	0.015	0.004
BP20-55	42	44	2	100	6700	911	102	0.267	0.295	0.081
BP20-55	44	46	2	100	20600	3390	173	0.819	0.638	0.223
BP20-55	46	47.5	1.5	100	4360	399	82	0.089	0.11	0.101
BP20-55	47.5	49	1.5	100	2690	93	69	0.008	0.018	0.004
BP20-55	49	51	2	100	3350	71	82	0.084	0.049	0.005
BP20-55	51	53	2	100	2590	20	79	0.009	0.004	0.002
BP20-55	53	55	2	100	2650	19	79	0.011	0.012	0.003
BP20-55	55	57	2	100	2710	18	79	<0.005	0.004	0.001
BP20-55	57	58.5	1.5	100	2710	12	83	<0.005	0.004	0.004
BP20-55	58.5	60	1.5	100	2630	15	79	<0.005	0.003	0.003
BP20-55	60	62	2	100	2780	16	84	<0.005	0.002	0.002
BP20-55	62	64	2	100	2760	24	83	0.028	0.003	0.003
BP20-55	64	66	2	100	2700	20	79	<0.005	0.003	0.002
BP20-55	66	68	2	100	2690	24	79	<0.005	0.002	0.002
BP20-55	68	70	2	100	2760	15	83	<0.005	0.002	0.002
BP20-55	70	72	2	100	2700	15	82	<0.005	0.002	0.003
BP20-55	72	74	2	100	2920	17	88	<0.005	0.001	0.002
BP20-55	74	76	2	100	2860	18	85	<0.005	0.002	0.001
BP20-55	76	77.3	1.3	100	2710	17	80	<0.005	0.002	0.001
BP20-55	77.3	78.5	1.2	100	2670	19	78	<0.005	0.002	0.001
BP20-55	78.5	80.5	2	100	2930	17	84	<0.005	0.002	0.002
BP20-55	80.5	82.5	2	100	2900	18	83	<0.005	0.003	0.002
BP20-55	82.5	84.3	1.8	100	2780	16	78	0.006	0.001	0.001
BP20-55	84.3	85.6	1.3	100	2860	15	79	<0.005	0.001	0.002
BP20-55	85.6	87.6	2	100	2620	14	72	<0.005	0.002	0.001
BP20-55	87.6	89.6	2	100	2700	14	73	<0.005	0.002	0.001
BP20-55	89.6	91.6	2	100	2690	16	74	<0.005	0.002	0.001
BP20-55	91.6	93	1.4	100	2680	17	74	<0.005	0.001	0.001
BP20-55	93	94.3	1.3	100	2760	16	74	<0.005	0.001	0.001
BP20-55	94.3	96.3	2	100	2870	18	79	<0.005	0.001	0.001
BP20-55	96.3	98.3	2	100	2810	14	80	<0.005	0.002	0.001
BP20-55	98.3	100.3	2	100	2970	15	81	<0.005	0.001	0.001
BP20-55	100.3	102.3	2	100	2960	14	81	<0.005	0.002	0.001
BP20-55	102.3	103.5	1.2	100	2810	14	78	<0.005	0.001	0.001
BP20-55	103.5	105.5	2	100	2800	10	79	<0.005	0.002	0.001
BP20-55	105.5	107.5	2	100	2950	10	81	<0.005	0.001	0.002
BP20-55	107.5	109.8	2.3	100	2400	14	67	<0.005	0.001	0.002
BP20-55	109.8	112	2.2	100	2700	9	76	<0.005	0.002	0.002
BP20-55	112	114	2	100	2760	12	70	<0.005	0.002	0.003
BP20-55	114	116	2	100	3060	19	76	0.005	0.002	0.002
BP20-55	116	118	2	100	3110	16	75	0.006	0.001	0.002
BP20-55	118	120	2	100	3120	30	70	0.009	0.002	0.001
BP20-55	120	122	2	100	3170	23	76	0.01	0.001	0.003
BP20-55	122	124	2	100	3070	14	76	0.006	0.001	0.001
BP20-55	124	126	2	100	3180	13	81	<0.005	0.001	0.002
BP20-55	126	128	2	100	3220	16	79	0.015	0.002	0.002
BP20-55	128	130	2	100	3140	21	78	0.009	0.001	0.003
BP20-55	130	132	2	100	2900	25	73	<0.005	0.001	0.003
BP20-55	132	133.3	1.3	100	2460	40	62	0.013	0.001	0.004
BP20-55	133.3	134	0.7	100	582	8	29	<0.005	<0.001	0.001
BP20-55	134	134.7	1.8	100	2680	64	67	0.008	0.003	0.004

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP20-55	136.5	138.3	1.8	100	3160	37	85	0.007	0.001	0.003
BP20-55	138.3	139.4	1.1	100	1230	21	40	<0.005	0.001	0.001
BP20-55	139.4	141.4	2	100	3110	30	84	0.008	<0.001	0.003
BP20-55	141.4	143.4	2	100	3000	43	78	0.006	0.001	0.003
BP20-55	143.4	145.4	2	100	3030	50	78	0.013	0.002	0.004
BP20-55	145.4	147.4	2	100	2930	25	83	0.017	0.001	0.002
BP20-55	147.4	149.4	2	100	2970	38	81	0.013	0.001	0.003
BP20-55	149.4	151.4	2	100	3030	23	85	0.017	0.001	0.004
BP20-55	151.4	153.4	2	100	2830	29	81	0.013	0.001	0.004
BP20-55	153.4	155.4	2	100	na	na	na	na	na	na
BP20-55	155.4	157.4	2	100	na	na	na	na	na	na
BP20-55	157.4	159.4	2	100	na	na	na	na	na	na
BP20-55	159.4	161.4	2	100	na	na	na	na	na	na
BP20-55	161.4	163.4	2	100	na	na	na	na	na	na
BP20-55	163.4	165	1.6	100	na	na	na	na	na	na
BP20-55	165	166.5	1.5	100	na	na	na	na	na	na
BP20-55	166.5	168	1.5	100	na	na	na	na	na	na
BP20-55	168	170	2	100	2200	83	69	0.013	0.016	0.004
BP20-55	170	172	2	100	2650	82	67	0.006	0.022	0.002
BP20-55	172	174	2	100	5130	159	91	0.075	0.1	0.005
BP20-55	174	176	2	100	3850	120	76	0.056	0.088	0.006
BP20-55	176	177.6	1.6	100	3310	160	66	0.117	0.129	0.009
BP20-55	177.6	178.6	1	100	635	258	34	0.006	0.001	0.001
BP20-55	178.6	180.6	2	100	3330	94	67	0.022	0.036	0.005
BP20-55	180.6	182.6	2	100	2990	56	73	0.03	0.016	0.004
BP20-55	182.6	184.6	2	100	1690	51	61	0.04	0.017	0.003
BP20-55	184.6	187	2.4	100	2800	59	66	0.037	0.034	0.005
BP20-55	187	189	2	100	3110	41	80	0.03	0.017	0.005
BP20-55	189	191	2	100	3250	52	82	0.021	0.024	0.005
BP20-55	191	193	2	100	3160	36	80	0.031	0.05	0.005
BP20-55	193	195	2	100	3400	37	85	0.078	0.067	0.005
BP20-55	195	197	2	100	4660	38	94	0.054	0.102	0.012
BP20-55	197	199	2	100	3140	27	83	0.041	0.019	0.004
BP20-55	199	201	2	100	2850	21	78	0.033	0.017	0.003
BP20-55	201	203	2	100	3070	21	83	0.014	0.008	0.003
BP20-55	203	205	2	100	3180	28	85	0.006	0.013	0.003
BP20-55	205	207	2	100	2910	17	82	0.014	0.003	0.002
BP20-55	207	209	2	100	2860	15	81	<0.005	0.002	0.001
BP20-55	209	211	2	100	2790	16	79	0.061	0.001	0.001
BP20-55	211	213	2	100	2850	14	81	<0.005	0.001	0.001
BP20-55	213	215	2	100	2750	12	79	0.009	0.001	0.001
BP20-55	215	217	2	100	2820	11	79	<0.005	0.001	0.001
BP20-55	217	219	2	100	2740	12	80	0.006	0.001	0.001
BP20-55	219	221	2	100	2750	10	79	<0.005	<0.001	<0.001
BP20-55	221	223	2	100	2780	9	80	<0.005	<0.001	0.001
BP20-55	223	225	2	100	2680	10	76	<0.005	0.001	0.001
BP20-55	225	227	2	100	2750	12	79	<0.005	0.003	0.002
BP20-55	227	229	2	100	2590	14	76	0.007	<0.001	0.001
BP20-55	229	231	2	100	1910	85	71	<0.005	0.001	0.002
BP20-55	231	233	2	100	2700	17	73	<0.005	0.001	0.003
BP20-55	233	235	2	100	3010	19	81	0.012	0.002	0.003
BP20-55	235	237	2	100	2860	20	77	0.063	0.005	0.003
BP20-55	237	239	2	100	3000	23	81	0.159	0.006	0.003
BP20-55	239	241	2	100	2830	22	78	0.031	0.003	0.004
BP20-55	241	243	2	100	2750	24	75	<0.005	0.002	0.005
BP20-55	243	244.5	1.5	100	3030	39	77	0.11	0.086	0.007
BP20-55	244.5	247.2	2.7	100	974	25	45	0.024	0.021	0.003
BP20-55	247.2	249.6	2.4	100	2690	41	69	0.019	0.025	0.007
BP20-55	249.6	250.7	1.1	100	2370	149	54	0.014	0.053	0.016
BP20-55	250.7	252.7	2	100	2940	27	79	<0.005	0.003	0.004
BP20-55	252.7	254.85	2.15	100	3470	35	85	0.056	0.077	0.012
BP20-55	254.85	255.8	0.95	100	2490	20	51	0.065	0.07	0.015
BP20-55	255.8	257.8	2	100	2900	13	81	0.007	0.004	0.003
BP20-55	257.8	259.45	1.65	100	2520	15	78	<0.005	0.002	0.002
BP20-55	259.45	261.5	2.05	100	2810	10	83	0.02	0.002	0.002
BP20-55	261.5	263.5	2	100	2800	12	81	<0.005	0.004	0.001
BP20-55	263.5	265.5	2	100	2740	11	81	0.007	0.002	0.001
BP20-55	265.5	267.8	2.3	100	2690	12	78	<0.005	0.007	0.001
BP20-55	267.8	269.1	1.3	100	2580	18	75	0.007	0.001	0.001
BP20-55	269.1	270.4	1.3	100	2810	13	83	0.01	0.001	<0.001
BP20-55	270.4	271.5	1.1	100	2720	23	80	<0.005	0.002	0.001
BP20-55	271.5	273.5	2	100	2980	6	92	<0.005	0.002	0.001
BP20-55	273.5	275.5	2	100	2970	7	88	<0.005	0.001	0.001
BP20-55	275.5	277.5	2	100	2860	8	83	<0.005	0.002	0.001
BP20-55	277.5	279.5	2	100	2880	9	83	<0.005	0.003	<0.001

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP20-55	279.5	281	1.5	100	2710	13	82	0.005	0.001	<0.001
BP20-55	281	282.5	1.5	100	2810	9	86	<0.005	0.002	<0.001
BP20-55	282.5	284.8	2.3	100	2520	12	75	<0.005	0.002	<0.001
BP20-55	284.8	286.8	2	100	2720	9	82	<0.005	0.002	<0.001
BP20-55	286.8	288.8	2	100	2470	14	77	0.04	0.002	<0.001
BP20-55	288.8	290.8	2	100	2420	15	77	<0.005	0.002	0.001
BP20-55	290.8	292.8	2	100	2330	12	75	0.005	0.001	0.001
BP20-55	292.8	294.8	2	100	2210	12	71	<0.005	0.001	0.001
BP20-55	294.8	296.3	1.5	100	2330	11	76	<0.005	0.001	0.001
BP20-55	296.3	297.7	1.4	100	2330	12	76	<0.005	0.002	0.002
BP20-55	297.7	299	1.3	100	1520	35	42	0.03	0.012	0.006
BP20-55	299	299.8	0.8	100	2560	37	75	0.038	0.022	0.005
BP20-55	299.8	300.5	0.7	100	1550	46	50	0.024	0.01	0.013
BP20-55	300.5	302	1.5	100	2530	37	76	0.079	0.047	0.005
BP20-55	302	303.4	1.4	100	3250	70	83	0.237	0.26	0.011
BP20-55	303.4	304.7	1.3	100	1180	47	38	0.026	0.045	0.004
BP20-55	304.7	306.7	2	100	2450	37	73	0.006	0.007	0.003
BP20-55	306.7	308.7	2	100	4220	46	84	0.21	0.213	0.012
BP20-55	308.7	310.7	2	100	2760	24	79	0.012	0.02	0.003
BP20-55	310.7	312.7	2	100	2520	20	78	<0.005	0.004	0.002
BP20-55	312.7	314.7	2	100	2570	15	83	<0.005	0.006	0.002
BP20-55	314.7	316.7	2	100	2500	15	81	0.021	0.003	0.002
BP20-55	316.7	318.7	2	100	2510	11	82	0.019	0.034	0.002
BP20-55	318.7	320.7	2	100	2440	13	78	0.014	0.002	0.001
BP20-55	320.7	322.7	2	100	2630	15	82	0.007	0.002	0.001
BP20-55	322.7	324.7	2	100	2640	11	85	0.009	0.001	<0.001
BP20-55	324.7	326.7	2	100	2510	13	81	<0.005	0.002	<0.001
BP20-55	326.7	328.7	2	100	2640	13	83	0.006	<0.001	<0.001
BP20-55	328.7	330.7	2	100	2740	18	83	<0.005	0.002	<0.001
BP20-55	330.7	332	1.3	100	2470	18	82	0.036	0.002	<0.001
BP20-55	332	334	2	100	2690	20	86	<0.005	0.002	<0.001
BP20-55	334	336	2	100	2720	30	89	0.006	0.003	<0.001
BP20-55	336	338	2	100	2560	12	87	0.01	0.003	0.001
BP20-55	338	340	2	100	2890	11	87	<0.005	0.001	<0.001
BP20-55	340	342	2	100	2980	3	89	<0.005	0.001	0.001
BP20-55	342	344	2	100	3010	5	94	<0.005	0.002	0.002
BP20-55	344	346	2	100	2980	3	95	<0.005	0.002	0.001
BP20-55	346	347.5	1.5	100	2850	1	101	0.006	0.012	0.002
BP20-55	347.5	349.3	1.8	100	2930	174	90	0.005	0.021	0.015
BP20-55	349.3	351.6	2.3	100	3990	512	105	0.04	0.07	0.015
BP20-55	351.6	353.7	2.1	100	4470	512	114	0.07	0.09	0.024
BP20-55	353.7	355.7	2	100	8890	1850	191	0.176	0.202	0.079
BP20-55	355.7	357.2	1.5	100	8390	1740	226	0.123	0.153	0.038
BP20-55	357.2	358.5	1.3	100	8870	1720	209	0.099	0.12	0.06
BP20-55	358.5	359.8	1.3	100	5220	751	152	0.053	0.057	0.036
BP20-55	359.8	361.1	1.3	100	6130	1170	203	0.048	0.056	0.031
BP20-55	361.1	362.7	1.6	100	3270	364	130	0.033	0.027	0.007
BP20-55	362.7	364.3	1.6	100	2980	85	87	0.022	0.024	0.007
BP20-55	364.3	366.1	1.8	100	5090	495	146	0.032	0.039	0.022
BP20-55	366.1	368	1.9	100	3800	380	136	0.031	0.033	0.014
BP20-55	368	370	2	100	3540	478	151	0.028	0.026	0.009
BP20-55	370	372	2	100	3740	53	133	0.022	0.034	0.009
BP20-55	372	373.5	1.5	100	3050	208	126	0.023	0.027	0.004
BP20-55	373.5	375	1.5	100	2590	49	118	0.017	0.016	0.003
BP20-55	375	376.7	1.7	100	3530	367	144	0.079	0.414	0.007
BP20-55	376.7	378.3	1.6	100	2500	403	143	0.018	0.017	0.004
BP20-55	378.3	380.3	2	100	334	161	30	<0.005	0.002	0.001
BP20-56	77.3	77.8	0.5	100	113	108	18	<0.005	0.001	<0.001
BP20-56	78.7	81.2	2.5	100	2920	30	84	<0.005	0.001	0.002
BP20-56	81.2	82.8	1.6	100	3170	25	88	0.009	0.002	0.003
BP20-56	82.8	84.8	2	100	3190	20	92	0.005	0.001	0.003
BP20-56	84.8	86.8	2	100	3290	17	91	0.006	<0.001	0.003
BP20-56	86.8	87.5	0.7	100	2880	64	77	0.011	0.004	0.005
BP20-56	87.5	88.9	1.4	100	3250	22	90	<0.005	0.001	0.002
BP20-56	88.9	91	2.1	100	3160	18	84	<0.005	0.001	0.002
BP20-56	91	94	3	100	3120	19	83	0.006	0.001	0.001
BP20-56	94	97	3	100	3200	21	84	0.019	0.005	0.001
BP20-56	97	100	3	100	3300	19	83	0.006	0.001	0.002
BP20-56	100	102.5	2.5	100	3400	21	87	0.01	0.005	0.002
BP20-56	102.5	104.5	2	100	3570	24	86	0.006	0.005	0.003
BP20-56	104.5	106.5	2	100	3520	20	85	0.021	0.029	0.004
BP20-56	106.5	107.15	0.65	100	2430	433	63	0.039	0.026	0.003
BP20-56	107.15	107.7	0.55	100	139	7	26	<0.005	<0.001	<0.001
BP20-56	107.7	110.5	2.8	100	2250	53	72	0.023	0.015	0.002
BP20-56	110.5	113.5	3	100	3270	58	75	0.029	0.021	0.003

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP20-56	113.5	116.5	3	100	3610	95	76	0.181	0.114	0.004
BP20-56	116.5	119.5	3	100	3360	48	78	0.031	0.011	0.004
BP20-56	119.5	121.25	1.75	100	3060	90	72	0.011	0.005	0.002
BP20-56	121.25	123.5	2.25	100	1845	26	65	<0.005	<0.001	0.005
BP20-56	123.5	126	2.5	100	3320	24	80	0.005	<0.001	0.008
BP20-56	126	129	3	100	3340	20	81	<0.005	<0.001	0.006
BP20-56	129	131.2	2.2	100	3240	16	79	<0.005	<0.001	0.005
BP20-56	131.2	134	2.8	100	3410	14	86	<0.005	<0.001	0.002
BP20-56	134	136.15	2.15	100	3430	16	86	0.006	<0.001	<0.001
BP20-56	136.15	137	0.85	100	1680	33	48	<0.005	<0.001	<0.001
BP20-56	137	140	3	100	3180	17	77	<0.005	0.001	<0.001
BP20-56	140	143	3	100	3360	17	85	<0.005	<0.001	0.001
BP20-56	143	146	3	100	3270	10	88	<0.005	0.001	<0.001
BP20-56	146	149	3	100	3140	13	89	0.022	0.012	<0.001
BP20-56	149	152	3	100	2610	13	80	<0.005	<0.001	<0.001
BP20-56	152	155	3	100	2990	11	89	<0.005	<0.001	<0.001
BP20-56	155	158	3	100	2780	14	80	<0.005	<0.001	<0.001
BP20-56	158	160	2	100	2760	22	82	0.028	<0.001	<0.001
BP20-56	160	162	2	100	2840	14	82	0.03	0.009	<0.001
BP20-56	162	163.4	1.4	100	2020	40	53	0.011	0.006	0.001
BP20-56	163.4	165.4	2	100	3020	17	88	0.012	0.002	0.001
BP20-56	165.4	168	2.6	100	3010	10	90	<0.005	0.001	0.001
BP20-56	168	171	3	100	2890	14	85	0.01	0.003	<0.001
BP20-56	171	174	3	100	2600	21	75	0.016	0.004	0.001
BP20-56	174	177	3	100	3070	9	95	<0.005	<0.001	0.001
BP20-56	177	179	2	100	3020	7	92	<0.005	<0.001	<0.001
BP20-56	179	182	3	100	2890	9	84	<0.005	<0.001	<0.001
BP20-56	182	185	3	100	2850	10	81	<0.005	<0.001	<0.001
BP20-56	185	188	3	100	2860	9	84	<0.005	<0.001	<0.001
BP20-56	188	191	3	100	2830	15	82	<0.005	<0.001	<0.001
BP20-56	191	194	3	100	2670	26	78	0.007	<0.001	<0.001
BP20-56	194	197	3	100	2910	17	82	0.012	0.001	<0.001
BP20-56	197	200	3	100	2710	16	79	<0.005	<0.001	<0.001
BP20-56	200	203	3	100	2610	16	81	<0.005	<0.001	<0.001
BP20-56	203	206	3	100	2620	17	80	<0.005	<0.001	<0.001
BP20-56	206	209	3	100	2600	12	82	<0.005	<0.001	<0.001
BP20-56	209	212	3	100	2800	7	91	<0.005	<0.001	<0.001
BP20-56	212	215	3	100	3180	9	101	0.005	<0.001	<0.001
BP20-56	215	218	3	100	2760	9	89	<0.005	<0.001	<0.001
BP20-56	218	221	3	100	2580	12	84	0.007	0.001	<0.001
BP20-56	221	224	3	100	2730	10	88	<0.005	<0.001	<0.001
BP20-56	224	227	3	100	2500	14	81	0.021	0.004	0.001
BP20-56	227	230	3	100	2760	12	87	<0.005	0.002	0.001
BP20-56	230	233	3	100	2730	12	86	<0.005	0.001	<0.001
BP20-56	233	236	3	100	2750	14	86	0.169	0.002	0.001
BP20-56	236	239	3	100	2820	11	90	<0.005	0.002	0.001
BP20-56	239	242	3	100	2610	12	86	0.009	0.001	0.001
BP20-56	242	245	3	100	2540	18	86	0.217	<0.001	0.001
BP20-56	245	247	2	100	2670	12	87	<0.005	0.001	<0.001
BP20-56	247	249	2	100	2590	10	86	0.008	<0.001	0.002
BP20-56	249	252	3	100	2720	10	87	<0.005	0.001	0.001
BP20-56	252	255	3	100	2710	11	91	0.046	0.001	0.001
BP20-56	255	258	3	100	2710	7	93	<0.005	0.002	0.002
BP20-56	258	261	3	100	2780	6	90	<0.005	0.001	0.001
BP20-56	261	264	3	100	2850	2	91	0.016	0.007	0.002
BP20-56	264	267	3	100	3670	49	130	0.051	0.077	0.009
BP20-56	267	269	2	100	3500	270	114	0.046	0.05	0.017
BP20-56	269	271	2	100	3530	278	112	0.038	0.041	0.016
BP20-56	271	273	2	100	3670	504	118	0.038	0.053	0.018
BP20-56	273	275	2	100	5750	896	170	0.084	0.109	0.024
BP20-56	275	277	2	100	11000	1670	181	0.188	0.285	0.054
BP20-56	277	279	2	100	15050	2580	214	0.311	0.428	0.099
BP20-56	279	281.5	2.5	100	11700	1820	179	0.209	0.258	0.054
BP20-56	281.5	283.5	2	100	5860	791	166	0.062	0.082	0.02
BP20-56	283.5	285.5	2	100	3050	62	102	0.048	0.035	0.003
BP20-56	285.5	287	1.5	100	3070	76	110	0.06	0.042	0.004
BP20-56	287	289	2	100	2600	14	92	0.008	0.009	0.003
BP20-56	289	291	2	100	2770	4	78	0.007	0.006	0.005
BP20-56	291	293	2	100	4050	34	135	0.084	0.085	0.01
BP20-56	293	295	2	100	2510	14	80	0.008	0.011	0.003
BP20-56	295	297.5	2.5	100	2310	26	82	0.019	0.029	0.004
BP20-56	297.5	300	2.5	100	4100	113	126	0.052	0.058	0.01
BP20-56	300	302	2	100	3740	41	124	0.048	0.051	0.01
BP20-56	302	304	2	100	3130	112	129	0.023	0.023	0.005
BP20-56	304	306	2	100	2110	1040	139	0.011	0.01	0.016

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP20-56	306	307.8	1.8	100	2220	435	129	0.019	0.012	0.011
BP20-56	307.8	309	1.2	100	608	101	40	<0.005	0.004	0.011
BP20-57	111.62	113	1.38	100	2740	64	77	<0.005	0.001	0.003
BP20-57	113	114.2	1.2	100	3490	17	91	<0.005	0.002	0.004
BP20-57	114.2	116.4	2.2	100	2970	31	83	<0.005	0.001	0.004
BP20-57	117	120	3	100	3230	23	87	<0.005	0.001	0.005
BP20-57	120	123	3	100	3250	29	89	0.005	<0.001	0.004
BP20-57	123	126	3	100	3180	23	85	0.018	0.022	0.004
BP20-57	126	129	3	100	3530	32	88	0.06	0.028	0.007
BP20-57	129	132	3	100	3600	36	92	0.076	0.025	0.008
BP20-57	132	135	3	100	3420	37	89	0.012	0.006	0.007
BP20-57	135	138	3	100	3480	45	87	0.038	0.031	0.008
BP20-57	138	141	3	100	3810	62	84	0.044	0.06	0.015
BP20-57	141	143.5	2.5	100	3390	32	89	0.025	0.014	0.006
BP20-57	143.5	145.5	2	100	3250	19	85	0.018	0.014	0.006
BP20-57	145.5	146.9	1.4	100	3450	17	92	0.009	0.003	0.003
BP20-57	146.9	148	1.1	100	2540	36	68	<0.005	0.002	0.005
BP20-57	148	150	2	100	1140	56	31	0.01	0.022	0.005
BP20-57	150	153	3	100	3520	32	87	0.014	0.018	0.007
BP20-57	153	156.2	3.2	100	4490	103	88	0.215	0.203	0.017
BP20-57	157	160	3	100	3840	184	67	0.113	0.166	0.018
BP20-57	160	163	3	100	4100	417	75	0.032	0.037	0.025
BP20-57	163	165.6	2.6	100	14400	1660	113	0.299	0.264	0.141
BP20-57	165.6	166.15	0.55	100	259	147	16	<0.005	0.004	0.009
BP20-57	166.15	169	2.85	100	3990	48	98	0.072	0.04	0.013
BP20-57	169	172	3	100	3370	22	93	0.005	0.005	0.004
BP20-57	172	175	3	100	3550	81	96	0.005	0.007	0.007
BP20-57	175	178	3	100	3050	19	87	0.038	0.039	0.002
BP20-57	178	181	3	100	2990	13	88	<0.005	0.004	0.002
BP20-57	181	184	3	100	2920	15	86	<0.005	0.003	0.002
BP20-57	184	187	3	100	3000	24	88	<0.005	<0.001	0.001
BP20-57	187	190	3	100	2870	21	82	0.012	0.001	0.001
BP20-57	190	192.75	2.75	100	2750	17	80	<0.005	<0.001	0.001
BP20-57	192.75	195	2.25	100	2860	10	84	0.008	0.001	0.001
BP20-57	195	197	2	100	2770	10	79	<0.005	0.001	0.001
BP20-57	197	199	2	100	2930	8	86	<0.005	<0.001	0.001
BP20-57	199	202	3	100	2790	12	80	<0.005	0.001	0.001
BP20-57	202	205	3	100	2580	9	71	0.006	0.001	0.001
BP20-57	205	208	3	100	2740	7	77	<0.005	0.002	0.001
BP20-57	208	211	3	100	2680	6	78	<0.005	0.001	0.001
BP20-57	211	214	3	100	2820	7	82	<0.005	0.001	0.001
BP20-57	214	217	3	100	2550	19	74	<0.005	0.001	0.001
BP20-57	217	220	3	100	2370	34	67	<0.005	0.001	0.001
BP20-57	220	223	3	100	2680	6	81	<0.005	<0.001	0.001
BP20-57	223	226	3	100	2730	6	83	<0.005	0.002	0.001
BP20-57	226	229	3	100	2800	5	84	<0.005	0.001	0.001
BP20-57	229	232	3	100	2880	18	91	<0.005	<0.001	0.001
BP20-57	232	235	3	100	2560	22	79	<0.005	<0.001	0.001
BP20-57	235	238	3	100	2390	22	80	<0.005	0.001	0.002
BP20-57	238	241	3	100	2580	7	81	0.023	0.007	0.003
BP20-57	241	243.6	2.6	100	5150	169	91	0.208	0.243	0.036
BP20-57	243.6	245.6	2	100	16400	2780	128	0.368	0.43	0.098
BP20-57	245.6	247.6	2	100	13650	2450	132	0.145	0.225	0.058
BP20-57	247.6	249.6	2	100	13650	2100	147	0.163	0.149	0.051
BP20-57	249.6	252.6	3	100	4650	194	110	0.025	0.064	0.013
BP20-57	252.6	255.6	3	100	7800	714	125	0.096	0.126	0.034
BP20-57	255.6	258.4	2.8	100	6440	953	116	0.079	0.098	0.025
BP20-57	258.4	261.4	3	100	3700	320	113	0.034	0.062	0.011
BP20-57	261.4	264	2.6	100	7270	1220	144	0.097	0.112	0.028
BP20-57	264	266.7	2.7	100	5860	779	126	0.108	0.131	0.028
BP20-57	266.7	268.3	1.6	100	9920	1770	151	0.313	0.48	0.076
BP20-57	268.3	269.9	1.6	100	11650	2040	160	0.278	0.443	0.095
BP20-57	269.9	272	2.1	100	7870	1185	142	0.116	0.177	0.048
BP20-57	272	275	3	100	8230	1225	161	0.118	0.142	0.04
BP20-57	275	277	2	100	5510	603	138	0.088	0.089	0.021
BP20-57	277	279.6	2.6	100	2810	183	95	0.027	0.032	0.008
BP20-57	279.6	282.3	2.7	100	6920	1055	164	0.072	0.093	0.027
BP20-57	282.3	285	2.7	100	4820	514	131	0.06	0.075	0.021
BP20-57	285	288	3	100	7680	1460	162	0.124	0.194	0.037
BP20-57	288	290.5	2.5	100	5610	822	144	0.111	0.119	0.026
BP20-57	290.5	293.24	2.74	100	8180	1520	184	0.111	0.119	0.026
BP20-57	293.24	296.2	2.96	100	3800	387	101	0.05	0.051	0.013
BP20-57	296.2	299	2.8	100	3200	339	108	0.036	0.038	0.008
BP20-57	299	302	3	100	2990	103	109	0.01	0.016	0.004
BP20-57	302	305	3	100	3770	450	138	0.039	0.042	0.005

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP20-57	305	308	3	100	2950	10	101	0.012	0.011	0.005
BP20-57	308	311	3	100	2690	4	91	0.022	0.008	0.003
BP20-57	311	314	3	100	5880	416	113	0.128	0.183	0.03
BP20-57	314	317	3	100	3090	975	107	0.023	0.026	0.03
BP20-57	317	320	3	100	2790	128	106	0.006	0.011	0.006
BP20-57	320	323	3	100	3210	41	107	0.025	0.027	0.004
BP20-57	323	324.4	1.4	100	2560	117	89	0.014	0.017	0.004
BP20-57	324.4	325.4	1	100	920	66	43	<0.005	0.006	0.001
BP21-01	115.4	118.4	3	100	2780	9	86	<0.005	<0.001	0.002
BP21-01	118.4	121.4	3	100	2870	15	87	0.005	<0.001	0.003
BP21-01	121.4	124.4	3	100	2910	10	89	<0.005	<0.001	0.001
BP21-01	124.4	127.4	3	100	2920	17	87	<0.005	0.001	<0.001
BP21-01	127.4	130.4	3	100	2920	20	88	0.005	<0.001	0.002
BP21-01	130.4	133.5	3.1	100	2720	20	81	0.01	<0.001	0.001
BP21-01	133.5	136.5	3	100	2740	22	82	0.007	<0.001	<0.001
BP21-01	136.5	139.5	3	100	2730	22	83	<0.005	<0.001	0.001
BP21-01	139.5	142.5	3	100	2710	19	83	<0.005	<0.001	0.001
BP21-01	142.5	145.5	3	100	2640	16	84	0.017	0.002	0.001
BP21-01	145.5	148.5	3	100	2620	15	83	0.021	<0.001	<0.001
BP21-01	148.5	151.5	3	100	2710	20	86	0.006	<0.001	0.001
BP21-01	151.5	154.5	3	100	2660	17	85	0.007	<0.001	<0.001
BP21-01	154.5	157.5	3	100	2710	17	87	<0.005	<0.001	0.001
BP21-01	157.5	160.5	3	100	2710	24	84	0.015	0.002	0.001
BP21-01	160.5	163.5	3	100	2560	17	81	<0.005	<0.001	<0.001
BP21-01	163.5	166.5	3	100	2640	13	84	0.007	<0.001	0.001
BP21-01	166.5	169.5	3	100	2600	15	84	0.005	<0.001	0.002
BP21-01	169.5	172.5	3	100	2390	17	79	0.011	<0.001	0.003
BP21-01	172.5	175.5	3	100	2570	15	88	0.009	<0.001	0.002
BP21-01	175.5	178.5	3	100	2430	18	83	0.007	0.015	0.003
BP21-01	178.5	181.5	3	100	2670	16	88	<0.005	<0.001	0.003
BP21-01	181.5	184.5	3	100	2410	14	82	0.005	0.002	0.003
BP21-01	184.5	187.5	3	100	2650	14	90	0.064	<0.001	0.002
BP21-01	187.5	190.5	3	100	2620	12	89	0.022	<0.001	0.003
BP21-01	190.5	193.4	2.9	100	2760	20	89	0.131	0.084	0.003
BP21-01	193.4	196.4	3	100	2690	19	94	0.159	0.273	0.002
BP21-01	196.4	199.4	3	100	3960	183	110	0.048	0.043	0.016
BP21-01	199.4	202.2	2.8	100	3990	186	115	0.138	0.175	0.012
BP21-01	202.2	205.5	3.3	100	8400	1730	161	0.149	0.189	0.066
BP21-01	205.5	208.5	3	100	2550	17	113	0.005	0.008	0.002
BP21-01	208.5	211.5	3	100	3380	149	127	0.028	0.018	0.006
BP21-01	211.5	214.5	3	100	2610	105	103	0.014	0.012	0.006
BP21-01	214.5	217.8	3.3	100	5240	409	146	0.065	0.077	0.018
BP21-01	217.8	218.75	0.95	100	7080	1190	158	0.174	0.163	0.043
BP21-01	218.75	221	2.25	100	3330	262	132	0.042	0.053	0.013
BP21-01	221	223.45	2.45	100	4390	299	137	0.045	0.033	0.016
BP21-01	223.45	226.5	3.05	100	2820	6	78	0.01	0.006	0.005
BP21-01	226.5	229.1	2.6	100	2980	11	99	0.017	0.017	0.007
BP21-01	229.1	232.1	3	100	3630	111	108	0.021	0.019	0.007
BP21-01	232.1	235.1	3	100	3620	112	97	0.039	0.032	0.007
BP21-01	235.1	238.1	3	100	144	37	14	<0.005	<0.001	0.001
BP21-02A	5.3	7.3	2	100	2980	129	106	0.033	0.03	0.003
BP21-02A	7.3	9.3	2	100	2820	38	97	0.018	0.025	0.003
BP21-02A	9.3	11.3	2	100	5510	755	145	0.043	0.042	0.022
BP21-02A	11.3	13.3	2	100	4270	317	120	0.035	0.035	0.01
BP21-02A	13.3	15.3	2	100	4200	240	106	0.024	0.029	0.008
BP21-02A	15.3	17.3	2	100	3270	61	102	0.022	0.035	0.004
BP21-02A	17.3	19.3	2	100	3490	215	110	0.082	0.076	0.009
BP21-02A	19.3	21.3	2	100	4560	479	121	0.033	0.04	0.011
BP21-02A	21.3	23.3	2	100	8960	1720	218	0.059	0.064	0.024
BP21-02A	23.3	25.3	2	100	11600	2360	277	0.077	0.088	0.041
BP21-02A	25.3	27.3	2	100	12200	2390	213	0.079	0.092	0.047
BP21-02A	27.3	30.1	2.8	100	8990	596	154	0.071	0.065	0.017
BP21-02A	30.1	32.1	2	100	7790	834	124	0.107	0.1	0.033
BP21-02A	32.1	34.1	2	100	4730	858	98	0.037	0.073	0.025
BP21-02A	34.1	36.2	2.1	100	3840	169	97	0.043	0.042	0.01
BP21-02A	36.2	38.5	2.3	100	4050	167	94	0.058	0.064	0.007
BP21-02A	38.5	41.2	2.7	100	2970	53	95	0.231	0.122	0.001
BP21-02A	116.6	118.6	2	100	2640	14	77	<0.005	0.001	<0.001
BP21-02A	118.6	120.6	2	100	2650	13	78	0.005	0.001	0.001
BP21-02A	120.6	122.6	2	100	2790	15	82	0.006	0.001	0.001
BP21-02A	122.6	124.6	2	100	2980	32	81	0.016	0.003	0.001
BP21-02A	124.6	125.4	0.8	100	239	15	17	0.011	0.001	0.001
BP21-02A	125.4	127.4	2	100	2700	14	79	0.01	0.002	0.001
BP21-02A	127.4	129.4	2	100	2630	13	77	0.021	0.001	0.001
BP21-02A	129.4	131.4	2	100	2760	11	81	0.005	0.001	0.001

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP21-02A	131.4	133.4	2	100	2670	13	77	<0.005	<0.001	0.001
BP21-02A	133.4	135.4	2	100	2910	13	84	<0.005	0.001	0.001
BP21-02A	135.4	137.2	1.8	100	2830	15	83	<0.005	0.001	0.001
BP21-02A	137.2	140.4	3.2	100	2760	18	83	0.01	0.002	0.002
BP21-02A	140.4	143.7	3.3	100	2680	17	82	0.01	0.002	0.006
BP21-02A	143.7	144.7	1	100	1100	24	36	0.012	0.004	0.002
BP21-02A	144.7	147.7	3	100	2760	29	80	0.005	0.003	0.003
BP21-02A	147.7	150.7	3	100	2760	18	85	0.006	0.002	0.003
BP21-02A	150.7	153	2.3	100	2840	16	89	0.01	0.002	0.003
BP21-02A	153	155.3	2.3	100	2610	30	76	0.007	0.003	0.004
BP21-02A	155.3	157.7	2.4	85	1520	61	44	0.019	0.002	0.003
BP21-02A	157.7	160.7	3	100	2800	78	73	0.157	0.076	0.003
BP21-02A	160.7	163.7	3	100	3200	48	81	0.057	0.065	0.005
BP21-02A	163.7	166.7	3	100	2790	40	76	0.007	0.016	0.004
BP21-02A	166.7	169.7	3	100	3080	41	83	0.014	0.024	0.005
BP21-02A	169.7	172	2.3	100	3060	41	82	0.006	0.013	0.005
BP21-02A	172	174.4	2.4	100	2760	72	72	0.005	0.007	0.004
BP21-02A	174.4	176.6	2.2	70	1350	42	39	0.013	0.007	0.002
BP21-02A	176.6	179.6	3	100	3070	58	77	0.045	0.039	0.004
BP21-02A	179.6	182.6	3	100	2760	38	73	0.032	0.013	0.004
BP21-02A	182.6	185.6	3	100	3020	35	84	<0.005	0.004	0.004
BP21-02A	185.6	188.6	3	100	2950	24	85	0.042	0.022	0.004
BP21-02A	188.6	191.6	3	100	3070	22	83	0.011	0.014	0.004
BP21-02A	191.6	194.6	3	100	2690	25	72	0.041	0.024	0.004
BP21-02A	194.6	196.6	2	100	2660	29	77	0.006	0.004	0.004
BP21-02A	196.6	199	2.4	100	2950	42	78	0.006	0.025	0.006
BP21-02A	199	201.9	2.9	100	3030	35	85	0.014	0.014	0.008
BP21-02A	205.35	260.5	2.15	100	2720	7	86	<0.005	0.001	0.002
BP21-02A	260.5	263.05	2.55	100	2730	12	86	<0.005	0.003	0.003
BP21-02A	263.05	264.5	1.45	100	507	265	34	<0.005	0.001	0.001
BP21-02A	264.5	267.5	3	100	2710	7	87	<0.005	0.001	0.002
BP21-02A	267.5	270.5	3	100	2750	6	87	<0.005	0.001	0.001
BP21-02A	270.5	273.5	3	100	2820	7	88	<0.005	0.002	0.001
BP21-02A	273.5	276.3	2.8	100	2770	9	86	0.006	0.001	0.001
BP21-02A	277.7	330.7	3	100	2700	11	92	<0.005	0.001	0.002
BP21-02A	330.7	333.3	2.6	100	2700	1	88	<0.005	0.002	0.004
BP21-02A	333.3	336.3	3	100	2720	3	88	<0.005	0.001	0.003
BP21-02A	336.3	339.3	3	100	2730	1	91	0.005	0.002	0.002
BP21-02A	339.3	342.3	3	100	3000	180	97	0.025	0.018	0.009
BP21-02A	342.3	345.3	3	100	2900	9	90	<0.005	0.005	0.004
BP21-02A	345.3	348.5	3.2	100	2870	3	88	0.009	0.007	0.004
BP21-02A	348.5	351.75	3.25	100	2740	33	73	0.01	0.012	0.004
BP21-02A	351.75	354.7	2.95	100	5020	865	167	0.057	0.072	0.011
BP21-02A	354.7	357	2.3	100	5490	1010	194	0.053	0.061	0.031
BP21-02A	357	359	2	100	3190	223	104	0.016	0.021	0.015
BP21-02A	359	361	2	100	2570	39	95	0.008	0.008	0.005
BP21-02A	361	362.95	1.95	100	1140	91	61	0.008	0.011	0.001
BP21-02A	362.95	365.15	2.2	100	72	50	18	<0.005	<0.001	0.002
BP21-02A	370.6	370.9	0.3	100	675	820	186	<0.005	0.001	0.062
BP21-03	68.2	69	0.8	100	2170	118	68	0.006	0.002	0.003
BP21-03	70.35	71	0.65	100	642	244	55	<0.005	0.001	0.002
BP21-03	71.45	73.5	2.05	100	2140	22	83	<0.005	0.002	0.003
BP21-03	73.5	75.5	2	100	2540	18	82	0.007	0.003	0.003
BP21-03	75.5	77.5	2	100	2590	15	89	0.064	0.007	0.003
BP21-03	77.5	79.5	2	100	2300	26	76	<0.005	0.002	0.003
BP21-03	79.5	81.3	1.8	100	2440	44	76	0.006	0.001	0.003
BP21-03	81.3	83.6	2.3	100	2740	3	75	<0.005	<0.001	0.002
BP21-03	83.6	85.35	1.75	100	2500	12	65	<0.005	0.001	0.002
BP21-03	85.35	87.1	1.75	100	2380	86	69	<0.005	<0.001	0.003
BP21-03	87.1	89.9	2.8	100	2180	10	46	<0.005	0.001	0.002
BP21-03	89.9	91.65	1.75	100	2080	267	70	0.007	0.001	0.002
BP21-03	91.65	94	2.35	100	2470	3	67	<0.005	<0.001	0.002
BP21-03	94	96.4	2.4	100	2600	1	61	0.006	<0.001	0.002
BP21-03	96.4	98	1.6	100	2590	1	52	<0.005	0.001	0.001
BP21-03	98	100	2	100	2230	3	73	0.01	0.001	0.002
BP21-03	100	102	2	100	2390	17	88	0.005	0.003	0.002
BP21-03	102	104	2	100	2340	7	56	0.005	0.003	0.003
BP21-03	104	106	2	100	2240	3	78	<0.005	0.001	0.003
BP21-03	106	108	2	100	2600	3	75	0.009	<0.001	0.004
BP21-03	108	109.9	1.9	100	2910	13	84	0.012	0.009	0.004
BP21-03	109.9	110.6	0.7	100	4870	224	125	0.092	0.085	0.018
BP21-03	110.6	112.3	1.7	100	7180	937	194	0.107	0.125	0.044
BP21-03	112.3	115.3	3	100	3360	119	137	0.025	0.028	0.011
BP21-03	115.3	118.3	3	100	2720	142	107	0.024	0.023	0.006
BP21-03	118.3	121.25	2.95	100	2870	64	110	0.013	0.015	0.008

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP21-03	121.25	123.5	2.25	100	2020	4230	73	0.009	0.042	0.152
BP21-03	123.5	126.15	2.65	100	3350	362	123	0.05	0.065	0.019
BP21-03	126.15	126.85	0.7	100	13750	2620	317	0.638	0.778	0.108
BP21-03	126.85	130	3.15	100	4720	332	141	0.122	0.136	0.013
BP21-03	130	133	3	100	2370	4	106	0.011	0.014	0.002
BP21-03	133	136	3	100	2200	4	90	0.039	0.019	0.003
BP21-03	136	139	3	100	3010	219	101	0.022	0.027	0.008
BP21-03	139	141.7	2.7	100	5000	409	146	0.065	0.076	0.031
BP21-03	141.7	144.7	3	100	6810	590	157	0.116	0.121	0.034
BP21-03	144.7	147.7	3	100	6000	781	149	0.056	0.072	0.056
BP21-03	147.7	149.65	1.95	100	5120	1210	145	0.048	0.06	0.073
BP21-03	149.65	151	1.35	100	1360	354	63	0.037	0.014	0.004
BP21-03	151	154	3	100	3190	134	107	0.041	0.079	0.007
BP21-03	154	157	3	100	3440	185	102	0.036	0.064	0.015
BP21-03	157	160	3	100	3550	215	118	0.028	0.046	0.018
BP21-03	160	163	3	100	3030	97	106	0.021	0.031	0.009
BP21-03	163	166	3	100	3930	346	139	0.026	0.038	0.016
BP21-03	166	169	3	100	2390	4	80	0.013	0.014	0.015
BP21-03	169	172	3	100	2940	45	105	0.028	0.03	0.004
BP21-03	172	174	2	100	2700	108	83	<0.005	0.012	0.002
BP21-03	174	177	3	100	3340	134	84	0.01	0.024	0.003
BP21-03	177	180	3	100	2910	3	106	0.034	0.03	0.004
BP21-03	180	183	3	100	2940	4	78	0.008	0.022	0.006
BP21-03	183	186	3	100	3200	55	119	0.022	0.032	0.008
BP21-03	186	189	3	100	2590	23	115	0.02	0.022	0.002
BP21-03	189	192	3	100	3350	314	135	0.048	0.049	0.012
BP21-03	192	195	3	100	2890	4	83	0.029	0.045	0.006
BP21-03	195	198	3	100	2760	6	104	0.027	0.04	0.003
BP21-03	198	201	3	100	3420	156	134	0.032	0.042	0.014
BP21-03	201	205	4	100	2890	80	101	0.028	0.029	0.008
BP21-03	205	208	3	100	2890	3	87	0.013	0.018	0.023
BP21-03	208	211	3	100	2680	3	91	0.008	0.014	0.003
BP21-03	211	214	3	100	3140	195	117	0.02	0.048	0.004
BP21-03	214	217	3	100	3450	9	158	0.027	0.054	0.004
BP21-03	217	220	3	100	2960	4	92	0.018	0.026	0.002
BP21-03	220	223	3	100	2930	3	112	0.011	0.016	0.002
BP21-03	223	226	3	100	2850	3	104	<0.005	0.008	0.002
BP21-03	226	229	3	100	3020	5	82	0.034	0.042	0.002
BP21-03	229	231.4	2.4	100	2690	19	97	0.021	0.021	0.002
BP21-03	231.4	233.4	2	100	2950	258	139	0.022	0.035	0.005
BP21-03	233.4	235.4	2	100	3520	301	151	0.03	0.031	0.007
BP21-03	235.4	237.45	2.05	100	2190	117	101	0.008	0.008	0.001
BP21-03	237.45	239.35	1.9	100	1730	396	97	0.005	0.007	<0.001
BP21-03	239.35	240.9	1.55	100	1780	187	71	0.006	0.005	0.001
BP21-04	21.9	24	2.1	100	2320	200	94	0.024	0.024	0.002
BP21-04	24	24.8	0.8	100	3080	279	108	0.023	0.037	0.002
BP21-04	24.8	27	2.2	78	3340	251	110	0.034	0.059	0.004
BP21-04	27	29.6	2.6	100	2450	85	90	0.058	0.055	0.004
BP21-04	29.6	30.45	0.85	65	3610	58	130	0.071	0.071	0.005
BP21-04	30.45	32.95	2.5	80	2780	22	105	0.024	0.037	0.005
BP21-04	32.95	34.45	1.5	67	2820	35	96	0.015	0.018	0.002
BP21-04	34.45	36.5	2.05	100	4660	292	136	0.035	0.042	0.007
BP21-04	36.5	38.2	1.7	100	3760	600	149	0.02	0.018	0.006
BP21-04	38.2	40.5	2.3	87	3450	928	180	0.013	0.014	0.011
BP21-04	40.5	42.2	1.7	100	3550	882	199	0.012	0.016	0.007
BP21-04	42.2	44.5	2.3	100	4510	572	179	0.025	0.033	0.004
BP21-04	44.5	45.8	1.3	100	5560	970	158	0.032	0.039	0.019
BP21-04	45.8	47.7	1.9	100	4560	290	118	0.031	0.052	0.004
BP21-04	47.7	49.7	2	100	3990	190	136	0.013	0.014	0.01
BP21-04	49.7	51.7	2	80	3390	249	110	0.011	0.013	0.007
BP21-04	51.7	53.55	1.85	100	2750	94	103	0.006	0.006	0.003
BP21-04	53.55	54.9	1.35	100	9710	1720	150	0.086	0.098	0.044
BP21-04	54.9	57	2.1	100	7230	1160	110	0.14	0.143	0.031
BP21-04	57	59	2	90	5240	699	86	0.105	0.092	0.021
BP21-04	59	61	2	95	3500	9	66	0.039	0.077	0.005
BP21-04	61	63	2	100	3370	3	74	0.064	0.079	0.005
BP21-04	63	65.5	2.5	100	3330	189	84	0.353	0.23	0.015
BP21-04	65.5	67.5	2	100	3900	201	93	0.16	0.131	0.013
BP21-04	67.5	69.5	2	100	3280	45	85	0.028	0.044	0.004
BP21-04	69.5	71.5	2	100	3330	5	94	0.007	0.002	0.004
BP21-04	71.5	73.5	2	90	2920	5	83	0.01	0.004	0.002
BP21-04	73.5	75.5	2	100	3030	4	92	0.02	0.002	0.002
BP21-04	75.5	77.5	2	100	3020	13	92	<0.005	<0.001	0.002
BP21-04	77.5	79.8	2.3	100	2880	17	90	0.008	<0.001	0.001
BP21-04	79.8	82.8	3	100	2910	23	90	0.065	0.006	0.002

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP21-04	82.8	85.8	3	100	2900	25	94	<0.005	0.002	0.002
BP21-04	85.8	88.8	3	100	2760	19	87	0.014	0.001	0.002
BP21-04	88.8	91.8	3	100	2670	30	85	<0.005	0.002	0.001
BP21-04	91.8	93.8	2	100	2740	30	86	<0.005	0.001	0.001
BP21-04	93.8	95.9	2.1	100	2790	22	89	<0.005	0.002	0.001
BP21-04	95.9	98	2.1	100	2770	19	90	<0.005	0.001	0.001
BP21-04	98	101	3	100	2780	29	87	0.007	0.002	0.001
BP21-04	101	104	3	100	2900	20	92	0.006	0.001	0.005
BP21-04	104	107	3	100	2840	35	86	<0.005	0.003	0.002
BP21-04	107	110	3	100	2860	27	88	<0.005	0.001	0.002
BP21-04	110	113	3	100	3030	18	85	<0.005	0.003	0.002
BP21-04	113	114.4	1.4	100	2970	16	80	0.005	0.002	0.002
BP21-04	114.4	117	2.6	100	2980	14	82	<0.005	0.002	0.001
BP21-04	117	120	3	100	3080	12	84	0.01	0.002	0.001
BP21-04	120	123	3	100	3080	14	83	0.008	0.002	0.001
BP21-04	123	126	3	100	2980	15	77	0.007	0.002	0.002
BP21-04	126	129	3	100	3190	17	82	0.012	0.004	0.002
BP21-04	129	132	3	100	3300	12	87	<0.005	0.002	0.002
BP21-04	132	135	3	100	3430	12	89	<0.005	0.002	0.002
BP21-04	135	138	3	100	3620	18	88	<0.005	0.003	0.001
BP21-04	138	141	3	100	3550	13	87	<0.005	0.002	0.003
BP21-04	141	144	3	100	3590	13	89	<0.005	0.003	0.001
BP21-04	144	147	3	100	3670	17	89	0.005	0.002	0.003
BP21-04	147	150	3	100	3750	13	90	<0.005	0.002	0.002
BP21-04	150	152	2	100	3270	23	77	0.008	0.002	0.002
BP21-04	152	154.9	2.9	100	3250	18	78	<0.005	0.002	0.002
BP21-04	154.9	156	1.1	100	3380	28	57	0.013	0.004	0.005
BP21-04	156	159	3	100	3800	15	88	0.012	0.003	0.003
BP21-04	159	162	3	100	3740	16	89	<0.005	0.002	0.004
BP21-04	162	165	3	100	3580	22	84	0.037	0.043	0.012
BP21-04	165	167.7	2.7	100	3740	20	88	0.092	0.113	0.011
BP21-04	167.7	169.3	1.6	100	2710	45	68	0.011	0.006	0.005
BP21-04	169.3	170.5	1.2	100	2260	300	51	0.039	0.01	0.003
BP21-04	170.5	173.5	3	100	3650	36	80	0.031	0.006	0.004
BP21-04	173.5	176.5	3	100	3360	10	85	<0.005	0.002	0.002
BP21-04	176.5	179.5	3	100	2790	157	67	0.007	0.004	0.003
BP21-04	179.5	182.5	3	100	3220	11	87	0.011	0.002	0.003
BP21-04	182.5	184.9	2.4	100	2740	19	80	<0.005	0.002	0.002
BP21-04	184.9	187.9	3	100	3190	19	85	<0.005	0.002	0.006
BP21-04	187.9	190.9	3	100	3150	22	85	<0.005	0.004	0.004
BP21-04	190.9	193.9	3	100	2750	40	79	<0.005	0.002	0.003
BP21-04	193.9	196.9	3	100	2550	44	71	0.007	0.002	0.003
BP21-04	196.9	198	1.1	100	277	32	58	<0.005	<0.001	0.001
BP21-04	198	201	3	100	3270	23	81	0.015	0.002	0.004
BP21-04	201	204	3	100	2790	26	73	0.01	0.003	0.003
BP21-04	204	207	3	100	3030	21	70	0.014	0.002	0.004
BP21-04	207	210	3	100	3050	21	74	0.006	0.002	0.002
BP21-04	210	213	3	100	3380	12	86	<0.005	0.002	0.004
BP21-04	213	216	3	100	3290	8	85	<0.005	0.002	0.003
BP21-04	216	219	3	100	3240	8	84	0.005	0.002	0.002
BP21-04	219	222	3	100	3290	10	81	<0.005	0.001	0.002
BP21-04	222	225	3	100	2960	11	75	<0.005	0.004	0.002
BP21-04	225	228	3	100	3240	9	85	<0.005	0.002	0.001
BP21-04	228	231	3	100	3220	8	86	<0.005	0.003	0.002
BP21-04	231	234	3	100	3150	9	84	0.005	0.005	0.003
BP21-04	234	237	3	100	3010	13	79	0.007	0.002	0.002
BP21-04	237	240	3	100	3050	11	85	<0.005	0.002	0.002
BP21-04	240	243	3	100	2990	10	83	0.015	0.002	0.002
BP21-04	243	246	3	100	2900	17	81	<0.005	0.002	0.002
BP21-04	246	249	3	100	2810	14	81	<0.005	0.001	0.002
BP21-04	249	250.5	1.5	100	2810	15	80	<0.005	0.002	0.002
BP21-04	250.5	253.4	2.9	100	2830	13	83	<0.005	0.001	0.002
BP21-04	253.4	256	2.6	100	2820	15	83	<0.005	0.002	0.003
BP21-04	256	257.5	1.5	100	2850	10	85	<0.005	0.001	<0.001
BP21-04	257.5	260.1	2.6	100	2790	21	82	<0.005	0.001	<0.001
BP21-04	260.1	263	2.9	100	2750	2	86	<0.005	0.001	0.001
BP21-04	263	266	3	100	2630	23	81	0.009	0.006	0.001
BP21-04	266	269	3	100	2700	2	97	0.005	0.002	<0.001
BP21-04	269	272	3	100	2540	4	87	<0.005	0.002	0.001
BP21-04	272	275	3	100	2360	2	96	<0.005	<0.001	<0.001
BP21-04	275	278	3	100	2690	2	77	0.005	0.001	0.001
BP21-04	278	281	3	100	2790	44	90	0.008	0.002	0.004
BP21-04	281	284	3	100	2680	15	100	<0.005	0.002	0.002
BP21-04	284	286.7	2.7	100	1410	459	64	0.008	0.007	0.009
BP21-04	286.7	288.7	2	100	3070	180	108	0.027	0.038	0.002

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP21-04	288.7	290.7	2	100	2170	237	87	0.007	0.009	0.003
BP21-04	290.7	292.35	1.65	100	5210	469	165	0.04	0.06	0.009
BP21-04	292.35	293.65	1.3	100	2500	322	107	0.015	0.022	0.001
BP21-04	293.65	296	2.35	100	2470	201	100	<0.005	0.006	0.003
BP21-04	296	297.4	1.4	100	2540	469	146	0.008	0.018	0.002
BP21-04	297.4	299.4	2	100	3650	264	114	0.114	0.042	0.01
BP21-04	299.4	301.1	1.7	100	7110	377	153	0.154	0.155	0.032
BP21-04	301.1	304	2.9	100	8770	1060	159	0.158	0.21	0.071
BP21-04	304	306.6	2.6	100	5000	558	122	0.074	0.101	0.006
BP21-04	306.6	307.6	1	100	528	294	29	<0.005	0.007	0.002
BP21-05	1	3	2	100	1070	66	40	<0.005	0.002	0.001
BP21-05	3	5	2	100	2650	28	81	<0.005	0.005	0.005
BP21-05	5	7	2	100	2670	12	74	<0.005	0.002	0.001
BP21-05	7	9	2	100	2540	9	77	<0.005	0.001	0.001
BP21-05	9	10.7	1.7	100	2490	12	81	<0.005	0.003	0.001
BP21-05	10.7	12.7	2	100	2640	10	91	<0.005	0.003	0.001
BP21-05	12.7	14.7	2	100	2590	13	86	0.075	0.048	0.002
BP21-05	14.7	16.7	2	100	2730	16	92	0.063	0.06	0.003
BP21-05	16.7	18.7	2	100	2650	20	100	0.051	0.052	0.004
BP21-05	18.7	20.7	2	100	2730	21	102	0.042	0.057	0.002
BP21-05	20.7	22.7	2	100	2270	10	98	<0.005	0.008	0.002
BP21-05	22.7	24.7	2	100	2980	321	113	0.025	0.027	0.024
BP21-05	24.7	26.7	2	100	3240	404	106	0.037	0.045	0.023
BP21-05	26.7	28.8	2.1	100	4820	1460	159	0.052	0.071	0.088
BP21-05	28.8	29.9	1.1	100	3370	434	129	0.032	0.037	0.024
BP21-05	29.9	32.1	2.2	100	3210	23	110	0.073	0.043	0.005
BP21-05	32.1	34.3	2.2	100	4320	72	117	0.079	0.103	0.009
BP21-05	34.3	37.45	3.15	100	5140	179	133	0.055	0.08	0.013
BP21-05	37.45	40.1	2.65	100	2820	9	99	0.013	0.009	0.002
BP21-05	40.1	42.9	2.8	100	2640	8	94	0.008	0.005	0.002
BP21-05	42.9	46	3.1	50	2700	79	102	0.023	0.021	0.004
BP21-05	46	47	1	100	64	47	11	<0.005	0.001	0.002
BP21-05	70.7	71.3	0.6	100	91	239	17	<0.005	<0.001	0.002
BP21-05	71.3	74	2.7	95	795	125	76	0.007	0.006	0.007
BP21-05	74	76.65	2.65	100	890	68	80	0.006	0.004	0.008
BP21-05	76.65	77.6	0.95	100	39	36	10	<0.005	0.001	0.001
BP21-05GH	49.5	51.5	2	100	5500	861	95	0.131	0.109	0.039
BP21-05GH	51.5	53.5	2	87	4260	349	90	0.063	0.066	0.027
BP21-05GH	53.5	55	1.5	100	2840	96	82	0.01	0.013	0.003
BP21-05GH	55	56.1	1.1	100	3600	166	113	0.041	0.04	0.009
BP21-05GH	56.7	58.7	2	100	4400	647	118	0.035	0.036	0.021
BP21-05GH	58.7	60.7	2	100	3580	622	99	0.029	0.036	0.014
BP21-05GH	60.7	62	1.3	100	6670	3320	170	0.036	0.093	0.037
BP21-05GH	62	64	2	100	3450	451	106	0.028	0.029	0.017
BP21-05GH	64	66	2	100	3460	209	105	0.051	0.066	0.01
BP21-05GH	66	68	2	100	2660	27	78	0.021	0.024	0.003
BP21-05GH	68	70	2	53	2790	96	101	0.024	0.033	0.008
BP21-05GH	70	72	2	100	2540	4	58	<0.005	0.004	0.002
BP21-05GH	72	74	2	100	2440	8	97	0.036	0.06	0.006
BP21-05GH	74	76	2	100	2330	1	80	<0.005	0.006	0.002
BP21-05GH	76	78	2	100	2490	2	73	0.008	0.009	0.002
BP21-05GH	78	80	2	100	2770	10	104	0.044	0.054	0.007
BP21-05GH	80	82	2	100	5120	287	133	0.079	0.088	0.014
BP21-05GH	82	84	2	100	4830	519	130	0.043	0.039	0.014
BP21-05GH	84	86.1	2.1	100	3780	652	128	0.031	0.032	0.01
BP21-05GH	86.9	88	1.1	100	2930	531	133	0.024	0.022	0.003
BP21-05GH	88	89.8	1.8	100	3180	483	145	0.024	0.022	0.003
BP21-05GH	89.8	91.2	1.4	79	2540	206	108	0.015	0.019	0.003
BP21-05GH	91.2	92.8	1.6	82	1160	120	66	0.009	0.02	0.002
BP21-05GH	92.8	93.55	0.75	100	2870	564	150	0.015	0.018	0.007
BP21-05GH	93.55	95.55	2	53	3260	152	103	0.018	0.019	0.004
BP21-05GH	95.55	97.2	1.65	52	2700	4	66	0.01	0.01	0.002
BP21-05GH	97.2	98.25	1.05	100	2980	5	104	0.021	0.027	0.005
BP21-06	3.5	5	1.5	100	3470	398	132	0.018	0.029	0.018
BP21-06	5.7	7.7	2	100	3390	550	119	0.022	0.03	0.018
BP21-06	8	10	2	100	4000	554	134	0.041	0.035	0.017
BP21-06	10	12	2	100	3930	1060	138	0.017	0.023	0.032
BP21-06	12	14	2	100	4010	97	109	0.043	0.047	0.004
BP21-06	14	16	2	100	2850	20	102	0.006	0.011	0.002
BP21-06	16	18	2	100	2830	23	100	0.014	0.01	0.001
BP21-06	18	20	2	100	2640	16	92	0.005	0.006	0.002
BP21-06	20	22	2	100	2880	17	98	<0.005	0.004	0.002
BP21-06	22	24	2	100	2950	22	89	0.008	0.006	0.001
BP21-06	24	26	2	100	2650	27	94	0.01	0.007	0.002
BP21-06	26	28	2	100	2690	77	96	0.018	0.02	0.003

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP21-06	28	29.7	1.7	100	133	59	13	<0.005	0.001	0.002
BP21-06GH	1.7	3	1.3	100	14000	2760	163	0.07	0.063	0.048
BP21-06GH	3	4.5	1.5	100	13500	2330	159	0.076	0.082	0.066
BP21-06GH	4.5	6	1.5	100	13500	2280	159	0.072	0.072	0.052
BP21-06GH	6	7.5	1.5	100	11050	2140	159	0.052	0.062	0.048
BP21-06GH	7.5	8.5	1	100	8800	1360	145	0.056	0.063	0.03
BP21-06GH	9.1	10.5	1.4	100	5710	981	96	0.131	0.104	0.024
BP21-06GH	10.5	11.5	1	80	5020	451	107	0.05	0.062	0.016
BP21-06GH	11.8	12.8	1	100	8690	811	129	0.065	0.063	0.026
BP21-06GH	13	14.1	1.1	100	6900	646	129	0.046	0.05	0.031
BP21-06GH	14.35	15.5	1.15	87	10750	2100	141	0.106	0.132	0.055
BP21-06GH	15.5	17	1.5	100	6750	1590	194	0.047	0.057	0.04
BP21-06GH	17	18.5	1.5	100	6090	1970	206	0.038	0.051	0.022
BP21-06GH	18.5	20	1.5	100	4300	926	155	0.034	0.044	0.012
BP21-06GH	20	21.5	1.5	100	5520	1400	204	0.056	0.051	0.021
BP21-06GH	21.5	23	1.5	100	4120	816	131	0.019	0.031	0.021
BP21-06GH	23	24.5	1.5	100	2760	210	71	0.024	0.046	0.009
BP21-06GH	24.5	26	1.5	83	2520	30	76	0.014	0.039	0.003
BP21-06GH	26	27.5	1.5	89	2860	23	115	0.03	0.045	0.004
BP21-06GH	27.5	29	1.5	100	6150	921	115	0.103	0.097	0.034
BP21-06GH	29	30	1	100	7710	1130	171	0.104	0.092	0.038
BP21-06GH	30	31.5	1.5	100	2890	267	95	0.045	0.048	0.006
BP21-06GH	31.85	33	1.15	100	3370	114	112	0.035	0.051	0.007
BP21-06GH	33	34.5	1.5	100	2910	63	95	0.018	0.032	0.003
BP21-06GH	34.5	36	1.5	100	2460	9	86	<0.005	0.018	0.002
BP21-06GH	36	37	1	100	2770	11	87	0.006	0.023	0.003
BP21-06GH	37	38.1	1.1	100	3360	80	119	0.029	0.038	0.007
BP21-06GH	38.55	39.6	1.05	100	7770	749	132	0.062	0.086	0.031
BP21-06GH	39.9	41.2	1.3	85	3600	229	68	0.025	0.033	0.009
BP21-06GH	41.2	42.5	1.3	23	6640	994	94	0.037	0.047	0.022
BP21-07	3	5	2	100	12500	2600	210	0.281	0.217	0.222
BP21-07	5	7	2	100	8800	1580	160	0.169	0.202	0.05
BP21-07	7	9	2	100	6140	516	141	0.104	0.105	0.025
BP21-07	9	11	2	100	8260	1090	176	0.121	0.147	0.028
BP21-07	11	13	2	75	8470	1400	178	0.117	0.139	0.044
BP21-07	13	15.05	2.05	100	4460	622	122	0.051	0.069	0.036
BP21-07	15.05	17	1.95	100	6950	1240	133	0.111	0.122	0.047
BP21-07	17	19	2	100	5110	625	127	0.063	0.075	0.031
BP21-07	19	21	2	100	4130	432	118	0.062	0.049	0.013
BP21-07	21	23	2	100	4820	834	121	0.055	0.066	0.013
BP21-07	23	25	2	60	4960	322	132	0.056	0.063	0.009
BP21-07	25	26.5	1.5	100	2630	67	88	0.005	0.01	0.003
BP21-07	26.5	29.5	3	100	2520	24	105	0.018	0.011	0.001
BP21-07	29.5	31.4	1.9	100	2960	132	108	0.02	0.025	0.007
BP21-07	31.4	33	1.6	75	3820	227	109	0.038	0.043	0.008
BP21-07	33	34.8	1.8	89	2700	11	105	0.023	0.027	0.003
BP21-07	34.8	37	2.2	78	2820	18	93	0.019	0.02	0.004
BP21-07	37	40	3	100	5980	1620	151	0.048	0.076	0.068
BP21-07	40	41.7	1.7	71	2490	61	104	<0.005	0.004	0.004
BP21-07	41.7	43	1.3	100	5180	358	135	0.082	0.099	0.031
BP21-07	43	45	2	100	2840	4	95	0.013	0.019	0.001
BP21-07	45	47	2	100	2620	5	93	0.013	0.007	0.002
BP21-07	47	49.5	2.5	100	2630	4	102	0.005	0.003	0.002
BP21-07	49.5	52	2.5	100	2270	14	94	0.007	0.005	0.001
BP21-07	52	53.7	1.7	100	2230	33	101	0.012	0.012	0.002
BP21-07	53.7	54.8	1.1	100	71	157	12	<0.005	0.001	<0.001
BP21-07GH	41.3	43	1.7	100	7660	1660	196	0.06	0.088	0.069
BP21-07GH	43	45	2	100	4250	669	139	0.031	0.044	0.022
BP21-07GH	45	47	2	100	4170	1780	154	0.034	0.049	0.042
BP21-07GH	47	48	1	100	3500	1470	206	0.023	0.03	0.02
BP21-07GH	48	49.8	1.8	100	3070	280	128	0.025	0.033	0.005
BP21-07GH	49.8	51.8	2	100	4420	632	147	0.053	0.07	0.013
BP21-07GH	51.8	53.8	2	100	2990	293	117	0.01	0.024	0.007
BP21-07GH	53.8	55	1.2	100	2360	44	106	0.011	0.003	0.001
BP21-07GH	55	56.2	1.2	100	2530	145	105	0.027	0.029	0.003
BP21-07GH	56.2	57	0.8	100	401	177	22	<0.005	0.001	0.004
BP21-07GH	71.25	73.4	2.15	100	822	77	78	<0.005	0.003	<0.001
BP21-07GH	73.4	76	2.6	85	936	65	84	<0.005	0.004	0.001
BP21-08	42	43.6	1.6	100	2560	144	109	0.012	0.011	0.005
BP21-08	43.6	44.9	1.3	100	2940	100	105	0.024	0.028	0.01
BP21-08	44.9	47.8	2.9	100	3200	469	114	0.022	0.028	0.017
BP21-08	47.8	50.5	2.7	100	3060	417	130	0.022	0.025	0.008
BP21-08	50.5	53	2.5	100	2810	299	114	0.028	0.033	0.005
BP21-08	53	56	3	100	2320	82	102	0.008	0.008	0.003
BP21-08	56	59	3	100	2540	13	105	0.008	0.008	0.001

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP21-08	59	62	3	100	2620	35	110	0.008	0.009	0.002
BP21-08	62	65	3	100	2440	250	107	0.021	0.018	0.003
BP21-08	65	68	3	100	2020	243	123	0.012	0.013	0.004
BP21-08	68	70.4	2.4	100	2810	116	121	0.02	0.018	0.003
BP21-08	70.4	73	2.6	100	2750	17	92	0.044	0.036	0.003
BP21-08	73	74.6	1.6	100	4930	389	124	0.037	0.038	0.015
BP21-08	74.6	76.4	1.8	100	3930	322	119	0.035	0.027	0.005
BP21-08	76.4	78	1.6	63	688	124	34	<0.005	0.003	0.001
BP21-08GH	105.7	107.7	2	100	2620	16	85	<0.005	<0.001	<0.001
BP21-08GH	107.7	109.7	2	100	2730	14	87	<0.005	<0.001	0.001
BP21-08GH	109.7	112	2.3	100	2390	24	81	0.02	<0.001	0.001
BP21-08GH	112	114	2	100	2510	37	81	0.087	0.017	0.001
BP21-08GH	114	116	2	100	2700	24	87	<0.005	<0.001	<0.001
BP21-08GH	116	118	2	100	2700	8	86	<0.005	<0.001	0.001
BP21-08GH	118	120	2	100	2730	9	98	0.008	0.001	0.002
BP21-08GH	120	122	2	100	2620	6	95	<0.005	0.001	0.003
BP21-08GH	122	123.5	1.5	100	2720	11	97	0.011	0.009	0.006
BP21-08GH	123.5	125	1.5	100	3140	315	92	0.667	0.601	0.05
BP21-08GH	125	126.88	1.88	100	5770	674	103	0.167	0.165	0.056
BP21-08GH	126.88	127.85	0.97	100	5890	749	111	0.174	0.152	0.032
BP21-08GH	127.85	129.15	1.3	100	17050	2960	199	0.359	0.442	0.101
BP21-08GH	129.15	131	1.85	100	11200	1490	153	0.228	0.378	0.071
BP21-08GH	131	132.5	1.5	90	4700	407	114	0.04	0.067	0.018
BP21-08GH	132.5	133.1	0.6	100	659	61	40	<0.005	0.002	0.002
BP21-08GH	133.1	135	1.9	100	8180	1230	130	0.192	0.24	0.056
BP21-08GH	135	136.4	1.4	100	11300	1780	155	0.211	0.318	0.116
BP21-08GH	136.4	138	1.6	100	8540	1360	154	0.169	0.209	0.06
BP21-08GH	138	140	2	100	11900	1940	182	0.217	0.29	0.059
BP21-08GH	140	142	2	100	8950	1260	161	0.201	0.239	0.058
BP21-08GH	142	143.75	1.75	100	9770	572	167	1.04	1.215	0.111
BP21-08GH	143.75	146	2.25	75	6220	385	117	0.449	0.655	0.042
BP21-08GH	146	147	1	100	6970	973	132	0.12	0.173	0.038
BP21-08GH	147	149	2	100	10200	2500	193	0.205	0.214	0.075
BP21-08GH	149	151	2	100	7390	861	169	0.1	0.126	0.034
BP21-08GH	151	152.5	1.5	100	6570	632	164	0.063	0.098	0.023
BP21-08GH	152.5	154.5	2	100	4010	96	129	0.034	0.056	0.009
BP21-08GH	154.5	156.5	2	100	2700	7	115	0.027	0.042	0.003
BP21-08GH	156.5	158.5	2	100	3080	7	141	0.037	0.045	0.004
BP21-08GH	158.5	160.5	2	100	2560	57	98	0.009	0.013	0.005
BP21-08GH	160.5	162.15	1.65	100	3520	513	136	0.041	0.053	0.006
BP21-08GH	162.15	164	1.85	100	202	406	21	<0.005	0.005	0.002
BP21-09	116.3	119.3	3	100	3210	19	80	<0.005	0.001	<0.001
BP21-09	119.3	122	2.7	100	3250	13	92	<0.005	0.002	0.001
BP21-09	122	125	3	100	3230	15	87	<0.005	0.001	0.001
BP21-09	125	128	3	100	2970	323	74	<0.005	0.002	0.002
BP21-09	128	131	3	100	3250	42	81	<0.005	0.001	0.001
BP21-09	131	133	2	100	3050	18	77	<0.005	0.001	0.001
BP21-09	133	135.6	2.6	100	2730	30	67	<0.005	0.001	0.001
BP21-09	135.6	137.1	1.5	100	3120	26	88	<0.005	0.001	0.001
BP21-09	137.1	140	2.9	55	2390	42	62	<0.005	0.001	0.001
BP21-09	140	141.8	1.8	72	2380	29	61	0.005	0.001	0.001
BP21-09	141.8	144.9	3.1	100	2810	21	74	0.008	0.001	0.005
BP21-09	144.9	148	3.1	100	2970	17	80	0.006	0.001	0.001
BP21-09	148	151	3	100	3080	11	82	<0.005	0.001	0.001
BP21-09	151	154	3	100	3110	12	83	<0.005	0.001	0.001
BP21-09	154	157	3	100	3230	8	87	<0.005	0.001	0.001
BP21-09	157	160	3	100	3210	10	86	0.005	0.002	0.001
BP21-09	160	161.8	1.8	100	3100	12	84	<0.005	0.001	0.001
BP21-09	161.8	163.6	1.8	100	1380	16	44	<0.005	<0.001	0.001
BP21-09	163.6	166.6	3	100	3050	15	80	<0.005	0.001	0.002
BP21-09	166.6	169.6	3	100	2930	13	81	<0.005	0.003	0.004
BP21-09	169.6	172.3	2.7	100	3570	34	92	0.012	0.002	0.003
BP21-09	172.3	175.3	3	100	2490	19	69	<0.005	0.001	0.003
BP21-09	175.3	178	2.7	100	3360	12	90	<0.005	0.002	0.003
BP21-09	178	181	3	100	2580	10	72	0.006	<0.001	0.002
BP21-09	181	184	3	100	3260	12	89	<0.005	0.001	0.001
BP21-09	184	187	3	100	3070	10	82	<0.005	0.001	0.002
BP21-09	187	190	3	100	3240	14	91	<0.005	0.001	0.002
BP21-09	190	193	3	100	3110	15	83	<0.005	0.001	0.001
BP21-09	193	196	3	100	3620	12	97	0.005	0.001	0.002
BP21-09	196	199	3	100	3150	9	83	<0.005	0.002	0.002
BP21-09	199	202	3	100	3290	10	85	0.005	0.001	0.001
BP21-09	202	205	3	100	2770	14	75	<0.005	0.001	0.001
BP21-09	205	208	3	100	3180	19	83	<0.005	0.001	0.002
BP21-09	208	209.8	1.8	100	3310	13	87	0.005	0.005	0.001

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP21-09	209.8	211.5	1.7	100	3240	26	85	0.013	<0.001	0.001
BP21-09	211.5	213.2	1.7	100	2800	94	72	0.008	0.002	0.001
BP21-09	213.2	214.9	1.7	100	2570	24	67	<0.005	0.001	0.001
BP21-09	214.9	217.6	2.7	100	2800	12	75	0.006	0.001	0.001
BP21-09	217.6	220.3	2.7	100	2960	11	82	<0.005	0.001	0.001
BP21-09	220.3	223	2.7	100	2960	10	83	<0.005	<0.001	0.001
BP21-09	223	225.7	2.7	100	2940	11	82	<0.005	0.001	0.001
BP21-09	225.7	228.4	2.7	100	3010	14	85	0.008	0.002	0.001
BP21-09	228.4	231.1	2.7	100	3180	14	88	0.013	0.002	0.002
BP21-09	231.1	233.8	2.7	100	2840	15	84	0.005	0.001	0.001
BP21-09	233.8	236.6	2.8	100	2750	19	81	0.006	0.001	0.001
BP21-09	236.6	239.6	3	100	2820	12	88	<0.005	0.003	0.003
BP21-09	239.6	242	2.4	100	2280	18	74	<0.005	0.002	0.003
BP21-09	242	244.7	2.7	100	2930	1	89	<0.005	<0.001	0.001
BP21-09	244.7	247.65	2.95	100	2920	3	96	<0.005	0.001	0.001
BP21-09	247.65	250.1	2.45	100	2850	5	91	0.008	0.004	0.002
BP21-09	250.1	252.8	2.7	100	2540	85	70	0.005	0.004	0.002
BP21-09	252.8	255.5	2.7	100	2720	4	92	0.005	0.001	0.001
BP21-09	255.5	258.2	2.7	100	2630	3	77	<0.005	0.003	0.002
BP21-09	258.2	260.9	2.7	100	2730	6	77	<0.005	0.004	0.001
BP21-09	260.9	263.6	2.7	100	3610	3	93	0.016	0.022	0.003
BP21-09	263.6	264.6	1	100	1490	55	53	0.009	0.01	0.002
BP21-09	264.6	266.6	2	100	4490	189	111	0.016	0.023	0.006
BP21-09	266.6	268.6	2	100	3910	49	131	0.017	0.019	0.01
BP21-09	268.6	270.6	2	100	4490	150	142	0.033	0.036	0.011
BP21-09	270.6	272.7	2.1	100	3350	419	106	0.015	0.02	0.009
BP21-09	272.7	274.3	1.6	100	2970	6	112	0.01	0.01	0.005
BP21-09	274.3	277.3	3	100	2730	305	124	0.027	0.025	0.003
BP21-09	277.3	280.3	3	93	2910	244	104	0.02	0.023	0.003
BP21-09	280.3	282.5	2.2	100	3150	89	99	0.03	0.023	0.004
BP21-09	282.5	285	2.5	100	3750	28	79	0.039	0.044	0.019
BP21-09	285	287.7	2.7	100	4140	95	89	0.041	0.061	0.014
BP21-09	287.7	290	2.3	100	5340	129	115	0.093	0.122	0.014
BP21-09	290	292.5	2.5	100	3020	149	78	0.047	0.068	0.004
BP21-09	292.5	295.5	3	100	4630	1165	111	0.061	0.081	0.014
BP21-09	295.5	297.7	2.2	100	3850	2180	104	0.021	0.035	0.066
BP21-09	297.7	299.5	1.8	100	4550	9	93	0.014	0.013	0.023
BP21-09	299.5	301.5	2	100	6890	153	131	0.079	0.094	0.04
BP21-09	301.5	303.5	2	100	8270	22	128	0.093	0.133	0.041
BP21-09	303.5	306.6	3.1	100	10550	128	143	0.199	0.246	0.144
BP21-09	306.6	308.9	2.3	100	2270	708	68	0.008	0.037	0.005
BP21-09	308.9	310.6	1.7	100	7250	876	185	0.075	0.065	0.005
BP21-09	310.6	312.2	1.6	100	6930	878	157	0.073	0.074	0.002
BP21-09	312.2	314.65	2.45	100	342	324	17	<0.005	0.002	0.001
BP21-09	314.65	317.65	3	100	2660	259	81	0.012	0.012	0.002
BP21-09	317.65	320.3	2.65	100	2960	295	85	0.026	0.016	0.001
BP21-09	320.3	323.4	3.1	100	3380	331	95	0.017	0.019	0.001
BP21-09	323.4	325.4	2	100	2710	247	74	0.022	0.015	0.001
BP21-09	325.4	327.4	2	100	174	68	14	0.005	0.003	0.004
BP21-09	327.4	328.1	0.7	100	111	299	97	<0.005	0.003	0.006
BP21-09	328.1	328.4	0.3	100	131	1205	155	<0.005	<0.001	0.004
BP21-09	328.4	329.15	0.75	100	65	367	85	<0.005	0.001	0.006
BP21-09	329.15	329.45	0.3	100	183	856	242	<0.005	0.003	0.026
BP21-09	329.45	331.3	1.85	100	195	180	67	<0.005	<0.001	0.001
BP21-09	331.3	333.15	1.85	100	90	183	17	<0.005	<0.001	0.001
BP21-10	26.2	28	1.8	100	2550	129	107	0.038	0.023	0.005
BP21-10	28	29.5	1.5	100	1890	135	85	0.055	0.083	0.003
BP21-10	29.5	31.5	2	100	2610	11	101	0.005	0.002	0.001
BP21-10	31.5	33.5	2	100	2760	96	97	0.032	0.027	0.005
BP21-10	33.5	35.5	2	100	2600	134	99	<0.005	0.004	0.003
BP21-10	35.5	37.7	2.2	100	2660	21	94	<0.005	0.003	0.004
BP21-10	37.7	40	2.3	100	2780	7	98	<0.005	0.002	0.004
BP21-10	40	42	2	100	2900	8	100	<0.005	0.002	0.001
BP21-10	42	44	2	100	3990	368	127	0.023	0.041	0.007
BP21-10	44	46	2	100	3250	240	100	0.03	0.041	0.009
BP21-10	46	47.8	1.8	100	2770	42	71	0.017	0.023	0.002
BP21-10	47.8	50	2.2	100	2830	15	111	0.025	0.027	0.007
BP21-10	50	51.55	1.55	100	3110	333	104	0.019	0.029	0.012
BP21-10	51.55	52.55	1	100	123	225	16	<0.005	0.002	0.002
BP21-11	44.8	47.4	2.6	100	2350	27	79	<0.005	0.016	0.001
BP21-11	47.4	49.7	2.3	85	2950	7	85	0.007	0.002	0.002
BP21-11	49.7	50.8	1.1	100	5760	212	105	0.328	0.326	0.044
BP21-11	50.8	51.3	0.5	100	10250	726	112	1.33	1.25	0.14
BP21-11	51.3	53.45	2.15	100	18200	2200	147	0.295	0.392	0.203
BP21-11	53.45	54.65	1.2	100	7430	510	102	0.311	0.402	0.059

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP21-11	54.65	55.6	0.95	100	4470	45	96	0.162	0.156	0.012
BP21-11	55.6	56.8	1.2	100	9290	1080	112	0.141	0.256	0.075
BP21-11	56.8	59.8	3	100	6990	706	109	0.041	0.056	0.024
BP21-11	59.8	61.5	1.7	100	13850	2330	164	0.23	0.338	0.071
BP21-11	61.5	63.1	1.6	100	14150	2390	185	0.293	0.425	0.084
BP21-11	63.1	64.4	1.3	100	11300	1740	164	0.193	0.299	0.044
BP21-11	64.4	66	1.6	100	5170	404	110	0.078	0.114	0.017
BP21-11	66	67.5	1.5	100	4190	152	111	0.03	0.035	0.009
BP21-11	67.5	70.5	3	100	8680	1330	172	0.099	0.137	0.03
BP21-11	70.5	73	2.5	100	3480	223	113	0.031	0.04	0.008
BP21-11	73	75.5	2.5	100	3720	109	112	0.062	0.067	0.007
BP21-11	75.5	78	2.5	100	3940	705	122	0.019	0.023	0.026
BP21-11	78	79	1	100	5510	807	143	0.022	0.027	0.03
BP21-11	79	81.6	2.6	100	3460	449	128	0.026	0.028	0.016
BP21-11	81.6	83.8	2.2	100	3260	41	99	0.015	0.022	0.004
BP21-11	83.8	85.85	2.05	100	3050	110	97	0.026	0.031	0.004
BP21-11	85.85	88	2.15	100	104	141	16	<0.005	0.002	0.017
BP21-12	8.3	10	1.7	100	10700	1600	102	0.464	0.632	0.115
BP21-12	10	12	2	100	13300	2150	128	0.438	0.448	0.106
BP21-12	12	14	2	60	9780	1260	121	0.247	0.295	0.067
BP21-12	14	16.4	2.4	62	3600	39	100	0.058	0.087	0.005
BP21-12	17	17.4	0.4	100	3320	55	104	0.056	0.119	0.006
BP21-12	17.4	19	1.6	100	10300	1860	138	0.231	0.381	0.087
BP21-12	19	20.45	1.45	100	8300	1120	133	0.198	0.279	0.06
BP21-12	20.45	22.45	2	100	3300	19	104	0.151	0.189	0.007
BP21-12	22.45	24.45	2	100	3480	292	116	0.066	0.071	0.008
BP21-12	24.45	26.25	1.8	100	3430	664	114	0.016	0.035	0.048
BP21-12	26.25	28.1	1.85	100	5210	690	135	0.076	0.056	0.011
BP21-12	28.1	30	1.9	100	3210	305	107	0.016	0.019	0.013
BP21-12	30	32.2	2.2	100	3340	201	117	0.018	0.02	0.011
BP21-12	32.2	32.9	0.7	100	6840	1530	164	0.105	0.135	0.05
BP21-12	32.9	34.4	1.5	100	2660	74	111	0.032	0.024	0.007
BP21-12	34.4	36.9	2.5	100	2820	188	109	0.038	0.034	0.007
BP21-12	36.9	39	2.1	100	4450	580	136	0.032	0.032	0.006
BP21-12	39	41.15	2.15	100	3020	730	132	0.019	0.018	0.004
BP21-12	41.15	43	1.85	100	2860	15	94	0.009	0.014	0.003
BP21-12	43	45	2	100	2710	9	118	0.035	0.027	0.003
BP21-12	45	47	2	100	2870	7	96	0.013	0.019	0.003
BP21-12	47	48.65	1.65	100	3320	47	87	0.025	0.026	0.007
BP21-12	48.65	51.3	2.65	100	3080	611	138	0.024	0.018	0.006
BP21-12	51.3	53	1.7	100	53	30	7	<0.005	0.002	0.002
BP21-13	27	29	2	100	6150	4270	115	0.089	0.097	0.063
BP21-13	29	31	2	100	6170	966	135	0.069	0.092	0.026
BP21-13	31	33	2	100	3720	78	105	0.026	0.038	0.006
BP21-13	33	35	2	100	2370	7	86	0.006	0.021	0.001
BP21-13	35	37	2	100	2640	70	80	0.018	0.039	0.005
BP21-13	37	39.4	2.4	100	2190	86	69	0.02	0.032	0.002
BP21-13	39.4	39.7	0.3	100	2280	160	71	0.018	0.028	0.001
BP21-13	39.7	43.1	3.4	100	2440	13	95	0.01	0.018	<0.001
BP21-13	43.1	43.9	0.8	100	2670	46	119	0.014	0.016	<0.001
BP21-13	43.9	46	2.1	100	1450	247	59	0.012	0.02	0.001
BP21-13	46	48	2	100	2170	6	81	0.02	0.019	<0.001
BP21-13	48	50	2	100	2260	24	83	0.013	0.016	0.002
BP21-13	50	52	2	100	2330	6	81	<0.005	0.007	<0.001
BP21-13	52	54	2	100	2040	37	76	0.03	0.019	0.001
BP21-13	54	55.5	1.5	100	2670	9	89	<0.005	0.008	<0.001
BP21-13	55.5	57	1.5	100	2920	12	91	0.019	0.041	0.002
BP21-13	57	58.6	1.6	69	2700	13	94	<0.005	0.01	0.018
BP21-13	58.6	60.5	1.9	100	2750	7	89	0.017	0.003	0.002
BP21-13	60.5	61.4	0.9	100	2400	6	115	0.006	0.009	0.002
BP21-14	24.7	26.7	2	100	3980	1130	102	0.069	0.07	0.013
BP21-14	26.7	28.2	1.5	100	6000	77	91	0.357	0.351	0.034
BP21-14	28.2	29.6	1.4	100	6840	4000	134	0.399	0.536	0.062
BP21-14	29.6	31	1.4	100	13100	365	237	0.481	0.629	0.065
BP21-14	31	32.6	1.6	100	8330	364	169	0.287	0.326	0.058
BP21-14	32.6	34.1	1.5	100	5610	466	135	0.126	0.186	0.029
BP21-14	34.1	36	1.9	100	2650	34	92	0.019	0.018	0.005
BP21-14	36	37.3	1.3	100	3100	125	92	0.048	0.048	0.01
BP21-14	37.3	39.5	2.2	100	5270	397	128	0.077	0.097	0.024
BP21-14	39.5	41	1.5	100	2930	216	102	0.017	0.022	0.009
BP21-14	41	42.6	1.6	100	2720	471	116	0.018	0.016	0.009
BP21-14	42.6	44.6	2	100	3050	520	133	0.016	0.018	0.012
BP21-14	44.6	46	1.4	100	2420	24	117	0.009	0.013	0.009
BP21-14	46	47.5	1.5	100	3190	422	138	0.02	0.025	0.008
BP21-14	47.5	49	1.5	100	3700	502	142	0.026	0.031	0.006

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP21-14	49	50.1	1.1	100	4370	783	158	0.042	0.037	0.006
BP21-14	50.1	52	1.9	100	2840	424	140	0.012	0.011	0.007
BP21-14	52	54	2	100	2770	100	123	0.022	0.017	0.009
BP21-14	54	56	2	100	3050	7	80	0.015	0.01	0.005
BP21-14	56	58	2	100	2740	10	99	<0.005	0.001	0.003
BP21-14	58	60.3	2.3	100	3300	46	98	0.013	0.017	0.01
BP21-14	60.3	62	1.7	100	282	530	44	<0.005	0.001	0.003
BP21-15	84	87	3	100	2750	13	89	<0.005	0.002	0.004
BP21-15	87	87.7	0.7	100	9510	188	145	0.536	0.792	0.055
BP21-15	87.7	91	3.3	100	2910	33	85	0.091	0.067	0.005
BP21-15	91	94	3	100	2800	30	86	0.064	0.018	0.005
BP21-15	94	97	3	100	2910	15	93	0.065	0.004	0.004
BP21-15	97	100	3	100	2880	16	91	0.019	<0.001	0.003
BP21-15	100	103	3	100	2810	5	91	0.085	0.001	0.003
BP21-15	103	106	3	100	3480	17	93	0.167	0.209	0.012
BP21-15	106	108.7	2.7	100	2640	9	85	0.019	0.001	0.003
BP21-15	108.7	111	2.3	100	2820	8	86	0.014	<0.001	0.003
BP21-15	111	113.8	2.8	100	2920	8	85	0.005	<0.001	0.002
BP21-15	113.8	114.2	0.4	100	2700	6	90	0.005	0.003	0.001
BP21-15	114.2	117	2.8	100	2940	6	92	0.043	0.001	0.003
BP21-15	117	119	2	100	3200	12	95	0.017	0.017	0.003
BP21-15	119	120.5	1.5	100	3290	12	97	0.025	0.025	0.006
BP21-15	120.5	121.6	1.1	100	10450	983	139	0.251	0.326	0.089
BP21-15	121.6	123	1.4	100	4940	120	105	0.086	0.102	0.017
BP21-15	123	124.8	1.8	100	4520	13	124	0.017	0.016	0.007
BP21-15	124.8	126.5	1.7	100	3990	762	120	0.046	0.055	0.018
BP21-15	126.5	128	1.5	100	9120	1920	166	0.21	0.286	0.048
BP21-15	128	129	1	100	14450	2500	188	0.298	0.411	0.092
BP21-15	129	130.1	1.1	100	10950	1940	162	0.2	0.324	0.042
BP21-15	130.1	132	1.9	100	13150	2420	197	0.269	0.393	0.063
BP21-15	132	134	2	100	12000	2690	212	0.243	0.359	0.072
BP21-15	134	136	2	100	10150	2260	210	0.207	0.24	0.056
BP21-15	136	137	1	100	6950	831	172	0.127	0.127	0.016
BP21-15	137	139.35	2.35	100	726	479	69	<0.005	0.005	0.001
BP21-15	139.35	141	1.65	100	11900	2140	212	0.163	0.238	0.059
BP21-15	141	143.2	2.2	100	8130	1090	154	0.115	0.17	0.036
BP21-15	143.2	144.85	1.65	100	4270	42	107	0.04	0.045	0.008
BP21-15	144.85	146.4	1.55	100	3840	417	122	0.032	0.037	0.006
BP21-15	146.4	147.8	1.4	100	3500	349	114	0.015	0.022	0.006
BP21-15	147.8	150	2.2	100	5850	834	177	0.029	0.06	0.04
BP21-15	150	152.1	2.1	100	3470	46	124	0.038	0.041	0.006
BP21-15	152.1	154	1.9	100	4420	55	126	0.079	0.117	0.013
BP21-15	154	155.5	1.5	100	4650	243	110	0.045	0.045	0.009
BP21-15	155.5	155.8	0.3	100	2350	2660	155	0.009	0.007	0.002
BP21-15	155.8	157	1.2	100	106	301	16	<0.005	0.001	<0.001
BP21-16	99.55	101	1.45	100	2970	37	74	<0.005	0.005	0.011
BP21-16	101	103.1	2.1	100	3700	43	88	0.05	0.066	0.016
BP21-16	103.1	105.1	2	100	3480	35	86	0.07	0.07	0.011
BP21-16	105.1	108.1	3	100	3220	25	85	0.016	0.017	0.006
BP21-16	108.1	111.1	3	100	2950	17	81	0.008	0.006	0.003
BP21-16	111.1	114.1	3	100	3000	31	84	<0.005	0.001	0.003
BP21-16	114.1	116.95	2.85	100	3000	13	89	0.005	0.002	0.002
BP21-16	116.95	118.2	1.25	100	678	14	27	<0.005	<0.001	0.001
BP21-16	118.2	121.25	3.05	100	3020	12	90	<0.005	<0.001	0.002
BP21-16	121.25	123	1.75	100	152	3	16	<0.005	<0.001	0.001
BP21-16	123	126	3	100	165	4	16	<0.005	<0.001	<0.001
BP21-16	126	129	3	100	294	7	19	<0.005	<0.001	<0.001
BP21-16	129	131	2	100	1355	7	44	<0.005	<0.001	0.003
BP21-16	131	134	3	100	2940	11	88	0.014	0.023	0.002
BP21-16	134	135.55	1.55	100	2970	7	93	<0.005	0.001	0.001
BP21-16	135.55	136.5	0.95	100	1110	9	40	0.05	0.001	0.001
BP21-16	136.5	139.5	3	100	2510	17	76	<0.005	0.001	0.001
BP21-16	139.5	142.5	3	100	2940	12	93	0.006	0.002	0.001
BP21-16	142.5	145.5	3	100	2850	10	89	<0.005	0.003	0.001
BP21-16	145.5	148.5	3	100	2740	22	85	<0.005	0.001	0.005
BP21-16	148.5	151.3	2.8	100	2800	13	89	0.026	0.001	0.001
BP21-16	151.3	154.3	3	100	2050	16	69	<0.005	0.001	0.002
BP21-16	154.3	157.3	3	100	2760	19	84	0.029	0.001	0.002
BP21-16	157.3	160.3	3	100	2600	10	89	0.005	<0.001	0.001
BP21-16	160.3	163.3	3	100	2410	8	79	0.007	0.003	0.002
BP21-16	163.3	166.3	3	100	2460	353	96	0.03	0.004	0.002
BP21-16	166.3	168.3	2	100	2140	38	78	0.005	0.001	0.002
BP21-16	168.3	169.85	1.55	100	2250	11	66	0.009	0.004	0.003
BP21-16	169.85	172.55	2.7	100	3990	272	78	0.134	0.111	0.011
BP21-16	172.55	174.6	2.05	100	12300	975	177	0.281	0.357	0.078

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP21-16	174.6	176.85	2.25	100	13350	1850	199	0.324	0.387	0.087
BP21-16	176.85	178.85	2	100	6210	379	125	0.072	0.094	0.02
BP21-16	178.85	180.85	2	100	3680	205	108	0.027	0.028	0.018
BP21-16	180.85	182.85	2	100	4540	393	134	0.026	0.034	0.019
BP21-16	182.85	184.85	2	100	5120	336	146	0.028	0.038	0.019
BP21-16	184.85	186.6	1.75	100	4330	40	119	0.032	0.043	0.012
BP21-16	186.6	188.55	1.95	100	1805	18	47	0.016	0.017	0.004
BP21-16	188.55	190	1.45	100	4810	153	125	0.049	0.065	0.016
BP21-16	190	192.1	2.1	100	3620	152	101	0.05	0.062	0.008
BP21-16	192.1	194.1	2	100	2400	241	82	0.014	0.017	0.004
BP21-16	194.1	195.8	1.7	100	2920	247	104	0.028	0.019	0.008
BP21-16	195.8	197.8	2	100	3250	108	99	0.027	0.023	0.006
BP21-16	197.8	199.8	2	100	4000	100	117	0.067	0.061	0.003
BP21-16	199.8	201.65	1.85	100	3300	237	114	0.029	0.034	0.004
BP21-16	201.65	204	2.35	100	3020	76	104	0.032	0.028	0.004
BP21-16	204	207	3	100	2960	87	114	0.026	0.034	0.005
BP21-16	207	209.15	2.15	100	2820	187	98	0.026	0.027	0.005
BP21-16	209.15	210.15	1	100	352	61	57	0.005	0.001	0.001
BP21-17	74.6	77	2.4	71	2970	6	96	<0.005	0.005	0.001
BP21-17	77	79.75	2.75	100	2780	28	90	0.017	0.016	0.002
BP21-17	79.75	81.75	2	100	3990	84	85	0.035	0.044	0.006
BP21-17	81.75	83.75	2	100	3840	125	91	0.173	0.166	0.009
BP21-17	83.75	85.75	2	100	3400	74	94	0.263	0.315	0.007
BP21-17	85.75	87.5	1.75	100	2830	73	74	0.112	0.108	0.005
BP21-17	87.5	88.35	0.85	100	3770	217	91	0.092	0.122	0.006
BP21-17	88.35	90.5	2.15	100	6670	554	116	0.132	0.139	0.022
BP21-17	90.5	92	1.5	100	6860	559	118	0.119	0.14	0.025
BP21-17	92	94	2	100	11300	1660	145	0.181	0.189	0.067
BP21-17	94	96	2	100	11600	1960	140	0.181	0.209	0.053
BP21-17	96	98	2	100	8810	916	131	0.099	0.107	0.04
BP21-17	98	99.75	1.75	100	5480	2580	85	0.059	0.065	0.111
BP21-17	99.75	101.5	1.75	100	5860	762	99	0.066	0.071	0.015
BP21-17	101.5	103.5	2	100	12000	2440	167	0.104	0.142	0.041
BP21-17	103.5	105.5	2	100	7220	1090	150	0.061	0.082	0.018
BP21-17	105.5	107.5	2	100	8260	1540	165	0.07	0.078	0.022
BP21-17	107.5	110.2	2.7	100	8500	2090	199	0.061	0.076	0.048
BP21-17	110.2	112.5	2.3	100	6920	2550	195	0.078	0.081	0.029
BP21-17	112.5	114.8	2.3	100	7580	1320	203	0.082	0.087	0.02
BP21-17	114.8	117.2	2.4	100	5480	905	166	0.036	0.044	0.018
BP21-17	117.2	120	2.8	100	3950	301	140	0.044	0.05	0.012
BP21-17	120	123	3	100	3840	155	136	0.03	0.036	0.009
BP21-17	123	125	2	100	4340	468	133	0.036	0.035	0.011
BP21-17	125	127	2	100	4550	297	127	0.035	0.038	0.009
BP21-17	127	129.5	2.5	100	6160	519	166	0.06	0.064	0.02
BP21-17	129.5	132.3	2.8	100	2110	203	96	0.011	0.017	0.004
BP21-17	132.3	135	2.7	100	1910	102	98	<0.005	0.006	0.002
BP21-17	135	138	3	100	2260	106	110	<0.005	0.005	0.002
BP21-17	138	141	3	100	2320	15	102	0.028	0.024	0.002
BP21-17	141	144	3	100	2290	7	103	0.011	0.012	0.002
BP21-17	144	147	3	100	2920	241	114	0.033	0.043	0.012
BP21-17	147	150	3	100	3470	576	108	0.085	0.134	0.02
BP21-17	150	152.15	2.15	100	3530	26	112	0.058	0.051	0.006
BP21-17	152.15	154	1.85	100	5000	355	120	0.048	0.052	0.01
BP21-17	154	155.2	1.2	100	5240	782	124	0.03	0.036	0.017
BP21-17	155.2	158	2.8	100	3020	312	100	0.019	0.021	0.01
BP21-17	158	160.85	2.85	100	2970	289	127	0.017	0.023	0.006
BP21-17	160.85	163.85	3	100	2050	288	150	0.017	0.014	0.002
BP21-17	163.85	166.85	3	100	1500	196	140	0.005	0.005	0.002
BP21-17	166.85	169.85	3	100	2040	242	159	0.009	0.007	0.002
BP21-17	169.85	172.7	2.85	100	2460	1340	148	0.008	0.012	0.01
BP21-17	172.7	175.7	3	100	3580	663	125	0.005	0.006	0.007
BP21-17	175.7	178.7	3	100	2990	923	147	0.007	0.006	0.005
BP21-17	178.7	181.7	3	100	3030	336	179	0.049	0.026	0.004
BP21-17	181.7	184.7	3	100	5380	544	166	0.024	0.043	0.019
BP21-17	184.7	187.7	3	100	4730	514	131	0.079	0.068	0.014
BP21-17	187.7	190.7	3	100	3480	180	104	0.054	0.056	0.008
BP21-17	190.7	193.7	3	100	2410	137	83	0.013	0.023	0.004
BP21-17	193.7	196.7	3	100	2210	693	101	0.011	0.019	0.003
BP21-17	196.7	199.3	2.6	100	2970	192	148	0.01	0.011	0.008
BP21-17	199.3	201	1.7	100	5350	568	157	0.039	0.03	0.027
BP21-17	201	202.5	1.5	100	10850	1960	189	0.117	0.113	0.048
BP21-17	202.5	203.5	1	100	9700	1470	134	0.113	0.154	0.062
BP21-17	203.5	206.5	3	100	3940	75	87	0.042	0.064	0.011
BP21-17	206.5	209.5	3	100	3360	71	103	0.109	0.093	0.005
BP21-17	209.5	211.5	2	100	3710	6	82	0.018	0.008	0.003

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP21-17	211.5	213.5	2	100	6800	1390	137	0.026	0.034	0.027
BP21-17	213.5	215.5	2	100	7560	1430	189	0.054	0.078	0.02
BP21-17	215.5	217.5	2	100	7070	1505	192	0.068	0.073	0.023
BP21-17	217.5	219.8	2.3	100	10300	1670	231	0.093	0.106	0.043
BP21-17	219.8	220.8	1	100	5420	704	122	0.04	0.047	0.025
BP21-17	220.8	223	2.2	100	6630	853	149	0.041	0.048	0.049
BP21-17	223	225	2	100	8660	1730	192	0.071	0.136	0.072
BP21-17	225	227.3	2.3	100	8970	1300	175	0.078	0.101	0.058
BP21-17	227.3	228.3	1	60	3180	565	72	0.043	0.044	0.075
BP21-17	228.3	231	2.7	100	7370	850	113	0.142	0.121	0.04
BP21-17	231	233.2	2.2	100	13850	1850	137	0.442	0.487	0.103
BP21-17	233.2	236	2.8	100	3000	31	90	0.049	0.078	0.007
BP21-17	236	239	3	100	2770	37	74	0.021	0.009	0.005
BP21-17	239	242	3	100	2750	6	71	<0.005	0.001	0.003
BP21-17	242	244.5	2.5	100	2760	5	79	<0.005	0.002	0.004
BP21-17	244.5	247.5	3	100	2670	5	82	<0.005	0.001	0.004
BP21-17	247.5	249.5	2	100	2720	8	82	<0.005	0.001	0.003
BP21-17	249.5	252	2.5	100	2780	14	88	0.005	0.006	0.004
BP21-17	252	254	2	100	2540	21	79	<0.005	0.002	0.005
BP21-17	254	256	2	90	2800	35	82	0.005	0.001	0.005
BP21-17	256	258.3	2.3	83	2580	23	76	0.005	0.008	0.004
BP21-17	258.3	259	0.7	100	1160	170	57	<0.005	0.001	0.003
BP21-17	259	260	1	100	43	7	13	<0.005	0.003	0.001
BP21-18	25.2	27	1.8	100	424	167	46	<0.005	0.001	0.001
BP21-18	27	29.1	2.1	100	1360	93	79	0.005	0.004	0.002
BP21-18	29.1	31.1	2	100	1160	146	87	0.008	0.004	0.001
BP21-18	31.1	33.1	2	100	1250	266	81	0.015	0.012	0.001
BP21-18	33.1	35	1.9	100	2650	91	83	0.015	0.023	0.005
BP21-18	35	37	2	100	4130	1290	119	0.012	0.018	0.019
BP21-18	37	39	2	100	4130	804	114	0.042	0.042	0.013
BP21-18	39	41	2	100	3250	655	107	0.058	0.084	0.01
BP21-18	41	43	2	100	3200	386	110	0.046	0.041	0.019
BP21-18	43	45	2	100	2820	51	99	0.027	0.035	0.006
BP21-18	45	47	2	100	3490	252	113	0.037	0.07	0.007
BP21-18	47	49	2	100	2470	4	147	<0.005	0.003	0.005
BP21-18	49	51.1	2.1	100	2310	39	88	0.018	0.018	0.003
BP21-18	51.1	53	1.9	100	3780	74	119	0.065	0.155	0.006
BP21-18	53	55	2	100	3210	42	114	0.018	0.041	0.004
BP21-18	55	57	2	100	2380	4	88	0.007	0.013	0.002
BP21-18	57	59	2	100	2260	368	73	0.014	0.024	0.007
BP21-18	59	61	2	100	3920	315	106	0.061	0.078	0.015
BP21-18	61	63	2	100	3260	288	109	0.014	0.021	0.009
BP21-18	63	65	2	100	3820	206	114	0.034	0.043	0.02
BP21-18	65	67	2	100	3600	151	111	0.061	0.054	0.013
BP21-18	67	69	2	100	3490	22	112	0.03	0.044	0.029
BP21-18	69	71	2	100	2700	24	93	0.006	0.006	0.004
BP21-18	71	73	2	100	3230	85	94	0.08	0.091	0.007
BP21-18	73	75	2	100	3330	102	99	0.046	0.058	0.006
BP21-18	75	77.3	2.3	100	3310	53	101	0.022	0.022	0.007
BP21-18	77.3	80	2.7	100	5060	481	116	0.033	0.035	0.021
BP21-18	80	83	3	85	3500	157	84	0.042	0.031	0.01
BP21-18	83	86	3	100	2770	76	77	0.008	0.002	0.005
BP21-18	86	89	3	100	2050	60	56	0.009	0.005	0.002
BP21-18	89	92	3	97	2660	145	65	0.01	0.011	0.008
BP21-18	92	95	3	100	4040	264	89	0.044	0.055	0.012
BP21-18	241.9	244	2.1	100	2530	21	86	0.015	<0.001	0.001
BP21-18	244	246	2	100	2530	19	88	<0.005	0.001	0.002
BP21-18	246	248.9	2.9	100	2190	14	76	0.008	<0.001	0.001
BP21-18	248.9	252	3.1	100	3660	75	98	0.091	0.094	0.005
BP21-18	252	255	3	100	2390	13	84	0.024	<0.001	0.001
BP21-18	255	258	3	100	2590	8	86	<0.005	<0.001	0.001
BP21-18	258	261	3	100	2670	7	90	<0.005	<0.001	0.001
BP21-18	261	263.6	2.6	100	2660	8	87	<0.005	<0.001	0.001
BP21-18	263.6	266.6	3	100	2740	8	90	<0.005	<0.001	0.002
BP21-18	266.6	269.6	3	100	2700	27	90	0.006	0.001	0.001
BP21-18	269.6	272	2.4	100	2590	31	88	0.026	0.019	0.002
BP21-18	272	274	2	100	2790	8	87	0.042	0.04	0.007
BP21-18	274	276.15	2.15	100	2770	311	99	0.01	0.007	0.006
BP21-18	276.15	278.15	2	100	2330	155	91	0.005	0.007	0.009
BP21-18	278.15	280	1.85	100	2010	20	85	<0.005	0.002	0.003
BP21-18	280	282	2	100	3360	368	112	0.026	0.031	0.006
BP21-18	282	283.4	1.4	100	2410	701	99	0.013	0.016	0.007
BP21-18	283.4	286	2.6	100	3130	1210	125	0.019	0.033	0.006
BP21-18	286	288	2	100	4450	314	137	0.042	0.064	0.004
BP21-18	288	289.9	1.9	100	2810	569	128	0.022	0.033	0.005

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP21-18	289.9	292.1	2.2	100	2070	247	108	0.014	0.021	0.005
BP21-18	292.1	294.3	2.2	100	1550	291	79	0.006	0.009	0.002
BP21-18	294.3	296.3	2	100	4570	80	139	0.041	0.057	0.01
BP21-18	296.3	298.3	2	100	3970	112	125	0.032	0.044	0.006
BP21-18	298.3	300.3	2	100	3910	428	149	0.047	0.031	0.003
BP21-18	300.3	302.65	2.35	100	3720	361	145	0.035	0.047	0.005
BP21-18	302.65	305.2	2.55	100	2840	179	98	0.018	0.019	0.007
BP21-18	305.2	306.2	1	100	3370	521	118	0.017	0.021	0.003
BP21-18	306.2	309.2	3	100	4050	187	119	0.031	0.035	0.014
BP21-18	309.2	310.2	1	100	209	169	26	<0.005	0.001	0.001
BP21-19	35.7	36.7	1	100	3960	91	98	0.072	0.075	0.008
BP21-19	36.7	38.45	1.75	100	3440	50	93	0.053	0.068	0.008
BP21-19	38.45	40.4	1.95	100	3070	15	97	0.028	0.043	0.005
BP21-19	41.4	43	1.6	100	4630	325	121	0.034	0.046	0.017
BP21-19	43	45.8	2.8	100	3770	480	136	0.031	0.036	0.015
BP21-19	45.8	48	2.2	100	3350	373	115	0.034	0.045	0.007
BP21-19	48	51.3	3.3	100	3560	458	109	0.057	0.043	0.005
BP21-19	51.3	52	0.7	100	1265	261	65	0.01	0.015	0.003
BP21-19	53.2	55.8	2.6	100	1020	70	65	0.005	<0.001	0.001
BP21-19	55.8	58.5	2.7	100	1125	52	68	<0.005	0.003	0.002
BP21-19	58.5	59.5	1	100	172	63	20	<0.005	0.003	0.002
BP21-20	50.5	53	2.5	100	2630	11	83	0.009	<0.001	0.002
BP21-20	53	56	3	100	2910	7	92	<0.005	<0.001	0.002
BP21-20	56	59	3	100	2400	8	78	<0.005	0.001	0.003
BP21-20	59	62	3	100	2610	4	86	<0.005	<0.001	0.003
BP21-20	62	65	3	100	2810	8	92	<0.005	0.001	0.002
BP21-20	65	68	3	100	2850	8	91	0.006	0.038	0.002
BP21-20	68	71.15	3.15	100	3150	63	95	0.067	0.068	0.009
BP21-20	71.15	72.6	1.45	100	3540	746	100	0.047	0.074	0.044
BP21-20	72.6	75.6	3	100	3210	163	111	0.135	0.144	0.012
BP21-20	75.6	77.6	2	100	6570	1070	146	0.082	0.111	0.041
BP21-20	77.6	79.55	1.95	100	6810	829	165	0.065	0.102	0.027
BP21-20	79.55	80.75	1.2	100	3030	92	115	0.012	0.014	0.006
BP21-20	80.75	82.75	2	100	6400	1260	168	0.08	0.087	0.037
BP21-20	82.75	84.6	1.85	100	5850	750	175	0.06	0.067	0.03
BP21-20	84.6	87	2.4	100	2900	15	82	0.071	0.007	0.003
BP21-20	87	89.5	2.5	100	3900	175	102	0.117	0.116	0.012
BP21-20	89.5	92	2.5	100	5080	27	182	0.069	0.104	0.019
BP21-20	92	94.05	2.05	100	4510	13	180	0.071	0.088	0.013
BP21-20	94.05	96	1.95	100	4810	220	132	0.064	0.059	0.018
BP21-20	96	98.3	2.3	100	1380	573	66	0.014	0.007	0.002
BP21-20	98.3	99.4	1.1	100	65	61	9	<0.005	0.001	0.003
BP21-21	67.05	68.5	1.45	100	2710	13	86	<0.005	0.001	0.001
BP21-21	68.5	71	2.5	100	2900	8	91	<0.005	0.001	0.001
BP21-21	71	73.8	2.8	100	3940	150	93	0.05	0.064	0.012
BP21-21	73.8	76.4	2.6	100	2770	13	90	<0.005	0.001	0.001
BP21-21	76.4	78.4	2	100	12450	1600	120	0.406	0.433	0.093
BP21-21	78.4	80.9	2.5	100	15950	2370	165	0.195	0.225	0.102
BP21-21	80.9	82.35	1.45	100	5220	146	110	0.035	0.059	0.016
BP21-21	82.35	84.3	1.95	100	3210	17	99	0.037	0.04	0.005
BP21-21	84.3	86.3	2	100	3270	56	89	0.028	0.066	0.008
BP21-21	86.3	88.3	2	100	2680	23	97	0.018	0.027	0.004
BP21-21	88.3	90.3	2	100	2760	9	109	0.019	0.021	0.003
BP21-21	90.3	92.3	2	100	3420	88	108	0.032	0.034	0.01
BP21-21	92.3	94.3	2	100	3240	45	104	0.064	0.059	0.005
BP21-21	94.3	96.3	2	100	2930	23	88	0.022	0.023	0.006
BP21-21	96.3	98.5	2.2	100	4250	537	121	0.046	0.064	0.021
BP21-21	98.5	100.85	2.35	100	2170	94	93	0.007	0.007	0.018
BP21-21	100.85	102.8	1.95	100	3310	104	116	0.033	0.036	0.005
BP21-21	102.8	104.8	2	100	2740	286	124	0.014	0.015	0.006
BP21-21	104.8	106.1	1.3	100	3670	456	124	0.025	0.022	0.007
BP21-21	106.1	107.1	1	100	3020	99	100	0.019	0.027	0.004
BP21-21	107.1	108.1	1	100	109	153	19	<0.005	<0.001	0.002
BP21-22	54.2	56	1.8	100	2600	10	83	0.006	0.01	0.002
BP21-22	56	57.5	1.5	100	2330	10	76	<0.005	0.006	0.003
BP21-22	57.5	58.2	0.7	100	2670	6	85	<0.005	0.001	0.001
BP21-22	58.2	61.2	3	100	2850	7	87	0.019	0.029	0.003
BP21-22	61.2	64.2	3	100	3820	113	95	0.143	0.212	0.013
BP21-22	64.2	65.6	1.4	100	2880	9	91	0.077	0.021	0.003
BP21-22	65.6	67.15	1.55	100	3650	115	106	0.125	0.135	0.01
BP21-22	67.15	69.5	2.35	100	9340	756	150	0.313	0.312	0.06
BP21-22	69.5	71.5	2	100	7590	1195	146	0.122	0.157	0.066
BP21-22	71.5	74.5	3	100	3220	135	107	0.023	0.031	0.009
BP21-22	74.5	77	2.5	100	2420	13	94	0.006	0.005	0.001
BP21-22	77	80	3	100	3410	132	106	0.026	0.053	0.006

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP21-22	80	83	3	100	3580	140	107	0.052	0.035	0.005
BP21-22	83	86	3	100	2790	6	81	<0.005	0.005	0.002
BP21-22	86	88	2	100	3950	128	113	0.047	0.066	0.007
BP21-22	88	90.2	2.2	78	2890	102	104	0.015	0.032	0.008
BP21-22	90.2	90.85	0.65	100	5430	1610	141	0.043	0.048	0.018
BP21-22	90.85	93.8	2.95	100	2820	22	83	0.02	0.017	0.005
BP21-22	93.8	96.8	3	100	3800	247	137	0.035	0.031	0.009
BP21-22	96.8	97.8	1	100	117	116	16	<0.005	<0.001	0.002
BP21-23	75.7	77.7	2	100	2400	12	87	0.008	0.007	0.003
BP21-23	77.7	79.7	2	100	2430	8	83	0.027	0.008	0.001
BP21-23	79.7	81.7	2	100	2610	12	87	0.01	0.012	0.002
BP21-23	81.7	83.7	2	100	3490	108	101	0.091	0.087	0.008
BP21-23	83.7	84.5	0.8	100	3740	176	100	0.21	0.22	0.012
BP21-23	84.5	85.5	1	100	3440	87	102	0.191	0.183	0.012
BP21-23	85.5	88	2.5	100	11100	2120	150	0.197	0.219	0.075
BP21-23	88	90	2	100	5220	940	137	0.056	0.057	0.031
BP21-23	90	92.5	2.5	100	3820	379	132	0.058	0.066	0.01
BP21-23	92.5	93.3	0.8	100	5050	538	133	0.06	0.085	0.011
BP21-23	93.3	95.5	2.2	100	3190	125	116	0.03	0.034	0.008
BP21-23	95.5	97.9	2.4	100	4490	802	158	0.041	0.052	0.015
BP21-23	97.9	99.5	1.6	100	2760	109	114	0.021	0.019	0.004
BP21-23	99.5	101.8	2.3	100	4840	1020	162	0.04	0.041	0.023
BP21-23	101.8	104.8	3	100	2540	23	77	0.049	0.065	0.003
BP21-23	104.8	107.4	2.6	100	3150	116	105	0.023	0.039	0.01
BP21-23	107.4	109.35	1.95	100	7790	1080	169	0.117	0.111	0.038
BP21-23	109.35	111.5	2.15	100	6640	986	171	0.059	0.07	0.02
BP21-23	111.5	114.4	2.9	100	3550	367	116	0.028	0.037	0.01
BP21-23	114.4	116.7	2.3	100	7400	1270	174	0.079	0.092	0.033
BP21-23	116.7	119	2.3	100	3990	788	137	0.037	0.044	0.013
BP21-23	119	121	2	100	4090	327	120	0.032	0.046	0.014
BP21-23	121	123.1	2.1	100	3350	79	119	0.033	0.041	0.015
BP21-23	123.1	125.3	2.2	100	5340	913	166	0.037	0.048	0.011
BP21-23	125.3	126.75	1.45	100	2950	131	118	0.013	0.014	0.004
BP21-23	126.75	128.3	1.55	100	4170	1475	192	0.025	0.029	0.014
BP21-23	128.3	130.8	2.5	100	2880	45	174	0.062	0.025	0.007
BP21-23	130.8	133.2	2.4	100	2500	9	76	0.02	0.01	0.002
BP21-23	133.2	135.1	1.9	100	2230	99	91	0.005	0.006	0.003
BP21-23	135.1	137.7	2.6	100	3900	1665	178	0.015	0.026	0.008
BP21-23	137.7	139.3	1.6	38	265	51	21	<0.005	0.002	0.002
BP21-24	143.7	146	2.3	100	3490	17	96	0.09	0.222	0.003
BP21-24	146	148	2	100	3340	17	91	<0.005	0.014	0.002
BP21-24	148	150	2	100	3560	21	89	0.054	0.028	0.004
BP21-24	150	152	2	100	3360	11	93	0.01	0.004	0.003
BP21-24	152	154.1	2.1	100	2990	10	83	<0.005	0.003	0.005
BP21-24	154.1	156.1	2	100	3050	8	95	<0.005	0.002	0.005
BP21-24	156.1	158.1	2	100	3000	9	104	0.008	0.004	0.003
BP21-24	158.1	160.1	2	100	2540	199	87	<0.005	0.009	0.004
BP21-24	160.1	162.1	2	100	2440	135	85	0.013	0.013	0.005
BP21-24	162.1	164.3	2.2	100	4180	329	118	0.058	0.07	0.016
BP21-24	164.3	166.8	2.5	100	4950	454	116	0.043	0.045	0.016
BP21-24	166.8	169	2.2	100	9140	1455	155	0.093	0.091	0.04
BP21-24	169	170.5	1.5	100	3630	164	108	0.018	0.016	0.01
BP21-24	170.5	172.5	2	100	7010	998	162	0.064	0.068	0.028
BP21-24	172.5	174.5	2	100	10300	1850	201	0.071	0.091	0.047
BP21-24	174.5	176.5	2	100	12300	2700	277	0.108	0.111	0.056
BP21-24	176.5	178.5	2	100	13450	2520	281	0.124	0.137	0.035
BP21-24	178.5	180.5	2	100	15600	3040	306	0.114	0.148	0.054
BP21-24	180.5	182.5	2	100	10900	1960	234	0.112	0.111	0.034
BP21-24	182.5	184.5	2	100	10950	1860	233	0.094	0.16	0.051
BP21-24	184.5	186.5	2	100	11000	854	205	0.129	0.096	0.036
BP21-24	186.5	188.5	2	100	5750	179	128	0.039	0.055	0.013
BP21-24	188.5	190.5	2	100	3200	9	94	<0.005	0.002	0.002
BP21-24	190.5	192.5	2	100	3530	6	94	0.049	0.031	0.004
BP21-24	192.5	194.5	2	100	10100	1930	216	0.082	0.105	0.026
BP21-24	194.5	196.5	2	100	8170	1505	191	0.07	0.099	0.018
BP21-24	196.5	198.5	2	100	5100	1070	213	0.058	0.059	0.017
BP21-24	198.5	200.5	2	100	3400	4030	142	0.025	0.063	0.08
BP21-24	200.5	202.5	2	100	5550	504	120	0.056	0.053	0.024
BP21-24	202.5	204.5	2	100	6360	710	143	0.076	0.089	0.023
BP21-24	204.5	206.5	2	100	4010	501	135	0.044	0.059	0.015
BP21-24	206.5	208.5	2	100	4260	166	111	0.1	0.092	0.013
BP21-24	208.5	210.5	2	100	3990	72	108	0.046	0.069	0.008
BP21-24	210.5	212.5	2	100	3500	62	95	0.01	0.017	0.006
BP21-24	212.5	214.5	2	100	4950	290	127	0.04	0.049	0.008
BP21-24	214.5	216.5	2	100	7650	1330	134	0.081	0.081	0.029

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP21-24	216.5	219	2.5	100	6590	667	106	0.072	0.075	0.025
BP21-24	219	220.1	1.1	100	18700	5410	163	0.269	0.348	0.17
BP21-24	220.1	222.1	2	100	5540	119	146	0.183	0.253	0.032
BP21-24	222.1	224.1	2	100	3150	78	75	0.024	0.013	0.023
BP21-24	224.1	226.1	2	100	2860	18	65	0.012	0.008	0.002
BP21-24	226.1	228.1	2	100	2550	15	68	<0.005	0.001	0.002
BP21-24	228.1	230.1	2	100	2810	25	75	<0.005	0.001	0.003
BP21-24	230.1	232.1	2	100	2740	136	76	0.007	0.007	0.005
BP21-24	232.1	234.1	2	100	3010	17	85	0.015	0.025	0.003
BP21-24	234.1	236.1	2	100	2940	16	76	<0.005	0.002	0.003
BP21-24	236.1	238.1	2	100	3320	15	86	0.009	0.002	0.003
BP21-24	238.1	240.1	2	100	1525	20	56	0.07	0.021	0.001
BP21-24	240.1	242.1	2	100	2750	14	82	0.006	0.004	0.003
BP21-24	242.1	244.1	2	100	2740	80	77	0.041	0.018	0.002
BP21-24	244.1	246.1	2	100	3100	13	96	<0.005	0.003	0.002
BP21-24	246.1	248.1	2	100	3210	8	63	0.011	0.004	0.001
BP21-24	248.1	250.1	2	100	2870	499	74	0.012	0.021	0.012
BP21-24	250.1	252.1	2	100	2650	86	83	0.028	0.013	0.002
BP21-24	252.1	254.1	2	100	2270	66	76	<0.005	<0.001	0.001
BP21-24	254.1	256.1	2	100	1940	174	58	<0.005	0.001	0.002
BP21-24	256.1	258.1	2	100	2590	16	84	<0.005	<0.001	0.001
BP21-24	258.1	260.1	2	100	2980	8	104	0.012	0.002	0.001
BP21-24	260.1	262.1	2	100	2790	6	88	0.005	0.001	0.001
BP21-24	262.1	264.1	2	100	2710	8	84	0.005	0.001	0.002
BP21-24	264.1	266.1	2	100	2540	33	77	<0.005	0.001	0.002
BP21-24	266.1	268.1	2	100	2750	29	85	<0.005	0.001	0.002
BP21-24	268.1	270.5	2.4	100	2890	13	85	<0.005	0.001	0.001
BP21-24	270.5	273.2	2.7	100	2800	11	77	0.037	0.002	0.001
BP21-24	273.2	275.2	2	100	2890	16	83	0.011	0.002	0.001
BP21-24	275.2	277.2	2	100	2570	12	71	0.015	0.002	0.001
BP21-24	277.2	279.2	2	100	3170	19	91	<0.005	0.001	0.002
BP21-24	279.2	281.2	2	100	2750	14	83	0.005	0.001	0.001
BP21-24	281.2	283.2	2	100	2830	12	84	0.005	<0.001	0.002
BP21-24	283.2	285.2	2	100	3050	13	88	0.005	0.002	0.001
BP21-24	285.2	287.2	2	100	2960	20	80	0.012	0.004	0.001
BP21-24	287.2	289.2	2	100	2790	39	78	<0.005	0.001	0.001
BP21-25	38.4	40.8	2.4	100	3380	6	104	0.021	0.033	0.004
BP21-25	40.8	43	2.2	100	2670	7	87	<0.005	0.003	0.001
BP21-25	43	46	3	100	2790	6	94	0.016	0.011	0.002
BP21-25	46	48.6	2.6	100	3110	55	97	0.057	0.056	0.011
BP21-25	48.6	50.5	1.9	100	5010	814	126	0.045	0.071	0.037
BP21-25	50.5	52.3	1.8	100	3570	633	124	0.023	0.022	0.008
BP21-25	52.3	53.85	1.55	100	2290	4	85	0.012	0.009	0.003
BP21-25	53.85	56.2	2.35	100	3720	914	162	0.019	0.02	0.01
BP21-25	56.2	57.8	1.6	100	2800	22	106	0.037	0.033	0.004
BP21-25	57.8	58.8	1	100	3620	312	133	0.03	0.041	0.006
BP21-25	58.8	61	2.2	100	2410	654	108	0.012	0.013	0.023
BP21-25	61	64	3	100	2670	6	90	0.012	0.014	0.002
BP21-25	64	66	2	100	3450	384	110	0.019	0.024	0.023
BP21-25	66	68.3	2.3	92	3500	98	111	0.026	0.035	0.012
BP21-25	68.3	69.3	1	80	140	234	37	<0.005	<0.001	0.001
BP21-26	7	8.9	1.9	100	2950	218	130	0.028	0.033	0.005
BP21-26	8.9	11	2.1	100	3310	120	116	0.021	0.019	0.004
BP21-26	11	12.5	1.5	100	2390	42	112	0.019	0.021	0.002
BP21-26	12.5	14.5	2	100	2540	368	111	0.01	0.012	0.003
BP21-26	14.5	16.5	2	100	3040	682	128	0.028	0.03	0.005
BP21-26	16.5	18.5	2	100	4280	623	130	0.043	0.048	0.015
BP21-26	18.5	20.5	2	100	6250	791	142	0.093	0.089	0.013
BP21-26	20.5	22.5	2	100	2820	48	115	<0.005	0.017	0.003
BP21-26	22.5	24.5	2	100	3490	410	133	0.028	0.045	0.006
BP21-26	24.5	26.5	2	100	3090	312	148	0.013	0.016	0.008
BP21-26	26.5	28.15	1.65	100	4710	742	173	0.021	0.024	0.011
BP21-26	28.15	30.6	2.45	100	4830	851	151	0.023	0.026	0.015
BP21-26	30.6	32.6	2	100	6210	885	130	0.034	0.045	0.013
BP21-26	32.6	34.6	2	100	8620	1820	128	0.052	0.054	0.026
BP21-26	34.6	36.6	2	100	5900	784	128	0.04	0.037	0.009
BP21-26	36.6	38.95	2.35	100	3170	48	128	0.023	0.023	0.003
BP21-26	38.95	41	2.05	100	3970	715	175	0.018	0.02	0.015
BP21-26	41	43	2	85	4920	1170	204	0.03	0.037	0.021
BP21-26	43	45.1	2.1	100	9440	1550	281	0.068	0.094	0.027
BP21-26	45.1	47.3	2.2	100	9910	2440	281	0.065	0.079	0.033
BP21-26	47.3	49.5	2.2	100	11800	2130	214	0.088	0.096	0.032
BP21-26	49.5	51.6	2.1	100	5230	723	135	0.057	0.065	0.013
BP21-26	51.6	53	1.4	100	5230	732	129	0.126	0.124	0.016
BP21-26	53	54.6	1.6	100	2910	29	98	0.014	0.014	0.002

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP21-26	54.6	56.6	2	100	4860	829	129	0.025	0.027	0.018
BP21-26	56.6	58.6	2	100	2740	11	109	0.013	0.009	0.003
BP21-26	58.6	60.6	2	100	4010	530	123	0.044	0.034	0.013
BP21-26	60.6	62.6	2	100	2760	4	120	<0.005	0.009	0.002
BP21-26	62.6	64.6	2	100	2800	161	103	0.014	0.013	0.006
BP21-26	64.6	66.6	2	100	3450	11	118	0.006	0.017	0.003
BP21-26	66.6	68.6	2	100	8320	538	126	0.069	0.105	0.027
BP21-26	68.6	70.6	2	100	3350	59	68	0.038	0.068	0.007
BP21-26	70.6	72.6	2	100	2760	5	100	0.006	0.021	0.004
BP21-26	72.6	74.3	1.7	100	4110	24	123	0.159	0.139	0.008
BP21-26	74.7	76.7	2	100	2500	13	91	0.005	0.008	0.003
BP21-26	76.7	78.7	2	100	2670	9	88	<0.005	0.003	0.002
BP21-26	78.7	80.7	2	100	2790	6	91	<0.005	0.001	0.001
BP21-26	80.7	82.4	1.7	100	2810	7	86	<0.005	0.003	0.002
BP21-26	82.4	84.5	2.1	66	2610	10	89	<0.005	0.006	0.003
BP21-26	84.9	87	2.1	100	2530	11	81	<0.005	0.002	0.002
BP21-26	87	89	2	100	3060	3	93	<0.005	0.002	0.002
BP21-26	89	91	2	100	3040	3	99	<0.005	0.002	0.001
BP21-26	91	92.1	1.1	100	2640	3	67	<0.005	0.009	0.003
BP21-26	92.1	94.1	2	90	2390	78	84	<0.005	0.004	0.004
BP21-26	94.5	96.1	1.6	100	2310	115	75	<0.005	0.003	0.005
BP21-26	97.1	98.5	1.4	100	2230	48	78	0.01	0.002	0.002
BP21-26	98.5	100	1.5	100	2490	29	83	0.005	0.003	0.002
BP21-26	101	103.1	2.1	76	2200	16	77	0.008	0.001	0.004
BP21-26	103.1	105.4	2.3	100	2460	31	79	<0.005	<0.001	0.002
BP21-26	105.4	108	2.6	100	2550	38	78	<0.005	0.001	0.002
BP21-26	108	110	2	100	2600	40	80	<0.005	0.001	0.003
BP21-26	110	113	3	100	2590	19	80	<0.005	0.002	0.002
BP21-26	113	116	3	100	2630	14	81	<0.005	0.001	0.001
BP21-26	116	119	3	100	2610	15	81	<0.005	0.001	<0.001
BP21-26	119	122	3	100	2660	16	80	<0.005	<0.001	<0.001
BP21-26	122	125	3	100	2680	14	82	<0.005	0.001	0.001
BP21-26	125	128	3	100	2680	10	80	<0.005	<0.001	0.001
BP21-26	128	131	3	100	2500	16	79	<0.005	<0.001	0.001
BP21-26	131	134	3	100	2580	16	77	<0.005	0.001	0.001
BP21-26	134	137	3	100	2690	9	82	<0.005	0.001	0.001
BP21-26	137	140	3	100	2640	7	82	<0.005	0.001	<0.001
BP21-26	140	143	3	100	2780	9	86	0.013	<0.001	0.001
BP21-26	143	146	3	100	2750	11	80	0.014	<0.001	0.001
BP21-26	146	149	3	100	2840	11	82	<0.005	0.001	0.001
BP21-26	149	152	3	100	2710	12	78	<0.005	<0.001	<0.001
BP21-26	152	155	3	100	2770	12	77	<0.005	<0.001	<0.001
BP21-26	155	157.7	2.7	100	2780	14	78	<0.005	0.001	0.001
BP21-26	271.1	273.5	2.4	100	2730	26	82	<0.005	0.001	0.001
BP21-26	273.5	276	2.5	100	2750	31	87	<0.005	0.001	<0.001
BP21-26	276	278.5	2.5	100	2700	16	87	<0.005	0.001	<0.001
BP21-26	278.5	281	2.5	100	2780	7	88	<0.005	0.001	0.001
BP21-26	281	284	3	100	2640	5	83	<0.005	<0.001	0.001
BP21-26	284	286.5	2.5	100	3140	1	96	<0.005	0.002	0.001
BP21-26	286.5	289	2.5	100	2860	1	91	0.039	0.004	0.001
BP21-26	289	290.6	1.6	100	3620	22	86	0.096	0.11	0.007
BP21-26	290.6	292.6	2	100	6830	1100	119	0.151	0.208	0.055
BP21-26	292.6	294.6	2	100	8020	1230	141	0.16	0.21	0.073
BP21-26	294.6	297	2.4	100	4020	293	143	0.062	0.081	0.014
BP21-26	297	299.5	2.5	100	4400	912	131	0.067	0.066	0.034
BP21-26	299.5	302	2.5	100	3960	60	138	0.02	0.027	0.006
BP21-26	302	304	2	100	3130	1	99	0.073	0.05	0.002
BP21-26	304	306	2	100	3580	1	108	0.061	0.103	0.004
BP21-26	306	308.4	2.4	100	3100	5	56	0.033	0.024	0.003
BP21-26	308.4	309.6	1.2	100	245	28	45	0.011	0.002	<0.001
BP21-26	309.6	312	2.4	100	2030	237	88	0.008	0.008	0.002
BP21-26	312	314.5	2.5	100	3040	2	103	0.005	0.003	0.002
BP21-26	314.5	317	2.5	100	2800	<1	82	<0.005	0.001	0.003
BP21-26	317	319.5	2.5	100	2880	<1	85	0.005	0.003	0.002
BP21-26	319.5	322	2.5	100	2930	<1	80	<0.005	0.004	0.002
BP21-26	322	324.5	2.5	100	2710	<1	82	0.058	0.009	0.002
BP21-26	324.5	327	2.5	100	4050	32	86	0.416	0.403	0.014
BP21-26	327	329.5	2.5	100	3180	1	87	0.021	0.037	0.012
BP21-26	329.5	332.5	3	100	3060	1	81	0.014	0.015	0.006
BP21-26	332.5	335.5	3	100	3050	3	91	0.018	0.023	0.013
BP21-26	335.5	338	2.5	100	2870	1	108	0.009	0.013	0.009
BP21-26	338	340.55	2.55	72	3030	6	140	0.034	0.029	0.006
BP21-26	340.55	342.5	1.95	95	110	34	15	<0.005	0.006	0.002
BP21-27	45	47.1	2.1	100	741	66	41	0.006	0.004	0.001
BP21-27	47.1	49	1.9	100	1520	89	81	0.007	0.006	0.001

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP21-27	49	51	2	100	1580	98	77	0.01	0.009	0.001
BP21-27	51	53	2	100	2670	158	100	0.02	0.031	0.003
BP21-27	53	54.7	1.7	100	3870	132	116	0.038	0.054	0.009
BP21-27	54.7	56.7	2	100	2780	38	88	0.034	0.02	0.006
BP21-27	56.7	59	2.3	80	1530	155	74	0.014	0.014	0.002
BP21-27	59	61	2	100	1075	78	63	<0.005	0.005	<0.001
BP21-27	61	63	2	100	1470	183	93	0.006	0.007	0.001
BP21-27	63	64.3	1.3	100	1745	119	78	0.05	0.025	0.003
BP21-27	64.3	65.7	1.4	100	1905	208	76	0.018	0.021	0.002
BP21-27	65.7	67.2	1.5	100	2750	614	155	0.039	0.026	0.02
BP21-27	67.2	69	1.8	100	2190	158	130	0.01	0.013	0.005
BP21-27	69	71	2	100	2240	345	103	0.018	0.018	0.004
BP21-27	71	73	2	100	4030	717	160	0.026	0.024	0.011
BP21-27	73	75	2	100	3590	389	140	0.024	0.025	0.007
BP21-27	75	76.3	1.3	100	2350	98	133	0.021	0.025	0.003
BP21-27	76.3	78	1.7	100	2560	497	144	0.016	0.017	0.007
BP21-27	78	80	2	100	2750	681	161	0.01	0.01	0.009
BP21-27	80	81.65	1.65	100	2670	391	139	0.02	0.025	0.004
BP21-27	81.65	83.1	1.45	100	2850	101	116	0.009	0.012	0.004
BP21-27	83.1	84.8	1.7	100	4270	479	127	0.043	0.069	0.008
BP21-27	84.8	86.5	1.7	100	3540	327	118	0.048	0.072	0.007
BP21-27	86.5	88.3	1.8	100	2580	18	102	0.014	0.019	0.003
BP21-27	88.3	90	1.7	100	2500	133	101	0.018	0.02	0.005
BP21-27	90	92	2	100	2380	68	69	0.009	0.006	0.004
BP21-27	92	93.7	1.7	100	2870	25	76	0.007	0.003	0.005
BP21-27	93.7	95	1.3	100	2140	46	62	0.01	0.006	0.002
BP21-27	95	97.15	2.15	80	923	9	30	<0.005	0.001	0.002
BP21-27	97.15	98.8	1.65	100	3780	65	88	0.008	0.012	0.01
BP21-27	99.7	100.95	1.25	100	8510	765	117	0.09	0.085	0.047
BP21-27	330	333	3	100	2410	22	76	<0.005	<0.001	0.001
BP21-27	333	336	3	100	2510	20	82	0.006	0.003	0.001
BP21-27	336	338	2	100	2350	14	77	0.007	0.002	0.002
BP21-27	338	339.3	1.3	100	2360	69	69	0.005	0.001	0.003
BP21-27	339.3	342	2.7	100	2680	22	78	<0.005	0.001	0.004
BP21-27	342	344	2	100	2730	1	84	0.026	0.002	0.002
BP21-27	344	346	2	100	2800	1	86	<0.005	0.002	0.002
BP21-27	346	348.65	2.65	100	2840	1	88	<0.005	0.003	0.002
BP21-27	348.65	351.45	2.8	100	4310	11	190	0.103	0.082	0.012
BP21-27	351.45	354.4	2.95	100	2920	5	86	<0.005	0.003	0.003
BP21-27	354.4	357.3	2.9	100	2960	3	86	<0.005	0.001	0.003
BP21-27	357.3	360	2.7	100	3850	112	110	0.024	0.034	0.007
BP21-27	360	362	2	100	5080	1050	138	0.058	0.058	0.036
BP21-27	362	364	2	100	2510	267	84	0.027	0.032	0.004
BP21-27	364	366	2	100	3060	86	92	0.01	0.013	0.007
BP21-27	366	368.55	2.55	100	3320	82	106	0.009	0.02	0.009
BP21-27	368.55	370.55	2	100	5250	861	118	0.119	0.1	0.036
BP21-27	370.55	372.5	1.95	100	7430	1240	189	0.135	0.13	0.009
BP21-27	372.5	374.5	2	100	6690	527	150	0.107	0.141	0.006
BP21-27	374.5	376.4	1.9	100	3130	271	96	0.052	0.048	0.002
BP21-27	376.4	377.15	0.75	100	1580	381	68	0.014	0.017	0.001
BP21-28	49.9	53	3.1	70	2150	30	86	0.01	0.008	0.002
BP21-28	53	55	2	100	2480	160	99	0.016	0.018	0.005
BP21-28	55	57	2	100	2220	106	88	0.011	0.02	0.002
BP21-28	57	59.3	2.3	100	2460	36	93	0.008	0.015	0.001
BP21-28	59.3	61.75	2.45	100	1770	67	60	0.005	0.007	0.001
BP21-28	61.75	62.65	0.9	100	1680	43	54	0.006	0.007	0.001
BP21-28	62.65	64	1.35	100	2440	43	90	<0.005	0.003	0.002
BP21-28	64	65.7	1.7	100	2480	97	82	0.027	0.027	0.002
BP21-28	65.7	67	1.3	100	1250	383	71	0.01	0.01	0.001
BP21-28	67	69	2	100	2700	8	88	<0.005	0.004	0.002
BP21-28	69	71	2	100	2760	7	82	<0.005	0.003	0.002
BP21-28	71	73	2	100	2860	10	95	0.014	0.014	0.003
BP21-28	73	75	2	100	2580	15	74	0.008	0.014	0.002
BP21-28	75	77	2	100	2810	8	87	0.009	0.014	0.002
BP21-28	77	78.6	1.6	100	2730	9	93	<0.005	0.003	0.001
BP21-28	78.6	81	2.4	100	2290	13	92	<0.005	0.003	0.001
BP21-28	81	83.4	2.4	100	2690	10	85	0.007	<0.001	0.001
BP21-28	83.4	84.4	1	100	1970	11	65	<0.005	0.004	0.003
BP21-28	84.4	85.4	1	100	113	38	12	<0.005	0.001	0.001
BP21-29	101	104	3	100	2830	17	89	<0.005	0.004	0.006
BP21-29	104	107	3	100	2670	21	83	<0.005	0.001	0.001
BP21-29	107	110	3	100	2620	25	82	<0.005	<0.001	0.002
BP21-29	110	113	3	100	2600	35	84	<0.005	<0.001	0.001
BP21-29	113	115	2	100	2590	17	84	<0.005	<0.001	0.001
BP21-29	115	117.15	2.15	100	2450	30	78	<0.005	<0.001	0.001

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP21-29	117.15	120	2.85	100	3060	17	83	0.006	0.008	0.002
BP21-29	120	123	3	100	2960	10	95	0.046	0.017	0.003
BP21-29	123	126	3	100	3200	19	100	0.044	0.032	0.004
BP21-29	126	129	3	100	3090	14	73	0.005	0.003	0.002
BP21-29	129	132	3	100	3080	22	94	0.024	0.021	0.002
BP21-29	132	135	3	100	2800	16	87	<0.005	0.003	0.005
BP21-29	135	138	3	100	3020	8	88	0.005	0.006	0.001
BP21-29	138	140	2	100	5520	723	156	0.049	0.073	0.015
BP21-29	140	142	2	100	3410	346	162	0.032	0.032	0.01
BP21-29	142	144	2	100	3420	531	184	0.021	0.023	0.012
BP21-29	144	146	2	100	2910	126	102	0.027	0.032	0.007
BP21-29	146	148	2	100	3180	68	103	0.028	0.034	0.005
BP21-29	148	150	2	100	3310	104	103	0.037	0.043	0.005
BP21-29	150	152.25	2.25	100	4030	138	122	0.036	0.04	0.008
BP21-29	152.25	153.25	1	100	295	669	44	<0.005	0.002	0.001
BP21-29	161.1	161.55	0.45	100	1640	544	109	<0.005	0.002	0.011
BP21-30	8	10	2	100	3390	44	103	0.051	0.052	0.004
BP21-30	10	12	2	100	4350	341	118	0.067	0.072	0.02
BP21-30	12	14	2	100	4550	574	122	0.04	0.05	0.023
BP21-30	14	16	2	100	3960	108	124	0.063	0.049	0.006
BP21-30	16	18	2	100	3120	104	111	0.028	0.037	0.005
BP21-30	18	20	2	100	3250	376	112	0.038	0.051	0.01
BP21-30	20	22	2	100	3700	643	135	0.041	0.056	0.01
BP21-30	22	23.4	1.4	100	5600	678	148	0.064	0.083	0.017
BP21-30	23.4	26	2.6	100	3470	40	108	0.022	0.035	0.006
BP21-30	26	28	2	100	3060	29	132	0.02	0.028	0.004
BP21-30	28	30	2	100	2600	172	92	0.076	0.103	0.007
BP21-30	30	32	2	100	2170	120	80	0.012	0.02	0.004
BP21-30	32	34	2	100	860	159	31	0.006	0.01	0.002
BP21-30	34	36	2	100	951	98	32	0.005	0.009	0.002
BP21-30	36	38	2	100	556	135	21	<0.005	0.007	0.002
BP21-30	38	39.6	1.6	100	311	99	17	<0.005	0.003	0.003
BP21-30	53	55	2	55	951	99	73	0.006	0.007	0.007
BP21-30	56	57.2	1.2	100	1220	68	88	0.008	0.007	0.014
BP21-30	58.8	60.4	1.6	63	998	310	73	0.013	0.015	0.01
BP21-30	60.8	61.8	1	100	532	355	33	<0.005	0.006	0.001
BP21-31	51.6	53	1.4	100	2630	3	67	<0.005	0.003	0.016
BP21-31	53	54.7	1.7	100	2570	57	55	0.026	0.03	0.033
BP21-31	54.7	56.9	2.2	73	2590	145	79	0.085	0.096	0.003
BP21-31	56.9	58.3	1.4	100	2540	79	72	<0.005	0.009	0.002
BP21-31	58.3	59.7	1.4	100	2400	61	61	0.006	0.006	0.009
BP21-31	59.7	62	2.3	100	2770	4	77	0.023	0.027	0.019
BP21-31	62	64	2	100	3230	20	105	0.077	0.102	0.008
BP21-31	64	65.7	1.7	100	2900	26	97	0.059	0.074	0.004
BP21-31	65.7	68	2.3	100	3040	9	112	0.082	0.077	0.003
BP21-31	68	69.6	1.6	100	2750	59	89	0.048	0.051	0.002
BP21-31	69.6	72	2.4	80	2170	67	66	0.011	0.006	0.002
BP21-31	72	74	2	100	3720	59	92	0.036	0.038	0.008
BP21-31	74	76	2	100	3440	6	93	0.017	0.021	0.006
BP21-31	76	77.8	1.8	100	3960	28	95	0.055	0.072	0.009
BP21-31	77.8	80	2.2	100	4660	323	94	0.236	0.293	0.033
BP21-31	80	83	3	100	4520	218	86	0.269	0.348	0.025
BP21-31	83	86	3	100	2960	64	87	0.013	0.017	0.007
BP21-31	86	89	3	100	3690	118	91	0.035	0.037	0.015
BP21-31	89	92	3	100	4740	233	110	0.056	0.084	0.021
BP21-31	92	94	2	100	5010	260	104	0.049	0.048	0.02
BP21-31	94	96	2	100	4330	323	114	0.021	0.023	0.012
BP21-31	96	98	2	100	4340	776	122	0.027	0.031	0.021
BP21-31	98	100	2	100	7290	763	157	0.053	0.065	0.013
BP21-31	100	102.25	2.25	100	4760	315	124	0.045	0.054	0.013
BP21-31	102.25	104.3	2.05	100	16750	3130	224	0.294	0.43	0.092
BP21-31	104.3	106.3	2	100	14450	2340	190	0.275	0.418	0.07
BP21-31	106.3	108.3	2	100	13950	2350	189	0.21	0.329	0.071
BP21-31	108.3	111	2.7	100	5160	490	101	0.096	0.116	0.028
BP21-31	111	114	3	93	2930	15	83	0.034	0.05	0.004
BP21-31	114	117	3	100	2780	14	87	<0.005	0.001	0.001
BP21-31	117	120	3	100	2890	8	84	<0.005	0.001	0.002
BP21-31	120	123	3	100	2330	6	83	0.019	0.004	0.001
BP21-31	123	126	3	100	2750	10	89	<0.005	<0.001	0.001
BP21-31	126	129	3	100	2700	10	93	<0.005	0.001	0.001
BP21-31	129	132	3	100	2810	8	84	0.01	<0.001	0.002
BP21-31	132	135	3	100	2650	8	82	<0.005	0.001	0.002
BP21-31	135	138	3	100	2860	17	89	0.035	0.027	0.003
BP21-31	138	141	3	100	2320	11	76	0.006	0.001	0.002
BP21-31	141	144	3	100	2360	47	80	<0.005	0.001	0.001

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP21-31	144	147	3	100	2370	17	83	<0.005	<0.001	0.001
BP21-31	147	150	3	100	2820	7	88	0.014	<0.001	0.001
BP21-31	150	153	3	100	2360	15	82	<0.005	<0.001	0.002
BP21-31	153	156	3	100	2610	8	85	0.007	0.001	0.002
BP21-31	156	159	3	100	2760	10	88	0.012	0.005	0.002
BP21-31	159	162	3	100	2680	4	89	<0.005	<0.001	0.002
BP21-31	162	165	3	100	2730	3	88	<0.005	0.001	0.002
BP21-31	165	168	3	100	2910	4	84	0.035	0.037	0.001
BP21-31	168	170	2	100	3300	10	89	0.021	0.043	0.003
BP21-31	170	172.5	2.5	100	4020	92	98	0.156	0.177	0.009
BP21-31	172.5	174.5	2	100	8350	916	148	0.192	0.301	0.052
BP21-31	174.5	175.6	1.1	100	3700	282	102	0.049	0.062	0.01
BP21-31	175.6	177.6	2	100	7440	1200	137	0.153	0.183	0.039
BP21-31	177.6	179.6	2	100	9980	1840	177	0.153	0.254	0.074
BP21-31	179.6	181.6	2	100	9470	3000	194	0.167	0.24	0.085
BP21-31	181.6	183.6	2	100	7080	910	156	0.114	0.13	0.02
BP21-31	183.6	186	2.4	100	4410	602	139	0.05	0.073	0.011
BP21-31	186	188	2	100	7200	916	147	0.183	0.228	0.042
BP21-31	188	190	2	100	10450	1440	188	0.285	0.26	0.065
BP21-31	190	192	2	100	4220	414	129	0.056	0.071	0.023
BP21-31	192	193	1	100	4060	605	124	0.054	0.073	0.022
BP21-31	193	194.5	1.5	100	7930	1330	162	0.157	0.202	0.06
BP21-31	194.5	195.9	1.4	100	14000	2390	223	0.194	0.282	0.108
BP21-31	195.9	197.3	1.4	100	2990	873	81	0.049	0.031	0.014
BP21-31	197.3	199	1.7	100	2440	249	89	0.005	0.009	0.006
BP21-31	199	200.5	1.5	100	3950	173	115	0.048	0.058	0.008
BP21-31	200.5	201.5	1	100	2700	44	105	0.011	0.013	0.005
BP21-31	201.5	203.5	2	100	4720	228	134	0.052	0.074	0.013
BP21-31	203.5	205	1.5	100	4370	562	133	0.039	0.047	0.029
BP21-31	205	206.8	1.8	100	3990	78	139	0.028	0.032	0.022
BP21-31	206.8	209	2.2	100	3010	21	95	0.01	0.012	0.004
BP21-31	209	211	2	100	2950	47	83	0.028	0.03	0.005
BP21-31	211	213.6	2.6	100	2770	8	65	0.021	0.016	0.004
BP21-31	213.6	216	2.4	100	3170	12	59	0.045	0.041	0.007
BP21-31	216	219	3	100	3610	37	90	0.081	0.079	0.008
BP21-31	219	222	3	100	2840	101	105	0.016	0.014	0.007
BP21-31	222	225	3	100	3400	103	112	0.037	0.036	0.006
BP21-31	225	227	2	100	3100	11	89	0.041	0.045	0.006
BP21-31	227	229	2	100	3470	38	110	0.028	0.039	0.008
BP21-31	229	231	2	100	3270	198	108	0.029	0.03	0.008
BP21-31	231	232.7	1.7	100	2390	130	96	0.016	0.017	0.004
BP21-31	232.7	233.7	1	100	352	330	35	<0.005	0.002	0.002
BP21-32	38.4	40.4	2	100	2530	9	88	<0.005	0.003	0.002
BP21-32	40.4	41.85	1.45	100	2480	9	98	0.005	0.002	0.006
BP21-32	41.85	43.35	1.5	100	2560	9	83	0.007	0.003	0.001
BP21-32	43.35	45.5	2.15	100	2400	4	77	0.007	0.008	0.001
BP21-32	45.5	47.6	2.1	100	2780	7	102	0.023	0.02	0.009
BP21-32	47.6	49.8	2.2	100	3500	306	115	0.049	0.056	0.004
BP21-32	49.8	50.6	0.8	100	2240	1380	101	0.028	0.03	0.007
BP21-32	50.6	51.6	1	100	1930	575	87	0.013	0.018	0.003
BP21-33	144.4	146.4	2	100	2640	16	91	0.026	0.001	<0.001
BP21-33	146.4	148.4	2	100	2620	17	90	<0.005	0.002	0.002
BP21-33	148.4	150.4	2	100	2480	18	87	<0.005	0.001	0.004
BP21-33	150.4	151.5	1.1	100	724	49	30	<0.005	<0.001	0.001
BP21-33	151.5	153.5	2	100	2500	32	86	0.022	0.001	0.002
BP21-33	153.5	156	2.5	100	2770	75	89	0.068	0.05	0.002
BP21-33	156	158.5	2.5	100	2760	45	88	0.014	0.002	0.001
BP21-33	158.5	160.85	2.35	100	2790	24	89	<0.005	0.001	0.002
BP21-33	160.85	163	2.15	100	2730	38	87	<0.005	0.001	0.003
BP21-33	163	165	2	100	2750	9	90	<0.005	0.002	0.001
BP21-33	166	168	2	100	2190	12	94	<0.005	0.001	0.002
BP21-33	168	170.5	2.5	100	2640	6	89	0.006	0.002	0.003
BP21-33	170.5	173	2.5	100	2460	12	84	<0.005	0.003	0.001
BP21-33	173	175	2	100	3640	38	107	0.346	0.312	0.006
BP21-33	175	177	2	100	10700	1440	138	0.247	0.343	0.095
BP21-33	177	179.5	2.5	100	8880	1650	139	0.202	0.266	0.081
BP21-33	179.5	181.5	2	100	8190	1710	183	0.215	0.171	0.045
BP21-33	181.5	183.8	2.3	100	9620	1930	185	0.166	0.193	0.066
BP21-33	183.8	185	1.2	100	3750	129	101	0.095	0.118	0.01
BP21-33	185	187	2	100	2670	7	96	0.005	0.012	0.003
BP21-33	187	189.5	2.5	100	2750	8	98	0.012	0.023	0.003
BP21-33	189.5	191.8	2.3	100	3410	170	107	0.043	0.049	0.011
BP21-33	191.8	193.4	1.6	100	7020	1110	149	0.134	0.172	0.052
BP21-33	193.4	195.8	2.4	100	2900	80	93	0.043	0.042	0.007
BP21-33	195.8	198	2.2	100	2890	4	96	0.022	0.029	0.002

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP21-33	198	200	2	100	2890	7	89	0.023	0.024	0.005
BP21-33	200	202	2	100	3290	135	112	0.034	0.039	0.01
BP21-33	202	204.4	2.4	100	3310	580	104	0.019	0.022	0.021
BP21-33	204.7	206	1.3	100	2650	15	97	0.009	0.012	0.009
BP21-33	206	208	2	100	2780	4	78	0.067	0.091	0.003
BP21-33	208	210	2	100	2810	4	97	0.022	0.03	0.005
BP21-33	210	212	2	100	2790	7	93	0.035	0.036	0.004
BP21-33	212	213.6	1.6	100	3340	12	97	0.038	0.032	0.006
BP21-33	213.6	214.75	1.15	100	2690	73	70	0.04	0.026	0.012
BP21-33	214.75	215.95	1.2	100	53	188	9	<0.005	0.001	0.002
BP21-34	67	68	1	100	2850	11	86	0.045	0.007	0.001
BP21-34	68	70	2	100	2880	15	88	<0.005	0.002	0.001
BP21-34	70	72.5	2.5	100	2840	8	90	<0.005	0.002	0.001
BP21-34	72.5	74.5	2	100	2420	7	85	<0.005	0.002	0.003
BP21-34	74.5	76.6	2.1	100	2840	10	97	0.006	0.001	0.002
BP21-34	76.6	78	1.4	100	2780	17	94	0.008	0.009	0.003
BP21-34	78	81	3	100	2710	10	96	<0.005	0.002	0.002
BP21-34	81	84	3	100	2680	10	96	0.005	0.002	0.002
BP21-34	84	87	3	100	2920	7	101	0.024	0.038	0.003
BP21-34	87	89.6	2.6	100	3070	27	99	0.042	0.052	0.006
BP21-34	89.6	91.4	1.8	100	3950	155	102	0.07	0.075	0.014
BP21-34	91.4	93.2	1.8	100	9110	1520	145	0.363	0.482	0.084
BP21-34	93.2	95.6	2.4	100	8800	1060	130	0.39	0.539	0.052
BP21-34	95.6	98	2.4	100	8880	466	135	0.233	0.394	0.031
BP21-34	98	99	1	100	6470	555	113	0.159	0.211	0.037
BP21-34	99	101.9	2.9	100	12650	1030	168	0.336	0.407	0.066
BP21-34	101.9	102.75	0.85	100	12250	2040	161	0.172	0.328	0.063
BP21-34	102.75	105.2	2.45	100	20500	2590	233	0.401	0.558	0.109
BP21-34	105.2	105.7	0.5	100	9510	1190	127	0.175	0.247	0.068
BP21-34	105.7	107.7	2	100	276	393	17	<0.005	0.004	0.003
BP21-35	22	24	2	100	2940	137	104	0.02	0.017	0.003
BP21-35	24	26	2	100	2470	13	92	0.01	0.01	0.003
BP21-35	26	28	2	100	2710	10	74	0.029	0.022	0.002
BP21-35	28	30	2	100	2650	52	116	0.023	0.035	0.003
BP21-35	30	32	2	100	3250	249	107	0.036	0.045	0.007
BP21-35	32	34	2	100	6880	1140	146	0.04	0.049	0.034
BP21-35	34	36	2	100	3600	478	129	0.022	0.035	0.01
BP21-35	36	38	2	100	5910	981	154	0.065	0.068	0.019
BP21-35	38	40	2	100	3810	874	158	0.018	0.023	0.014
BP21-35	40	42	2	100	7880	1880	222	0.049	0.052	0.018
BP21-35	42	44	2	100	8500	1940	205	0.036	0.054	0.024
BP21-35	44	46	2	100	15400	2900	272	0.232	0.085	0.067
BP21-35	46	48	2	100	18050	2130	282	0.096	0.135	0.058
BP21-35	48	50	2	100	15700	1930	194	0.109	0.095	0.058
BP21-35	50	52.25	2.25	100	15450	2430	156	0.107	0.126	0.071
BP21-35	52.25	53.8	1.55	100	13450	1460	144	0.331	0.497	0.109
BP21-35	53.8	56.2	2.4	100	10400	1400	133	0.256	0.28	0.051
BP21-35	56.2	58.2	2	100	8280	848	112	0.262	0.282	0.062
BP21-35	58.2	60.2	2	100	6160	409	96	0.181	0.253	0.03
BP21-35	60.2	62.2	2	100	5040	80	85	0.196	0.198	0.01
BP21-35	62.2	64.2	2	100	6010	236	96	0.208	0.235	0.014
BP21-35	64.2	66.2	2	100	13300	1420	149	0.082	0.141	0.062
BP21-35	66.2	68.7	2.5	100	12850	1680	132	0.218	0.24	0.077
BP21-35	68.7	70	1.3	100	6530	275	88	0.105	0.148	0.016
BP21-35	70	72	2	100	3080	19	81	0.014	0.021	0.005
BP21-35	72	74	2	100	3460	131	71	0.083	0.108	0.011
BP21-36	115	117	2	100	2490	39	75	0.006	0.002	0.001
BP21-36	117	119	2	100	2600	201	87	0.019	0.007	0.001
BP21-36	119	121	2	100	2530	69	87	<0.005	0.001	0.001
BP21-36	121	123	2	100	2410	7	90	0.011	0.003	0.001
BP21-36	123	125	2	100	2770	3	89	0.011	0.018	<0.001
BP21-36	125	127.5	2.5	100	2760	4	80	<0.005	<0.001	0.001
BP21-36	127.5	130	2.5	100	2680	4	82	<0.005	0.001	0.001
BP21-36	130	132.1	2.1	84	2610	3	81	<0.005	<0.001	0.001
BP21-36	132.1	134	1.9	80	2590	3	78	<0.005	0.001	0.001
BP21-36	134.5	137	2.5	80	2570	3	94	<0.005	0.002	0.002
BP21-36	137	139	2	85	2580	5	88	0.012	0.011	0.001
BP21-36	139	141	2	100	2790	13	97	0.017	0.018	0.002
BP21-36	141	143	2	100	2970	22	114	0.082	0.073	0.003
BP21-36	143	145	2	100	3310	126	101	0.051	0.058	0.005
BP21-36	145	147	2	100	2680	12	97	0.012	0.013	0.002
BP21-36	147	149	2	100	3060	13	90	0.06	0.049	0.002
BP21-36	149	151	2	100	3780	582	119	0.025	0.038	0.014
BP21-36	151	153	2	100	3310	197	138	0.035	0.044	0.029
BP21-36	153	155	2	100	3840	5	119	0.044	0.044	0.004

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP21-36	155	157	2	100	4090	4	125	0.072	0.063	0.005
BP21-36	157	159	2	100	2150	18	79	0.007	0.006	0.002
BP21-36	159	161	2	100	2440	5	86	<0.005	0.001	0.002
BP21-36	161	163	2	100	2560	5	107	<0.005	0.003	0.002
BP21-36	163	165	2	100	2600	49	82	0.025	0.019	0.004
BP21-36	165	167	2	100	2940	21	90	0.04	0.058	0.005
BP21-36	167	168.9	1.9	100	3000	18	91	0.025	0.027	0.007
BP21-36	168.9	171	2.1	77	120	107	23	<0.005	0.001	0.001
BP21-37	15	17	2	100	5170	482	107	0.036	0.054	0.012
BP21-37	17	19	2	100	7390	959	144	0.084	0.084	0.025
BP21-37	19	21	2	100	5720	742	134	0.047	0.058	0.023
BP21-37	21	23	2	100	3230	357	115	0.015	0.02	0.008
BP21-37	23	25	2	100	3260	408	126	0.017	0.02	0.017
BP21-37	25	27	2	100	4010	215	96	0.017	0.023	0.01
BP21-37	27	28.2	1.2	100	5510	482	133	0.017	0.018	0.022
BP21-37	28.2	29.7	1.5	100	4250	532	136	0.018	0.023	0.027
BP21-37	29.7	31.3	1.6	100	4650	753	172	0.038	0.035	0.024
BP21-37	31.3	33.7	2.4	83	4020	466	146	0.041	0.042	0.017
BP21-37	33.7	36	2.3	48	4140	611	176	0.036	0.04	0.016
BP21-37	36.6	38	1.4	50	3420	448	134	0.007	0.006	0.006
BP21-37	38.7	41	2.3	100	2830	758	176	0.015	0.012	0.003
BP21-37	42	43	1	100	3160	729	171	0.011	0.01	0.002
BP21-37	43	45	2	100	2800	635	157	0.009	0.009	0.006
BP21-37	45	46.2	1.2	100	3980	59	132	0.023	0.022	0.011
BP21-37	54	55	1	100	59	23	12	<0.005	0.001	0.002
BP21-38	103.6	105.68	2.08	100	45	42	13	<0.005	<0.001	0.002
BP21-38	105.68	106.9	1.22	100	72	764	42	<0.005	0.002	0.006
BP21-38	106.9	109	2.1	100	79	25	13	<0.005	<0.001	<0.001
BP21-39	99.35	101	1.65	100	3110	124	79	0.02	0.02	0.004
BP21-39	101	102.6	1.6	100	2930	89	69	0.035	0.029	0.005
BP21-39	102.6	103.9	1.3	100	4980	82	133	0.028	0.037	0.02
BP21-39	103.9	105.5	1.6	100	4730	154	115	0.049	0.049	0.028
BP21-39	105.5	107.2	1.7	100	3600	628	152	0.015	0.018	0.013
BP21-39	107.2	109	1.8	100	4540	477	134	0.052	0.053	0.03
BP21-39	109	111	2	100	3010	40	103	0.012	0.034	0.005
BP21-39	111	113	2	100	2270	165	89	0.014	0.018	0.004
BP21-39	113	115	2	100	2320	49	103	0.021	0.024	0.011
BP21-39	115	117	2	100	2030	97	100	0.039	0.048	0.002
BP21-39	117	119.2	2.2	100	2390	235	109	0.094	0.034	0.007
BP21-39	119.2	121.2	2	100	2750	17	114	0.025	0.02	0.005
BP21-39	121.2	123.2	2	100	3810	676	168	0.008	0.007	0.017
BP21-39	123.2	125.4	2.2	100	3780	439	174	0.008	0.006	0.006
BP21-39	125.4	127.6	2.2	100	4980	417	156	0.018	0.012	0.016
BP21-39	127.6	130	2.4	100	5580	943	176	0.021	0.022	0.02
BP21-39	130	132.7	2.7	100	3680	187	144	0.074	0.034	0.008
BP21-39	132.7	134.7	2	100	3300	244	147	0.014	0.012	0.007
BP21-39	134.7	136.7	2	100	3460	584	162	0.025	0.02	0.006
BP21-39	136.7	138.7	2	100	3510	185	134	0.032	0.028	0.006
BP21-39	138.7	140.7	2	100	3990	339	146	0.029	0.023	0.006
BP21-39	140.7	142.2	1.5	100	3390	434	149	0.014	0.013	0.005
BP21-39	142.2	145	2.8	82	275	9	23	<0.005	0.001	0.001
BP21-39	145.3	147.3	2	100	3590	603	153	0.031	0.035	0.016
BP21-39	147.3	149.3	2	100	4560	659	142	0.041	0.044	0.02
BP21-39	149.3	151	1.7	100	5520	788	163	0.025	0.024	0.029
BP21-39	151	152.3	1.3	100	5360	768	144	0.02	0.024	0.025
BP21-39	152.3	154	1.7	100	3800	443	130	0.016	0.015	0.01
BP21-39	154	156	2	100	3090	279	115	0.074	0.067	0.009
BP21-39	156	158	2	100	4050	596	138	0.036	0.038	0.013
BP21-39	158	160	2	100	3440	291	104	0.028	0.037	0.009
BP21-39	160	162	2	100	3060	67	113	0.053	0.064	0.005
BP21-39	162	164.2	2.2	100	2320	3	80	<0.005	0.005	0.002
BP21-39	164.2	166.5	2.3	100	2810	23	115	0.051	0.057	0.003
BP21-39	166.5	169	2.5	100	5490	1880	144	0.022	0.02	0.033
BP21-39	169	171.6	2.6	100	8460	1890	134	0.042	0.053	0.047
BP21-39	171.6	173.6	2	100	7280	1070	113	0.035	0.04	0.033
BP21-39	173.6	176.45	2.85	100	3650	55	106	0.077	0.087	0.005
BP21-39	176.45	178.4	1.95	100	9620	1490	133	0.061	0.073	0.038
BP21-39	178.4	180.4	2	100	7870	820	123	0.117	0.164	0.029
BP21-39	180.4	182.4	2	100	2970	37	95	0.024	0.025	0.002
BP21-39	182.4	184.4	2	100	2920	1	93	0.005	0.011	0.002
BP21-39	184.4	186.4	2	100	2700	2	89	0.005	0.002	0.002
BP21-39	186.4	188	1.6	100	3050	1	104	<0.005	0.002	0.002
BP21-39	188	191	3	100	3010	1	91	0.02	0.032	0.003
BP21-39	191	194	3	100	2960	9	81	0.035	0.035	0.005
BP21-39	194	197	3	100	2730	5	81	<0.005	0.001	0.002

Hole	From (m)	To (m)	Interval (m)	Recovery (%)	Ni (ppm)	Cu (ppm)	Co (ppm)	Pt (g/t)	Pd (g/t)	Au (g/t)
BP21-39	197	200	3	100	2350	15	77	<0.005	0.002	0.003
BP21-39	200	203	3	100	2590	7	82	<0.005	0.002	0.003
BP21-39	203	206	3	100	2570	6	90	<0.005	0.001	0.004
BP21-39	206	209	3	100	2760	21	66	<0.005	<0.001	0.005
BP21-39	209	212	3	100	2800	10	85	<0.005	0.003	0.002
BP21-39	212	215	3	100	2370	6	68	0.009	0.003	0.003
BP21-39	215	218	3	100	2460	1	82	0.007	0.001	0.002
BP21-39	218	220.8	2.8	100	2740	3	87	<0.005	0.001	0.002
BP21-39	220.8	222.1	1.3	100	2580	5	79	0.007	0.002	0.002

Appendix One

JORC Code, 2012 Edition | 'Table 1' Report

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections).

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> Assays are reported for 48 diamond core drill holes for a total of 8,606m of drilling. The drill core was cut by diamond core saw and continuous quarter (NQ & HQ) core sample taken for assay according to lithological criteria in intervals ranging from 0.3 m to 4.0 m with a mean of 2.13 m. Sample weights for assay ranged from approx. 0.40 to 7.80 kg with a mean of c. 2.84 kg. Drilling and sampling was supervised by a suitably qualified geologist. For the Company's best understanding of previous owner's drilling please refer to previous Blackstone Minerals' announcements to the ASX and additionally available from http://blackstoneminerals.com.au.
Drilling techniques	<ul style="list-style-type: none"> Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> The drilling was of HQ (64mm) and NQ (48mm) diameter and was conducted by drilling contractor Intergeo using Longyear diamond coring rigs. Selected core runs were orientated with a REFLEX ACTIII or spear tools.
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> Recoveries were calculated by Ban Phuc Nickel Mines personnel by measuring recovered core length vs downhole interval length. Drill core recovery through the reported mineralised zones was ranged from 23% to 100%, with the length-weighted mean being >99% (see Table 2). There is no discernible correlation between grades and core recovery.
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography. The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> All of the drill core was qualitatively geologically logged by a suitably qualified Ban Phuc Nickel Mines geologist. Sulfide mineral abundances were visually estimated. The detail of geological logging is considered sufficient for mineral exploration. 48 holes for 8,606m were logged and 4,483 m selected for assay on the basis of the visual presence of sulfides.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. 	<ul style="list-style-type: none"> The drill core was cut lengthwise by diamond core saw and continuous half or quarter core sample bagged for assay in intervals according to lithological criteria determined by a Ban Phuc Nickel Mines geologist. Sampling intervals ranged from 0.3 m to 4.0 m with a mean of 2.13 m. Continuous remnant core has been retained in the trays for future reference or sampling as necessary. Duplicate quarter core samples were collected.

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> Sample weights for assay ranged from approx. 0.40 to 7.80 kg with a mean of c. 2.84 kg. The bagged core samples were submitted to SGS Hai Phong, Vietnam ('SGS') where the quarter core samples were dried and crushed to -5 mm, then a 250 g was split from each and pulverised to 85 % passing 75 microns to produce the analytical pulps which were then dispatched to ALS Geochemistry, Perth WA ('ALS') for assay.
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established. 	<ul style="list-style-type: none"> Ni, Cu and Co were determined at ALS by industry standard nitric + perchloric + hydrofluoric + hydrochloric acid digest with ICP-AES finish. Pt, Pd and Au were determined at ALS by industry standard 50 g fire assay and ICP-AES finish. Approx. one commercially certified assay standard per 25 core samples was inserted by Blackstone Minerals in each sample submission. All standards in the batches reported here (=141 standards submitted) are within 21 % of the Ni, Cu, Co (mean difference 2%) and 55% Pt, Pd and Au (mean difference 3%) of reference values for the grade ranges of interest. (4 results from 109 standards submitted within the batches reported here, returned results outside the expected range for the precious metal standards. The laboratory is reviewing these outcomes. For the 105 results within the expected range - results are within 7% for Pt, Pd and Au (mean difference 1%) of reference values for the grade ranges of interest. Approximately one crushed rock blank per 25 samples was included in the submission and reported below 12 ppm for Ni, Cu and Co, and below 0.004 for Au, Pt and Pd (with a mean of 0.0012). Quarter core duplicates were included at a rate of approx. 1 per 25 samples and sampling error is considered acceptable.
Verification of sampling and assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> The assay results are compatible with the observed mineralogy, historic mining and exploration results (please refer to previous Blackstone Minerals' announcements to the ASX and additionally available from http://blackstoneminerals.com.au). Twinned holes were not used. Primary data is stored and documented in industry standard ways. Assay data is as reported by ALS and has not been adjusted in any way. Remnant assay pulps are currently held in storage by the assay laboratory.
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> Drill hole collar location was determined by Leica 1203+ total station survey to centimetre accuracy. The holes were down hole orientation surveyed using a Deviflex non-magnetic survey tool. Co-ordinates were recorded in Ban Phuc Mine Grid and UTM Zone 48N WGS84 grid and coordinate system.

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> Topographic control is provided by a precision Ban Phuc Nickel Mines Digital Terrain Model.
Data spacing and distribution	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. Whether the data-spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	<ul style="list-style-type: none"> The drilling discussed is peripheral to and within previously 50-100 meter spaced drilling and was designed to infill to less than 50 meters overall. Drilling was conducted on the Ban Phuc Mine Grid. All visibly altered or mineralised zones in the drill core were sampled and assayed (see above). Non-composited data is reported. It is anticipated that the new Ban Phuc infill drilling results will be incorporated in a resource update for the Ban Phuc DSS orebody.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> Previous drilling and interpretation indicate the reported drill holes are suitably orientated to test the target zones. Structural orientations determined from drill core suggest the reported sulfide intervals are 60-80% of true thickness for Ban Phuc. Terrain and target depth are significant constraints and can result in oblique intersection angles. Relevant cross sections are included in the announcement.
Sample security	<ul style="list-style-type: none"> The measures taken to ensure sample security. 	<ul style="list-style-type: none"> The chain of custody for the drill core samples from collection to dispatch to the assay laboratory was managed by Ban Phuc Nickel Mines personnel. Sample numbers were unique and did not include any locational information useful to non-Ban Phuc Nickel Mines and non-Blackstone Minerals personnel. The level of security is considered appropriate.
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> The assay results agree well with the observed mineralogy, historic mining and exploration results (refer to previous Blackstone Minerals announcements to the ASX and additionally available from http://blackstoneminerals.com.au). Further drilling is planned to refine the shape and extents of the mineralised zones.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section)

Criteria	Explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> The drilling was located within the Ta Khoa Concession and is covered by the Foreign Investment Licence, 522 G/P, which Ban Phuc Nickel Mines Joint Venture Enterprise (BPNMJE) was granted on January 29th, 1993. An Exploration Licence issued by the Ministry of Natural Resources and Environment covering 34.8 km² within the Ta Khoa Concession is currently in force. Blackstone Minerals Limited owns 90% of Ban Phuc Nickel Mines.
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> The first significant work on the Ban Phuc nickel deposit and various adjacent

Criteria	Explanation	Commentary
		prospects including Ban Chang was by the Vietnamese Geological Survey in the 1959-1963 period. The next significant phase of exploration and mining activity was by Asian Mineral Resources from 1996 to 2018, including mining of the Ban Phuc massive sulfide vein mining during the 2013 to 2016 period. The project, plant and infrastructure has been on care and maintenance since 2016.
Geology	<ul style="list-style-type: none"> • Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> • The late Permian Ta Khoa nickel-copper-sulfide deposits and prospects are excellent examples of the globally well-known and economically exploited magmatic nickel - copper sulfide deposits. The identified nickel and copper sulfide mineralisation within the project include disseminated, net texture and massive sulfide types. The disseminated and net textured mineralisation occurs within dunite adccumulate intrusions, while the massive sulfide veins typically occur in the adjacent metasedimentary wall-rocks and usually associated with narrow ultramafic dykes. For more detail of the deposit and regional geology see Mapleson and Grguric N43-101 Technical Report on the Ta Khoa (Ni Cu Co PGE) Prospects Son La Province, Vietnam available from System for Electronic Document Analysis and Retrieval (www.sedar.com) for Asian Minerals Resources Limited. A recent summary of the geology of the Ban Phuc intrusion can be found in Wang et al 2018, A synthesis of magmatic Ni-Cu-(PGE) sulfide deposits in the ~260 Ma Emeishan large igneous province, SW China and northern Vietnam, Journal of Asian Earth Sciences 154.
Drill hole Information	<p>CA summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</p> <ul style="list-style-type: none"> ○ easting and northing of the drill hole collar; ○ elevation or RL (Reduced Level - elevation above sea level in metres) of the drill hole collar; ○ dip and azimuth of the hole ○ down hole length and interception depth; ○ hole length. <ul style="list-style-type: none"> • If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<ul style="list-style-type: none"> • Drill hole coordinates, depth, orientation, hole length and assay results are given in Tables 1 and 2. • For the Company's best understanding of previous owners drilling please refer to previous Blackstone Minerals announcements to the ASX and additionally available from http://blackstoneminerals.com.au
Data aggregation methods	<ul style="list-style-type: none"> • In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. • Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. 	<ul style="list-style-type: none"> • Assay results given in Table 2 represent the drill core intervals as sampled and assayed. • Upper cuts have not been applied. • Metal equivalent values are not used.

Criteria	Explanation	Commentary
	<ul style="list-style-type: none"> The assumptions used for any reporting of metal equivalent values should be clearly stated. 	
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known'). 	<ul style="list-style-type: none"> All intervals reported in Table 1 are down hole. Structural orientations determined from orientated drill core suggest that the reported intersections and intervals are c. 60-80% of true thickness for Ban Phuc. Appropriate drill sections are included in the body of this release.
Diagrams	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> Appropriate exploration plan and sections are included in the body of this release.
Balanced reporting	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced, to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> All drill results given in Table 2 represent the intervals as sampled and assayed.
Other substantive exploration data	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples - size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> Appropriate exploration plan and sections are included in the body of this release. For the Company's best understanding of previous owners drilling please refer to previous Blackstone Minerals announcements to the ASX and additionally available from http://blackstoneminerals.com.au
Further work	<ul style="list-style-type: none"> The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> Blackstone Minerals proposes to conduct further drilling and associated activities to better define and extend the identified mineralised zones. An appropriate exploration plan is included in the body of this release.