

ASX ANNOUNCEMENT 14 October 2025

Stavely Copper-Gold Project, Western Victoria - Gold Exploration Update

# Phase 2 Drilling at Fairview North Extends Shallow Gold Mineralisation to +300m with Further Drilling Imminent to Test Strike and Dip Extensions

Recent drilling returns broad, shallow gold intercepts including 14m at 2.14g/t gold and 19m at 1.35g/t gold, with higher-grade 1m intervals of up to 18.60g/t gold

- Phase 2 Reverse Circulation (RC) drilling has successfully increased the known strike extent of shallow gold mineralisation at Fairview North to over 300m, with significant intercepts including:
  - 14m at 1.08g/t gold from 19m drill depth in drill-hole SFRC015, including:
    - 5m at 2.0g/t gold from 19m; and
  - 13m at 1.22g/t gold from 40m drill depth, including:
    - 4m at 2.29g/t gold from 42m
  - 40m at 0.98g/t gold from surface in SFRC018, including:
    - 14m @ 2.14g/t gold from 16m down-hole, including:
      - 4m at 6.14g/t gold from 16m, including:
        - 1m at 18.60g/t gold from 16m
  - 21m at 0.98g/t gold from 31m drill depth in SFRC019, including:
    - 10m at 1.81g/t gold from 42m, including:
      - 2m at 6.64g/t gold from 42m
- > Strong intercepts recorded on both the northern-most and southern-most drill sections:
  - On the southern-most drill section, drill-hole SFRC024 intercepted:
    - 19m at 1.35g/t gold from 60m drill depth, including:
      - 1m at 12.75g/t gold from 60m
  - On the northern-most drill section, drill-hole SFRC034 intercepted:
    - 7m at 1.85g/t gold from 7m drill depth; and
- The gold mineralisation at Fairview North remains open along strike to the north and south, and down-dip.
- Follow-up Phase 3 RC drilling at Fairview North, Fairview South and the S41 gold prospects is planned to commence before the end of October.



### ASX ANNOUNCEMENT



Stavely Minerals Limited (ASX Code: **SVY** – "Stavely Minerals") is pleased to advise that it has received assay results from the Phase 2 Reverse Circulation (RC) drilling program at the Fairview North gold prospect, at its 100%-owned **Stavely Copper-Gold Project** in western Victoria (Figures 1 & 2).

A total of 23 RC drill-holes were completed at Fairview North and a single additional RC drill hole was completed at Fairview South as part of the recent Phase 2 program.

**Stavely Minerals Chair and Managing Director, Mr Chris Cairns, said**: "Our decision to refocus on the outstanding gold potential across the Stavely Project continues to deliver more exciting results.

"These Phase 2 RC drilling results have materially increased the strike extent of shallow gold mineralisation at the Fairview North prospect to more than 300m, with good widths and grades of gold mineralisation continuing to be intersected.

"Together with the recently announced soil auger gold results from Fairview South, these results provide and give us strong impetus to proceed to a Phase 3 RC drilling program, scheduled to commence before the end of October.

"Additionally, we will complete some reconnaissance RC drilling at the S41 breccia-hosted gold target, specifically in a priority area not currently under crop. The S41 breccia-hosted gold target is a very large hydrothermal system with significant gold discovery potential and is at an early stage of exploration."

The recently received Fairview North RC drilling assay results include broad intervals of gold mineralisation:

- 19m at 1.35g/t gold from 60m drill depth in drill-hole SFRC024, including:
  - 1m at 12.75g/t gold from 60m
- 14m at 1.08g/t gold from 19m drill depth in drill-hole SFRC015, including:
  - 5m at 2.0g/t gold from 19m; and
- 13m at 1.22g/t gold from 40m drill depth, including:
  - 4m at 2.29g/t gold from 42m
- 7m at 1.85g/t gold from 7m drill depth in drill-hole SFRC034
- 40m at 0.98g/t gold from surface in SFRC018, including:
  - 14m @ 2.14g/t gold from 16m down-hole, including:
    - 4m at 6.14g/t gold from 16m, including:
      - 1m at 18.60g/t gold from 16m
- 21m at 0.98g/t gold from 31m drill depth in SFRC019, including:
  - 10m at 1.81g/t gold from 42m, including:
    - 2m at 6.64g/t gold from 42m

A drill collar location plan for Fairview North gold prospect is provided in Figure 3 and cross-sections (from north to south) are provided in Figures 4 through 11.



The known strike extent of the shallow gold mineralisation at Fairview North has now been extended to over 300m and remains open to the north and south as well as down-dip.

Most notably, strong intercepts were received on both the northern-most and southern-most drill sections:

- On the northern-most drill section, drill hole SFRC034 intercepted:
  - 7m at 1.85g/t gold from 7m drill depth, and
- On the southern-most drill section, drill hole SFRC024 intercepted:
  - 19m at 1.35g/t gold from 60m drill depth, including
    - 1m at 12.75g/t gold from 60m

A Phase 3 RC drilling program at Fairview North has been designed to further extend the known gold mineralisation along strike and to fill-in some gaps. Many of the intermediate drill lines were only tested with two drill holes each with mixed results.

With the assay results reported in this release providing a better understanding of the location of gold mineralisation in these areas, more focused follow-up is now warranted.

A drill collar location plan for Fairview South is provided in Figure 12 and a cross-section is provided in Figure 13. The second step-out drill hole at Fairview South was not as compelling as the original drill-hole SFSRC001; however, recently reported soil auger gold and associated indicator element geochemistry, along with surface float rock chips, provides strong encouragement that gold mineralisation extends for a further 400m south of SFSRC001<sup>1</sup> (see Figures 14-16).

The Phase 3 drill program for Fairview North and Fairview South will also include some reconnaissance RC drilling at the S41 breccia-hosted gold target, specifically in a priority area not currently under crop. The S41 breccia-hosted gold target is a very large hydrothermal system with significant gold discovery potential which is at an early stage of exploration.

An RC drill rig is expected to mobilise before the end of October to commence this program.

Yours sincerely,

**Chris Cairns** 

**Executive Chair and Managing Director** 

The information in this report that relates to Exploration Targets, Exploration Results, Mineral Resources or Ore Reserves is based on information compiled by Mr Chris Cairns, a Competent Person who is a Fellow of the Australian Institute of Geoscientists and a Fellow of the Australasian Institute of Mining and Metallurgy. Mr Cairns is a full-time employee of the Company. Mr Cairns is Executive Chair and Managing Director of Stavely Minerals Limited and is a shareholder and option holder of the Company. Mr Cairns has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'.

<sup>&</sup>lt;sup>1</sup> See ASX announcements 29 September 2025 and 14 July 2025

## **ASX ANNOUNCEMENT**



Mr Cairns consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

Previously Reported Information: The information in this report that references previously reported exploration results is extracted from the Company's ASX market announcements released on the date noted in the body of the text where that reference appears. The previous market announcements are available to view on the Company's website or on the ASX website (www.asx.com.au). The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcements. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcements.

Authorised for lodgement by Chris Cairns, Executive Chair and Managing Director.

# For Further Information, please contact:

# Stavely Minerals Limited

Phone: 08 9287 7630

Email: <a href="mailto:info@stavely.com.au">info@stavely.com.au</a>

# Media Inquiries:

Nicholas Read - Read Corporate

Phone: 08 9388 1474



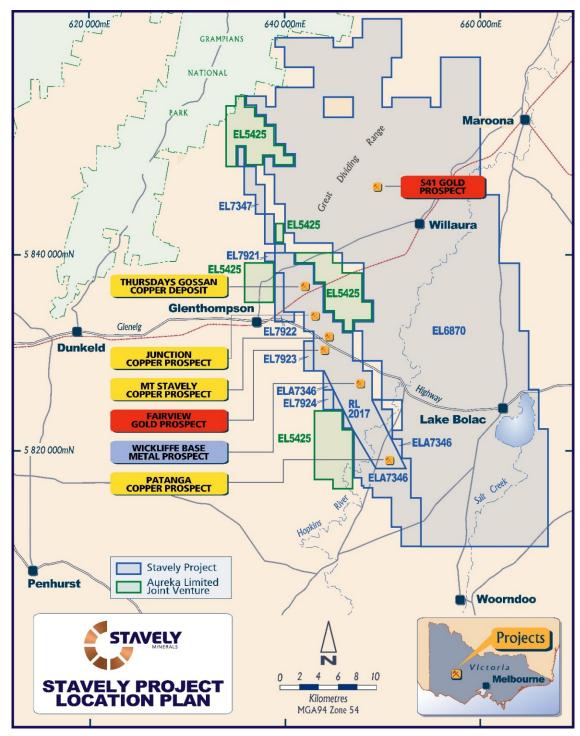


Figure 1. Stavely Project and prospect location map.



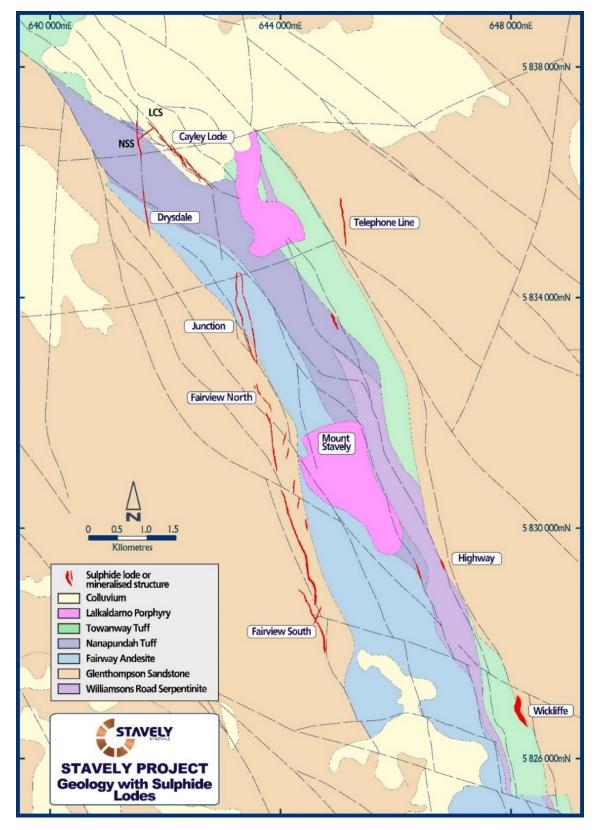


Figure 2. Stavely Project Cayley Lode to Fairview South prospect location map.



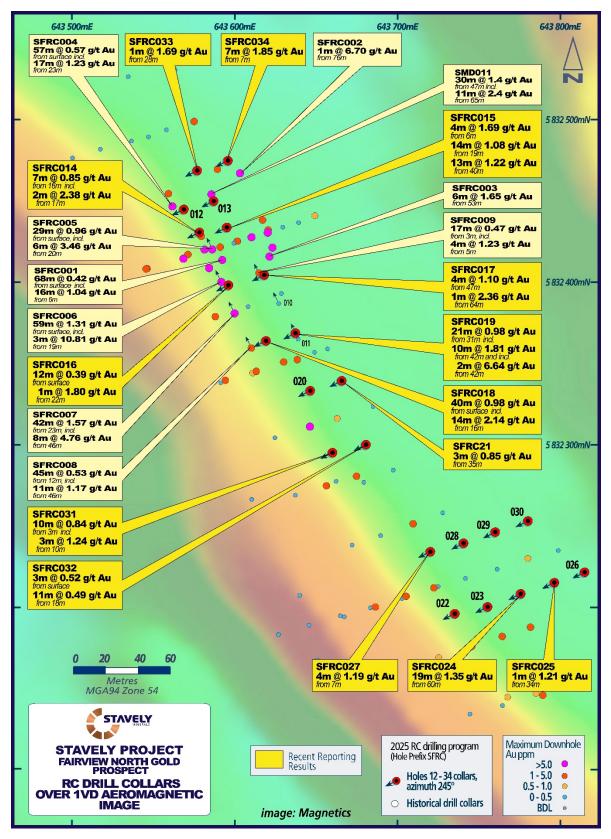


Figure 3. Fairview North RC drill hole collar location plan with selected intercepts annotated.



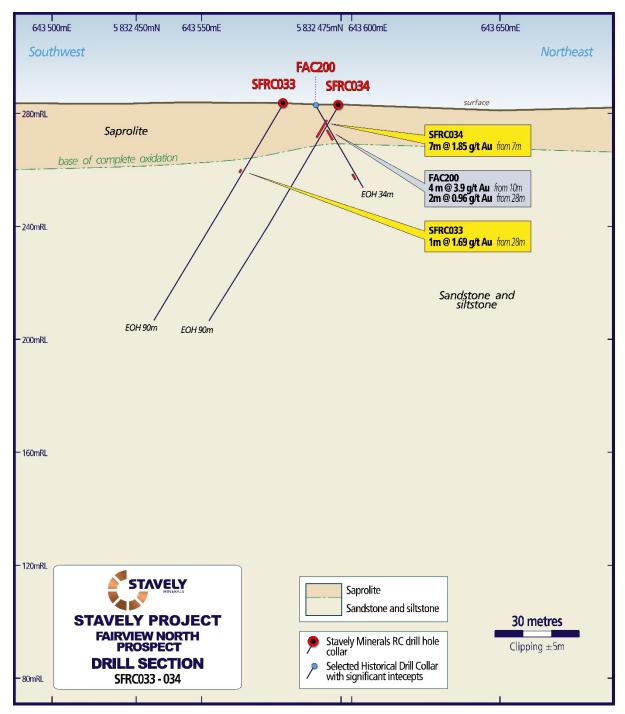


Figure 4. SFRC033 and SFRC034 drill hole cross section.



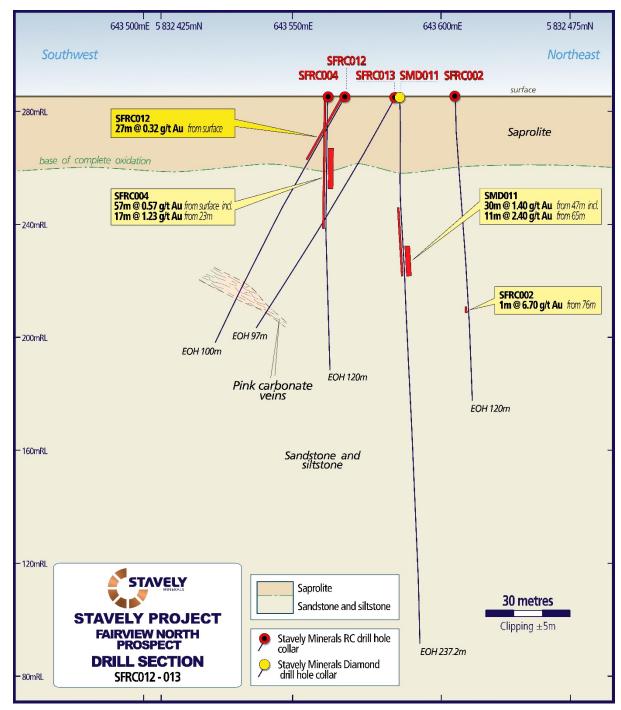


Figure 5. SFRC012 and SFRC013 drill hole cross section.



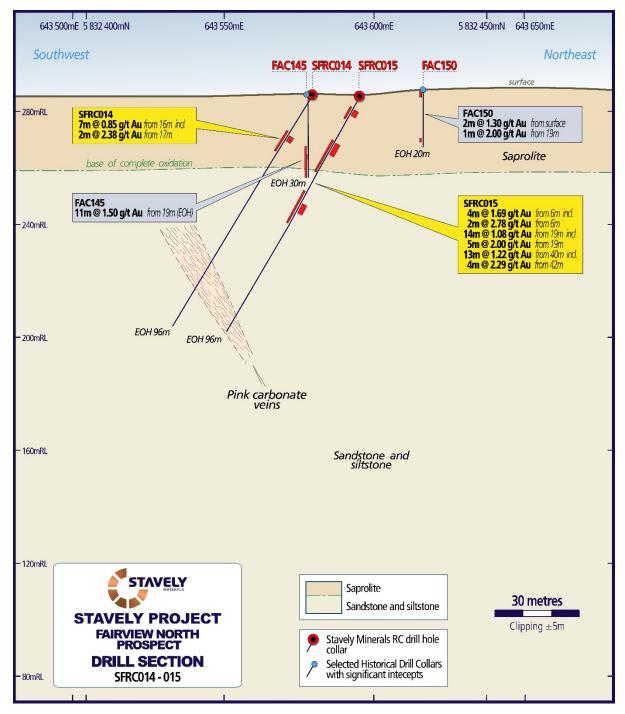


Figure 6. SFRC014 and SFRC015 drill hole cross section.



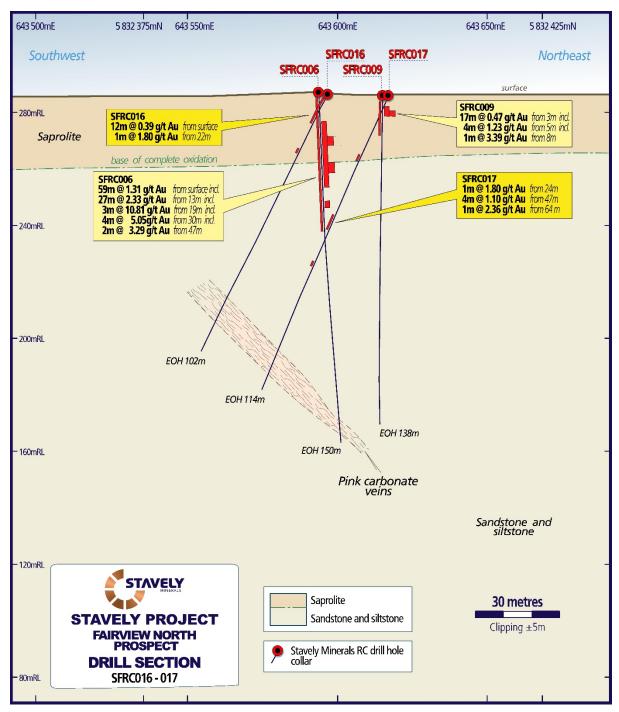


Figure 7. SFRC016 and SFRC017 drill hole cross section.



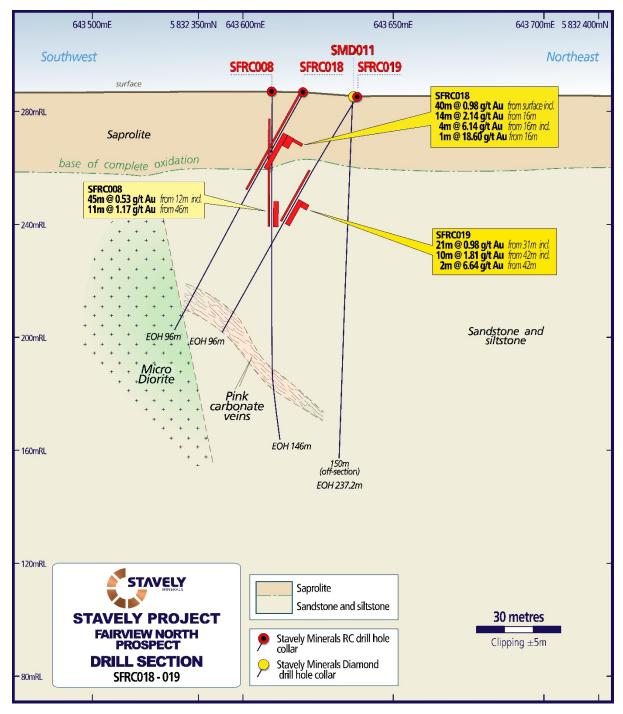


Figure 8. SFRC018 and SFRC019 drill hole cross section.



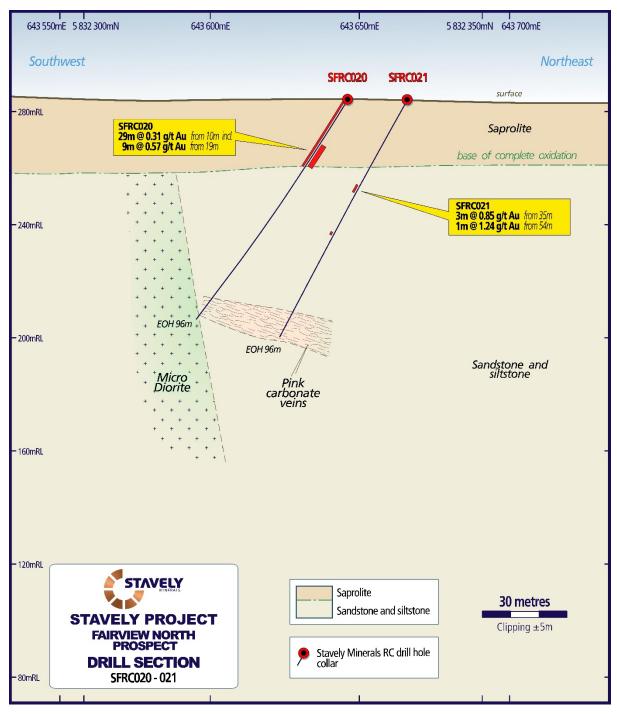


Figure 9. SFRC020 and SFRC021 drill hole cross section.



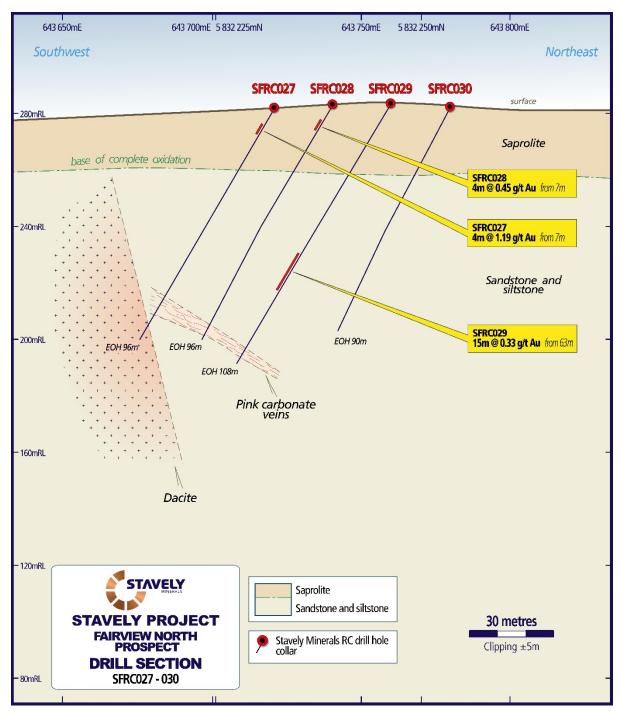


Figure 10. SFRC027 to SFRC030 drill hole cross section.



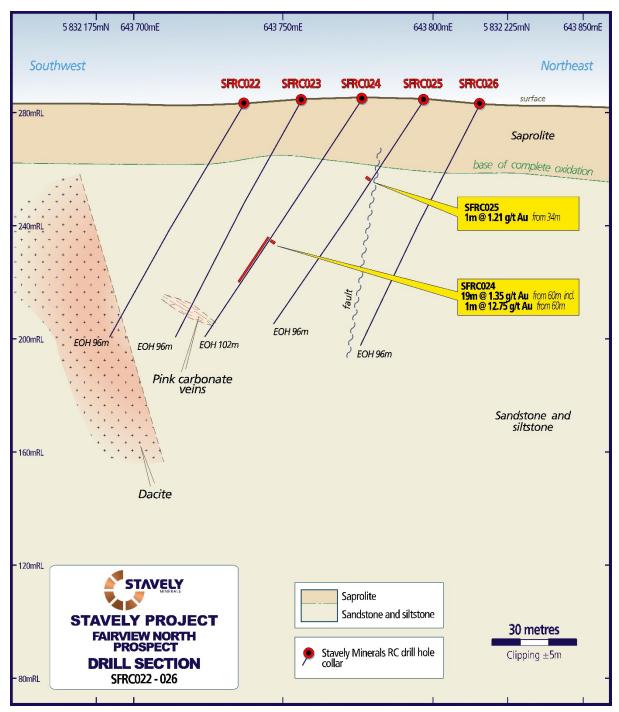


Figure 11. SFRC022 to SFRC026 drill hole cross section.



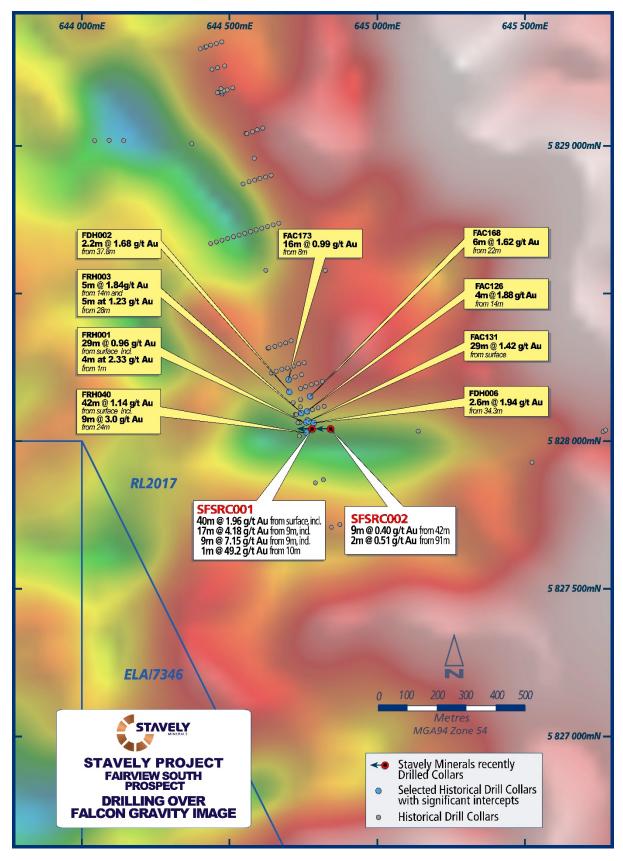


Figure 12. Fairview South drill collar location plan with gravity image in the background.



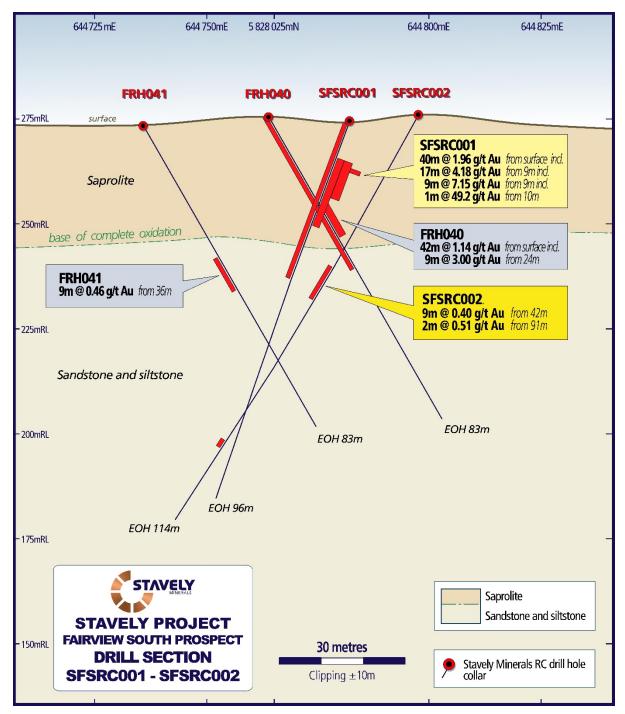


Figure 13. Fairview South drill-hole SFSRC001 and SFSRC002 cross-section.



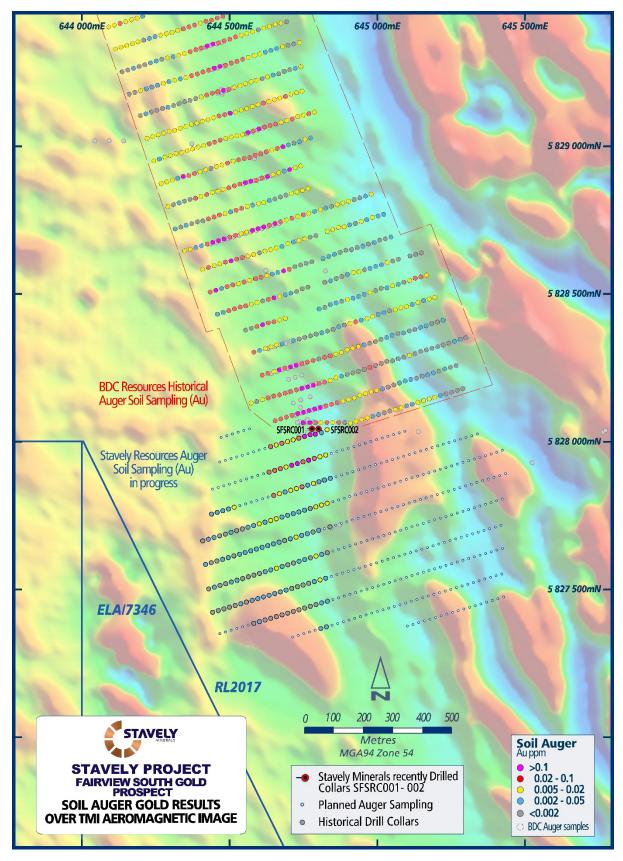


Figure 14. Fairview South soil auger gold results with RC drill hole collars SFSRC001 and SFSRC002 shown.



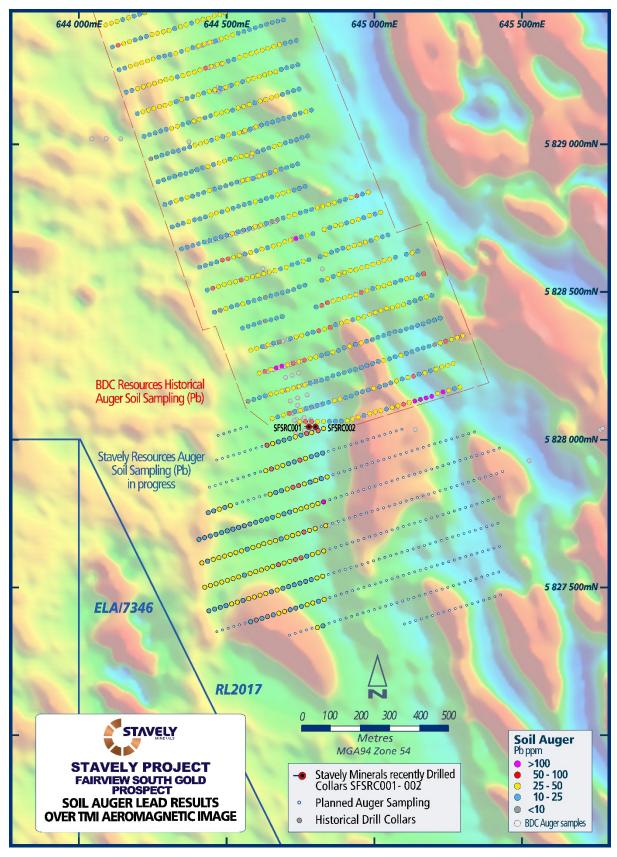


Figure 15. Fairview South soil auger lead results with RC drill-hole collars SFSRC001 and SFSRC002 shown.



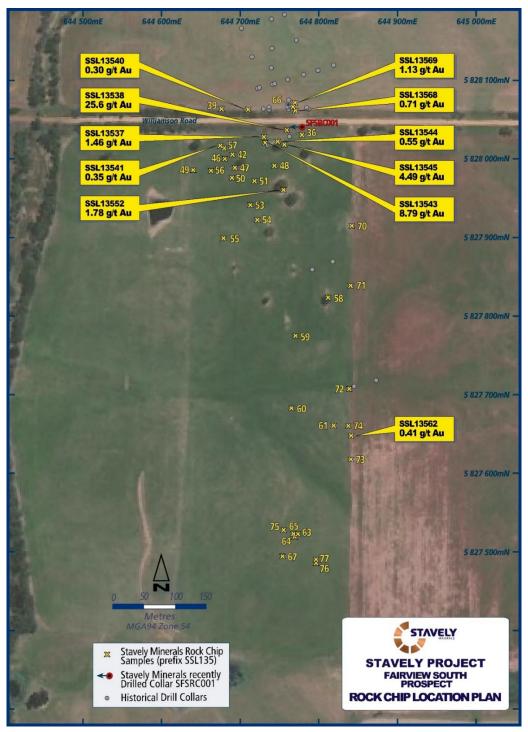


Figure 16. Fairview South gold prospect recent RC drill collar location map and float rock-chip sample locations overlaid on satellite image.





Fairview Nor	ur Prospe										
		MGA 94 z	one 54				Interce	pt			
Hole id	Hole Type	East	North	Dip/ Azimuth	RL (m)	Total Depth (m)	From (m)	To (m)	Width (m)	Estimated true width	Au (g/t)
SFRC005	RC	643584	5832421	-60/336	286	102	0	29	29		0.96
						Incl.	20	26	6		3.46
SFRC006	RC	643592	5832400	-60/340	288	150	0	59	59		1.31
						Incl.	13	40	27		2.33
						Incl.	19	22	3		10.81
						Incl.	30	34	4		5.05
						Incl.	47	49	2		3.29
SFRC007	RC	643599	5832380	-60/336	287	150	23	65	42		1.57
						Incl.	46	54	8		4.76
						Incl.	49	53	4		8.05
SFRC008	RC	643609	5832358	-60/336	287	146	12	57	45		0.53
						Incl.	46	57	11		1.17
SFRC009	RC	643615	5832405	-60/336	287	138	3	20	17		0.47
						Incl.	5	9	4		1.23
						Incl.	8	9	1		3.39
SFRC010	RC	643626	5832386	-60/336	286	150		I	No Sig	nificant Interce	epts
SFRC011	RC	643638	5832365	-60/334	286	150			No Sig	nificant Interce	epts
SFRC012	RC	643569	5832445	-60/244	286	100	0	27	27		0.32
SFRC013	RC	643587	5832450	-60/250	285	97		I	No Sigr	nificant Interc	epts
SFRC014	RC	643579	5832430	-59/249	286	96	16	23	7		0.85
						Incl.	17	19	2		2.38
SFRC015	RC	643595	5832435	-62/251	285	96	6	10	4		1.69
						Incl.	6	8	2		2.78
							19	33	14		1.08
						Incl.	19	24	5		2.00
							40	53	13		1.22
						Incl.	42	46	4		2.29
SFRC016	RC	643596	5832399	-65/250	287	102	0	12	12		0.39
							22	23	1		1.80
SFRC017	RC	643617	5832405	-66/249	286	114	24	25	1		1.80
							47	51	4		1.10
							64	65	1		2.36
SFRC018	RC	643619	5832364	-61/248	287	96	0	40	40		0.98
						Incl.	16	30	14		2.14
						Incl.	16	20	4		6.14





						Incl.	16	17	1		18.60
SFRC019	RC	643637	5832369	-60/248	285	96	31	52	21		0.98
						Incl.	42	52	10		1.81
						Incl.	42	44	2		6.64
SFRC020	RC	643646	5832333	-57/244	284	96	0	29	29		0.31
						Incl.	19	28	9		0.57
SFRC021	RC	643666	583234	-61/248	284	96	35	38	3		0.85
							54	55	1		1.24
SFRC022	RC	643735	5832196	-59/244	283	96			No Sign	ificant Interc	epts
SFRC023	RC	643755	5832200	-61/251	285	96			No Sign	ificant Interc	epts
050004	D0	643776	583220	57/05 4	005	102	60	79	19		1.35
SFRC024	RC	043770	363220	-57/254	285	Incl.	60	61	1		12.75
SFRC025	RC	643796	5832215	-56/250	284	96	34	35	1		1.21
SFRC026	RC	643815	5832222	-62/247	283	96			No Sign	ificant Interc	epts
SFRC027	RC	643720	5832234	-60/245	282	96	7	11	4		1.19
SFRC028	RC	643740	5832239	-59/245	283	96	7	11	4		0.45
SFRC029	RC	643760	5832246	-59/250	284	108	63	78	15		0.33
SFRC030	RC	643780	5832253	-62/251	283	90			No Sign	ificant Interc	epts
SFRC031	RC	643660	5832294	-60/248	284	84	3	13	10		0.84
						Incl.	10	13	3		1.24
SFRC032	RC	643681	5832303	-59/249	284	96	0	3	3		0.52
							18	29	11		0.49
						Incl.	18	19	1		1.85
							28	29	1		1.32
SFRC033	RC	643577	5832469	-59/250	283	90	28	29	1		1.69
SFRC034	RC	643596	5832475	-60/245	283	90	7	14	7		1.85
Fairview Sou	th Prospe	ect - Interc	ept Table								
		MGA 94 z	one 54				Interce	pt			
Hole id	Hole	East	North	Dip/	RL	Total	From	То	Width	Estimated	Au
	Туре			Azimuth	(m)	Depth (m)	(m)	(m)	(m)	true width	(g/t)
SFSRC001	RC	644778	5828039	-70/270	274	96	0	40	40	20*	1.96
						Incl	9	26	17	8.5*	4.18
						Incl	9	18	9	4*	7.15
						Incl	10	11	1	0.5*	49.2
SFSRC002	RC	644797	5828040	-60/266	276	114	42	51	9		0.40
							91	93	2		0.51

<sup>\*</sup>High degree of uncertainty



# JORC Code, 2012 Edition – Table 1

# **Section 1 Sampling Techniques and Data**

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.	Stavely Project Fairview Gold Prospect Stavely Minerals Soil Auger Sampling Sampling was conducted by a local farmer using an auger mounted on the back of a tractor. These holes were drilled to a depth of approximately 60 cm and the soil was cleaned away from around the hole. On recommencement and usually within 20 cm the colour of the sample changed from a leached grey to a variety of colours. At 120 cm the auger was lifted and the sample, usually about 1 kilogram in weight was removed from the auger flights.
	5 - 5 - 5 - 5 - 5 - 5 - 5 - 5 - 5 - 5 -	Stavely Minerals' Diamond Drilling
		For SMD011 the diamond core for the entire hole was sampled. PQ quarter core and HQ half core was submitted for analysis. Sample intervals were based on lithology but in general were 1m. No intervals were less than 0.3m or greater than 1.8m.
		Stavely Minerals' RC Drilling
		Reverse Circulation (RC) percussion drilling was used to produce a 1m bulk sample (~25kg) which was collected in plastic bags and representative 1m split samples (12.5%, or nominally 3kg) were collected using a cone splitter and placed in a calico bag. The cyclone was cleaned out with compressed air at the end of each hole and periodically during the drilling.
		Historical Drilling
		In 2006 Beaconsfield Gold Mines Pty Limited drilled aircore, RC and diamond holes at the Fairview prospect.
		Beaconsfield drilled 167 aircore holes (FAH001-FAH167) for 3,844m to test anomalous soil samples that had returned >100ppb Au. The holes were drilled vertical using a multipurpose drill rig and assayed for gold only. A total of 7 diamond holes (FDH001 – FDH007) were completed for 874 metres. The holes were drilled at -60° either to the east or the west. The diamond holes targeted immediately beneath the best geochemistry and were assayed for gold only. A total of 51 RC drill holes (FRH001 – FRH051) for 3,588 metres were also drilled to target various soil/ aircore geochemical anomalies. Apart from FRH020, which was drilled at -60° on an azimuth of 240°, the holes were drilled at -60° on an azimuth of 060°. The holes were assayed for gold only.



Criteria	JORC Code explanation	Commentary
		In 2009 BCD Metals Pty Ltd drilled 29 aircore holes (FAC168 – FAC203) for 1,888m at the Fairview North and South prospects. The aircore drilling contractor was Broken Hill Exploration. The holes were assayed for gold only, using Fire Assay.
		Historical Soil Auger Sampling
		In 2006 Beaconsfield Gold Mines Pty Limited conducted soil auger sampling at the Fairview Prospect. Sampling was conducted by a local farmer using an auger mounted on the back of a tractor. These holes were drilled to a depth of approximately 60 cm and the soil was cleaned away from around the hole. On recommencement and usually within 20 cm the colour of the sample changed from a leached grey to a variety of colours. At 120 cm the auger was lifted and the sample, usually about 1 kilogram in weight was removed from the auger flights.
	Include reference to	Stavely Project
	measures taken to ensure sample representivity and	Fairview Gold Prospect
	the appropriate calibration	Stavely Minerals Soil Auger Sampling
	of any measurement tools or systems used.	No CRM, duplicate samples or blank samples were included with the auger sample batches sent to the laboratory.
		Stavely Minerals' Diamond and RC Drilling
		Sample representivity was ensured by a combination of Company Procedures regarding quality control (QC) and quality assurance/ Testing (QA). Certified standards and blanks were inserted into the assay batches.
		Historical Drilling
		QA reported by BCD Metals for the 2009 drilling included the collection of field duplicates and the use of standards and blank samples.
		Historical Soil Auger Sampling
		There is no indication as to whether Beaconsfield Gold Mines Pty Limited included any standards in their assay batches. They did submit some pulps from the Onsite Laboratory in Bendigo to ALS in Orange for check analysis. In general these results showed strong correlation to the original results but several had significant discrepancies.
	Aspects of the	Stavely Project
	determination of mineralisation that are	Fairview Gold Prospect
	Material to the Public	Stavely Minerals' Diamond Drilling
	Report - In cases where 'industry standard' work has been done this would be relatively simple (e.g.	Drill sampling techniques are considered industry standard for the Stavely work programme.



Criteria	JORC Code explanation	Commentary
	'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling	The diamond core for the entire hole has been sampled. PQ quarter core and HQ half core was submitted for analysis. Sample intervals were based on lithology but in general were 1m. No intervals were less than 0.3m or greater than 1.8m.
		The diamond drill samples were submitted to Australian Laboratory Services ("ALS") in Orange, NSW. Laboratory sample preparation involved:- sample crush to 70% < 2mm, riffle/rotary split off 1kg, pulverize to >85% passing 75 microns.
	problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may	Diamond core samples were analysed by ME-ICP61 – multi acid digest with HF and ICPAES and ICPMS and Au-AA23 – fire assay with AAS finish.
	warrant disclosure of detailed information.	Recent Stavely Minerals' RC Drilling
		The one metre RC drill splits for the entire length of the drill holes were submitted to Australian Laboratory Services ("ALS") in Adelaide, SA. Laboratory sample preparation involved:- sample crush to 70% < 2mm, riffle/rotary split off 1kg, pulverize to >85% passing 75 microns.
		The RC samples were analysed by ME-MS61 – four-acid digest with ICPAES and ICPMS finish and Au-TL43 – aqua regia extraction with ICP-MS finish at ALS in Perth.
		Previous Stavely Minerals' RC Drilling
		The one metre RC drill splits for the entire length of the drill holes were submitted to Australian Laboratory Services ("ALS") in Orange, NSW. Laboratory sample preparation involved:- sample crush to 70% < 2mm, riffle/rotary split off 1kg, pulverize to >85% passing 75 microns.
		The RC samples were analysed by ME-ICP61 – multi acid digest with HF and ICPAES and ICPMS and Au-AA23 – fire assay with AAS finish.
		Historical Drilling
		The field procedures for the aircore drilling consisted of 1m samples from the cyclone being run through a two-tier 25:75 riffle splitter and composited into 2m samples to provide approximately 5kg sample. The reject from the riffle splitter was placed into individual piles on plastic sheeting which were then sieved to provide chips for logging. With the hammer drilling, the sample mass of the 2m composite was often significantly greater than 5kg and these samples were re-split through the lower tier of the riffle splitter (50-50) to reduce the mass. Fairview ground conditions were reported to be generally moderately weathered to fresh rock with generally no major sample loss or groundwater issues.
		The 1m split samples for the entire length of the RC drill holes were submitted for analysis.



Criteria	JORC Code explanation	Commentary
		The diamond half core was sampled for the entire length of the hole, either on one metre intervals or based on mineralised zones.
		All field samples were dispatched to Onsite Laboratory Services at Bendigo, with samples from Fairview assayed for gold only by Fire Assay (FA/AAS). Field duplicates and standards were routinely submitted as well as blanks. All samples were dried, crushed and pulverised to -80#.
Drilling	Drill type (e.g. core,	Stavely Project
techniques	reverse circulation, open- hole hammer, rotary air	Fairview Gold Prospect
	blast, auger, Bangka,	Stavely Minerals' Diamond Drilling
	sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face- sampling bit or other type, whether core is oriented	Diamond drill hole SMD011 was drilled by Titeline Drilling in February and March 2017. Diamond drilling was used to produce drill core with a diameter of 85mm (PQ) from surface until the ground was sufficiently consolidated and then core with a diameter of 63.5mm (HQ) was returned.
	and if so, by what method, etc).	Diamond drilling was standard tube. Diamond core was orientated by the Reflex ACT III core orientation tool.
		SMD011 was orientated at -55° towards azimuth 155° to a depth of 237m.
		Recent Stavely Minerals' RC Drilling
		RC drill holes SFRC005 to SFRC0034 and SFSRC001 and SFSRC002 were drilled by GMP Exploration Drilling P/L using a UDR650 Rig.
		The Fairview North RC holes (SFRC005 to SFRC0011) were orientated at -60° towards azimuth 336°. The Fairview North RC holes (SFRC0012 to SFRC0034) were orientated at -60° towards azimuth 245°.
		The Fairview South RC Holes (SFSRC001- 002) are orientated at -70° towards azimuth 270° and at -60° towards azimuth 270°, respectively.
		Previous Stavely Minerals' RC Drilling
		RC drill holes SFRC001 to SFRC004 were drilled by Budd Drilling using standard 6m length RC rods (4" diameter) and 4" slimline hammer with a 121mm face sampling RC bit.
		The RC holes were orientated at either -55° or -65° towards azimuth 155° to a depth of 120m each.
		Historical Drilling
		No details were reported for the diamond drilling. For the 2012 aircore drilling, the rig was 700psi/300cfm and it was found that the conditions at Fairview South were more difficult than anticipated and a down-the-hole hammer had to be used instead. At Fairview North some of the aircore drilling was completed with a RAB-style hammer using a cross-over to provide sample return through the rods. When this hammer failed it was replaced with the same small hammer used at Fairview South.



Criteria	JORC Code explanation	Commentary
		In 2006 the RC and diamond drilling was conducted by a multipurpose drilling rig. The holes were internally surveyed down hole.
Drill sample	Method of recording and	Stavely Project
recovery	assessing core and chip sample recoveries and	Fairview Gold Prospect
	results assessed.	Stavely Minerals' Recent RC Drilling
		RC sample recovery was good. Booster air pressure was used. Some water was noted in the RC holes.
		Stavely Minerals' Diamond Drilling
		Diamond core recoveries were logged and recorded in the database.
		Core recovery for SMD011 was good.
		Stavely Minerals' Previous RC Drilling
		RC sample recovery was good. Booster air pressure was used. RC sample recovery was visually checked during drilling for moisture or contamination. Insignificant sample loss or carry-over gain was recorded. No significant water was noted in the RC holes.
		Historical Drilling
		At Fairview, ground conditions were reported by BCD Metals to be generally moderately weathered to fresh rock with generally no major sample loss or groundwater issues.
	Measures taken to maximise sample recovery and ensure representative nature of the samples.	Stavely Project
		Fairview Gold Prospect
		Stavely Minerals' Diamond Drilling
		Diamond core is reconstructed into continuous runs on an angle iron cradle for orientation marking. Depths are checked against the depth given on the core blocks and rod counts are routinely carried out by the driller.
		Stavely Minerals' RC Drilling
		The RC samples are collected in plastic bags directly from the rig-mounted cyclone and laid on the ground in rows of 10. The drill cyclone and sample buckets are cleaned between rod-changes and after each hole to minimise down-hole and/ or cross contamination.
		Historical Drilling
		No details are available for the historical drill holes.
	Whether a relationship	Stavely Project
	exists between sample recovery and grade and	Fairview Gold Prospect
	whether sample bias may	Stavely Minerals' Diamond Drilling
	have occurred due to	Not an issue relevant to diamond drilling.



Criteria	JORC Code explanation	Commentary		
	preferential loss/gain of	Stavely Minerals' RC Drilling		
	fine/coarse material.	No analysis has been undertaken as yet regarding whether sample bias may have occurred due to preferential loss/gain of fine/coarse material but it is not considered to have material effect given the good sample recovery.		
		Historical Drilling		
		No details are available for the historical drill holes.		
Logging	Whether core and chip	Stavely Project		
	samples have been geologically and	Fairview Gold Prospect		
	geotechnically logged to a	Stavely Minerals' Diamond and RC Drilling		
	level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.	Geological logging of samples followed Company and industry common practice. Qualitative logging of samples including (but not limited to) lithology, mineralogy, alteration, veining and weathering. Diamond core logging included additional fields such as structure and geotechnical parameters.		
		Magnetic Susceptibility measurements were taken for each 1m diamond core interval.		
		Historical drilling		
		The historical drill holes have been geologically logged on 1m intervals.		
	Whether logging is qualitative or quantitative in nature. Core (or	Stavely Project		
		Fairview Gold Prospect		
	costean, channel, etc)	Stavely Minerals' Diamond Drilling		
	photography.	All logging is quantitative, based on visual field estimates. Systematic photography of the diamond core in the wet and dry form was completed.		
		Stavely Minerals' RC Drilling		
		All logging is quantitative, based on visual field estimates. Chip trays with representative 1m RC samples were collected.		
		Historical Drilling		
		All logging is quantitative, based on visual field estimates.		
	The total length and	Stavely Project		
	percentage of the relevant intersections logged.	Fairview Gold Prospect		
		Stavely Minerals' Diamond Drilling		
		Detailed diamond core logging, with digital capture, was conducted for 100% of the core by Stavely's on-site geologist at the Company's core shed near Glenthompson.		
		Stavely Minerals' RC Drilling		



Criteria	JORC Code explanation	Commentary
		All RC chip samples were geologically logged by Stavely Minerals' on-site geologists on a 1m basis, with digital capture in the field.
		Historical Drilling
		The historical drill holes have been geologically logged on 1m intervals in their entirety.
Sub- sampling	If core, whether cut or sawn and whether	Stavely Project
techniques	quarter, half or all core	Fairview Gold Prospect
and sample preparation	taken.	Stavely Minerals' Diamond Drilling
preparation		Detailed diamond core logging, with digital capture, was conducted for 100% of the core by Stavely's on-site geologist at the Company's core shed near Glenthompson.
		Stavely Minerals' RC Drilling
		All RC chip samples were geologically logged by Stavely Minerals' on-site geologists on a 1m basis, with digital capture in the field.
		Historical Drilling
		The historical drill holes have been geologically logged on 1m intervals in their entirety.
	If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.	Stavely Project
		Fairview Gold Prospect
		Stavely Minerals' RC Drilling
		Splitting of RC samples occurred via a rotary cone splitter by the RC drill rig operators. Cone splitting occurred regardless of whether the sample was wet or dry.
		Historical Drilling
		The field procedures for the aircore drilling consisted of 1m samples from the cyclone being run through a two-tier 25:75 riffle splitter and composited into 2m samples to provide approximately 5kg sample. With the hammer drilling the sample mass of the 2m composite was often significantly greater than 5kg and these samples were resplit through the lower tier of the riffle splitter (50-50) to reduce the mass.
		The 1m split samples for the RC drill holes were submitted for analysis.
		The samples were dried, crushed and pulverised to -80# at the laboratory.
	For all sample types, the	Stavely Project
	nature, quality and appropriateness of the sample preparation	Fairview Gold Prospect
		Stavely Minerals' Diamond and RC Drilling
	technique.	Company procedures were followed to ensure subsampling adequacy and consistency. These included (but



Criteria	JORC Code explanation	Commentary
		were not limited to) daily work place inspections of sampling equipment and practices.
		Historical Drilling
		No details of sample preparation are given for the historical drilling.
	Quality control procedures	Stavely Project
	adopted for all sub- sampling stages to	Fairview Gold Prospect
	maximise representivity of	Stavely Minerals' Diamond and RC Drilling
	samples.	Blanks and certified reference materials are submitted with the samples to the laboratory as part of the quality control procedures.
		Historical Drilling
		Field duplicates, blanks and standards were submitted with the samples to the laboratory as part of the quality control procedures for the aircore, RC and diamond drilling.
	Measures taken to ensure	Stavely Project
	that the sampling is representative of the in	Fairview Gold Prospect
	situ material collected, including for instance results for field duplicate/second-half sampling.	Stavely Minerals' Diamond Drilling
		No second-half sampling has been conducted at this stage.
		Stavely Minerals' RC Drilling
		No field duplicates have been taken at this stage.
		Historical Drilling
		Field duplicates were submitted with the samples to the laboratory as part of the quality control procedures for the aircore and RC drilling.
	Whether sample sizes are	Stavely Project
	appropriate to the grain size of the material being	Fairview Gold Prospect
	sampled.	Stavely Minerals' Diamond and RC Drilling
		The sample sizes are considered to be appropriate to correctly represent the sought mineralisation.
		Historical Drilling
		The sample sizes are considered to be appropriate to correctly represent the sought mineralisation.
Quality of	The nature, quality and	Stavely Project
assay data and	appropriateness of the assaying and laboratory	Fairview Gold Prospect
laboratory	procedures used and	Stavely Minerals Soil Auger Sampling
tests	whether the technique is considered partial or total.	The samples were sent to the Australian Laboratory Services ("ALS") in Adelaide where they were dried and sieved. The samples were analysed for gold by Method Au-



Criteria	JORC Code explanation	Commentary
		TL43 and for a multi-element suite by Method ME-MS61 at ALS in Perth.  The Au-TL43 technique uses a 25g sample which is digested in a mixture of 3 parts hydrochloric acid and 1 part nitric acid (aqua regia). This acid mixture generates nascent chlorine and nitrosyl chlorite, which will dissolve free gold and gold compounds such as calaverite (AuTe2).
		Digestion if each sample is performed in individual disposable HDPE bottles to eliminate the probability of contamination. Gold is determined by ICP-MS directly from the digestion liquor. Samples high in sulphides or carbon content may lead to low gold recoveries unless they are roasted prior to digestion.
		The soil samples were also analysed by multielement ICPAES/ICPMS Analysis - Method ME-MS61. A 0.25g sample is pre-digested for 10-15 minutes in a mixture of nitric and perchloric acids, then hydrofluoric acid is added and the mixture is evaporated to dense fumes of perchloric (incipient dryness). The residue is leached in a mixture of nitric and hydrochloric acids, the solution is then cooled and diluted to a final volume of 25mls. Elemental concentrations are measured using ICP Atomic Emission Spectrometry and ICP Mass Spectrometry.
		Recent RC Drilling and Rock Chip Samples
		The RC drill chips and the rock chip samples were analysed by multi-element ICP-MS Analysis – Method ME-MS61.
		The ME-MS61 Method is a Multi-Element Ultra Trace method combining a four-acid digestion with ICP-MS instrumentation. A four-acid digest is performed on 0.25g of sample to quantitatively dissolve most geological materials. This method is not appropriate for mineralized samples. Analytical analysis performed with a combination of ICP-AES & ICP-MS.
		A prepared sample (0.25 g) is digested with perchloric, nitric, hydrofluoric, and hydrochloric acids. The residue is leached with dilute hydrochloric acid and diluted to volume. The resulting solution is analysed by a combination of inductively coupled plasma-atomic emission spectrometry (ICP-AES) and inductively coupled plasma-mass spectrometry with results corrected for spectral or isotopic interferences.
		The RC drill chips and rock chip samples were also analysed for gold using Method – Au-TL43. This is a Method is for Trace Level Au by aqua regia extraction with ICP-MS finish. The detection limit range is 0.001 ppm to 1 ppm. A 25g sample is digested in a mixture of 3 parts hydrochloric acid and 1 part nitric acid (aqua regia). This acid mixture generates nascent chlorine and nitrosyl chloride, which will dissolve free gold and gold compounds such as calaverite (AuTe2). Digestion of each sample is performed in individual disposable HDPE bottles to eliminate the probability of contamination. Gold



Criteria	JORC Code explanation	Commentary
		is determined by ICP-MS directly from the digestion liquor.
		Over-range gold samples (>1ppm Au) were re-assayed using the Au-AROR43 Method. This method is an overlimit method which is used to analyse the same solution prepared from the Trace Level Au by aqua regia extraction method (25g).
		A finely pulverised sample (25 g) is digested in a mixture of 3 parts hydrochloric acid and 1 part nitric acid (aqua regia). This acid mixture generates nascent chlorine and nitrosyl chloride, which will dissolve free gold and gold compounds such as calaverite (AuTe <sub>2</sub> ). Gold is determined by ICPMS directly from the digestion liquor. This method allows for the simple and economical addition of extra elements by running the digestion liquor through the ICPMS.
		Stavely Minerals' Previous Diamond and RC Drilling
		The RC and core samples were analysed by multielement ICPAES Analysis - Method ME-ICP61. A 0.25g sample is pre-digested for 10-15 minutes in a mixture of nitric and perchloric acids, then hydrofluoric acid is added and the mixture is evaporated to dense fumes of perchloric (incipient dryness). The residue is leached in a mixture of nitric and hydrochloric acids, the solution is then cooled and diluted to a final volume of 12.5mls. Elemental concentrations are measured simultaneously by ICP Atomic Emission Spectrometry. This technique approaches total dissolution of most minerals and is considered an appropriate assay method for epithermal to mesothermal gold systems.
		The RC and core samples were also analysed for gold using Method Au-AA23. Up to a 30g sample is fused at approximately 1,100°C with alkaline fluxes including lead oxide. During the fusion process lead oxide is reduced to molten lead which acts as a collector for gold. When the fused mass is cooled the lead separates from the impurities (slag) and is placed in a cupel in a furnace at approximately 900°C. The lead oxidizes to lead oxide, being absorbed by the cupel, leaving a bead (prill) of gold, silver (which is added as a collector) and other precious metals. The prill is dissolved in aqua regia with a reduced final volume. Gold content is determined by flame AAS using matrix matched standards. For samples which are difficult to fuse a reduced charge may be used to yield full recovery of gold. This technique approaches total dissolution of most minerals and is considered an appropriate assay method for detecting gold mineralisation.
		Historical Drilling  The camples were analyzed for gold by Fire Assay with a
		The samples were analysed for gold by Fire Assay with a flame atomic absorption spectroscopy finish.



Criteria	JORC Code explanation	Commentary
		A sample is fused at approximately 1,100°C with alkaline fluxes including lead oxide. During the fusion process lead oxide is reduced to molten lead which acts as a collector for gold. When the fused mass is cooled the lead separates from the impurities (slag) and is placed in a cupel in a furnace at approximately 900°C. The lead oxidizes to lead oxide, being absorbed by the cupel, leaving a bead (prill) of gold, silver (which is added as a collector) and other precious metals. The prill is dissolved in aqua regia with a reduced final volume. Gold content is determined by flame AAS using matrix matched standards.
		Fire Assay is a total digestion method and is suitable for determining ore-grade gold results.
		Historical Soil Auger Sampling
		The Beaconsfield auger soil samples were submitted to Onsite Laboratories in Bendigo. The samples were analysed for Au, Ag, As, Fe, Ni, Pb and Zn using FA/AAS Fire Assay/flame Atomic Absorption Spectroscopy and AR/AAS Aqua Regia digest, flame Atomic Absorption Spectroscopy.
	For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.	Not applicable to this report.
	Nature of quality control	Stavely Project
	procedures adopted (e.g. standards, blanks,	Fairview Gold Prospect
	duplicates, external laboratory checks) and	Stavely Minerals Soil Auger Sampling
	whether acceptable levels of accuracy (i.e. lack of bias) and precision have	The analytical laboratory provide their own routine quality controls within their own practices. The results from their own validations were provided to Stavely Minerals.
	been established.	Stavely Minerals' Diamond and RC Drilling
		The analytical laboratory provide their own routine quality controls within their own practices. The results from their own validations were provided to Stavely Minerals.
		For the 2025 RC Drilling a CRM standards and blacks were submitted at a frequency of one per 20 samples.
		Results from the CRM standards and the blanks gives confidence in the accuracy and precision of the assay data returned from ALS.
		Historical Drilling



Criteria	JORC Code explanation	Commentary
		The quality control data for the historical drilling has not been assessed.
		Historical Soil Auger Sampling
		Repeat and duplicate gold analysis were undertaken by the laboratory on some of the Beaconsfield soil auger samples.
Verification	The verification of	Stavely Project
of sampling and	significant intersections by either independent or	Fairview Gold Prospect
assaying	alternative company personnel.	Stavely Minerals' Diamond & RC Drilling
	personner.	Stavely Minerals' Managing Director has visually verified significant intersections in the core from SMD011 and the RC chips.
		Historical Drilling
		Stavely Minerals' Managing Director has visually verified the significant intersections in historical diamond drilling.
	The use of twinned holes.	No twinned holes have been drilled.
	Documentation of primary	Stavely Project
	data, data entry procedures, data verification, data storage (physical and electronic)	Fairview Gold Prospect
		Stavely Minerals' Diamond and RC Drilling
	protocols.	Primary data was collected for drill holes using the OCRIS logging template on Panasonic Toughbook laptop computers using lookup codes. The information was sent to a database consultant for validation and compilation into a SQL database.
		Historical Drilling
		No details provided for historical drilling.
	Discuss any adjustment to assay data.	No adjustments or calibrations were made to any assay data used in this report.
Location of	Accuracy and quality of surveys used to locate drill holes (collar and	Stavely Project
data points		Fairview Gold Prospect
	down-hole surveys), trenches, mine workings	Stavely Minerals Soil Auger Sampling
	and other locations used in Mineral Resource	The auger sample locations were recorded using a DGPS to accuracy of +/- 1m.
	estimation.	Stavely Minerals' RC Drilling
		The drill collar location was pegged before drilling and surveyed using a Garmin handheld GPS to accuracy of +/- 3m. Subsequently the collar location was surveyed using a DGPS to accuracy of +/- 1m. Collar surveying was performed by Stavely Minerals' personnel. This is considered appropriate at this early stage of exploration.
		Stavely Minerals Rock Chip Samples



Criteria	JORC Code explanation	Commentary
		The rock chip sample locations were recorded using a Garmin handheld GPS to accuracy of +/- 3m
		Stavely Minerals' Previous Diamond and RC Drilling
		The drill collar location was pegged before drilling and surveyed using a Garmin handheld GPS to accuracy of +/- 3m. Collar surveying was performed by Stavely Minerals' personnel. This is considered appropriate at this early stage of exploration.
		For the diamond holes, down-hole single shot surveys were conducted by the drilling contractor. Surveys were conducted at approximately every 30m down-hole.
		Historical Drilling
		For the diamond holes down-hole single shot surveys were conducted by the drilling contractor. Surveys were conducted at approximately every 40m to 60m down-hole.
		Historical Soil Auger Sampling
		The auger sample locations were recorded using a hand held GPS on a local grid with 80m line spacings and 20m sample spacings.
	Specification of the grid system used.	The grid system used is GDA94, zone 54.
	Quality and adequacy of topographic control.	At the Fairview gold prospect, topographic control is achieved via use of DTM developed from a 2008 airborne magnetic survey conducted by UTS Contractors measuring relative height using radar techniques.
		For Stavely Minerals' exploration, the RL was recorded for each drill hole and soil sample location from the GPS. Accuracy of the GPS is considered to be within 5m.
Data spacing and distribution	Data spacing for reporting of Exploration Results.	The drill hole spacing is project specific, refer to figures in text.
aistribution	Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.	N/A
	Whether sample compositing has been applied.	Stavely Project Fairview Gold Prospect
	appriod.	Stavely Minerals Soil Auger Sampling



Criteria	JORC Code explanation	Commentary
		A single sample was collected from the bottom of the auger flight.
		Stavely Minerals' Diamond Drilling
		For SMD011 the entire drill hole was sampled. Sample intervals were generally 1m. In some cases the sample interval was based on either lithology or visual identification of mineralisation. No intervals were less than 0.3m or greater than 1.8m.
		Stavely Minerals' RC Drilling
		No sample compositing has been applied.
		Historical Drilling
		For the aircore drilling 2m composite samples were submitted to the laboratory.
		For the diamond drill holes sample intervals were generally 1m. In some cases the sample interval was based on either lithology or visual identification of mineralisation. No intervals were less than 0.25m or greater than 3.5m.
		Historical Sail Augar Sampling
		Historical Soil Auger Sampling  A single sample was collected from the bottom of the auger flight for the Beaconsfield auger samples.
Orientation of data in	Whether the orientation of	Stavely Project
relation to	sampling achieves unbiased sampling of	Fairview Gold Prospect
geological structure	possible structures and the extent to which this is	Stavely Minerals' Recent RC Drilling
ou acture	known, considering the deposit type.	It is not possible to determine the orientation of structures in drill chips.
		Historical Drilling
the drilling orientation and		The aircore holes were drilled vertically. The diamond holes were drilled at 60° either toward 070° or 250° which is not considered the optimal orientations to intercept the ladder veins responsible for mineralisation.
	If the relationship between	Stavely Project
	the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if	Fairview Gold Prospect
		Stavely Minerals' Diamond and RC Drilling
		There is insufficient drilling data to date to demonstrate
		continuity of mineralised domains and determine if any orientation sampling bias can be identified in the data.
	material.	Historical Drilling





Criteria	JORC Code explanation	Commentary
		The drill grid is approximately perpendicular to the strike of the lithological and structural boundaries but may not be optimal for the vein direction.
Sample	The measures taken to	Stavely Project Fairview Gold Prospect
security	ensure sample security.	
		Samples are delivered in closed poly-weave bags to the courier in Ballarat by Stavely Minerals' personnel. The samples are couriered to ALS Laboratory in Adelaide, SA.
		Historical Drilling
		No available data to assess security.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	No audits or reviews of the data management system has been carried out.



# **Section 2 Reporting of Exploration Results**

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral	Type, reference	Stavely Project
tenement and land tenure status	land tenure ownership including	The Stavely Project comprises RL2017, EL6870, EL7347, EL7921, EL7922, EL7923 and EL7924. Stavely Minerals hold 100% ownership of the Stavely Project tenements.
		The mineralisation at Thursday's Gossan is situated within retention licence RL2017.
		EL4556, which was largely replaced by RL2017 was purchased by Stavely Minerals (formerly Northern Platinum) from BCD Resources Limited in May 2013. RL2017 was granted on the 8 <sup>th</sup> May 2020 and expires on the 7 <sup>th</sup> May 2030. A Section 31 Deed and a Project Consent Deed has been signed between Stavely Minerals Limited and the Eastern Maar Native Title Claim Group for RL2017.
		EL6870 was granted on the 30 August 2021 and expires on the 29 August 2026. A Section 31 Deed and a Project Consent Deed has been signed between Stavely Minerals Limited and the Eastern Maar Native Title Claim Group for EL6870.
		EL7347 was granted on the 17 <sup>th</sup> June 2022 for a period of 5 years. EL7921 was granted on the 15 <sup>th</sup> September 2022 for a period of 5 years. EL7922, EL7923 and EL7924 were granted on the 29 <sup>th</sup> September 2022 for a period of 5 years. These 5 tenements do not cover crown land and are not subject to Native Title.
		Black Range Joint Venture
		The Black Range Joint Venture comprises exploration licence EL5425 and is an earn-in and joint venture agreement with Aureka Ltd (previously Navarre Minerals Limited. Stavely Minerals earned 83% equity in EL5425 in December 2022. EL5425 was granted on 18 December 2021 and expires on the 17 December 2027.
held at the time of reports along with any known	impediments to obtaining a licence to operate in the	All the exploration licences and the retention licence are in good standing and no known impediments exist.





Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	Stavely Project
		Fairview Gold Prospect
paraso		The Fairview gold prospect was first identified as a gold-insoil anomaly approximately 4km in length, hosted in an inferred structural contact between the Fairview Andesite and the Glenthompson Sandstone. A single aircore hole drilled by Newcrest intersected 14m of 0.4 g/t Au from 32m to the end of the hole, confirming a bedrock source for the soil anomaly. Shallow aircore drilling of Fairview North by Beaconsfield Gold Mines Pty Ltd generated significant near-surface gold values in excess of 1 g/t, including 4m of 6.69 g/t Au from 10m (FAH035) and 30m of 1.39 g/t Au from surface (FAH131). BCD Metals Pty Ltd drilled an intercept of 10m of 4.2 g/t Au from 6m in FAC178 from Fairview North in 2012.
		All work conducted by previous operators at the Fairview gold prospect is considered to be of a high quality.
Geology	Deposit type, geological	Stavely Project
	setting and style of mineralisation.	Fairview Gold Prospect
		The Fairview gold anomaly is hosted in an inferred structural contact between the Fairview Andesite Breccia and the Glenthompson Sandstone. Petrologic description demonstrates the gold mineralisation is associated with sericite, albite and K-spar (adularia) alteration and quartz sulphide veins with chalcopyrite, sphalerite, galena and gold. Gold is noted as inclusions in galena. The sphalerite is of a pale yellow colour and, in conjunction with the adularia, suggestive of a high-level low-temperature low-sulphidation epithermal affinity.
Drill hole Information	A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:  easting and northing of the drill hole collar	A table of the significant intercepts reported is provided in the text.
	elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar	
	dip and azimuth of the hole	
	down hole length and interception depth	
	hole length.	





	If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	No material drill hole information has been excluded.
Data aggregation methods	In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.	Stavely Project  Fairview Gold Prospect  Exploration results for the diamond hole were reported where the gold interval started and ended in +1 g/t Au and there is no more than 3m at an average of <0.25 g/t Au internal dilution.  All Au values greater that 1m at > 1g/t have been reported for the RC drill holes as well as mineralised envelopes greater than 50m at > 0.4 g/t Au.  No top-cutting of high grade assay results have been applied, nor was it deemed necessary for the reporting of significant intersections.
	Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.	Stavely Project  Fairview Gold Prospect  In reporting exploration results, length weighted averages are used for any non-uniform intersection sample lengths. Length weighted average is (sum product of interval x corresponding interval grade %) divided by sum of interval length.  Historical Drilling  In reporting exploration results, length weighted averages are used for any non-uniform intersection sample lengths. Length weighted average is (sum product of interval x corresponding interval grade %) divided by sum of interval length.
	The assumptions used for any reporting of metal equivalent values should be clearly stated.	No metal equivalent values are used for reporting exploration results.





Relationship between mineralisation widths and intercept lengths	These relationships are particularly important in the reporting of Exploration Results.  If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.	Stavely Project Fairview Gold Prospect There is insufficient drilling data to date to demonstrate continuity of mineralised domains and determine the relationship between mineralisation widths and intercept lengths. Further drilling is planned to confirm the orientation of the gold mineralised vein arrays.
	If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').	Refer to the Tables and Figures in the text.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Refer to Figures in the text.  Plan views of the auger soil locations and selected results are included in the body of the report.  A plan view of the drill hole collar location is included.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	Stavely Project Fairview Gold Prospect Stavely Minerals' Diamond and RC Drilling All Au values greater than 1m at >1 g/t Au have been reported for SMD011. All Au values greater that 1m at > 1 g/t Au have been reported for the RC drill holes as well as mineralised envelopes greater than 50m at > 0.4g/t Au.

### **ASX ANNOUNCEMENT**



Other substantive exploration data Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.

All relevant exploration data is shown on figures and discussed in the text.

In 2018 three RC drill samples from the Fairview Gold Prospect were sent to ALS Metallurgy in Adelaide to assess the amenability of the samples to heap leaching.

The program included:

- Sample preparation
- Multi-element head analysis
- Bottle roll leach tests
- Percolation rate tests
- Agglomeration following by percolation rate tests
- Column cyanidation leach tests
- Gravity tests
- Size by size gold analysis

The whole sample was dried, homogenised via a rotary sample divider and split into 4 kg charges for testing. 4 x 2 kg charges were also split for bottle roll leach, percolation and agglomeration tests. One 4 kg charge was stage crushing to -1.7 mm for gravity and bottle roll leach tests. A 100 g sample was also split and pulverised for head analysis.

Over 80% gold was recovered for all three samples through low-cost column/heap leach. Heap leach only is recommended to treat Fairview ores.

Grades of base metals and mercury were very low.

Grades of organic carbon were very low, preg-robbing is not anticipated to occur during the cyanidation leach process.

Size by size Au assay results were very spotty, which indicates the presence of coarse Au flakes. Gravity separation to recover coarse Au prior to leach may benefit AU recovery.

In the brief test program conducted it was not possible to establish optimum conditions, further investigation using diamond drill samples is recommended.

The full report titled "Column Leach Testwork conducted upon ore samples from Fairview Gold Deposit for Stavely Minerals Limited" by ALS Metallurgy is available on the Stavely Minerals website (www.stavely.com.au) under the Technical Data tab.





# Further work

The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).

Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.

# **Stavely Project**

# **Fairview North Gold Prospect**

Further RC drilling will be designed follow-up on the recent results.

# **Fairview South Gold Prospect**

The soil auger program to the south of RC drill holes SFSRC001 and SFSRC002 will recommence once the crop has been harvested. Drilling will be planned to test the soil auger anomalies.