

31 March 2017

LOS DOMOS GOLD-SILVER PROJECT
YIELDS FURTHER HIGH GRADE ASSAY RESULTS

Equus Mining Limited ('Equus') (ASX: EQE) is pleased to announce further high grade gold-silver assay results from the Company's Los Domos gold-silver project. Preparation for drill testing of several key targets is underway.

Highlights

- **T1 Structure Prospect drill target:** Recently reported surface sampling has extended the mineralised strike length of the T1 Structure Prospect from 160m to 430m with assay results **averaging 13.31 g/t gold equivalent (AuEq)**. Additional assays just received include **25.36 g/t AuEq** (8.06 g/t Au & 1140 g/t Ag) and **44.09 g/t AuEq** (10.85 g/t Au & 2190 g/t Ag). These high grade results increase the **average sample grade to 15.02 g/t AuEq** and reaffirm the T1 Structure Prospect as being a high priority drill target.
- **T8 Structure Prospect drill target:** Recently reported preliminary mapping and sampling has defined gold-silver epithermal mineralisation at the T8 Structure Prospect occurring within a currently identified 100m long x 70m wide structural corridor with assay results **averaging 2.60 g/t AuEq**. Additional assays just received from infill sampling locations include **40.92 g/t AuEq** (36.10 g/t Au & 254 g/t Ag). These high grade results increase the **average sample grade to 7.59 g/t AuEq** and reaffirm the T8 Structure Prospect as being a high priority drill target. In addition, multiple quartz veins have been located 600m to the south along strike and are to be sampled.
- **8 Defined Drill Targets:** To date 8 prospect drill targets, exhibiting characteristic epithermal metal zonation, have been defined through vein sampling. Four of these have returned high grade gold and silver mineralisation from quartz veins outcropping at surface and are considered to be within or just above the precious metal zone. Another four have returned anomalous gold and silver values and elevated epithermal pathfinder metals typically found above epithermal precious metal zones. The four structural prospects that have yielded high-grade gold and silver mineralisation are:


| | | |
|---------------------------------|--|----------------------------|
| ➤ T1 Structure Prospect: | 15.02 g/t AuEq average sample grade | 430 m strike length |
| ➤ T2 Structure Prospect: | 3.99 g/t AuEq average sample grade | 250 m strike length |
| ➤ T7 Structure Prospect: | 5.24 g/t AuEq average sample grade | 270 m strike length |
| ➤ T8 Structure Prospect: | 7.59 g/t AuEq average sample grade | 100 m strike length |
- **Project Attributes:** The Los Domos gold-silver project is well located, 10km south of the township of Chile Chico and adjacent to the Cerro Bayo gold-silver mine which is currently producing around 2 Mozpa of silver and 20 Kozpa gold¹. With an altitude range of 800m to 1200m and a dry, moderate climate, Los Domos is able to be explored year round.

¹www.mandalayresources.com

Los Domos Gold-Silver Project

Equus Mining Limited (ASX: EQE) has rights to 100% of the Los Domos gold-silver project. See Map 1 for the project's location and the announcement dated 25 October 2016 for further details. The project area is located 15km southeast of the operating Cerro Bayo gold-silver mine and treatment plant which is owned by Mandalay Resources and is currently producing around 2 Mozpa of silver and 20 Kozpa gold and has reserves as of December 2016 were 8.9 Moz of silver and 72 Koz gold. (Source: <http://www.mandalayresources.com>)

Map 1. Los Domos Gold-Silver Project Location

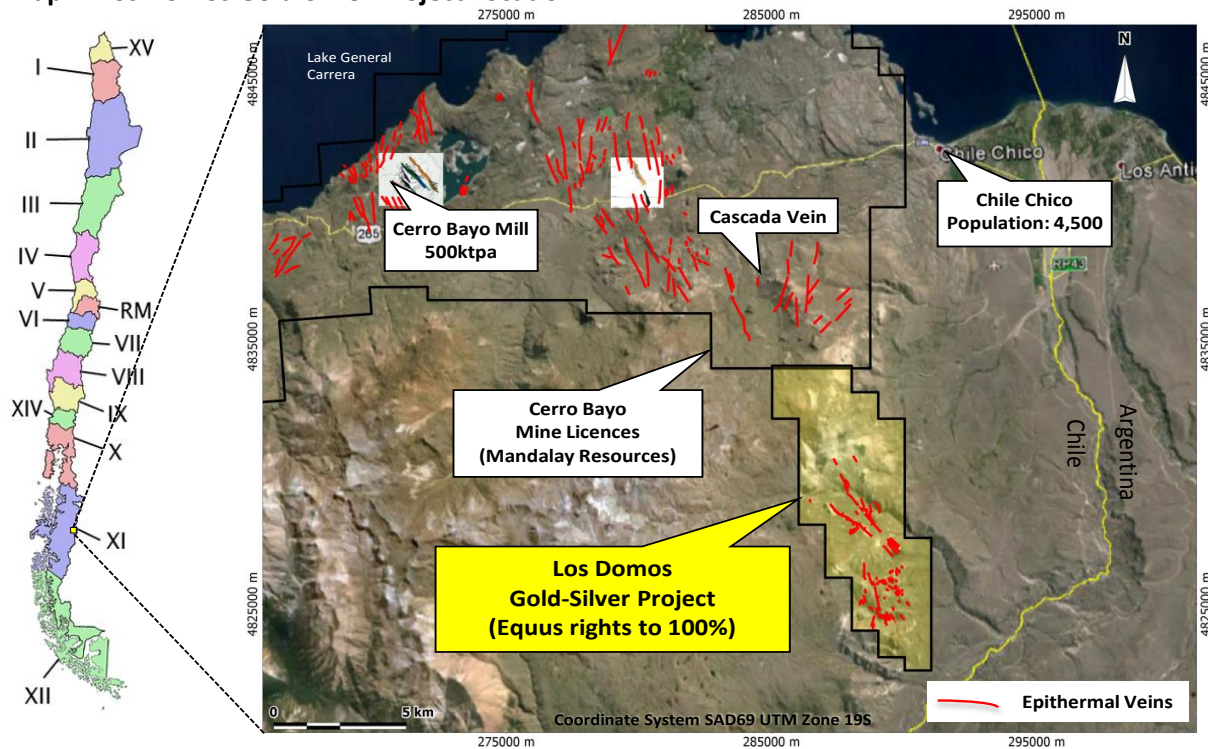


Previous mapping and rock chip sampling throughout the Los Domos Project area has delineated multiple structural corridors hosting chalcedonic - saccharoidal quartz veins and hydrothermal breccias. Apart from reconnaissance style mapping and sampling, these newly discovered structural corridors have never received any modern systematic exploration and hence have never been drill tested. Previous vein mapping and sample results have shown typical vertical precious metal, pathfinder element and quartz texture zonation whereby:

- High grade gold and silver grades are reported predominantly in saccharoidal veins which outcrop at lower altitudes throughout the Los Domos Project area – typically below 1100m. See areas T1 and T7 in Map 2.
- Areas where both relatively higher antimony and arsenic and intermittent grade gold and silver grades have been recorded typically occur between 1100m and 1200m. See areas T2 and the newly discovered T8 area in Map 2.
- Areas where relatively higher antimony and arsenic and other pathfinder element values are reported with only anomalous precious metal values are typically in veins at higher altitude above 1200m. See areas T3, T4, T5, and T6 in Map2.

Understanding the vertical metal zonation within the epithermal vein system at Los Domos is key to guiding future exploration including drill testing (see announcement dated on 25 October 2016 for further discussion). Increased recognition of geochemical, vein quartz texture and alteration zonation of epithermal Au-Ag systems is delivering the next generation of discoveries of concealed deposits, such as those of Cerro Bayo (Mandalay) and Cerro Negro (Goldcorp).

Map 2. Los Domos Gold-Silver Geochemical Sampling Results

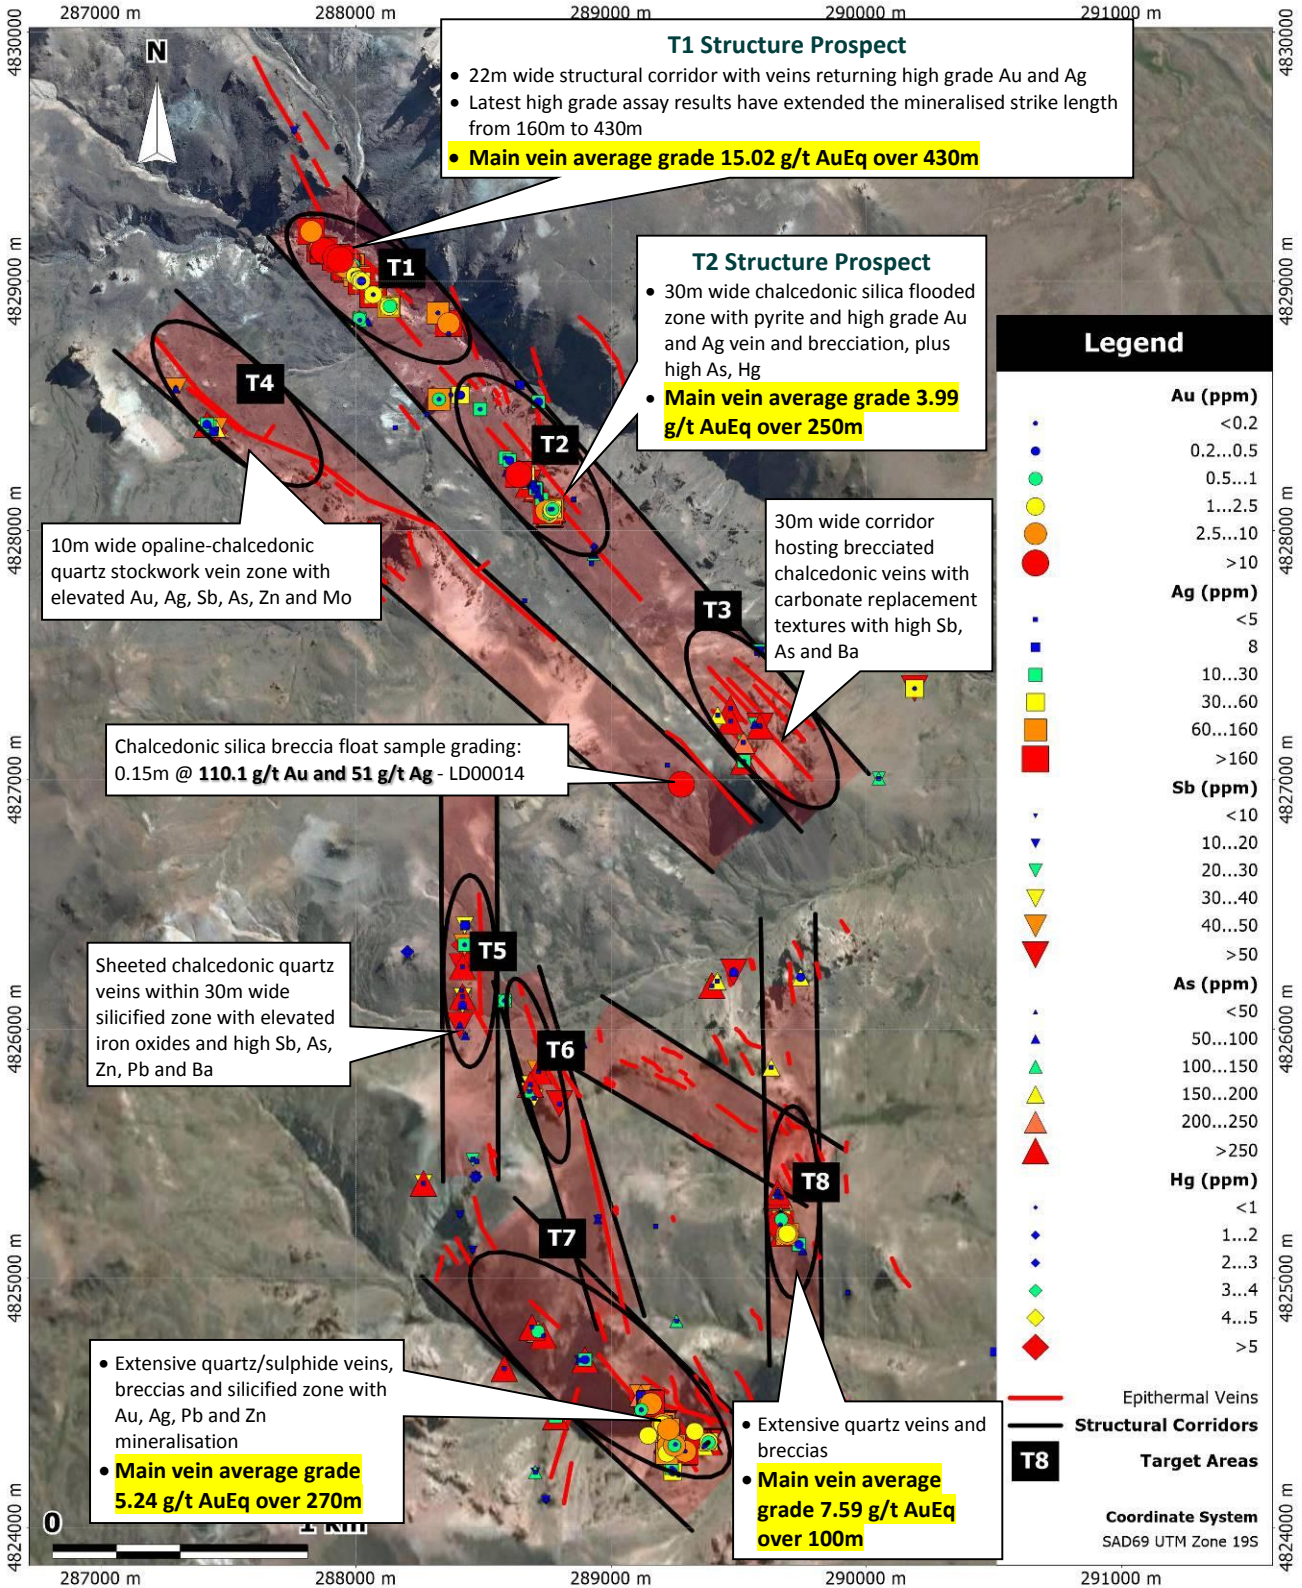

T1 Structure Prospect

Recently reported surface sampling had extended the mineralised strike length of the T1 Structure Prospect from 160m to **430m with assay results from 23 samples averaging 13.31 g/t AuEq**. Additional assays just received from infill sampling locations are as follows:

LD00398 - 0.20m @ **25.36 g/t AuEq** (8.06 g/t Au & 1140 g/t Ag)
LD00400 - 0.40m @ **44.09 g/t AuEq** (10.85 g/t Au & 2190 g/t Ag)

These high grade results increased the **average sample grade to 15.02 g/t AuEq** and reaffirm the T1 Structure Prospect as being within the epithermal precious metal zone at surface and is a high priority drill target. See Section 1. Previously reported assays at T1 are restated below as AuEq:

LD00013 - 0.40m @ **111.40 g/t AuEq** (81.10 g/t Au & 1996 g/t Ag)
LD00007 - 0.40m @ **55.63 g/t AuEq** (50.68 g/t Au & 326 g/t Ag)
LD00035 - 0.40m @ **36.18 g/t AuEq** (32.73 g/t Au & 227 g/t Ag)
LD00081 - 0.40m @ **26.01 g/t AuEq** (5.67 g/t Au & 1340 g/t Ag)
LD00347 - 0.40m @ **9.38 g/t AuEq** (3.52 g/t Au & 386 g/t Ag)
LD00344 - 0.33m @ **9.31 g/t AuEq** (2.81 g/t Au & 428 g/t Ag)
LD00339 - 0.78m @ **8.00 g/t AuEq** (2.38 g/t Au & 370 g/t Ag)
LD00338 - 0.60m @ **7.89 g/t AuEq** (2.96 g/t Au & 325 g/t Ag)
LD00356 - 1.40m @ **6.21 g/t AuEq** (2.35 g/t Au & 254 g/t Ag)
LD00359 - 0.20m @ **5.44 g/t AuEq** (1.63 g/t Au & 251 g/t Ag)
LD00345 - 0.50m @ **4.09 g/t AuEq** (1.31 g/t Au & 183 g/t Ag)
LD00349 - 0.40m @ **3.38 g/t AuEq** (1.33 g/t Au & 135 g/t Ag)
LD00333 - 1.00m @ **3.05 g/t AuEq** (0.79 g/t Au & 149 g/t Ag)
LD00354 - 0.45m @ **3.01 g/t AuEq** (1.04 g/t Au & 130 g/t Ag)
LD00334 - 1.20m @ **2.08 g/t AuEq** (0.61 g/t Au & 144 g/t Ag)
LD00363 - 1.20m @ **2.76 g/t AuEq** (1.18 g/t Au & 104 g/t Ag)
LD00348 - 0.90m @ **2.61 g/t AuEq** (0.58 g/t Au & 134 g/t Ag)
LD00351 - 1.50m @ **2.27 g/t AuEq** (0.60 g/t Au & 110 g/t Ag)
LD00353 - 0.50m @ **1.60 g/t AuEq** (0.55 g/t Au & 69 g/t Ag)
LD00355 - 0.50m @ **1.49 g/t AuEq** (0.52 g/t Au & 64 g/t Ag)
LD00365 - 0.50m @ **1.34 g/t AuEq** (0.71 g/t Au & 49 g/t Ag)
LD00350 - 0.70m @ **1.45 g/t AuEq** (0.39 g/t Au & 61 g/t Ag)
LD00367 - 0.22m @ **0.78 g/t AuEq** (0.54 g/t Au & 16 g/t Ag)

Gold Equivalent Calculation Formula (AuEq)

$$\text{AuEq(g/t)} = \text{Au(g/t)} + \text{Ag(g/t)} \times \frac{\text{Price per 1 Ag(g)} \times \text{Ag Recovery (\%)}}{\text{Price per 1 Au(g)} \times \text{Au Recovery (\%)}}$$

ie Ag:Au = 68:1

Gold Equivalent Calculation Assumptions

| | | | |
|------------------------|---------------------|-----------------|---|
| Gold Price: | US\$1244 per ounce | US\$40 per gram | The metallurgical recoveries for Au and Ag are based on the recoveries being achieved by a neighbouring Cerro Bayo mine which is operating in the same geologic setting as the Los Domos project. It is EQE's opinion that all the elements included in the metal equivalents calculation have a reasonable potential to be recovered and sold. |
| Silver Price: | US\$18.35 per ounce | US59c per gram | |
| 2016 Gold Recovery*: | 84.93% | | |
| 2016 Silver Recovery*: | 87.40% | | |

*Source: http://www.mandalayresources.com/wp-content/uploads/2013/09/Cerro_Bayo_Operating_Statistics_Q4_2016.pdf

Strong Ag and Au mineralisation with comparatively lower As, Sb and Hg values indicates that the surface expression of the T1 Structure Prospect is within the epithermal precious metal deposition zone. Vein mapping and sampling results to date from Los Domos indicate vertical precious metal, pathfinder element and quartz texture zonation typical of epithermal systems. The zonation at Los Domos demonstrates that precious metal mineralisation is generally better developed at lower topographic levels throughout the project area, indicating enhanced Au-Ag depositional levels of the paleo-epithermal system and vein development in favourable host stratigraphy. The T1 Structure Prospect is interpreted to be centered on the northeast bounding fault of a large scale graben structure. See Figure 1 and Figure 2.

Graben structures are related to tensional structural zones and thus are conducive to vein development. The 30m wide zone of silification and brecciation that envelopes veining at the T1 Structure Prospect could be indicative that veining may widen at depth where more competent stratigraphy has been interpreted to extend. This widening is likely to be caused by brittle fracturing and more open space development within the more competent host rock unit.

**Figure 1. Los Domos T1, T2 & T4 Structure Prospects' Interpreted Controls on Mineralisation
Conceptual Cross Section of 3.5km long Graben Structure**

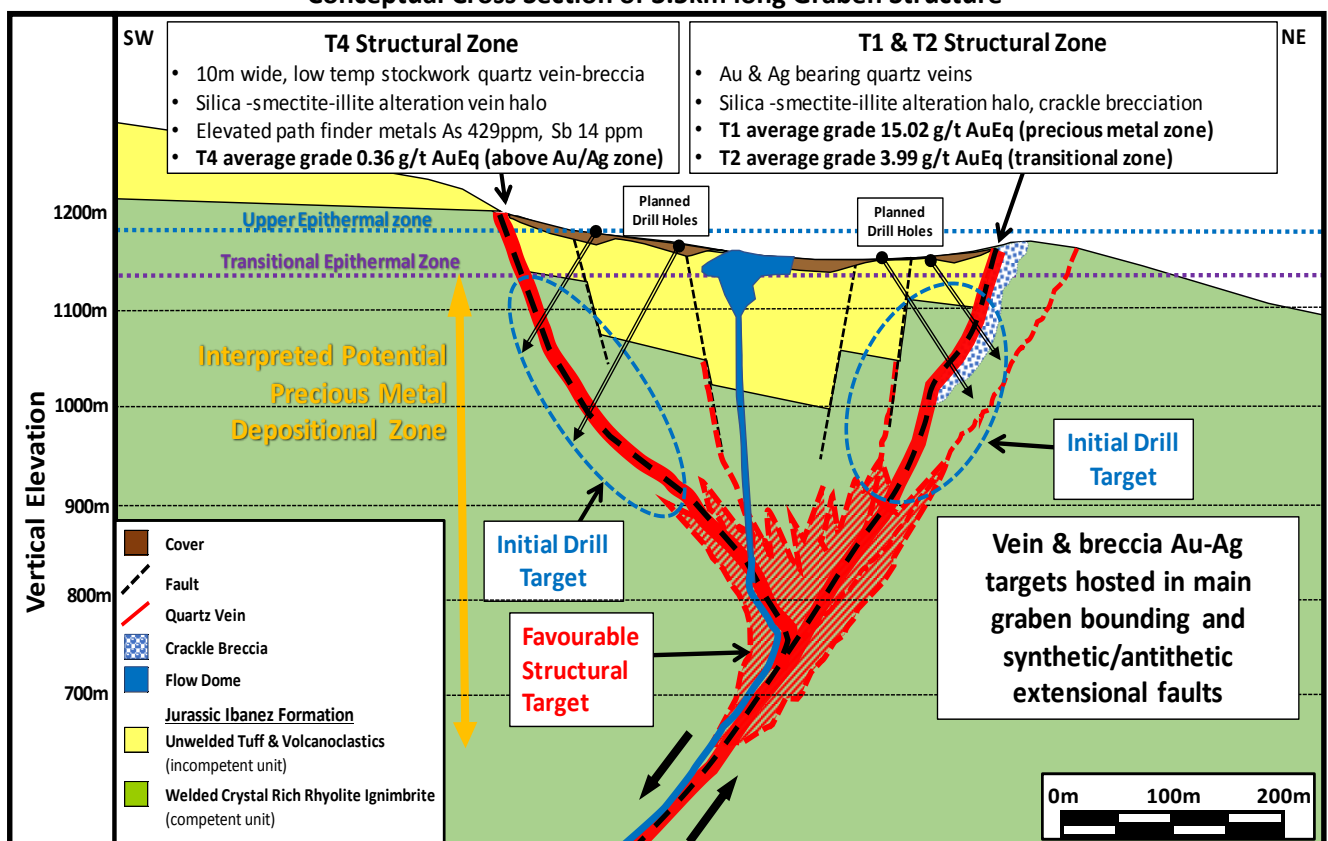


Figure 2. Conceptual Lithological Controls on Quartz Vein Development


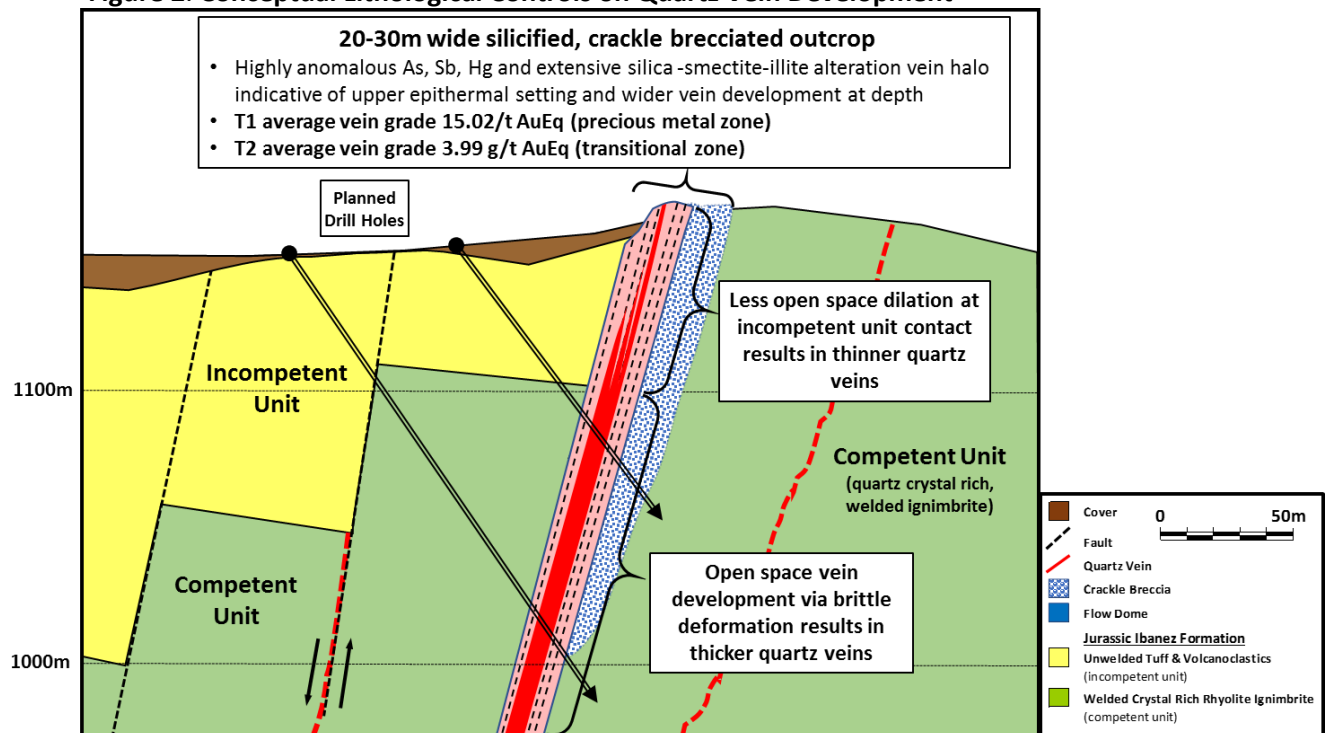


Photo 1. Outcropping hematite rich, brecciated quartz vein T5 structure at Los Domos



Section 1. Longitudinal Section of T1, T2, and T3 Prospects Showing Vertical Epithermal Zonation

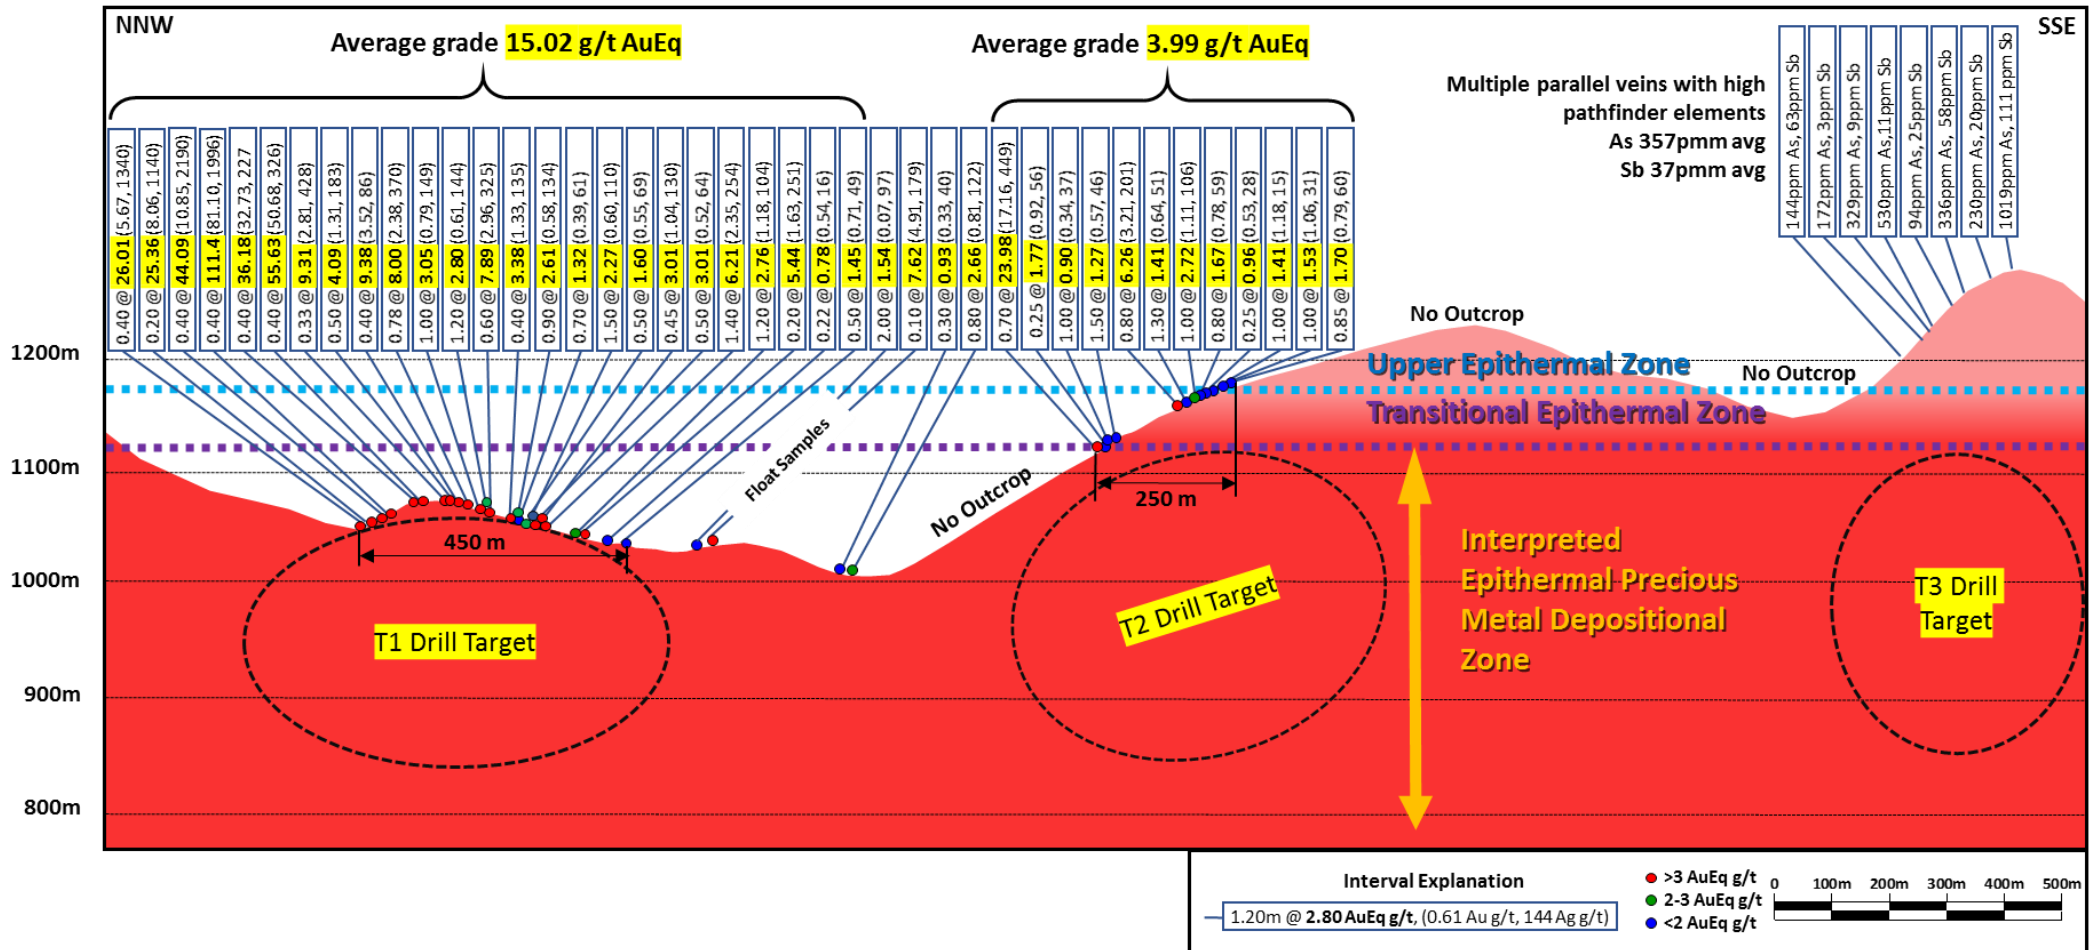

T2 Structure Prospect

Field mapping and sampling to better define known gold-silver epithermal mineralisation at the T2 Structure also commenced in January 2017. Chalcedonic silica flooded-crackle breccias with pyrite and high grade Au and Ag quartz veining occur within a 30m wide structural corridor. Assay results from outcrop sampling has defined the T2 Structure Prospect mineralised strike length to be at least **250m including assay results from 12 samples averaging 3.99 g/t AuEq**. See section 2. Previously reported assays at T2 are restated below in AuEq:

| |
|---|
| LD00008 - 0.70m @ 23.98 g/t AuEq (449 g/t Ag & 17.16 g/t Au) |
| LD00225 - 0.25m @ 1.77 g/t AuEq (56 g/t Ag & 0.92 g/t Au) |
| LD00325 - 1.00m @ 0.90 g/t AuEq (37 g/t Ag & 0.34g/t Au) |
| LD00330 - 1.50m @ 1.27 g/t AuEq (46 g/t Ag & 0.57 g/t Au) |
| LD00217 - 0.80m @ 6.26 g/t AuEq (201 g/t Ag & 3.21 g/t Au) |
| LD00260 - 1.30m @ 1.41 g/t AuEq (51 g/t Ag & 0.64 g/t Au) |
| LD00262 - 1.00m @ 2.72 g/t AuEq (106 g/t Ag & 1.11 g/t Au) |
| LD00263 - 0.80m @ 1.68 g/t AuEq (59 g/t Ag & 0.78 g/t Au) |
| LD00253 - 0.25m @ 0.96 g/t AuEq (28 g/t Ag & 0.53 g/t Au) |
| LD00208 - 1.00m @ 1.41 g/t AuEq (15 g/t Ag & 1.18 g/t Au) |
| LD00215 - 1.00m @ 1.53 g/t AuEq (31 g/t Ag & 1.06 g/t Au) |
| LD00214 - 0.85m @ 1.70 g/t AuEq (60 g/t Ag & 0.79 g/t Au) |

Comparatively high As and Hg values coinciding with strong Ag and Au mineralisation indicates that the surface expression of the T2 Structure Prospect is at the transitional epithermal level and potentially just above the epithermal precious metal depositional zone. The T2 Structure Prospect is interpreted to be centered on the same NE bounding fault of a large scale graben structure as that of the T1 Structure Prospect.

T4 Structure Prospect

Initial field work has discovered an **8m wide zone of low temperature chalcedonic quartz stockwork veining and breccia which has been mapped so far to extend over a strike length of approximately 150m**. Three reconnaissance samples from this zone returned anomalous gold and silver values averaging 0.36 g/t AuEq and highly anomalous As and Sb values, indicating that the surface expression of this prospect is at the upper epithermal zone.

T7 Structure Prospect

Recently reported early stage mapping and sampling has defined gold-silver epithermal mineralisation in quartz veining at the T7 Structure Prospect. Assay results from vein outcrop sampling has defined the T7 Structure Prospect mineralised strike length to be at least **270m with assay results from 12 samples averaging 5.24 g/t AuEq**. See Section 2. Previously reported assays at T7 are restated below in AuEq:

| | |
|-------------|--|
| LDT 14 - | 1.40m @ 14.09 g/t AuEq (7.55 g/t Au & 431 g/t Ag) |
| LD00086 - | 2.50m @ 7.36 g/t AuEq (5.60 g/t Au & 116 g/t Ag) |
| LD00065 - | 1.50m @ 6.79 g/t AuEq (4.76 g/t Au & 134 g/t Ag) |
| LDT 04 - | 4.00m @ 5.99 g/t AuEq (2.71 g/t Au & 216 g/t) |
| LD00082 - | 1.00m @ 5.59 g/t AuEq (3.60 g/t Au & 131 g/t Ag) |
| LDT 07 - | 4.70m @ 2.45 g/t AuEq (1.72 g/t Au & 48 g/t Ag) |
| LDT 2/3 - | 3.00m @ 2.34 g/t AuEq (1.16 g/t Au & 48 g/t Ag) |
| LDT 10/13 - | 2.30m @ 1.57 g/t AuEq (1.16 g/t Au & 27 g/t Ag) |
| LDT 05 - | 4.00m @ 0.96 g/t AuEq (0.79 g/t Au & 11 g/t Ag) |

Strong Ag and Au mineralisation with high Pb and Zn value and comparatively low As, Sb and Hg values indicates that the surface expression of the T7 Structure Prospect is within the epithermal precious metal deposition zone.

T8 Structure Prospect

Recently reported early stage mapping and sampling has defined gold-silver epithermal mineralisation at the T8 Structure Prospect. Intense quartz veining hosting Au and Ag mineralisation occurs within a 70m wide, highly silicified and clay altered structural corridor with assay results from **4 samples averaging 2.60 g/t AuEq**. Additional assays just received from infill sampling locations are as follows:

LD00391 - 0.20m@ **40.92 g/t AuEq** (36.10 g/t Au & 254 g/t Ag)
 LD00388 - 1.00m@ **1.10 g/t AuEq** (1.02 g/t Au & 11 g/t Ag)
 LD00387 - 1.00m@ **0.74 g/t AuEq** (0.54 g/t Au & 28 g/t Ag)


These high grade results increase the **average sample grade to 7.59 g/t AuEq** and together with the elevated As and Sb values indicate that outcropping upper portions of veining at the T8 Structure Prospect occur potentially just above the epithermal precious metal zone and comprise a high priority drill target. See Section 3. Previously reported assays at T8 are restated below in AuEq:

LD00279 - 0.50m@ **5.34 g/t AuEq** (4.27 g/t Au & 149 g/t Ag)
 LD00280 - 0.60m@ **2.11 g/t AuEq** (1.79 g/t Au & 45 g/t Ag)
 LD00274 - 1.00m@ **2.08 g/t AuEq** (1.96 g/t Au & 17 g/t Ag)
 LD00380 - 0.25m@ **0.88 g/t AuEq** (0.59 g/t Au & 40 g/t Ag &)


High Ag and Au coincident with elevated As and Hg is indicative that the surface expression of the T8 Structure Prospect corresponds to the transitional epithermal zone, potentially above the epithermal precious metal depositional zone.

Multiple quartz veins have been located 600m to the south along strike and are to be sampled. See Section 3.


Photo 2. Outcropping hematite rich, brecciated quartz vein T8 structure at Los Domos

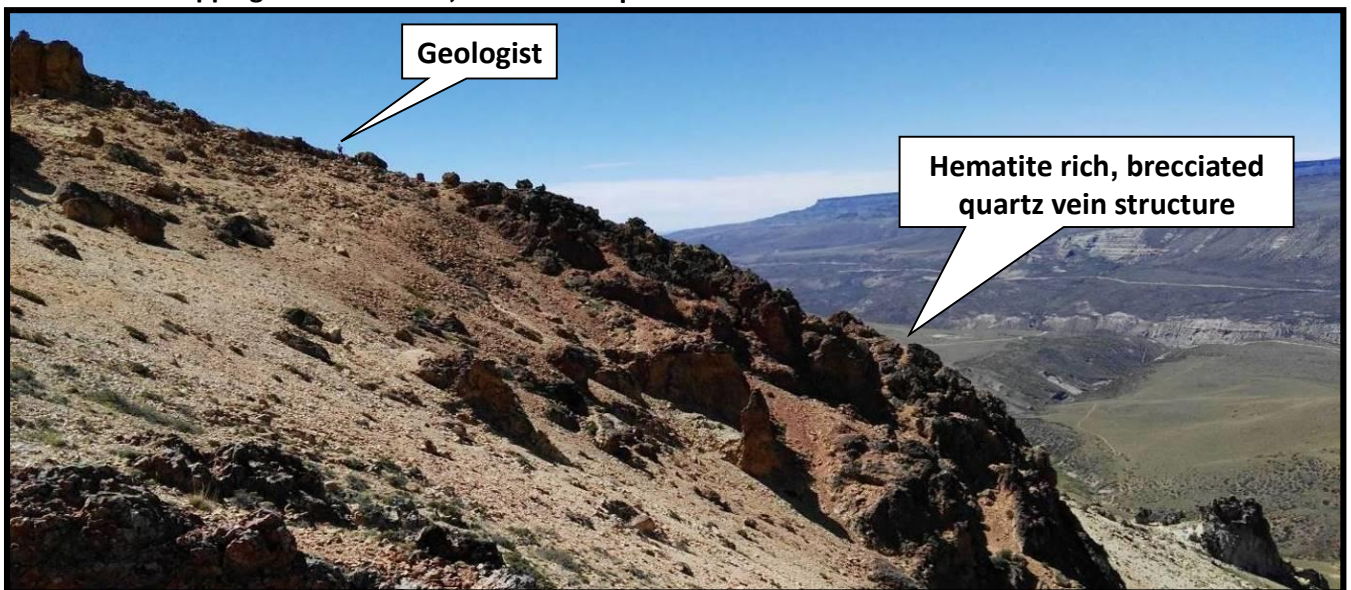

Section 2 . Longitudinal Section of T7 Showing Vertical Epithermal Zonation

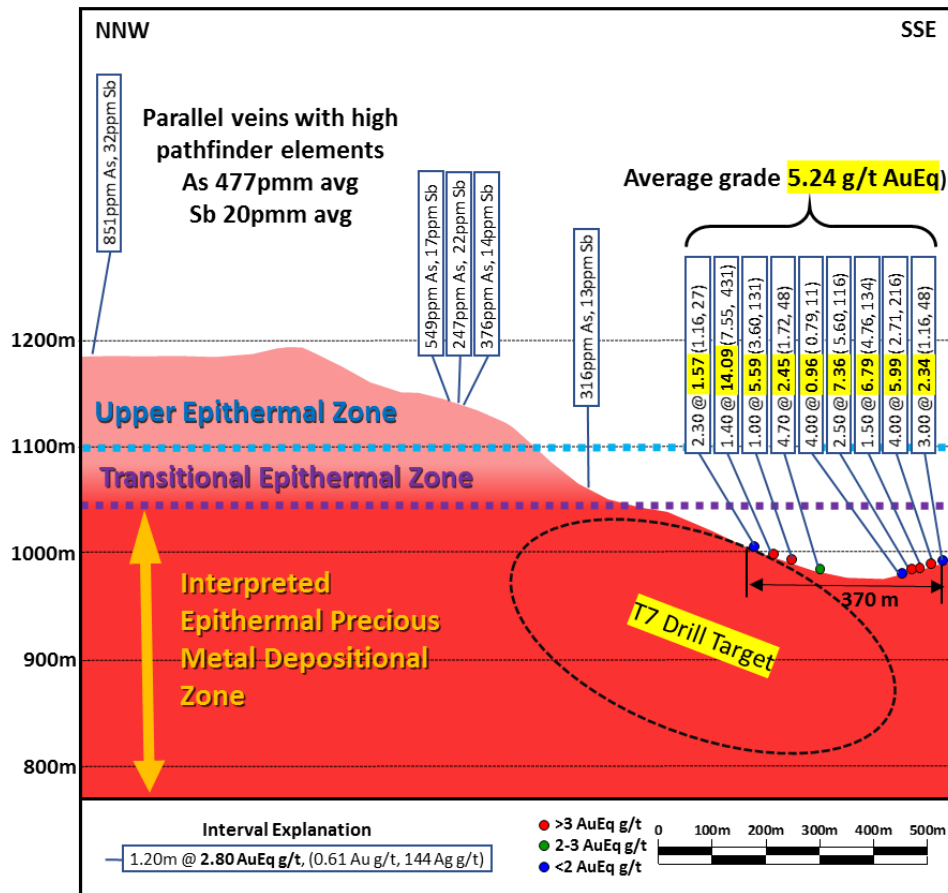

Section 3. Longitudinal Section of T8 Showing Vertical Epithermal Zonation

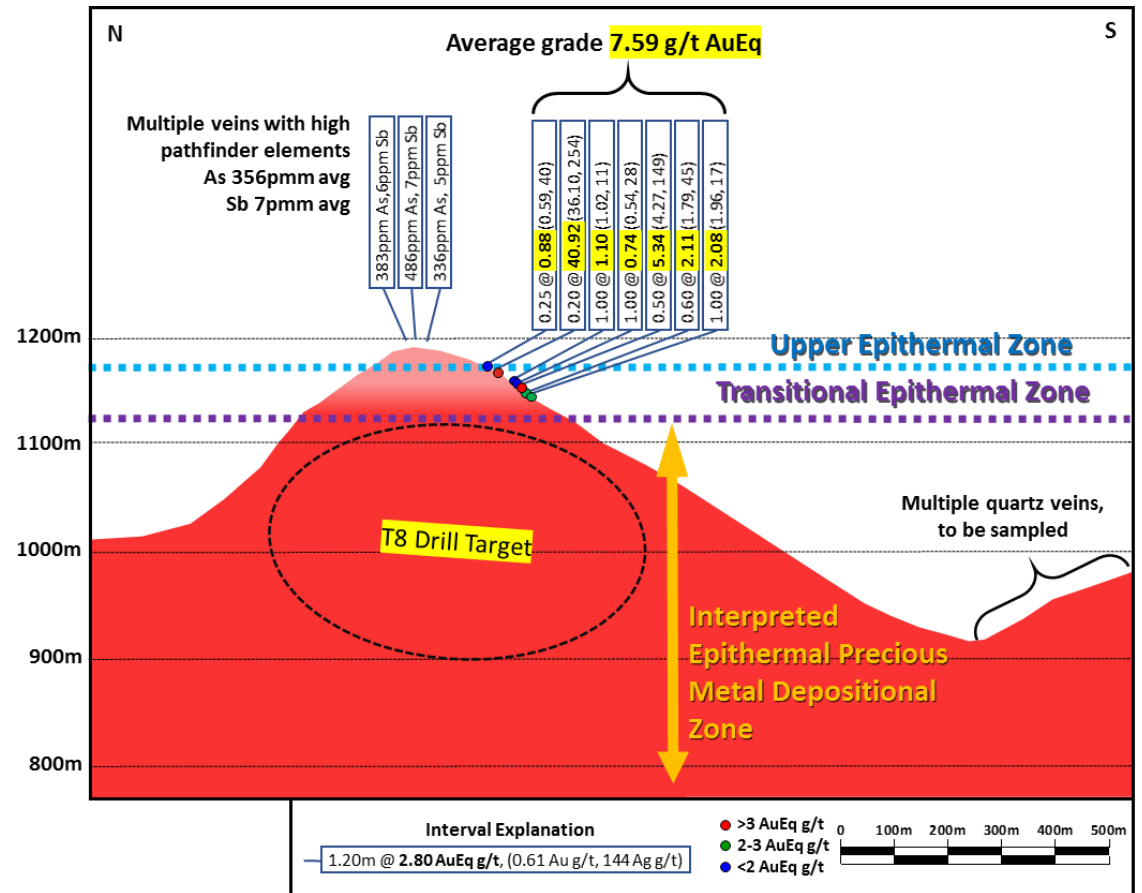

For further information, please contact:

Ted Leschke – Managing Director

Ph: +61 2 9300 3366

Email: tleschke@equusmining.com

Website: www.equusmining.com

pjn8844

(i) All the material assumptions underpinning exploration results for sample numbers LD00001 to LD00102 are outlined in Table 1 and Appendix 1 in the initial public report titled Los Domos Gold-Silver project (see ASX release dated 25 October 2016) and continue to apply and have not materially changed.

(ii) All the material assumptions underpinning exploration results for sample numbers LD00103 to LD00205 are outlined in Table 1 and Appendix 1 in the December 2016 Quarterly Activities Report (see ASX release dated 31 January 2017) continue to apply and have not materially changed.

(iii) All the material assumptions underpinning exploration results for sample numbers LD00206 to LD00382 are outlined in Table 1 and Appendix 1 in the report titled Los Domos Gold-Silver Project High Grade Assay Results (see ASX release dated 3 March 2017) continue to apply and have not materially changed.

COMPETENT PERSON'S STATEMENT:

The information in this report that relates to Exploration Results for the Los Domos Gold-Silver project is based on information compiled by Damien Koerber. Mr Koerber is a geological consultant to the Company. Mr Koerber is a Member of the Australian Institute of Geoscientists and has sufficient experience which is relevant to the style of mineralisation and type of deposits under consideration and to the activities which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Koerber has a beneficial interest as shareholder and Director of Terrane Minerals SpA ('vendor') in Los Domos Gold-Silver project and consents to the inclusion in this report of the matters based on his information in the form and context in which it appears.

JORC Code, 2012 Edition – Table 1 LOS DOMOS EXPLORATION PROGRAM EQUUS MINING LIMITED

A. DIAMOND SAW CHANNEL SAMPLING

Section 1 Sampling Techniques and Data

| Criteria | JORC Code explanation | Commentary |
|---|--|---|
| Sampling techniques | <ul style="list-style-type: none"> Nature and quality of sampling (eg. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. | <p><u>Diamond Saw Channel Sampling</u></p> <ul style="list-style-type: none"> Sawn Channel samples were collected of quartz veins and zones of silicification, within Jurassic age Ibanez Formation rhyolite ignimbrite by a qualified geologist. Sample locations were surveyed with a handheld GPS using Coordinate Projection System SAD69 UTM Zone 19S. Representative channel samples of 2-3Kg weight were taken across the strike of the outcrop over various width intervals except where noted. Intervals were cut at right angles to geological strike except where noted. Limited analysing of hand samples was conducted by a handheld XRF instrument prior to despatch of samples for conventional laboratory analysis. |
| Drilling techniques | <ul style="list-style-type: none"> Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). | <p><u>No drilling was carried out in this sampling programme</u></p> |
| Drill sample recovery | <ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. | <p><u>No drilling was carried out in this sampling programme</u></p> |
| Logging | <ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. | <ul style="list-style-type: none"> Sawn Channel samples were geologically logged by a qualified geologist. The orientation of the associated mineralised structures was logged by a qualified geologist. |
| Sub-sampling techniques and sample preparation | <ul style="list-style-type: none"> If core, whether cut or Rock Chip and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half | <ul style="list-style-type: none"> Sawn Channel samples were a minimum width of 30cm and approximate sample support of half core NQ from diamond drilling, ie sample diameter of 56mm, being a half core sample of that. |

| Criteria | JORC Code explanation | Commentary |
|--|--|--|
| | <p>sampling.</p> <ul style="list-style-type: none"> Whether sample sizes are appropriate to the grain size of the material being sampled. | |
| Quality of assay data and laboratory tests | <ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. | <p><u>Diamond Saw Channel Sampling</u></p> <ul style="list-style-type: none"> Samples were stored in a secure location and transported to the ALS laboratory in in Santiago for sample preparation of fine crush, riffle split and pulverizing of 1kg to 85% < 75µm under laboratory code Prep-31 Pulps were analysed by ALS Santiago using method code Au-ICP21, ME-MS41, Ag-OG46 (for Ag values > 100 g/t Ag) and Zn-AA62 y Pb-AA62 for Zn and Pb values over 1% respectively Alternate blanks and certified standards were submitted within each laboratory batch at a ratio of 1:15 (i.e. 65%) for which acceptable levels of accuracy were reported. |
| Verification of sampling and assaying | <ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. | <p><u>Diamond Saw Channel Sampling</u></p> <ul style="list-style-type: none"> Laboratory CSV files are merged with GPS Location data files using unique sample numbers as the key. No adjustments were made to assay data |
| Location of data points | <ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. | <p><u>Diamond Saw Channel Sampling</u></p> <ul style="list-style-type: none"> Samples are located using handheld GPS receivers. Coordinate Projection System SAD69 UTM Zone 19S The topographic control, using handheld GPS, was adequate for the survey. |
| Data spacing and distribution | <ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. | <p><u>Rock Chip Channel Sampling</u></p> <ul style="list-style-type: none"> Results will not be used for resource estimation prior to any supporting drilling being carried out. Compositing of assay results where applicable on contiguous samples has been applied on a weighted average basis. |
| Orientation of data in relation to geological structure | <ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. | <p><u>Rock Chip Channel Sampling</u></p> <ul style="list-style-type: none"> Representative rock chip samples of 2-3Kg weight were taken perpendicular to the strike of the vein outcrop over 0.2m to 1 metre intervals except where noted. |
| Sample security | <ul style="list-style-type: none"> The measures taken to ensure sample security. | <ul style="list-style-type: none"> Samples were dispatched and transported by a registered courier to ALS Minerals & SGS Chile laboratories in Santiago by a qualified geologist and were not left unattended at any time. |
| Audits or reviews | <ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. | <ul style="list-style-type: none"> No audits or reviews of the data management system have been carried out. |

Section 2 Reporting of Exploration Results

| Criteria | JORC Code explanation | Commentary |
|--|---|--|
| Mineral tenement and land tenure status | <ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a license to operate in the area. | <ul style="list-style-type: none"> Equus Mining Limited holds the rights to acquire 100% of Los Dornos PROJECT which consists of exploration licences Electrum 1 to 11, exploration claim application Electrum 12 and mining licenses Pedregoso 7 1-30, Pedregoso 1 1-30 and Honda 20 1-20. Through an agreement, Terrane Minerals SpA will transfer all its LOS DOMOS PROJECT assets into a new JV company (51% Equus, 49% Terrane) for Equus funding a programme of systematic surface sampling and 2,000m of drilling. Post the initial exploration programme Equus has a one-year option to acquire the remaining 49% of the JV company by issuing Terrane A\$450k in shares at a fixed share price based on the market at the time of agreement execution. Vendor shares will be escrowed for 1 year. The laws of Chile relating to exploration and mining have various requirements. As the exploration advances, specific filings and environmental or other studies may be required. There are ongoing requirements under Chilean mining laws that will be required at each stage of advancement. Those filings and studies are maintained and updated as required by Equus Mining's environmental and permit advisors specifically engaged for such purposes. |
| Exploration done by other parties | <ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. | <ul style="list-style-type: none"> All sampling to date has been done by Damien Koerber who is a qualified geologist with 20 years of experience in Latin America and is a Member of the Australian Institute of Geoscientists |
| Geology | <ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. | <ul style="list-style-type: none"> The Cerro Bayo District hosts veins and breccias containing gold and silver mineralization. The deposits show multiple stages of mineralization and display open-space filling and banding, typical of low-sulphidation epithermal style mineralization. Mineralogy is complex and is associated with mineralization and alteration assemblages that suggest at least three stages of precious metal deposition. |
| Drill hole Information | <ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. | <ul style="list-style-type: none"> No drilling was carried out in this sampling programme. The work carried out is a rock channel sampling programme Sample locations were surveyed with a handheld GPS using Coordinate Projection System SAD69 UTM Zone 19S. Please refer to Appendix 1 for relevant information. In due course collar coordinates of these trenches will be surveyed by a differential GPS however to date surveying has been conducted by a handheld Garmin GPS using grid system SAD69 UTM Zone 19S. Azimuths and dips of the Sawn trenches were surveyed by a Brunton compass. |
| Data aggregation methods | <ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be | <ul style="list-style-type: none"> Neither equivalent, aggregate or upper or lower cut-off grades were used in any tables or summations of the data. The assumptions used for reporting gold equivalent values are: $\text{AuEq(g/t)} = \text{Au(g/t)} + \text{Ag(g/t)} \times \frac{\text{Price per 1 Ag(g)} \times \text{Ag Recovery (\%)}}{\text{Price per 1 Au(g)} \times \text{Au Recovery (\%)}}$ |

| Criteria | JORC Code explanation | Commentary | | | | | | | | | | | | | | | | |
|---|--|---|--|--|--|-------------|--------------------|-----------------|--|---------------|---------------------|-----------------|----------------------|--------|--|------------------------|--------|--|
| | <p><i>shown in detail.</i></p> <ul style="list-style-type: none"> <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i> | <p style="text-align: center;">ie Ag:Au = 68:1</p> <table border="1"> <tr> <td>Gold Price:</td> <td>US\$1244 per ounce</td> <td>US\$40 per gram</td> <td rowspan="4">The metallurgical recoveries for Au and Ag are based on the recoveries being achieved by a neighbouring Cerro Bayo mine which is operating in the same geologic setting as the Los Domos project. It is EQE's opinion that all the elements included in the metal equivalent calculation have a reasonable potential to be recovered and sold.</td> </tr> <tr> <td>Silver Price:</td> <td>US\$18.35 per ounce</td> <td>US\$9c per gram</td> </tr> <tr> <td>2016 Gold Recovery*:</td> <td>84.93%</td> <td></td> </tr> <tr> <td>2016 Silver Recovery*:</td> <td>87.40%</td> <td></td> </tr> </table> | | | | Gold Price: | US\$1244 per ounce | US\$40 per gram | The metallurgical recoveries for Au and Ag are based on the recoveries being achieved by a neighbouring Cerro Bayo mine which is operating in the same geologic setting as the Los Domos project. It is EQE's opinion that all the elements included in the metal equivalent calculation have a reasonable potential to be recovered and sold. | Silver Price: | US\$18.35 per ounce | US\$9c per gram | 2016 Gold Recovery*: | 84.93% | | 2016 Silver Recovery*: | 87.40% | |
| Gold Price: | US\$1244 per ounce | US\$40 per gram | The metallurgical recoveries for Au and Ag are based on the recoveries being achieved by a neighbouring Cerro Bayo mine which is operating in the same geologic setting as the Los Domos project. It is EQE's opinion that all the elements included in the metal equivalent calculation have a reasonable potential to be recovered and sold. | | | | | | | | | | | | | | | |
| Silver Price: | US\$18.35 per ounce | US\$9c per gram | | | | | | | | | | | | | | | | |
| 2016 Gold Recovery*: | 84.93% | | | | | | | | | | | | | | | | | |
| 2016 Silver Recovery*: | 87.40% | | | | | | | | | | | | | | | | | |
| Relationship between mineralisation widths and intercept lengths | <ul style="list-style-type: none"> <i>These relationships are particularly important in the reporting of Exploration Results.</i> <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i> | <ul style="list-style-type: none"> All sample intervals over vein outcrop were taken perpendicular to the strike of the vein outcrop | | | | | | | | | | | | | | | | |
| Diagrams | <ul style="list-style-type: none"> <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> | <ul style="list-style-type: none"> The location and results received for Diamond Saw Channel samples are displayed in the attached maps and/or Tables. | | | | | | | | | | | | | | | | |
| Balanced reporting | <ul style="list-style-type: none"> <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i> | <ul style="list-style-type: none"> Results for all samples collected in this program are displayed on the attached maps and/or Tables. | | | | | | | | | | | | | | | | |
| Other substantive exploration data | <ul style="list-style-type: none"> <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i> | <ul style="list-style-type: none"> No metallurgical or bulk density tests were conducted at the project. | | | | | | | | | | | | | | | | |
| Further work | <ul style="list-style-type: none"> <i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i> | <ul style="list-style-type: none"> Further work is dependent on management review of the existing data. | | | | | | | | | | | | | | | | |

Appendix 1 – Los Domos Sample Assays

| Sample Number | East | North | Altitude (m) | Vein | | | Au ppm | Ag ppm | As ppm | Sb ppm | Zn ppm | Cu ppm | Pb ppm | Hg ppm | Mo ppm |
|---------------|-----------|-----------|--------------|-----------|-------------|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | SAD69 H19 | SAD70 H19 | | Width (m) | Strike (x°) | Dip (-x °) | | | | | | | | | |
| LD00206 | 288756 | 4828070 | 1164 | 1 | 120 | 85 | 0.08 | 6.15 | 192 | 3.63 | 190 | 5.9 | 1180 | 1.51 | 1.06 |
| LD00207 | 288756 | 4828070 | 1164 | 1 | 120 | 85 | 0.02 | 1.82 | 115 | 2.2 | 68 | 3.4 | 688 | 0.52 | 1.3 |
| LD00208 | 288758 | 4828066 | 1160 | 1 | 125 | 60 | 1.18 | 15 | 230 | 6.93 | 206 | 7.8 | 1700 | 1.41 | 1.93 |
| LD00210 | 288759 | 4828067 | 1160 | 1 | 125 | 60 | 0.33 | 3.53 | 436 | 4.44 | 118 | 2.7 | 68.9 | 0.09 | 0.82 |
| LD00211 | 288758 | 4828065 | 1151 | 0.85 | 125 | 60 | 0.32 | 14.6 | 1010 | 8.32 | 109 | 10.1 | 2100 | 2.02 | 2.01 |
| LD00212 | 288758 | 4828066 | 1151 | 1.15 | 150 | 60 | 0.09 | 5.3 | 441 | 5.27 | 60 | 5.6 | 694 | 0.18 | 1.55 |
| LD00213 | 288759 | 4828067 | 1151 | 1 | 150 | 60 | 0.20 | 12.15 | 519 | 6.8 | 115 | 6.4 | 1765 | 2.16 | 5.84 |
| LD00214 | 288760 | 4828063 | 1151 | 0.85 | 150 | 60 | 0.79 | 60.4 | 573 | 18.95 | 587 | 7.2 | 1340 | 2.07 | 2.25 |
| LD00215 | 288758 | 4828064 | 1151 | 1 | 135 | 60 | 1.06 | 30.8 | 567 | 14.25 | 97 | 9.4 | 7940 | 1.05 | 2.68 |
| LD00216 | 288745 | 4828078 | 1134 | 1 | 140 | 70 | 0.05 | 1.41 | 324 | 4.97 | 75 | 8.3 | 40.4 | 0.12 | 1.94 |
| LD00217 | 288746 | 4828079 | 1134 | 0.8 | 140 | 70 | 3.21 | 201 | 220 | 8.42 | 54 | 7.2 | 167 | 0.83 | 4.3 |
| LD00218 | 288746 | 4828079 | 1134 | 1 | 320 | 70 | 0.01 | 0.74 | 51.6 | 1.48 | 10 | 2.3 | 35.7 | 0.32 | 1.09 |
| LD00219 | 288673 | 4828189 | 1141 | 0.8 | 310 | 80 | 0.02 | 1.61 | 89.1 | 4.21 | 58 | 7.2 | 88.1 | 0.12 | 1.56 |
| LD00220 | 288673 | 4828190 | 1141 | 0.8 | 310 | 80 | 0.05 | 4.86 | 137.5 | 9.38 | 34 | 13.9 | 359 | 0.23 | 2.63 |
| LD00221 | 288674 | 4828190 | 1140 | 0.8 | 310 | 80 | 0.02 | 2.29 | 71.9 | 12.4 | 21 | 11.2 | 382 | 0.12 | 1.85 |
| LD00222 | 288674 | 4828191 | 1140 | 0.7 | 310 | 80 | 0.05 | 7.48 | 164.5 | 103.5 | 63 | 26.2 | 1050 | 0.56 | 15.65 |
| LD00223 | 288654 | 4828226 | 1072 | 1 | 135 | 78 | 0.12 | 8.05 | 99.8 | 1.78 | 32 | 1.3 | 23.6 | 0.11 | 1.04 |
| LD00224 | 288652 | 4828227 | 1069 | 0.9 | 135 | 78 | 0.02 | 1.55 | 66.8 | 2.41 | 62 | 1.7 | 15.5 | 0.12 | 1.06 |
| LD00225 | 288648 | 4828230 | 1066 | 0.25 | 135 | 78 | 0.92 | 56.4 | 55.5 | 6.18 | 21 | 8.1 | 14.8 | 0.66 | 2.75 |
| LD00226 | 288648 | 4828231 | 1066 | 0.6 | 135 | 78 | 0.01 | 1.1 | 53.3 | 0.79 | 5 | 2.5 | 10.3 | 0.03 | 1.14 |
| LD00228 | 288371 | 4828546 | 985 | 1 | 125 | 65 | 0.02 | 1.24 | 66.5 | 1.33 | 4 | 2.7 | 22.6 | 0.07 | 1.79 |
| LD00229 | 288371 | 4828545 | 985 | 0.25 | 125 | 65 | 0.02 | 1.32 | 50.7 | 7.35 | 6 | 3.3 | 18.6 | 0.66 | 1.26 |
| LD00230 | 288372 | 4828544 | 985 | 1 | 125 | 65 | 0.02 | 1.56 | 63.6 | 6.71 | 8 | 2.6 | 107.5 | 0.57 | 1.99 |
| LD00231 | 288372 | 4828543 | 985 | 1 | 125 | 65 | 0.01 | 0.7 | 47.6 | 2.63 | 4 | 1.8 | 18.8 | 0.39 | 1.94 |
| LD00232 | 288325 | 4828527 | 1007 | 0.8 | 150 | 73 | 0.81 | 122 | 52.5 | 3.14 | 37 | 5.3 | 12.1 | 0.31 | 2.22 |
| LD00233 | 288325 | 4828526 | 1007 | 1 | 150 | 73 | 0.01 | 1.56 | 34.3 | 0.47 | 98 | 1.5 | 7.5 | 0.06 | 1.15 |
| LD00234 | 288893 | 4824682 | 1059 | 0.5 | 145 | 75 | 0.05 | 2.46 | 195 | 1.87 | 86 | 9.9 | 301 | 0.17 | 6.17 |

| Sample Number | East | North | Altitude (m) | Vein | Strike (x°) | Dip (-x °) | Au ppm | Ag ppm | As ppm | Sb ppm | Zn ppm | Cu ppm | Pb ppm | Hg ppm | Mo ppm |
|---------------|-----------|-----------|--------------|-----------|-------------|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | SAD69 H19 | SAD70 H19 | | Width (m) | | | | | | | | | | | |
| LD00235 | 288897 | 4824674 | 1049 | 0.4 | 145 | 76 | 0.40 | 18.85 | 361 | 12.5 | 646 | 34.8 | 2260 | 0.79 | 5.12 |
| LD00236 | 288945 | 4824687 | 1170 | 0.5 | 295 | 65 | 0.00 | 0.02 | 6.4 | 0.39 | 2 | 1.7 | 6.1 | 0.03 | 2.07 |
| LD00237 | 288933 | 4827903 | 1185 | 1.1 | 125 | 85 | 0.00 | 0.38 | 25.5 | 0.74 | 13 | 2.2 | 17.6 | 0.22 | 0.83 |
| LD00238 | 288933 | 4827904 | 1185 | 1.3 | 125 | 85 | 0.00 | 0.33 | 28.2 | 0.72 | 42 | 2.6 | 14.5 | 0.07 | 0.47 |
| LD00239 | 288933 | 4827905 | 1185 | 1.17 | 125 | 85 | 0.01 | 0.34 | 36.3 | 0.51 | 11 | 1.9 | 17.1 | 0.08 | 0.52 |
| LD00240 | 288932 | 4827905 | 1185 | 0.5 | 125 | 85 | 0.03 | 1.06 | 134 | 0.98 | 8 | 2 | 15.4 | 0.05 | 1.53 |
| LD00241 | 288931 | 4827906 | 1185 | 1 | 125 | 85 | 0.02 | 0.74 | 64.5 | 0.67 | 5 | 1.9 | 13.7 | 0.06 | 1.18 |
| LD00242 | 288930 | 4827906 | 1185 | 0.4 | 125 | 85 | 0.00 | 0.5 | 30.7 | 0.65 | 7 | 1.7 | 13.5 | 0.11 | 0.45 |
| LD00243 | 288930 | 4827912 | 1188 | 1 | 285 | 75 | 0.00 | 0.15 | 25.8 | 0.85 | 15 | 2.2 | 10.5 | 0.06 | 0.34 |
| LD00244 | 288930 | 4827911 | 1188 | 0.46 | 285 | 75 | 0.01 | 0.48 | 86.4 | 1.45 | 5 | 3.4 | 24.3 | 0.07 | 0.97 |
| LD00245 | 288930 | 4827910 | 1188 | 0.9 | 285 | 75 | 0.01 | 0.31 | 67 | 0.78 | 8 | 3.4 | 8.5 | 0.05 | 0.49 |
| LD00246 | 288935 | 4827935 | 1172 | 0.92 | 125 | 60 | 0.01 | 1.02 | 23.1 | 0.93 | 11 | 0.8 | 27 | 0.15 | 4.06 |
| LD00247 | 288934 | 4827935 | 1172 | 0.9 | 125 | 60 | 0.10 | 2.68 | 29.3 | 1.11 | 10 | 1.7 | 26.5 | 0.33 | 5.18 |
| LD00248 | 288933 | 4827935 | 1172 | 1 | 125 | 60 | 0.08 | 1.23 | 24.9 | 0.85 | 25 | 1.9 | 32.1 | 0.1 | 1.79 |
| LD00250 | 288852 | 4828124 | 1165 | 0.9 | 305 | 90 | 0.00 | 0.49 | 24.3 | 0.57 | 30 | 1.3 | 34.4 | 0.05 | 0.52 |
| LD00251 | 288853 | 4828125 | 1165 | 0.45 | 305 | 90 | 0.02 | 2.49 | 29 | 0.67 | 17 | 1.4 | 284 | 0.05 | 1.19 |
| LD00252 | 228854 | 4828125 | 1165 | 0.45 | 305 | 90 | 0.08 | 2.84 | 47.8 | 0.81 | 11 | 1.6 | 384 | 0.11 | 0.85 |
| LD00253 | 288756 | 4828070 | 1164 | 0.25 | 150 | 85 | 0.52 | 27.7 | 346 | 9.03 | 38 | 17.3 | 3450 | 1.78 | 2.03 |
| LD00254 | 288761 | 4828068 | 1165 | 1.5 | 135 | 60 | 0.13 | 6.47 | 346 | 16.5 | 650 | 10.9 | 1685 | 1.03 | 3.12 |
| LD00255 | 288762 | 4828069 | 1165 | 0.35 | 135 | 60 | 0.03 | 2.75 | 124.5 | 6.55 | 362 | 4.6 | 253 | 0.55 | 1.37 |
| LD00256 | 288759 | 4828079 | 1161 | 0.95 | 138 | 65 | 0.00 | 0.25 | 17.1 | 0.87 | 47 | 2.2 | 26.9 | 0.11 | 0.41 |
| LD00257 | 288759 | 4828080 | 1161 | 1.6 | 138 | 65 | 0.33 | 12.2 | 370 | 10.25 | 18 | 5.3 | 1555 | 1.38 | 2.21 |
| LD00258 | 288759 | 4828081 | 1161 | 0.9 | 138 | 65 | 0.20 | 11.9 | 633 | 12.25 | 183 | 5.2 | 705 | 0.84 | 1.66 |
| LD00259 | 288758 | 4828081 | 1162 | 1 | 138 | 65 | 0.28 | 14.35 | 794 | 8.15 | 192 | 2.7 | 1525 | 0.59 | 2.51 |
| LD00260 | 288758 | 4828081 | 1162 | 1.3 | 112 | 80 | 0.64 | 50.8 | 828 | 21.5 | 106 | 13.5 | 4600 | 3.77 | 3.48 |
| LD00261 | 288756 | 4828079 | 1161 | 1.34 | 112 | 80 | 0.18 | 11.15 | 485 | 5.15 | 349 | 7.2 | 1285 | 0.24 | 1.55 |
| LD00262 | 288768 | 4828084 | 1163 | 1 | 112 | 80 | 1.11 | 106 | 466 | 9.8 | 120 | 12.7 | 5000 | 3.17 | 1.56 |
| LD00263 | 288769 | 4828085 | 1166 | 0.8 | 112 | 80 | 0.78 | 59 | 378 | 7.32 | 195 | 5.8 | 3530 | 1.74 | 1.24 |
| LD00264 | 288770 | 4828086 | 1167 | 0.9 | 112 | 80 | 0.15 | 3.8 | 362 | 6.17 | 46 | 3.9 | 199.5 | 0.18 | 0.93 |

| Sample Number | East | North | Altitude (m) | Vein | Strike (x°) | Dip (-x °) | Au ppm | Ag ppm | As ppm | Sb ppm | Zn ppm | Cu ppm | Pb ppm | Hg ppm | Mo ppm |
|---------------|-----------|-----------|--------------|-----------|-------------|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | SAD69 H19 | SAD70 H19 | | Width (m) | | | | | | | | | | | |
| LD00266 | 288760 | 4828086 | 1163 | 0.9 | 138 | 80 | 0.04 | 7.64 | 103.5 | 8.9 | 106 | 6.9 | 428 | 1.39 | 38.3 |
| LD00267 | 288759 | 4828086 | 1162 | 0.9 | 138 | 80 | 0.04 | 3.81 | 80.2 | 3.07 | 63 | 5 | 178.5 | 0.54 | 9.72 |
| LD00268 | 288728 | 4828125 | 1155 | 0.9 | 123 | 61 | 0.03 | 4.07 | 116 | 6.08 | 32 | 5.9 | 219 | 0.17 | 1.72 |
| LD00269 | 288728 | 4828125 | 1156 | 0.2 | 123 | 61 | 0.06 | 13.8 | 162.5 | 9.63 | 7 | 6.4 | 310 | 0.17 | 7.5 |
| LD00270 | 288726 | 4828125 | 1153 | 1 | 123 | 61 | 0.04 | 1.92 | 115.5 | 3.93 | 6 | 6.8 | 255 | 0.15 | 2.05 |
| LD00271 | 288725 | 4828125 | 1152 | 1 | 123 | 61 | 0.01 | 1.46 | 65.9 | 2.64 | 17 | 2.9 | 54.2 | 0.15 | 0.75 |
| LD00272 | 288711 | 4828144 | 1155 | 0.75 | 123 | 61 | 0.03 | 2.65 | 81.8 | 4.28 | 8 | 4 | 62.2 | 0.16 | 1.59 |
| LD00273 | 288711 | 4828145 | 1156 | 1 | 123 | 61 | 0.03 | 2.4 | 87 | 5.65 | 5 | 3.9 | 41.8 | 0.11 | 1.33 |
| LD00274 | 289679 | 4825167 | 1126 | 1 | 120 | 45 | 1.96 | 17.2 | 47.9 | 4.14 | 5 | 2.5 | 155.5 | 0.16 | 3.99 |
| LD00275 | 289679 | 4825168 | 1126 | 1 | 120 | 45 | 0.34 | 14 | 94.9 | 2.44 | 13 | 6 | 669 | 0.09 | 14.5 |
| LD00276 | 289680 | 4825169 | 1125 | 1 | 120 | 45 | 0.15 | 18.15 | 87.2 | 3.35 | 29 | 7.1 | 1040 | 0.1 | 8.05 |
| LD00277 | 289680 | 4825170 | 1125 | 1 | 120 | 45 | 0.09 | 5.53 | 29.6 | 1.81 | 31 | 3.9 | 309 | 0.05 | 6.73 |
| LD00278 | 289681 | 4825171 | 1124 | 1 | 120 | 45 | 0.11 | 2.67 | 55.5 | 1.83 | 20 | 4.2 | 399 | 0.04 | 17.4 |
| LD00279 | 289691 | 4825178 | 1137 | 0.5 | 120 | 73 | 4.27 | 149 | 115.5 | 6.52 | 24 | 16.3 | 1020 | 0.68 | 11.4 |
| LD00280 | 289691 | 4825179 | 1138 | 0.6 | 120 | 73 | 1.79 | 44.6 | 106 | 6.33 | 73 | 35.6 | 2340 | 0.31 | 11.4 |
| LD00282 | 289665 | 4825327 | 1216 | 1 | 145 | 70 | 0.03 | 1.91 | 191.5 | 5.11 | 95 | 3.2 | 45 | 0.11 | 4.51 |
| LD00283 | 289665 | 4825326 | 1216 | 1 | 145 | 70 | 0.02 | 0.53 | 109.5 | 4.53 | 25 | 1.3 | 17.6 | 0.06 | 2.66 |
| LD00284 | 289664 | 4825325 | 1215 | 1 | 145 | 70 | 0.02 | 0.78 | 208 | 9.52 | 17 | 2 | 13.4 | 0.17 | 3.47 |
| LD00285 | 289664 | 4825324 | 1215 | 1 | 145 | 70 | 0.04 | 0.75 | 200 | 9.03 | 40 | 2 | 17.6 | 0.21 | 3.62 |
| LD00286 | 289650 | 4825331 | 1193 | 0.7 | 320 | 90 | 0.03 | 0.84 | 179.5 | 4.8 | 41 | 0.9 | 15.8 | 0.12 | 3.7 |
| LD00287 | 289649 | 4825330 | 1193 | 1.2 | 320 | 90 | 0.03 | 1.54 | 486 | 7.07 | 7 | 1.2 | 49.2 | 0.13 | 14.4 |
| LD00288 | 288715 | 4828147 | 1154 | 0.6 | 123 | 61 | 0.08 | 6.46 | 183.5 | 4.03 | 13 | 11.3 | 481 | 0.13 | 6.72 |
| LD00289 | 288716 | 4828147 | 1154 | 1.1 | 123 | 61 | 0.05 | 5.14 | 130.5 | 5.77 | 53 | 7.7 | 786 | 0.16 | 8.93 |
| LD00290 | 288707 | 4828169 | 1161 | 1 | 135 | 75 | 0.05 | 5.73 | 130.5 | 5.2 | 40 | 8.9 | 716 | 0.49 | 4.93 |
| LD00291 | 288707 | 4828169 | 1160 | 1 | 135 | 75 | 0.02 | 2.84 | 136 | 10.85 | 53 | 9.2 | 166 | 0.22 | 4.38 |
| LD00292 | 288706 | 4828168 | 1159 | 1 | 135 | 75 | 0.09 | 8.61 | 196.5 | 16.35 | 66 | 24.1 | 1190 | 0.55 | 9.47 |
| LD00293 | 288706 | 4828168 | 1158 | 1 | 135 | 75 | 0.16 | 13.05 | 250 | 16.5 | 161 | 34.9 | 1920 | 0.34 | 24 |
| LD00294 | 288705 | 4828167 | 1157 | 1 | 135 | 75 | 0.10 | 11.4 | 213 | 12.05 | 129 | 28.5 | 1640 | 0.43 | 13.15 |
| LD00295 | 288705 | 4828167 | 1156 | 0.9 | 135 | 75 | 0.14 | 17.25 | 196 | 11.75 | 142 | 16 | 876 | 0.57 | 6.37 |

| Sample Number | East | North | Altitude (m) | Vein | Strike (x°) | Dip (-x °) | Au ppm | Ag ppm | As ppm | Sb ppm | Zn ppm | Cu ppm | Pb ppm | Hg ppm | Mo ppm |
|---------------|-----------|-----------|--------------|-----------|-------------|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | SAD69 H19 | SAD70 H19 | | Width (m) | | | | | | | | | | | |
| LD00296 | 288704 | 4828166 | 1155 | 1 | 135 | 75 | 0.04 | 4.67 | 112.5 | 8.02 | 148 | 10.5 | 550 | 0.26 | 5.86 |
| LD00297 | 288704 | 4828166 | 1154 | 1.2 | 135 | 75 | 0.05 | 5.49 | 107.5 | 2.66 | 52 | 7 | 682 | 0.15 | 8.64 |
| LD00298 | 288689 | 4828185 | 1139 | 1 | 130 | 65 | 0.02 | 0.76 | 34.9 | 0.64 | 38 | 1.9 | 16.7 | 0.07 | 1.2 |
| LD00299 | 288689 | 4828185 | 1139 | 1 | 130 | 65 | 0.32 | 9.52 | 321 | 2.85 | 26 | 11.9 | 746 | 0.31 | 2.14 |
| LD00300 | 288688 | 4828186 | 1139 | 1.3 | 130 | 65 | 0.04 | 2.34 | 90.7 | 2.9 | 63 | 6.8 | 210 | 0.09 | 3.53 |
| LD00301 | 288688 | 4828186 | 1138 | 1.2 | 130 | 65 | 0.02 | 1.2 | 72.3 | 1.6 | 24 | 10.6 | 70.3 | 0.05 | 0.86 |
| LD00302 | 288687 | 4828187 | 1138 | 1.3 | 130 | 65 | 0.02 | 2 | 141.5 | 2.3 | 31 | 4.7 | 161.5 | 0.14 | 1.71 |
| LD00304 | 288676 | 4828183 | 1137 | 0.9 | 125 | 65 | 0.02 | 1.64 | 124 | 3.37 | 25 | 3.4 | 20.6 | 0.24 | 0.85 |
| LD00305 | 288676 | 4828184 | 1137 | 1.1 | 125 | 65 | 0.01 | 2.4 | 209 | 4.68 | 64 | 3.7 | 25.3 | 0.2 | 0.9 |
| LD00306 | 288676 | 4828185 | 1138 | 1 | 125 | 65 | 0.01 | 2.54 | 258 | 14.7 | 23 | 5.1 | 25.9 | 0.56 | 0.69 |
| LD00307 | 288676 | 4828186 | 1138 | 1.15 | 125 | 65 | 0.00 | 0.86 | 66 | 2.07 | 19 | 3.7 | 10.9 | 0.11 | 0.76 |
| LD00308 | 288676 | 4828187 | 1139 | 1 | 125 | 65 | 0.01 | 0.83 | 80.9 | 1.24 | 8 | 8.3 | 9.2 | 0.06 | 0.68 |
| LD00309 | 288676 | 4828188 | 1139 | 0.95 | 125 | 65 | 0.00 | 0.6 | 72 | 1.18 | 18 | 8 | 6.3 | 0.04 | 0.67 |
| LD00310 | 288676 | 4828189 | 1140 | 0.95 | 125 | 65 | 0.01 | 0.69 | 99 | 1.94 | 38 | 3 | 8.4 | 0.06 | 0.6 |
| LD00311 | 288675 | 4828190 | 1140 | 1 | 125 | 65 | 0.01 | 0.56 | 63.2 | 1.81 | 17 | 2.9 | 7.2 | 0.07 | 0.76 |
| LD00312 | 288675 | 4828191 | 1141 | 1.1 | 125 | 65 | 0.00 | 0.74 | 90.6 | 2.57 | 24 | 5.5 | 11.1 | 0.08 | 0.64 |
| LD00313 | 288675 | 4828192 | 1141 | 1 | 125 | 65 | 0.01 | 1.05 | 77.7 | 3.08 | 16 | 1.8 | 13.9 | 0.24 | 0.93 |
| LD00314 | 288675 | 4828193 | 1142 | 0.7 | 125 | 65 | 0.01 | 0.74 | 83.3 | 3.12 | 7 | 4.1 | 36.9 | 0.05 | 1.41 |
| LD00315 | 288675 | 4828194 | 1142 | 1.1 | 125 | 65 | 0.01 | 2.21 | 134 | 6.03 | 65 | 3.3 | 45.4 | 0.32 | 0.8 |
| LD00316 | 288675 | 4828195 | 1143 | 0.93 | 125 | 65 | 0.01 | 0.73 | 67.5 | 1.48 | 91 | 2 | 12.1 | 0.08 | 0.77 |
| LD00317 | 288675 | 4828196 | 1143 | 0.93 | 125 | 65 | 0.01 | 0.73 | 76.8 | 1.4 | 48 | 2.7 | 16.8 | 0.11 | 0.92 |
| LD00318 | 288676 | 4828197 | 1144 | 0.76 | 125 | 65 | 0.01 | 0.37 | 33.5 | 0.72 | 11 | 1.9 | 10.9 | 0.06 | 0.55 |
| LD00319 | 288676 | 4828198 | 1144 | 1.1 | 125 | 65 | 0.00 | 0.51 | 55.8 | 0.47 | 5 | 2.1 | 10 | 0.05 | 0.65 |
| LD00320 | 288676 | 4828199 | 1145 | 0.93 | 125 | 65 | 0.01 | 0.52 | 130.5 | 1.95 | 5 | 3.9 | 10.6 | 0.05 | 0.85 |
| LD00321 | 288677 | 4828200 | 1145 | 0.92 | 125 | 65 | 0.01 | 0.97 | 83.2 | 5.78 | 20 | 2.9 | 13.7 | 0.23 | 1.06 |
| LD00322 | 288677 | 4828201 | 1146 | 1 | 125 | 65 | 0.01 | 0.77 | 48.3 | 2.95 | 7 | 3.5 | 43.5 | 0.32 | 0.95 |
| LD00323 | 288678 | 4828203 | 1148 | 0.84 | 125 | 65 | 0.02 | 1.2 | 49.4 | 5.28 | 31 | 6.8 | 287 | 0.18 | 3.25 |
| LD00325 | 288647 | 4828228 | 1115 | 1 | 108 | 90 | 0.37 | 36.5 | 111.5 | 2.47 | 33 | 5.6 | 386 | 0.22 | 1.9 |
| LD00326 | 288646 | 4828229 | 1115 | 0.8 | 108 | 90 | 0.18 | 12.7 | 88.1 | 1.6 | 9 | 4.1 | 231 | 0.09 | 1.76 |

| Sample Number | East | North | Altitude (m) | Vein | Strike (x°) | Dip (-x °) | Au ppm | Ag ppm | As ppm | Sb ppm | Zn ppm | Cu ppm | Pb ppm | Hg ppm | Mo ppm |
|---------------|-----------|-----------|--------------|-----------|-------------|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | SAD69 H19 | SAD70 H19 | | Width (m) | | | | | | | | | | | |
| LD00327 | 288645 | 4828230 | 1115 | 0.9 | 108 | 90 | 0.08 | 7.71 | 106.5 | 1.26 | 7 | 3.3 | 206 | 0.08 | 1.57 |
| LD00328 | 288637 | 4828220 | 1113 | 0.7 | 122 | 68 | 0.22 | 24.9 | 78.8 | 1.99 | 6 | 2.6 | 121 | 0.31 | 2.62 |
| LD00329 | 288647 | 4828218 | 1118 | 0.75 | 122 | 68 | 0.04 | 3.15 | 87.3 | 0.87 | 62 | 3.1 | 160.5 | 0.08 | 1.08 |
| LD00330 | 288665 | 4828221 | 1122 | 1.5 | 136 | 88 | 0.57 | 46.1 | 93.9 | 1.52 | 36 | 5.2 | 85.7 | 0.37 | 2.86 |
| LD00331 | 288641 | 4828257 | 1131 | 1.6 | 125 | 90 | 0.04 | 3.75 | 112.5 | 3.34 | 68 | 6.9 | 82.1 | 0.2 | 1.39 |
| LD00332 | 288590 | 4828234 | 1136 | 0.75 | 318 | 85 | 0.07 | 1.72 | 99.8 | 1.92 | 16 | 2.9 | 18.3 | 0.21 | 1.14 |
| LD00333 | 287989 | 4829067 | 1030 | 1 | 118 | 66 | 0.79 | 149 | 33.9 | 4.73 | 136 | 1.6 | 8.2 | 0.17 | 2.14 |
| LD00334 | 287987 | 4829067 | 1032 | 1.2 | 118 | 66 | 0.61 | 144 | 203 | 10.75 | 7 | 3.6 | 16 | 0.19 | 2.19 |
| LD00335 | 287918 | 4829091 | 1065 | 1.8 | 120 | 70 | 0.24 | 17.8 | 67.2 | 2.61 | 7 | 3 | 37 | 0.05 | 1.44 |
| LD00336 | 287916 | 4829091 | 1065 | 0.45 | 120 | 70 | 0.18 | 25.4 | 80.2 | 2.4 | 4 | 2.2 | 45.4 | 0.04 | 3.37 |
| LD00337 | 287915 | 4829091 | 1065 | 1 | 120 | 70 | 0.11 | 3.87 | 71.3 | 1.03 | 4 | 2.6 | 19.6 | 0.01 | 1.5 |
| LD00338 | 287969 | 4829046 | 1056 | 0.8 | 121 | 85 | 2.96 | 325 | 70.2 | 14.75 | 7 | 2.6 | 27.9 | 0.33 | 2.13 |
| LD00339 | 287964 | 4829049 | 1060 | 0.78 | 121 | 85 | 2.38 | 370 | 77.2 | 11.6 | 7 | 4.5 | 30.7 | 0.38 | 1.39 |
| LD00340 | 287963 | 4829051 | 1063 | 1 | 121 | 85 | 0.07 | 3.89 | 60.9 | 2.5 | 8 | 1.1 | 13.6 | 0.08 | 0.63 |
| LD00341 | 287962 | 4829050 | 1063 | 0.3 | 121 | 85 | 0.16 | 8.54 | 102 | 5.88 | 5 | 1.1 | 14.3 | 0.11 | 1.08 |
| LD00342 | 287962 | 4829050 | 1063 | 0.45 | 121 | 85 | 0.30 | 22.8 | 98 | 3.27 | 3 | 1.3 | 10.3 | 0.11 | 2.66 |
| LD00344 | 287956 | 4829055 | 1069 | 0.33 | 113 | 88 | 2.81 | 428 | 47.3 | 11.6 | 2 | 3.9 | 19.7 | 0.9 | 2.62 |
| LD00345 | 287955 | 4829054 | 1068 | 0.5 | 113 | 88 | 1.31 | 183 | 77.6 | 7.08 | 17 | 4 | 28.5 | 0.27 | 3.83 |
| LD00346 | 287955 | 4829053 | 1068 | 1.4 | 113 | 88 | 0.24 | 55.1 | 209 | 11.15 | 13 | 2.6 | 22.5 | 0.18 | 5.1 |
| LD00347 | 287963 | 4829056 | 1068 | 0.4 | 130 | 85 | 3.52 | 386 | 46.1 | 10.8 | 10 | 3 | 19.5 | 0.21 | 2.35 |
| LD00348 | 287995 | 4829021 | 1045 | 0.9 | 110 | 79 | 0.58 | 134 | 182.5 | 10 | 5 | 6.2 | 141.5 | 0.22 | 40.3 |
| LD00349 | 287997 | 4829022 | 1046 | 0.4 | 110 | 79 | 1.34 | 135 | 110.5 | 10.35 | 34 | 2 | 43.9 | 0.35 | 4.63 |
| LD00350 | 287997 | 4829022 | 1046 | 0.7 | 110 | 79 | 0.39 | 61.1 | 119 | 3.37 | 13 | 3.4 | 18.3 | 0.1 | 21.9 |
| LD00351 | 288013 | 4829017 | 1026 | 1.5 | 117 | 75 | 0.60 | 110 | 69.7 | 4.15 | 19 | 2.8 | 18.3 | 0.19 | 6.37 |
| LD00353 | 288013 | 4829016 | 1027 | 0.5 | 110 | 70 | 0.55 | 68.8 | 60.1 | 4.35 | 12 | 1.8 | 18.5 | 0.18 | 3.55 |
| LD00354 | 288012 | 4829007 | 1029 | 0.45 | 110 | 70 | 1.04 | 130 | 61.8 | 3.69 | 7 | 1.6 | 26.9 | 0.3 | 2.68 |
| LD00355 | 288014 | 4829007 | 1027 | 0.85 | 110 | 70 | 0.52 | 64.2 | 53 | 5.4 | 8 | 5.1 | 19 | 0.37 | 2.86 |
| LD00356 | 288022 | 4829001 | 1024 | 1.4 | 110 | 70 | 2.35 | 254 | 18.5 | 9.11 | 49 | 2.3 | 27.6 | 0.37 | 2.1 |
| LD00357 | 288022 | 4829002 | 1023 | 0.58 | 110 | 70 | 0.27 | 33.8 | 110 | 7.83 | 13 | 4.2 | 91.9 | 1.89 | 3.2 |

| Sample Number | East | North | Altitude (m) | Vein | Strike (x°) | Dip (-x °) | Au ppm | Ag ppm | As ppm | Sb ppm | Zn ppm | Cu ppm | Pb ppm | Hg ppm | Mo ppm |
|---------------|-----------|-----------|--------------|-----------|-------------|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | SAD69 H19 | SAD70 H19 | | Width (m) | | | | | | | | | | | |
| LD00358 | 288067 | 4828955 | 1006 | 0.65 | 100 | 85 | 0.22 | 43.5 | 108 | 3.84 | 54 | 2.1 | 69.7 | 0.34 | 8.8 |
| LD00359 | 288068 | 4828946 | 1001 | 0.2 | 119 | 80 | 1.63 | 251 | 85.3 | 6.09 | 41 | 2.6 | 31.3 | 0.25 | 8 |
| LD00360 | 288068 | 4828947 | 1001 | 0.85 | 119 | 80 | 0.16 | 36.9 | 127 | 4.03 | 31 | 1.9 | 33.9 | 0.29 | 4.79 |
| LD00361 | 288133 | 4828900 | 993 | 0.55 | 115 | 80 | 0.31 | 16.95 | 120 | 2.34 | 29 | 2.1 | 29.6 | 0.13 | 13.15 |
| LD00362 | 288129 | 4828898 | 992 | 0.55 | 110 | 75 | 0.12 | 4.86 | 34.4 | 1.21 | 23 | 2.1 | 19.8 | 0.09 | 2.54 |
| LD00363 | 288128 | 4828898 | 992 | 1.2 | 110 | 75 | 1.18 | 104 | 75.1 | 3.51 | 83 | 2.3 | 29.4 | 0.17 | 17 |
| LD00365 | 288132 | 4828901 | 993 | 0.5 | 115 | 80 | 0.71 | 48.8 | 84.2 | 2.33 | 21 | 2.3 | 38.7 | 0.16 | 18.6 |
| LD00366 | 288046 | 4828837 | 1056 | 0.5 | 128 | 69 | 0.03 | 2.59 | 58.5 | 3.38 | 25 | 1.2 | 11.4 | 0.18 | 1.62 |
| LD00367 | 288012 | 4828850 | 1061 | 0.22 | 134 | 82 | 0.54 | 16.45 | 151 | 5.76 | 8 | 2.1 | 30.2 | 0.23 | 2.47 |
| LD00368 | 288015 | 4828843 | 1061 | 0.28 | 134 | 82 | 0.09 | 16.45 | 108.5 | 2.19 | 10 | 1.2 | 49.5 | 0.1 | 1.32 |
| LD00369 | 289652 | 4825343 | 1197 | 1.1 | 314 | 85 | 0.01 | 1 | 78.5 | 3.39 | 11 | 0.9 | 16.3 | 0.14 | 3.81 |
| LD00370 | 289652 | 4825344 | 1197 | 0.3 | 314 | 85 | 0.03 | 1.58 | 383 | 6.39 | 5 | 1.5 | 35.4 | 0.07 | 10.6 |
| LD00371 | 289652 | 4825345 | 1197 | 0.9 | 314 | 85 | 0.02 | 1.19 | 102.5 | 4.56 | 11 | 1.4 | 11.3 | 0.08 | 3.98 |
| LD00372 | 289652 | 4825346 | 1197 | 0.75 | 314 | 85 | 0.01 | 0.65 | 98.7 | 4.19 | 7 | 1.1 | 16.1 | 0.02 | 4.32 |
| LD00373 | 289665 | 4825260 | 1210 | 0.6 | 133 | 70 | 0.02 | 1.19 | 100.5 | 2.43 | 8 | 1.5 | 13.1 | 0.1 | 3.97 |
| LD00374 | 289664 | 4825259 | 1210 | 0.9 | 133 | 70 | 0.01 | 0.83 | 76.5 | 1.56 | 6 | 1.3 | 11.4 | 0.07 | 3.14 |
| LD00375 | 289663 | 4825258 | 1209 | 0.95 | 133 | 70 | 0.01 | 1.14 | 85.3 | 1.01 | 4 | 1.5 | 29.1 | 0.02 | 3.93 |
| LD00376 | 289662 | 4825257 | 1209 | 0.95 | 133 | 70 | 0.01 | 1.03 | 91.4 | 0.99 | 3 | 1.2 | 35.7 | 0.02 | 4.07 |
| LD00377 | 289663 | 4825239 | 1190 | 0.7 | 144 | 56 | 0.11 | 3.08 | 66.1 | 1.9 | 2 | 1.5 | 41.8 | 0.07 | 4.02 |
| LD00378 | 289664 | 4825238 | 1190 | 1.1 | 144 | 56 | 0.22 | 2.77 | 69.2 | 1.6 | 2 | 1 | 22.8 | 0.08 | 2.81 |
| LD00379 | 289665 | 4825237 | 1190 | 1 | 144 | 56 | 0.14 | 4.74 | 85.1 | 2.18 | 3 | 1.4 | 51.4 | 0.07 | 2.56 |
| LD00380 | 289666 | 4825236 | 1190 | 0.6 | 144 | 56 | 0.59 | 39.9 | 29.9 | 3.76 | 3 | 2.6 | 40.8 | 0.4 | 2.98 |
| LD00381 | 289662 | 4825215 | 1170 | 1 | 135 | 50 | 0.08 | 1.19 | 153.5 | 4.54 | 11 | 2 | 26.1 | 0.05 | 2.76 |
| LD00382 | 288923 | 4827867 | 1188 | 1.2 | 145 | 62 | 0.00 | 0.24 | 14.5 | 0.57 | 2 | 1.3 | 7.6 | 0.04 | 1.88 |
| LD00383 | 289927 | 4824942 | 1089 | 1.0 | 170 | 80 | 0.02 | 0.30 | 38.6 | 0.61 | 18 | 1.5 | 22.7 | 0.04 | 4.70 |
| LD00385 | 289751 | 4825111 | 1102 | 1.0 | 175 | 85 | 0.15 | 4.73 | 79.2 | 3.32 | 15 | 9.6 | 465.0 | 0.13 | 7.55 |
| LD00386 | 289736 | 4825134 | 1139 | 1.0 | 175 | 75 | 0.41 | 10.95 | 118.5 | 6.24 | 168 | 4.9 | 357.0 | 0.11 | 16.20 |
| LD00387 | 289686 | 4825189 | 1136 | 1.0 | 165 | 80 | 0.54 | 28.20 | 191.5 | 15.10 | 3 | 21.6 | 8190.0 | 0.31 | 4.82 |
| LD00388 | 289673 | 4825180 | 1114 | 1.0 | 175 | 75 | 1.02 | 10.80 | 547.0 | 5.27 | 167 | 13.1 | 3640.0 | 0.23 | 16.35 |

| Sample Number | East | North | Altitude (m) | Vein | Strike (x°) | Dip (-x °) | Au ppm | Ag ppm | As ppm | Sb ppm | Zn ppm | Cu ppm | Pb ppm | Hg ppm | Mo ppm |
|---------------|-----------|-----------|--------------|-----------|-------------|------------|--------|---------|--------|--------|--------|--------|--------|--------|--------|
| | SAD69 H19 | SAD70 H19 | | Width (m) | | | | | | | | | | | |
| LD00389 | 289664 | 4825250 | 1169 | 1.0 | 180 | 85 | 0.05 | 2.13 | 74.8 | 1.39 | 58 | 2.2 | 30.6 | 0.10 | 3.98 |
| LD00390 | 289257 | 4824828 | 1059 | 1.2 | 290 | 65 | 0.00 | 0.14 | 135.0 | 1.94 | 5 | 6.3 | 17.1 | 0.05 | 1.61 |
| LD00391 | 289663 | 4825216 | 1152 | 0.2 | 180 | 70 | 36.10 | 254.00 | 19.3 | 16.30 | 191 | 1.0 | 29.8 | 2.43 | 2.84 |
| LD00394 | 287425 | 4828417 | 1196 | 0.15 | 315 | 70 | 0.11 | 14.40 | 230.0 | 13.65 | 114 | 6.3 | 140.0 | 7.08 | 2.65 |
| LD00395 | 287416 | 4828426 | 1195 | 0.25 | 310 | 70 | 0.20 | 10.80 | 429.0 | 9.40 | 64 | 8.8 | 211.0 | 1.03 | 3.33 |
| LD00396 | 287442 | 4828396 | 1198 | 1.1 | 315 | 72 | 0.29 | 6.52 | 89.2 | 5.34 | 19 | 3.2 | 143.5 | 2.88 | 5.33 |
| LD00397 | 287448 | 4828405 | 1195 | 1.2 | 315 | 70 | 0.01 | 0.77 | 52.0 | 3.05 | 12 | 2.2 | 49.6 | 0.36 | 0.63 |
| LD00398 | 287860 | 4829129 | 1072 | 0.2 | 307 | 69 | 8.06 | 1140.00 | 81.6 | 26.00 | 16 | 5.5 | 70.9 | 2.46 | 1.36 |
| LD00400 | 287873 | 4829121 | 1069 | 0.25 | 307 | 69 | 10.85 | 2190.00 | 113.5 | 58.40 | 27 | 19.5 | 169.5 | 1.11 | 2.82 |