MEDALLION METALS

LIMITED

ASX ANNOUNCEMENT



16 January 2025 ASX:MM8

Significant Sulphides Intersected at Trilogy Deposit

Highlights

- Significant sulphides intersected in diamond drilling at the Trilogy Deposit (Trilogy), located approximately 9km south of the Kundip Mining Centre (KMC)
- The first drill hole of a three hole program (DD24MY246) intersected occurrences of semi massive to massive sulphides from approximately 95m down hole, over a continuous interval of approximately 22m
- Drilling to target the fresh portions of the discreet Cu-Au dominant and Zn-Pb-Ag dominant lodes of Trilogy for the purposes of collecting sample for metallurgical assessment
- Assays are expected to be received through March and April 2025
- Metallurgical testwork to be undertaken to investigate the potential to commercialise Trilogy at the established Forrestania processing infrastructure or through direct shipping of highgrade portions of the deposit



Figure 1: DD24MY246: massive pyrite-chalcopyrite -galena mineralisation approximately 113m downhole

Managing Director, Paul Bennett, commented:

"Forrestania infrastructure, in particular the established flotation capacity has the potential to realise value at Trilogy. Our focus is on the shallow, fresh, high-grade parts of the deposit when considering Forrestania to make a concentrate or direct shipping opportunities. The drilling visually confirms the deposit geometry and provides great encouragement in relation to assay results which are to follow. If Trilogy can yield saleable products then another significant growth opportunity presents itself for the Company and its shareholders."

Overview

Medallion Metals Limited (ASX: MM8, the Company or Medallion) is pleased to report significant visible sulphide mineralisation in diamond drilling at the Trilogy deposit (Trilogy), located approximately 9 kilometres south of the Kundip Mining Centre (KMC) (Figure 2). Trilogy is part of the broader Jerdacuttup Project (Jerdacuttup), a strategically held tenement group extending over approximately 400 square kilometres and straddling the Mount Barren Group and Hatfield formation both thought to be prospective for base and precious metals mineralisation.

Trilogy was discovered by Homestake Gold Australia Limited (**HGAL**) in 1997 and is interpreted as a sedimentary exhalative (**SedEx**) style Au-Cu-Ag-Pb-Zn deposit contained within Proterozoic aged graphitic siltstones. It is host to a substantial JORC 2012 Mineral Resource Estimate (**MRE**) of 162 koz Au, 9.7 Moz Ag, 66 kt Cu, 133 kt Pb & 77 kt Zn¹.

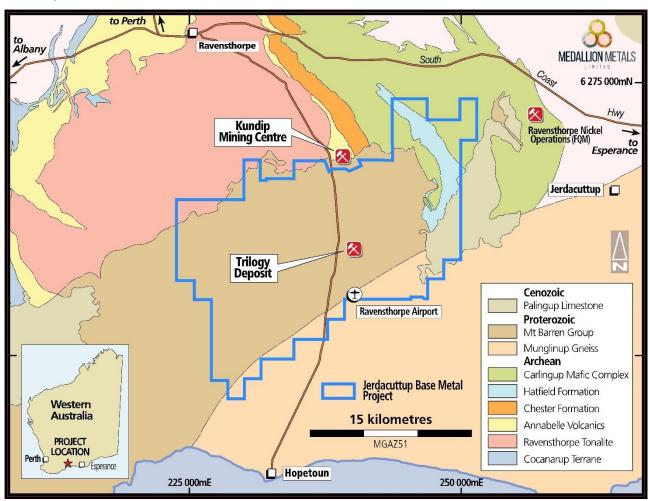


Figure 2: Trilogy deposit location within the Jerdacuttup Project.

2024-25 Drilling at Trilogy

With drilling underway at KMC, the Company has taken the opportunity to commence a three (3) hole diamond drill program at Trilogy in between crop cycles on the overlying freehold land. Two parent holes will be completed (DD24MY246 and DD24MY247) with an additional hole wedged off DD24MY247. Drill metres planned at Trilogy during this program total approximately 400 metres. The objective of the drill program is to collect sample mass for metallurgical testwork. Drilling is targeting the fresh component of the deposit and is planned to intersect the Copper-Gold dominant (**Cu-Au**) and Zinc-Lead-Silver (**Zn-Pb-Ag**) dominant geological domains. Mineralised drill core will be cut in half and then one-half core will be halved again. Quarter core sample will be assayed and

¹ Refer to the Company's Prospectus announced on the ASX on 18 March 2021 for further details regarding the MRE.

the remainder retained for metallurgical testwork to assess the ability to commercialise the fresh component of Trilogy through the established Forrestania processing plant or through direct shipping.

Following the completion of DD24MY246, the core was logged and visual results recorded as follows:

CORE INTERVAL GEOLOGICAL LOGGING (ASSAYS PENDING) ~95.50m 98.80m Grading from disseminated sulphide, pyrite (3%), chalcopyrite (1%) with disseminated and semi massive galena, (3%), +/- sphalerite into banded and blebby sulphides, pyrite (7%), galena (5%), chalcopyrite (2%), trace sphalerite. Hosted within graphitic shale. ~98.80m to 105.50m Banded, blebby and disseminated sulphides in laminated graphitic shale. Pyrite (10%), chalcopyrite (7%), galena (5%), sphalerite (1%), trace covelite. Weak to moderate silica alteration. ~105.50 - 109.80m Increasing sulphide composition, blebby, banded and, disseminated. Pyrite (30%), galena (5%), chalcopyrite (3%), sphalerite (2%) within graphitic sediment. Silica alteration decreasing. ~109.80m - 112m Semi massive sulphide bands within graphitic sediment. Pyrite (60%), galena (7%), chalcopyrite (3%), sphalerite (1%)~112m - 117m Massive sulphide. Pyrite (75%), chalcopyrite (15)%, galena (10%) ~117m - 120m Graphitic sediment with blebby pyrite (1%)

Table 1: Visual logging of DD24MY246 (assays pending).

DD24MY246 was targeting the lead-zinc dominant lode within the Trilogy deposit. The hole intersected laminated graphic shale with multiple styles of sulphide in line with the existing interpretation. The semi massive to massive sulphide zone logged between 109.80m to 117m is dominant in pyrite 60%-80%, 5%-10% galena, 3-5% chalcopyrite within this interval. These same minerals were observed in disseminated, blebby and banded form from ~70m downhole. Sulphides observed from ~70m downhole is in line with the interpretation as displayed below in Figure 3.

Reviewing core photos and geology logs from historical holes MYD217 (up dip) and MYD157 (down dip), the sulphide assemblages are comparable. Significant intercepts in fresh rock from historical drilling include;

- 54m @ 12.7% Cu, 6.2% Pb, 3.5% Zn, 0.36 Au, 73.2g.t Ag (6.3% CuEq) from 76m. (**MYD157**) (Includes 0.7m of core loss)
- 23.7m @ 0.9% Cu, 2.5% Pb, 0.4% Zn, 0.2g/t Au, 51g/t Ag (2.7% CuEq) from 51.3m (MYD217)
- 26m @ 1.5% Cu, 3.7% Pb, 3.0% Zn, 0.5g/t Au, 63g/t Ag (5.4% CuEq) from 81m (MYD217)

(Includes 3m of internal core loss, attributed zero grade for all elements)2

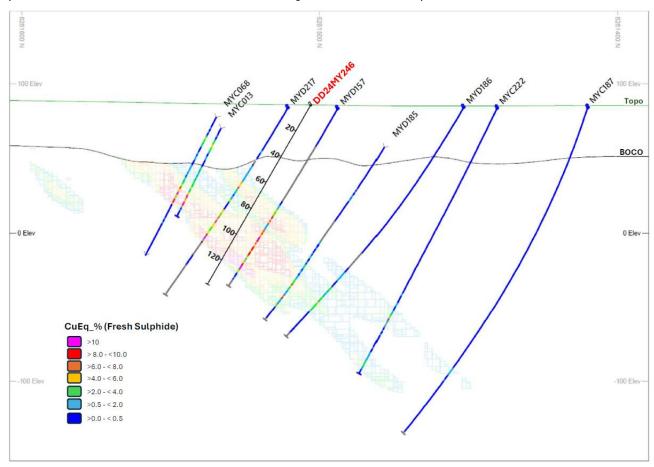


Figure 3: Cross section through Trilogy block model (CuEq %), section line shown in Annexure 3.

Trilogy Overview

The Company's primary focus is on the proposed development of KMC, part of the broader Ravensthorpe Gold Project (**RGP**). In December 2024, Medallion released the results of a Scoping Study (**Study**) that assessed underground mining of KMC deposits and processing that material through established infrastructure located at Forrestania, located approximately 170km by road from KMC. The Study results confirm a technically and

² Refer to the Company's Prospected released on 18 March 2021 for further information on historical Trilogy drill results that inform the Mineral Resource Estimate.



commercially robust development opportunity, generating strong cashflows and offering returns on investment which are attractive relative to the risks identified through the Study process³.

A key driver of upside to the Study outcomes was identified as the potential to commercialise Trilogy by taking advantage of the established flotation plant at Forrestania. Trilogy is located approximately 9km south of KMC on granted Mining Lease M74/176 and is situated on freehold land where Medallion has established access rights.

Trilogy was discovered in 1997 after Tectonic Resources NL (**Tectonic**) and Homestake Gold Australia Limited (**HGAL**) entered into a joint venture agreement over parts of the Jerdacuttup tenements in May 1996. Homestake's interest was based on the possible continuation of gold mineralisation in the Archean under Proterozoic cover at the southern end of the field (Figure 2).

Following the discovery, multiple drill programs were completed over subsequent years along with numerous phases of study work and metallurgical test work. Study work culminated in the completion of a Definitive Feasibility Study (**DFS**) in 2011 that considered development of a stand alone flotation plant at Trilogy to produce concentrates from oxide, transitional and fresh material types.

Prior to the current drill program commencing in 2024, a total of 319 drill holes for 38,444m has been completed at Trilogy by former owners. In March 2018, Medallion completed a revised JORC 2012 Mineral Resource estimate for Trilogy based on much of this previous drilling. The Trilogy Mineral Resource estimate is tabulated below with additional detail provided in Annexure 4.

Trilogy -		Au	Ag	Cu	Pb	Zn	Au	Ag	Cu	Pb	Zn
March 2018	kt	g/t	g/t	%	%	%	koz	koz	kt	kt	kt
Indicated	4,633	0.9	53.2	1.4	2.7	1.6	133	7,929	63.0	126.2	72.2
Inferred	968	1.1	60.1	0.5	0.9	0.6	35	1,869	4.4	8.3	5.5
Total	5,601	0.9	54.4	1.2	2.4	1.4	169	9,798	67.3	134.4	77.7

Table 2: Trilogy MRE.

The deposit has a strike length of 350m orientated northeast and dips at 40° to the southeast, extending downdip for 320 m. The mineralisation is broadly stratiform to the metasediments with three main sub-parallel zones that vary in width between 10 to 20 m. The lodes are separated by up to 30m of un-mineralised rock.

The above estimate contains material within the oxide and transitional weathering zones. Reported in the fresh rock only, above a 2.0% CuEq cut-off grade, the Trilogy MRE fresh subset is shown in Table 3.

Trilogy - March 2018	kt	Au g/t	Ag g/t	Cu %	Pb %	Zn %	Au koz	Ag koz	Cu kt	Pb kt	Zn kt
Indicated	3,205	1.0	60.3	1.5	3.7	2.2	101	6,211	48.3	117.3	70.2
Inferred	310	0.9	55.2	0.9	2.1	1.5	10	551	2.8	6.6	4.8
Total	3,515	1.0	59.8	1.5	3.5	2.1	111	6,761	51.1	123.9	75.0

Table 3: Trilogy MRE, fresh subset.

Refer to the Company's Prospectus announced on the ASX on 18 March 2021 for further details regarding the historical drilling and historical studies undertaken at the Trilogy deposit in addition to the Trilogy Mineral Resource Estimate completed by Medallion in 2018.

³ Refer to the Company's ASX announcement dated 17 December 2024 for further information relating to the Scoping Study.



Next Steps

DD24MY246 has been logged and will be cut and sampled in coming days. Assay results from the interpreted mineralised zone are expected to be received in March 2024. Similarly, upon completion of DD24MY247 and the subsidiary wedge hole, drilling will be logged and sampled with assay results expected in March or April 2024.

Upon receipt of assays, the Company will select sample mass for metallurgical testwork. Sample mass will also be forwarded to third parties who have expressed interest in the potential to direct purchase of material mined from Trilogy.

Further updates will be provided as information becomes available.

Drill Program Update

Medallion's 2024 drill program concluded in late December with approximately 9,500 metres of RC drilling completed at KMC. Assay results from this drilling remain outstanding for over half of this drilling and will be reported over coming weeks.

A diamond drill rig mobilised to Ravensthorpe and commenced drilling at the Trilogy deposit in late December before breaking for Christmas and the New Year. Diamond drilling recommenced at Trilogy on 8 January 2025. Upon completion of drilling at Trilogy, the diamond rig will relocate to KMC to undertake approximately 4,000 metres of in-fill drilling and to collect metallurgical sample. Metallurgical testwork on KMC samples will inform and refine engineering to support the proposed modifications to Forrestania processing plant to treat KMC production inventory.

This announcement is authorised for release by the Board of Medallion Metals Limited.

-ENDS-

For further information, please visit the Company's website www.medallionmetals.com.au or contact:

Paul Bennett
Managing Director
Medallion Metals Limited
Phone: +61 8 6424 8700

Email: info@medallionmetals.com.au

Suite 1, 11 Ventnor Avenue, West Perth WA 6005



DISCLAIMER

No representation or warranty, express or implied, is made as to the fairness, accuracy, or completeness of the information, contained in this material or of the views, opinions and conclusions contained in this material. To the maximum extent permitted by law, the Company, and its respective directors, officers, employees, agents and advisers disclaim any liability (including, without limitation any liability arising from fault or negligence) for any loss or damage arising from any use of this material or its contents, including any error or omission there from, or otherwise arising in connection with it.

PREVIOUSLY REPORTED INFORMATION

References in this announcement may have been made to certain ASX announcements, including exploration results, Mineral Resources and Ore Reserves. For full details, refer said announcement on said date. The Company is not aware of any new information or data that materially affects this information. Other than as specified in this announcement and mentioned announcements, the Company confirms it is not aware of any new information or data that materially affects the information included in the original market announcement(s), and in the case of estimates of Mineral Resources and Ore Reserves, that all material assumptions and technical parameters underpinning the estimates in the relevant announcement continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original announcement.

CAUTIONARY STATEMENTS

Certain information in this announcement may contain references to visual results. The Company draws attention to the inherent uncertainty in reporting visual results.

The Company notes there is no guarantee that the proposed transaction with IGO Ltd (Proposed Transaction) will proceed or that negotiations will result in a binding sale agreement and that there is no guarantee that if the Proposed Transaction proceeds, that it will proceed on the terms disclosed as no binding terms have been agreed between Medallion and IGO in relation to the Proposed Transaction. If the Proposed Transaction proceeds, the Company will announce the binding terms of the negotiated transaction to ASX in due course.

REPORTING OF COPPER EQUIVALENT GRADES

The Trilogy Mineral Resource is reported above a copper equivalent (Cu_Eq %) reporting cut-off grade due to the polymetallic nature of the mineralisation and the differing orientations and spatial relationships between the elements. The following prices (Australian dollars) were used in the calculation of the Cu_Eq %: copper - \$9,000/t, gold - \$1,800/oz, silver - \$25/oz, zinc - \$4,800/t, lead - \$3,500/t. These figures have been used to calculate two Cu_Eq %, the first for the oxidised component of the deposit which is dominated by copper, gold and silver mineralisation. The formula for the oxide is: Cu_Eq % (oxide) = (Cu_ppm + $(6,430*Au_ppm) + (90*Ag_ppm))/10000$, and for the mineralisation in the transitional and fresh material, the Cu_Eq % calculation is: Cu_Eq % (sulph) = $(Cu_ppm + (6,430*Au_ppm) + (90*Ag_ppm)) + (0.533*Zn_ppm) + (0.388*Pb_ppm))/10000$.

It is noted that whilst the Cu_Eq values were calculated inside the block model to assist with reporting the Mineral Resource, they are a conceptual reporting tool only, and do not yet represent a metal equivalent in the conventional sense. The calculation is disclosed for transparency in accordance with Clause 50 of the JORC Code, and the reader is cautioned that the calculated number is internal to the block model reporting processes only.

Refer to the Company's Prospectus dated 18 March 2021 for further information relating to the Trilogy Mineral Resource Estimate.

COMPETENT PERSONS STATEMENT

The information in this announcement that relates to exploration results is based on information compiled by Ms Claire Edwards, a Competent Person who is a Member the Australasian Institute of Mining and Metallurgy ("AusIMM"). Ms Edwards is an employee and security holder of the Company and has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Mineral Resources and Ore Reserves' (the "JORC Code"). Ms Edwards consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

FORWARD LOOKING STATEMENTS

Some statements in this announcement are forward-looking statements. Such statements include, but are not limited to, statements with regard to capacity, future production and grades, projections for sales, sales growth, estimated revenues and reserves, the construction cost of a new project, projected operating costs and capital expenditures, the timing of expenditure, future cash flow, cumulative negative cash flow (including maximum cumulative negative cash flow), the outlook for minerals and metals prices, the outlook for economic recovery and trends in the trading environment and may be (but are not necessarily) identified by the use of phrases such as "will", "would", "could", "expect", "anticipate", "believe", "likely", "should", "could", "predict", "plan", "propose", "forecast", "estimate", "target", "outlook", "guidance" and "envisage". By their nature, forward-looking statements involve risk and uncertainty because they relate to events and depend on circumstances that will occur in the future and may be outside the Campany's control. Actual results and developments may differ materially from those expressed or implied in such statements because of a number of factors, including levels of demand and market prices, the ability to produce and transport products profitably, the impact of foreign currency exchange rates on market prices and operating costs, operational problems, political uncertainty and economic conditions in relevant areas of the world, the actions of competitors, suppliers or customers, activities by governmental authorities such as changes



in taxation or regulation. Given these risks and uncertainties, undue reliance should not be placed on forward-looking statements which speak only as at the date of this announcement. Subject to any continuing obligations under applicable law or any relevant stock exchange listing rules, the Company does not undertake any obligation to publicly release any updates or revisions to any forward-looking statements contained in this material, whether as a result of any change in the Company's expectations in relation to them, or any change in events, conditions or circumstances on which any such statement is based.

ANNEXURE 1: 2024 Trilogy Drilling – Drill Hole Collar Table


Hole ID	Prospect	Hole Type	Depth (m)	Grid ID	Easting	Northing	RL	Dip (°)	Azimuth
DD24MY246	Trilogy	DD	138.7	MGA2020_51	241704	6261452	85	-60	300
DD24MY247	Trilogy	DD	158.8	MGA2020_51	241723	6261395	85	-60	300

ANNEXURE 2: 2024 Trilogy Drilling – Significant Results

Hole ID	Depth From (m)	Depth To (m)	Width (downhole)	Au (ppm)	Cu (ppm)	Ag (ppm)	Zn (ppm)	Pb (ppm)	Comments
		N/A						Visual results only	



ANNEXURE 3: PLAN OF TRILOGY DRILL HOLE COLLAR POSITIONS

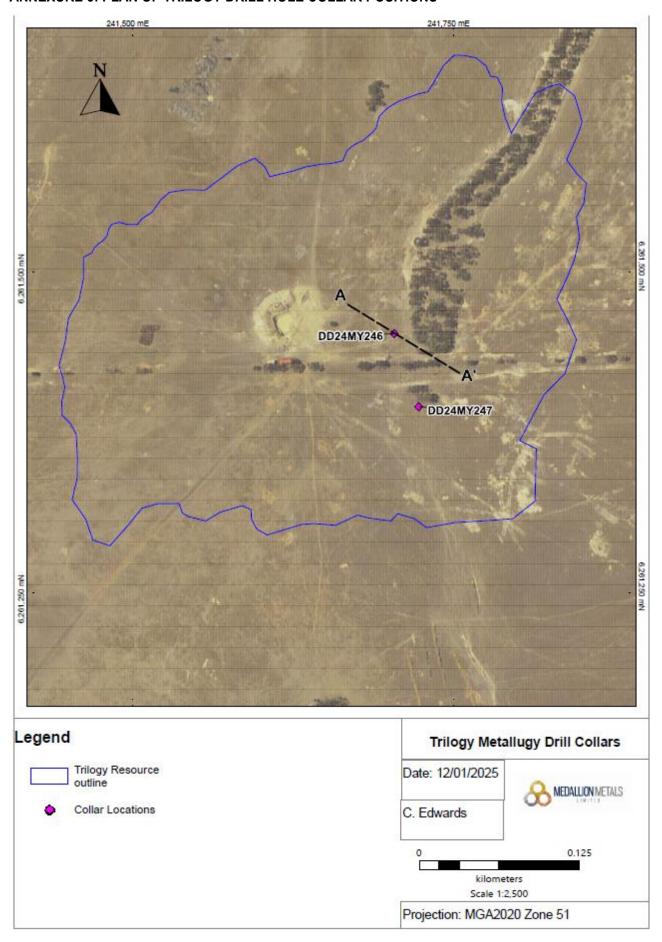



ANNEXURE 4: Trilogy Deposit Mineral Resources, March 2018

Teil	ogy - March 201	0		Au	Ag	Cu	Pb	Zn	Au	Ag	Cu	Pb	Zn
11111	ogy - March 201	0	kt	g/t	g/t	%	%	%	koz	koz	kt	kt	kt
	Oxide	Indicated	129	2.4	85.3	0.5	-	-	10	354	0.6	-	-
Open Pit		Inferred	336	1.9	71.7	0.1	-	-	21	774	0.3	-	-
(Cu_Eq > 0.5%)	Trans/Fresh	Indicated	4,476	0.8	52.5	1.4	2.8	1.6	121	7,556	62.0	126.0	72.1
		Inferred	614	0.7	54.9	0.6	1.3	0.9	14	1,084	3.8	8.2	5.3
Underground	Trans/Fresh	Indicated	28	2.8	21.0	1.3	0.6	0.4	3	19	0.4	0.2	0.1
(Cu_Eq > 2.5%)		Inferred	18	1.5	19.7	1.4	0.3	1.1	1	11	0.3	0.1	0.2
Sub-total		Indicated	4,633	0.9	53.2	1.4	2.7	1.6	133	7,929	63.0	126.2	72.2
Sub-total		Inferred	968	1.1	60.1	0.5	0.9	0.6	35	1,869	4.4	8.3	5.5
Total			5,601	0.9	54.4	1.2	2.4	1.4	169	9,798	67.3	134.4	77.7

The preceding statement of Mineral Resources conforms to the JORC Code. All tonnages are dry metric tonnes. Minor discrepancies may occur due to rounding to appropriate significant figures.



ANNEXURE 5: Trilogy 2024 Drilling JORC Table 1

Section 1, Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	 Nature and quality of sampling (e.g., cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g., 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g., submarine nodules) may warrant disclosure of detailed information. 	 Diamond Drill holes (DDH) at Trilogy were completed by Medallion Metals which followed protocols and QAQC procedures as per industry best practice. Core samples were collected with a diamond rig drilling PQ (83mm) from base of mud rotary pre-collar within weathered and saprolite material before casing off within hard rock and completing the hole with HQ3 (63mm) diameter core. All DDH are reconstructed and orientated, logged geologically, and marked up for assay at a minimum sample interval of 0.3m to ensure adequate sample weight and a maximum sample interval of 1m, constrained by geological boundaries. After logging and photographing, drill core is cut in half with a diamond saw, with one half halved again with a diamond saw. A quarter of the drill core is sent to the laboratory for assay. The remaining core is retained for metallurgical testwork. Sample weights range from 1-3kg. All Diamond core is stored in industry standard core trays and racks and is labelled with the drill hole ID and core intervals. The independent laboratory pulverises the entire sample for analysis as described below; Industry prepared independent standards are inserted approximately every 1 in 20 samples. The independent laboratory then takes the samples which are dried, split, crushed, and pulverized prior to analysis as described below. Sample sizes are considered appropriate for the material sampled. Samples are considered representative and appropriate for this type of drilling. Core samples are appropriate for use in a resource estimate.
Drilling techniques	Drill type (e.g., core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g., core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	DDH were drilled from surface by Topdrill Pty Ltd (Topdrill), competing a mud rotatory pre collar to a pre determined depth away from the mineralisation interpretation. The pre collar was followed by PQ (83mm) diameter in weathered, broken ground before casing off and drilling HQ3 (63mm).
Drill sample recovery	 Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse 	 Core recovery is measured for each drilling run by the driller and then checked by the Company's geological team during the mark up and logging process. No assays have been received at the time of reporting to determine potential sample bias.



	material.	
Logging	 Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	 Geology logging is undertaken from the commencement of core,recording lithology, oxidation state, metadata, alteration, and veining. Structural logging, recovery of core, hardness, and Rock Quality Designation (RQD's) are all recorded from drill core. Metallurgical studies have been completed on the Trilogy deposit demonstrating that within the fresh domain, copper, gold, silver, lead and zinc can be recovered using industry standard process techniques. The logging process is appropriate to be used for Mineral Resource Estimates and mining studies. General logging data captured are; qualitative (descriptions of the various geological features and units) and quantitative (numbers representing structural amplitudes, vein percentages, rock mass quality and hardness). Core is photographed in both dry and wet form. All drillholes are logged in full.
Sub-sampling techniques and sample preparation	 If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	 Core samples were collected with a diamond drill rig drilling PQ or HQ3 core. After logging and photographing, diamond core is cut in a Discoverer® Automatic Core Cutting Facility using a Corewise Auto Core Saw. Diamond core is cut in half with a diamond saw, with one half halved again with a diamond saw. A quarter of the drill core is sent to the laboratory for assay. The remaining core is retained for metallurgical testwork. Holes are sampled over mineralised intervals to geological boundaries on a nominal 1m basis with a minimum of 0.3m and maximum of 1m. Field QAQC procedures involve the use of certified reference material (CRM) inserted approximately every 1 in 20 samples. Each sample is dried, split, crushed, and pulverised. Sample sizes are considered appropriate for the style of mineralisation (massive and disseminated sulphide veins), the thickness and consistency of the intersections, the sampling methodology and percent value assay ranges for the primary elements at Trilogy. Core samples are appropriate for use in a Mineral Resource Estimate.
Quality of assay data and laboratory tests	 The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (e.g., standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e., lack of bias) and precision have been established. 	No assay results have been received at the time of reporting.



Verification of sampling and assaying	 The verification of significant intersections by either independent or alternative company personnel. The use of twinned drillholes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	 No assay results have been received at the time of reporting. No twinning was completed.
Location of data points	 Accuracy and quality of surveys used to locate drillholes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	 DDH collar locations are located by handheld GPS to an accuracy of +/- 3m. Drill holes completed by Topdrill were surveyed using IMDEX Reflex Gyro Sprint IQ continuous Rate Gyro tool. Azimuths are determined using an Reflex TN14 Gyrocompass (azi aligner) which has an Azimuth Accuracy of 0.5° sec latitude. Downhole surveys are uploaded to the IMDEX HUB IQ, a cloud-based data management program where surveys are validated and approved by the geologist before importing into the database. The grid projection is GDA20/ MGA Zone 51. Diagrams and a location table are provided in the report.
Data spacing and distribution	 Data spacing for reporting of Exploration Results. Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	 The DDH drill program at Trilogy consists of two separate parent holes drilled for the purpose of collecting metallurgical sample. A secondary child hole was wedged off one of the parents to collect additional sample mass. The parent holes are drilled between existing drilling that is spaced ~20m x 20m. All holes are geologically logged and provide a strong basis for geological control and continuity of mineralisation. No Mineral Resource or Ore Reserve estimations are presented. No assay results have been received at the time of reporting.
Orientation of data in relation to geological structure	 Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	 The orientation of drilling at Trilogy is approximately perpendicular to the strike and dip of the mineralisation where known. Sampling is therefore considered representative of the mineralised zones. The chance of bias introduced by sample orientation is considered minimal.
Sample security	The measures taken to ensure sample security.	 Samples are collected by Company personnel in calico bags, which are in turn placed in polyweave bags. Polyweave bags are transferred into bulka bags for transport which are secured on wooden pallets and transported directly via road freight to the laboratory with a corresponding submission form and consignment note. The laboratory checks the samples received against the submission form and notifies the Company of any missing or additional samples. Once the laboratory has completed the assaying, the pulp packets, pulp residues and coarse rejects are held in the laboratory's secure warehouse. On request, the pulp packets are



		returned to the site warehouse on secure pallets where they are stored.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	 An internal review of data quality will be conducted on the receipt of assay data. No external audits or reviews have been undertaken at this stage of the programme.

Section 2, Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	 Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	 The Trilogy prospect is situated within Mining Lease 74/176. The tenement is wholly owned by Medallion Metals Ltd. There are no known heritage or environmental impediments to development over the lease where significant results have been reported. The tenement is in good standing with the Western Australian Department of Mines, Industry Regulation and Safety. No known impediments exist to operate in the area.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	 Mineralisation styles hosted in the Mount Barren Group of the Palaeoproterozoic-age Barren Basin are dominated by a spectrum of variably developed silver-lead-zinc and spatially related copper-gold mineral occurrences that collectively display features characteristic of sediment-hosted massive sulphide deposits. The type example and largest is the Trilogy deposit discovered in 1997 by Homestake Gold of Australia (HGAL) following drilling of a surface gold and base metal anomaly. Numerous targets were defined during the 1990s using a combination of geophysical and surface geochemical sampling techniques by Pan Australian and Delta Gold, resulting in the identification of a multitude of prospects many of which still remain untested by drilling. Prior to this current DDH program, a total of 319 drill holes for 38,444m has been completed at Trilogy by the former owners HGAL and Tectonic Resources (TTR) between 1997 and 2010. Historical drilling is on a nomimal 40m x 40m spacing. In March 2018, Medallion completed a revised JORC 2012 Mineral Resource estimate for Trilogy based on much of this previous drilling, reporting an Indicated and Inferred Resource of 5.6 Mt grading at 2.4% Pb, 1.4% Zn, 1.2% Cu, 0.9 g/t Au and 54.5 g/t Ag. The Trilogy Mineral Resource estimate is tabulated in Annexure 4. Refer to the Company's Prospectus announced on the ASX on 18 March 2021 for further details regarding the historical drilling undertaken at the Trilogy deposit and the Trilogy Mineral Resource Estimate.
Geology	Deposit type, geological setting and style of mineralisation.	Trilogy is interpreted to be a Sedimentary Exhalative (SedEx) base metal



		deposit with three main stratiform lodes that strike 350m northeast and dip 40° to the southeast extending for 320m down-dip. • Main lodes (A, B and C) vary in thickness between 10m-20m and can be
		separated by up to 30m of un-mineralised rock.
		Mineralisation is broadly conformable to interbedded graphitic shales and
		siltstones of the Kybalup Schist of the Mesoproterozoic Mt Barren Group.
		Sulphides are predominantly galena-sphalerite-chalcopyrite-pyrite and occur as massive to matrix style.
Drillhole	A summary of all information material to the understanding of the exploration	Drill hole location and directional information is provided within the body of the
Information	results including a tabulation of the following information for all Material drillholes:	report and within Annexure 1.
	o easting and northing of the drillhole collar	All DDH drilling is included in the plan view maps.
	 elevation or RL (Reduced Level – elevation above sea level in metres) of the drillhole collar 	
	o dip and azimuth of the hole	
	o down hole length and interception depth	
	o hole length.	
	• If the exclusion of this information is justified on the basis that the information is	
	not Material and this exclusion does not detract from the understanding of the	
	report, the Competent Person should clearly explain why this is the case.	
Data aggregation	• In reporting Exploration Results, weighting averaging techniques, maximum	No exploration results reported for diamond drilling.
methods	and/or minimum grade truncations (e.g., cutting of high grades) and cut-off grades	No metal equivalent values reported for diamond drilling.
	are usually Material and should be stated.	
	Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low grade results, the procedure used for such aggregation.	
	should be stated and some typical examples of such aggregations should be	
	shown in detail.	
	The assumptions used for any reporting of metal equivalent values should be	
	clearly stated	
Relationship	These relationships are particularly important in the reporting of Exploration	The mineralisation within diamond drill holes is interpreted to be approximately
between	Results.	perpendicular to the strike of mineralisation.
mineralisation	• If the geometry of the mineralisation with respect to the drillhole angle is known,	All mineralised intervals reported are approximate, but are not true width, as
widths and	its nature should be reported.	drilling is not always perpendicular to the strike/dip of mineralisation.
intercept lengths	If it is not known and only the down hole lengths are reported, there should be a close statement to this effect (e.g., 'down hole length true width not known').	Reported mineralised intersections are estimates. Confirmation of true widths will only be possible when all regulate are received, and finel geological.
	clear statement to this effect (e.g., 'down hole length, true width not known').	will only be possible when all results are received, and final geological interpretations have been completed.
		No assay results have been reported.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should	Plans and sections are provided in the main body of the report.
Diagrams	be included for any significant discovery being reported. These should include,	Than and sections are provided in the main body of the report.
	but not be limited to a plan view of the drillhole collar locations and appropriate	
	sectional views.	
	·	



Balanced reporting	 Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced avoiding misleading reporting of Exploration Results. 	
Other substantive exploration data	 Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	·
Further work	 The nature and scale of planned further work (e.g., tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	collect metallurgical testwork sample mass.