

DRILLING CONFIRMS 500M (1,600FT) EXTENSION OF GOLD ZONE AT GOLDEN GATE NORTH - HORSE HEAVEN USA

***GOLD INTERCEPTS OVER 200M WIDTH, 500M LONG CONFIRMS GOLD ZONE
GOLD ASSAYS INCLUDE 324M (1,060ft) @ 0.5 G/T AU, 8.7M @ 1 G/T AU***

HIGHLIGHTS

- 🚩 **Gold assays returned from first three drill holes at Golden Gate North:** Gold assay results from first three drill holes this season at Golden Gate North at the Horse Heaven Project in Idaho USA, comprising HH-GG26-031C, 032C and 039C.
- 🚩 **Wide intercepts of almost continuous gold mineralisation:** Gold mineralisation in drill hole assays extends from surface almost to the bottom of two drillholes, HH-GG26-031C & 032C, (Figure 1,2) with best gold intercepts:

HH-GG26-032C: **324 metres (1,060 ft) @ 0.49 g/t gold (Au)** from surface, with best gold intervals of:

 - **92.4 m (303 ft) @ 0.54 g/t Au** from 215.7m downhole;
 - **25.5 m @ 0.82 g/t Au** from 190.2m;
 - **8.7 m @ 1.05 g/t Au** from 62.5m;

HH-GG26-031C: **322 metres (1,055 ft) @ 0.37 g/t Au** from surface, with best gold interval of:

30.8m @ 0.88 g/t Au from 76.2m downhole;

including **5.7m @ 1.15 g/t Au** from 140.1m.

HH-GG26-039C: **134.2 m (440 ft) @ 0.40 g/t Au** from surface, with best gold intervals of:

 - **51.7 m (170 ft) @ 0.53 g/t Au** from 82.5m downhole.
- 🚩 **Results confirm a mineralised gold zone over 500m (1,600ft) at Golden Gate North open-ended:** Gold results in reported drillholes confirm 2025 drill results in HH-GG25-005C and 006C identifying significant gold mineralisation extending over a true length of at least 500 metres (1600ft), up to HH-GG26-039C. Mineralisation is open in both directions, and at least 200 metres (650ft) wide and a true depth of at least 300 metres (990ft) at Golden Gate North (Figures 1,2). Prior gold in soil sample results potentially extend mineralisation a further 500m northwards and also to the south (Figure 5). Drill results extend mineralisation down dip and support prior reported gold intercepts in a 2025 drill hole HH-GG25-006C from the same drill site, of:

 - **15.6m @ 1.10 g/t Au** from 166.7m and **133.7m @ 0.55g/t Au** from 376.5m (see ASX announcement 17 February 2026).
- 🚩 **Further gold drill results awaited immediately to the north to define gold mineralisation:** Assays pending with incomplete results for gold in drill holes at both Golden Gate North and South.
- 🚩 **Results anticipated soon on tungsten mineralisation at Golden Gate.**

Resolution Minerals Ltd (ASX: RML; NASDAQ: RML) ("Resolution" or the "Company") is pleased to report gold assays from three drill holes at Golden Gate North, confirming a significant gold mineralised zone at RML's 100% owned Horse Heaven Antimony-Tungsten-Gold-Silver Project ("Horse Heaven"), Idaho, USA.

The results confirm and extend the gold mineralised zone over a true length of at least 500 metres (1,600ft), open ended to the NE and SW a further 500m, and at least 200 metres (650ft) wide and open at depth for at least 300 metres (990ft) at Golden Gate North (Figure 1, 2). Gold assay results reported are from the first two fanned drill holes this season at Golden Gate North, HH-GG26-031C and 032C, mineralised with gold from surface. Results support prior reported gold intercepts in drill hole HH-GG26-006C (Figure 2,3). HH-GG26-039C is almost 500m further north of the other two drillholes.

Best gold grade intercepts from drill holes HH-GG26-031C and 032C include:

Drill hole HH-GG26-031C: 324 metres (1,060 ft) @ 0.49 g/t Au from surface to 324m with best intervals:

8.2 m @ 0.50 g/t gold (Au) from 15.4m downhole;
Including: **1.0m @ 1.11 g/t Au** from 15.4m
Including: **1.0m @ 1.00g/t Au** from 22.66m
4.8m @ 0.75 g/t Au from 71.4m
30.8m @ 0.88 g/t Au from 76.2m
Including: **5.7m @ 1.15 g/t Au** from 140.1m
Including: **2.0m @ 1.65g/t Au** from 149.35m

Drill hole HH-GG26-032C: 322 metres (1,055ft) @ 0.37 g/t Au from surface to 322m with best intervals:

31.5 m @ 0.24 g/t gold (Au) from surface;
Including: **3.9m @ 0.56 g/t Au** from 11.2m downhole;
2.6m @ 0.70 g/t Au from 38.2m
8.65m @ 1.05 g/t Au from 62.5m downhole
Including: **2.55m @ 1.48 g/t Au** from 63.5m
46.0m @ 0.40 g/t Au from 71.15m downhole
Including: **6.8m @ 0.69 g/t Au** from 94.55m
Including: **4.4m @ 0.83 g/t Au** from 95.6m
39.6m @ 0.55 g/t Au from 135.9m downhole
Including: **2.1m @ 1.37 g/t Au** from 138.5m
Including: **7.1m @ 0.78 g/t Au** from 155.55m
25.5m @ 0.82 g/t Au from 190.2m downhole
Including: **1.0m @ 1.79 g/t Au** from 195.3m
Including: **1.5m @ 1.37 g/t Au** from 201.3m
92.4m @ 0.54 g/t Au from 215.65m downhole
Including: **6.95m @ 0.70 g/t Au** from 223.3m
Including: **15.5m @ 0.87 g/t Au** from 250.4m
Including: **1.5m @ 1.6 g/t Au** from 256.6m
Including: **1.4m @ 1.2 g/t Au** from 298.6m
6.1m @ 0.20 g/t Au from 318.2m downhole

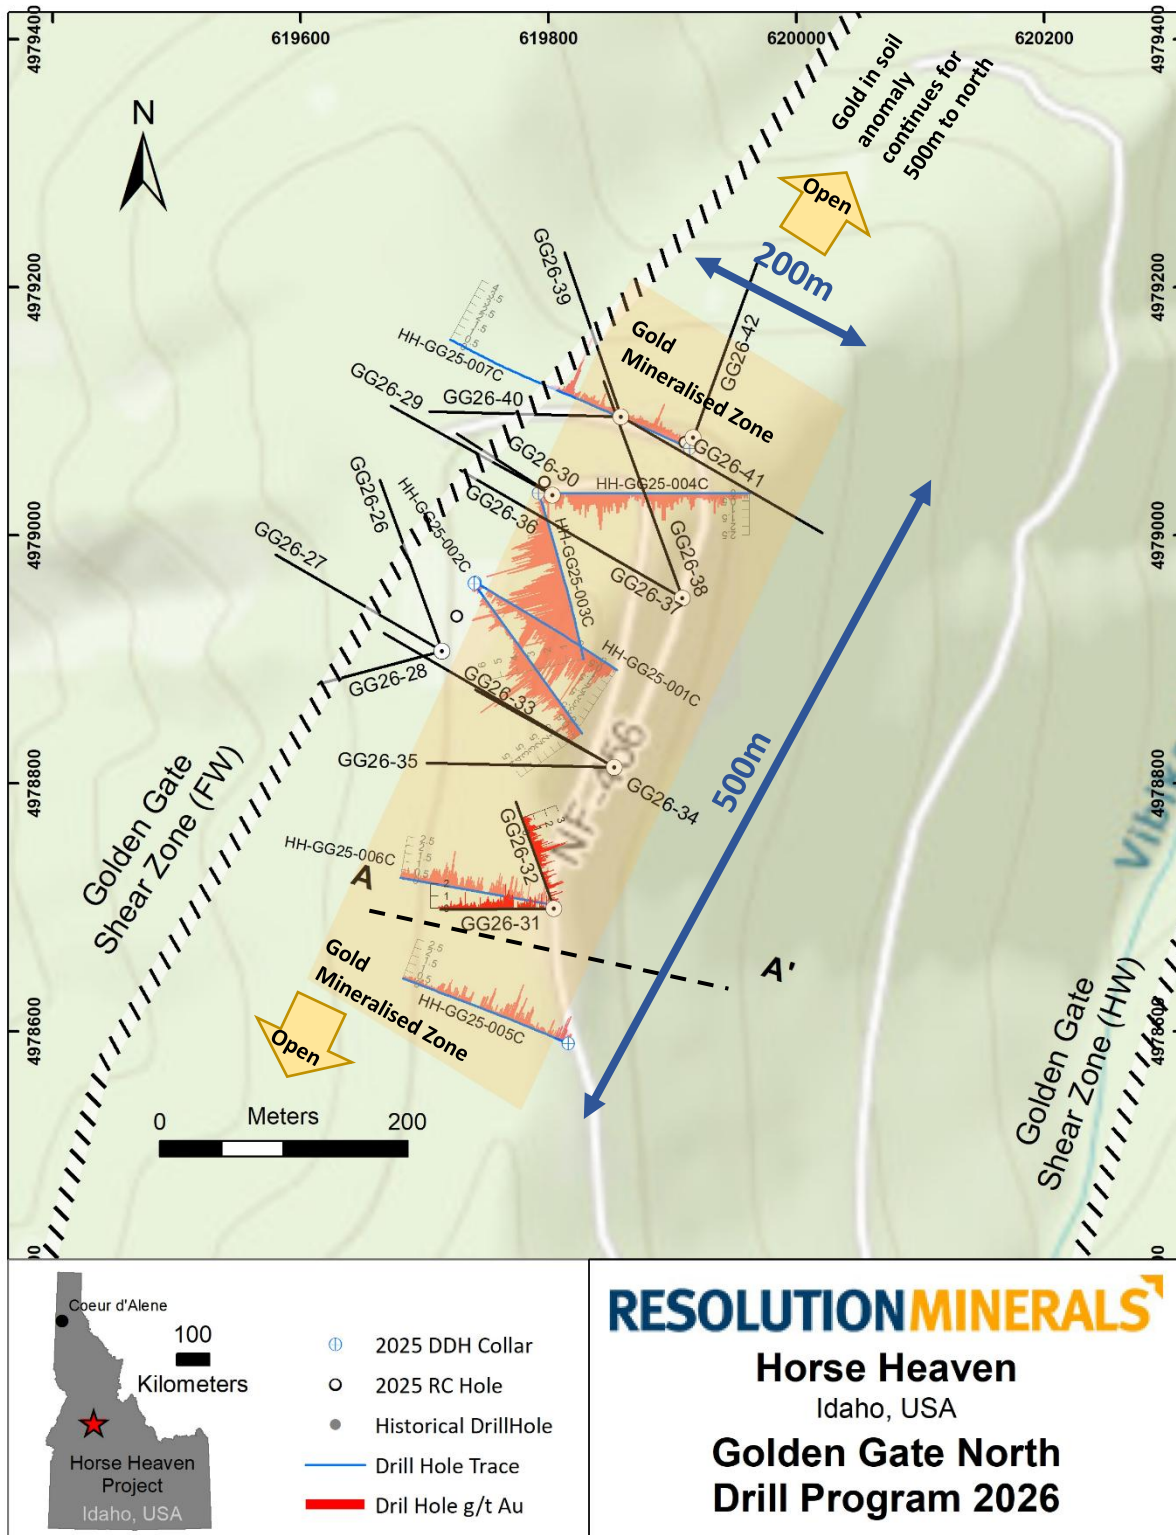


Figure 1: Resolution's Golden Gate North – Location of drill holes 2026 and 2025 with reported drill hole gold assays for drill holes in 2026 and 2025 as histograms (red) and location of Cross section in Figure 2, with interpreted gold mineralised zone (Pale yellow) and interpreted fault/shear zones. Note the zone is open ended to NE and SW, with a gold-in-soil anomaly extending a further 500m to the north (see Figure 5).

Best gold grade intercepts from drill hole HH-GG26-039C include:

Drill hole HH-GG26-039C: 134.2 m (440 ft) @ 0.40 g/t Au from surface to 134.2m with best intervals:

29.7m @ 0.43 g/t Au from 6.1m downhole

28.8m @ 0.36 g/t Au from 42.7m;

51.7 m @ 0.53 g/t Au from 82.5m.

Drill hole HH-GG26-032C also contained a significant silver intercepts:

2.45m @ 28 g/t Ag (70.15 m – 72.6 m)

Results confirm and extend gold mineralisation from 2025 drilling at Golden Gate North

Results confirm 2025 drill results and extend the gold mineralised zone down dip of last season's 2025 discovery drill holes, to a depth of 300m (990ft), at Golden Gate North, as reflected in previously reported drillholes HH-GG26-005C and 006C, as detailed below *(see ASX announcement 2 December 2025 and 17 February 2026)*.

Significant gold mineralisation is open ended and extends over a length of at least 500 metres (1600ft) at least 200 metres (650ft) wide and at least 300 metres (990ft) deep at Golden Gate North (Figs. 1,2,3). Prior gold in soil sample results potentially extend mineralisation a further 500m northwards and a similar distance to the south (Figure 5).

Gold mineralisation is open down dip of the lowest drill intercepts at an elevation of 1650m (5400ft), 350 meters (1150ft) vertically below surface. The remaining drill holes to be returned from Golden Gate North from the assay laboratory were designed to infill the gaps in the drill information and will increase our confidence and knowledge of the gold-tungsten system at Golden Gate North.

Significant previously reported drill hole assays include:

HH-GG25-001C: 197.5m @ 1.26 g/t Au from 34.0m (open ended);

HH-GG25-002C: 265.2m @ 0.60 g/t Au from surface (open ended);

HH-GG25-003C: 253.0m @ 1.50 g/t Au from surface (open ended);

HH-GG25-004C: 240.8m @ 0.64 g/t Au from surface (open ended);

HH-GG25-005C: 283.5m @ 0.36 g/t Au from surface (open ended);

HH-GG25-006C: 103.5m @ 0.37/t Au from surface

15.6m @ 1.10 g/t Au from 166.7m

133.7m @ 0.55g/t Au from 376.5m (open ended); and

HH-GG25-007C: 207.2m @ 0.42 g/t Au from surface.

(see ASX announcement 2 December 2025 and 17 February 2026).

All reported intervals are downhole lengths and do not necessarily represent true widths.

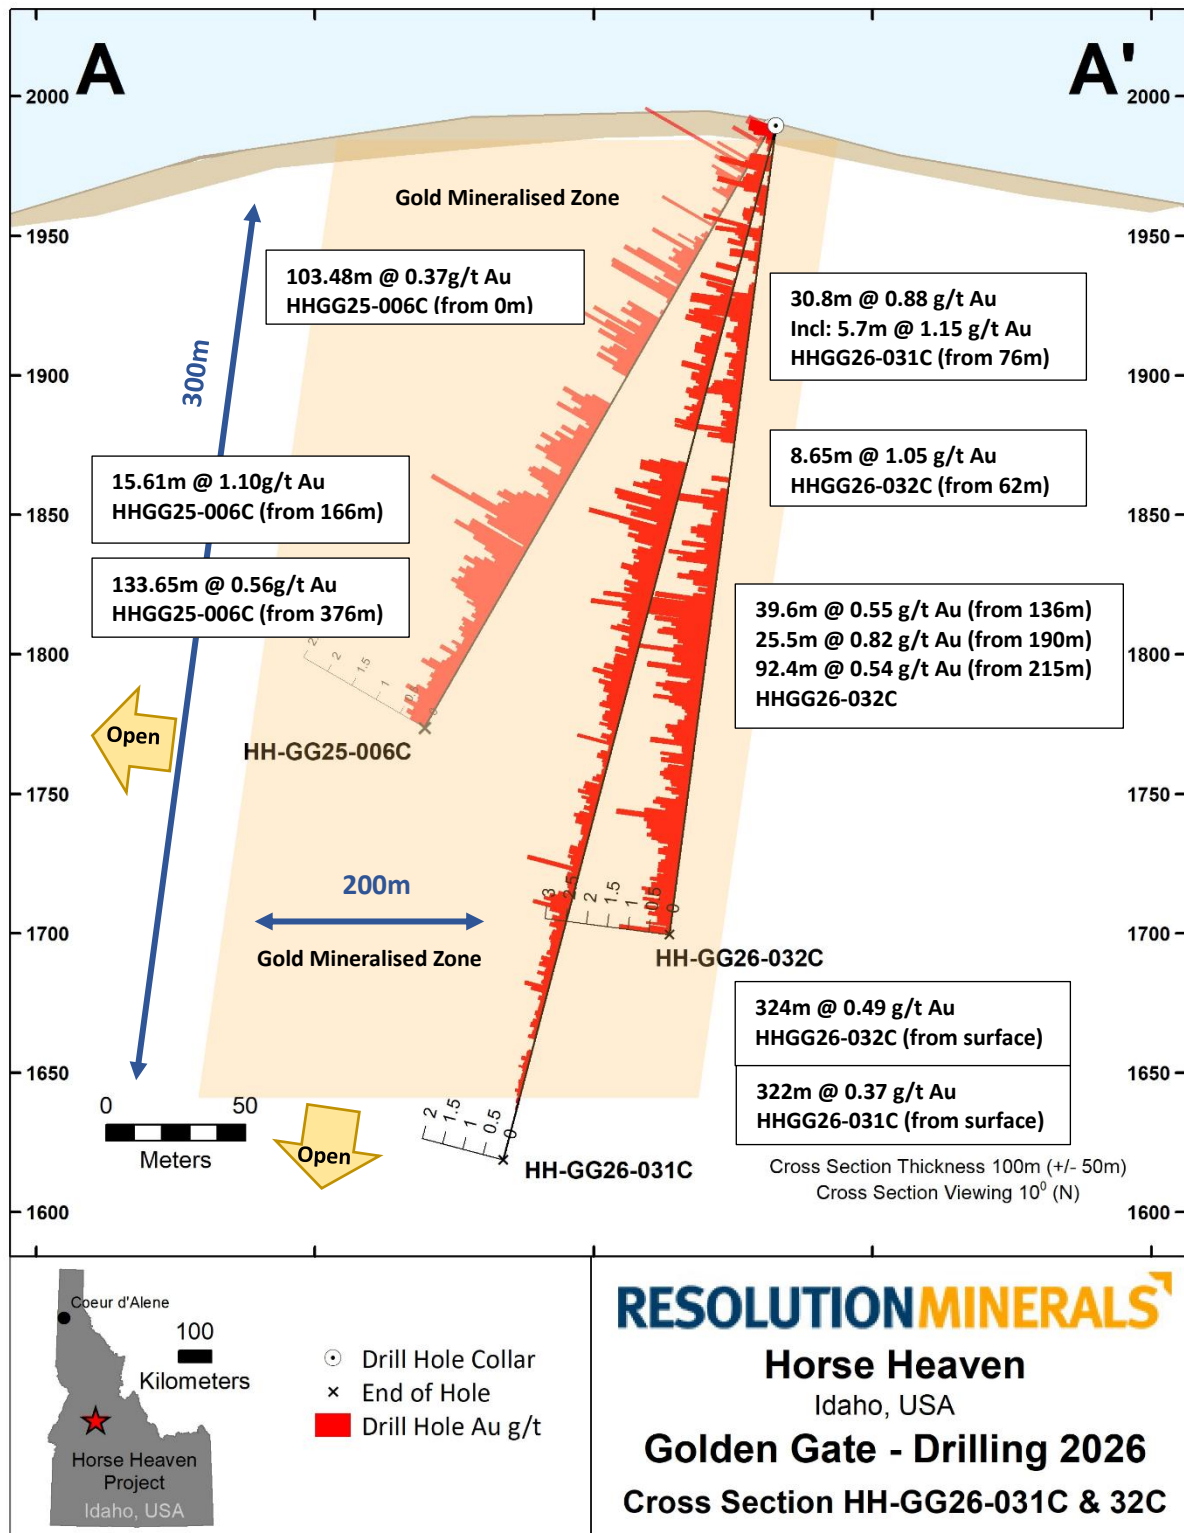


Figure 2: Resolution's Golden Gate North – Cross section of two reported drill holes with gold assays as histograms in red, overlain on 2025 drillhole HHGG25-006, with significant gold intervals and interpreted gold mineralised zone. Location of cross section is on Figures 1,5.

Results indicate an extension of gold mineralisation between Golden Gate North and South

Results indicate a potential extension of the gold mineralised zone at Golden Gate North towards the new gold discovery at Golden Gate South, more than 2000 metres (6500ft) further south as indicated in the gold-in-soil anomaly (Figure 5). This 2026 season's drilling intercepted wide zones of gold mineralisation downhole at Golden Gate South, including the following previously reported intercepts (see ASX announcement 24 August 2026 and 15 September 2026), including:

Drill hole HH-GG26-006C: **3.77 metres @ 1.53 g/t Au** from 298.8m downhole;

Including: **1.29m @ 4.01 g/t Au** from 298.8m.

Drill hole HH-GG26-005C: **10.2 m @ 1.83 g/t Au** from 58.05m downhole

Including: **3.9 m @ 3.19 g/t Au** from 58.05m downhole;

Drill hole HH-GG26-003C: **305.7 metres @ 0.64 g/t Au** from surface;

Including: **17.25m @ 1.19g/t Au** from 264.85m downhole;

Drill hole HH-GG26-002C: **32.6m @ 0.49 g/t Au** from surface; and

87.9m @ 0.52 g/t Au from 48.97m-136.84 m downhole

Drill hole HH-GG26-001C: **49.5m @ 0.58 g/t Au** from surface.

Craig Lindsay, Resolution's CEO of US Operations, stated: *"The assay results continue to strengthen a major zone of gold mineralisation at Golden Gate North. Additional results are pending from both Golden Gate South and Golden Gate North, which may better define the dimensions of the gold mineralised zones and will increase our confidence of last year's gold discovery. The gold story continues to grow rapidly at Golden Gate, in what is developing into a large gold system. On a parallel basis, we are advancing our understanding of the tungsten opportunity at Golden Gate, and we expect to be releasing tungsten assays shortly."*

Objectives of the 2026 Drill Program

The objective of RML's large 2026 Golden Gate Drill Program was to target and define the scale and extent of tungsten and gold mineralisation at Golden Gate. The 2026 drill program was recently completed, with 42 diamond core holes drilled for 12,236m (40,144 ft) Golden Gate Horse Heaven Project. Drilling was undertaken at Golden Gate North and Golden Gate South (located approximately 2km south of Golden Gate North and a target that has not been the subject of prior drilling). The average hole depth in the program was approximately 290m. Golden Gate is located within RML's Horse Heaven Antimony-Tungsten-Gold-Silver Project in Idaho, USA, immediately adjacent to the recently permitted Perpetua Resources' Stibnite Gold Project. Drilling planned for 2027, which is currently being permitted, will be focused on testing a 2,000m corridor which connects Golden Gate North and South, testing open-ended mineralisation to the north of Golden Gate North and additional in-fill drilling.

Initial tungsten assays and further gold results awaited to define mineralisation

Assays are incomplete for over 32 drill holes that targeted a combination of both gold and tungsten mineralisation at Golden Gate North and Golden Gate South.

Geological Summary of Three Reported Drill holes from Golden Gate North

Two drill holes, Drill hole HH-GG26-031C and Drill hole HH-GG26-032C, were drilled as fan-holes from the same drill platform as a 2025 drill hole, Drill hole HH-GG25-06C at the southern end of a gold mineralised zone. Drill hole HH-GG26-039C was drilled at the northern end of a gold mineralised zone. All holes intersected variably sheared and faulted Cretaceous granodiorite of the Idaho Batholith. Alteration is widespread and consists principally of weak to strong silicification and sericite-pyrite alteration of mafic minerals, and sericite-clay alteration of feldspars. Pyrite occurs as a replacement of primary minerals and within quartz-pyrite veins and shear seams. Vein density and pyrite content generally increase within the more intensely deformed and silicified intervals, supporting the interpretation that the Golden Gate Shear Zone provided a pathway for hydrothermal fluids. Gold mineralisation appears to be present with arsenopyrite and pyrite in quartz veins and in gouge shear zones in each drill hole. Anomalous silver assays appear to be associated with base metals.

Drill hole HH-GG26-031C intersected zones of strong silicification with sericite and mafics altered to sericite with pyrite until 345.5m below which altered to sericite only through the end of the hole. Pyrite concentration is 1-2% for most of the hole. Shearing evident until 249m then decreases. Elevated pyrite content is associated with stronger shearing with an example at 246.5-249m of pyrite concentration up to 3% until 249m.

Drill hole HH-GG26-032C intersected variable with mafics altered to white mica +sericite and feldspars variably alter to sericite with clay concentrated in fault zones+ small structures. Weak to moderate shearing/faulting 83 m - 86 m and 93 m -98 m with a Fault Breccia from 221.2 m – 222.9 m with 1-2% pyrite + arsenopyrite at 251-253.5m and 315-333m.

Drill hole HH-GG26-039C intersected repeated brecciated zones, less than 1m wide, with abundant iron oxides +clay rich matrix to 85m depth. Following this, more silicification without oxidation and appears mineralised until 162m depth where an andesite dyke is present. Below this, alteration changes to weak sericite alteration.

All reported intervals are downhole lengths and do not necessarily represent true widths. The presence of alteration, silicification, quartz veining and visible pyrite is based on geological observations and does not indicate economic mineralisation.



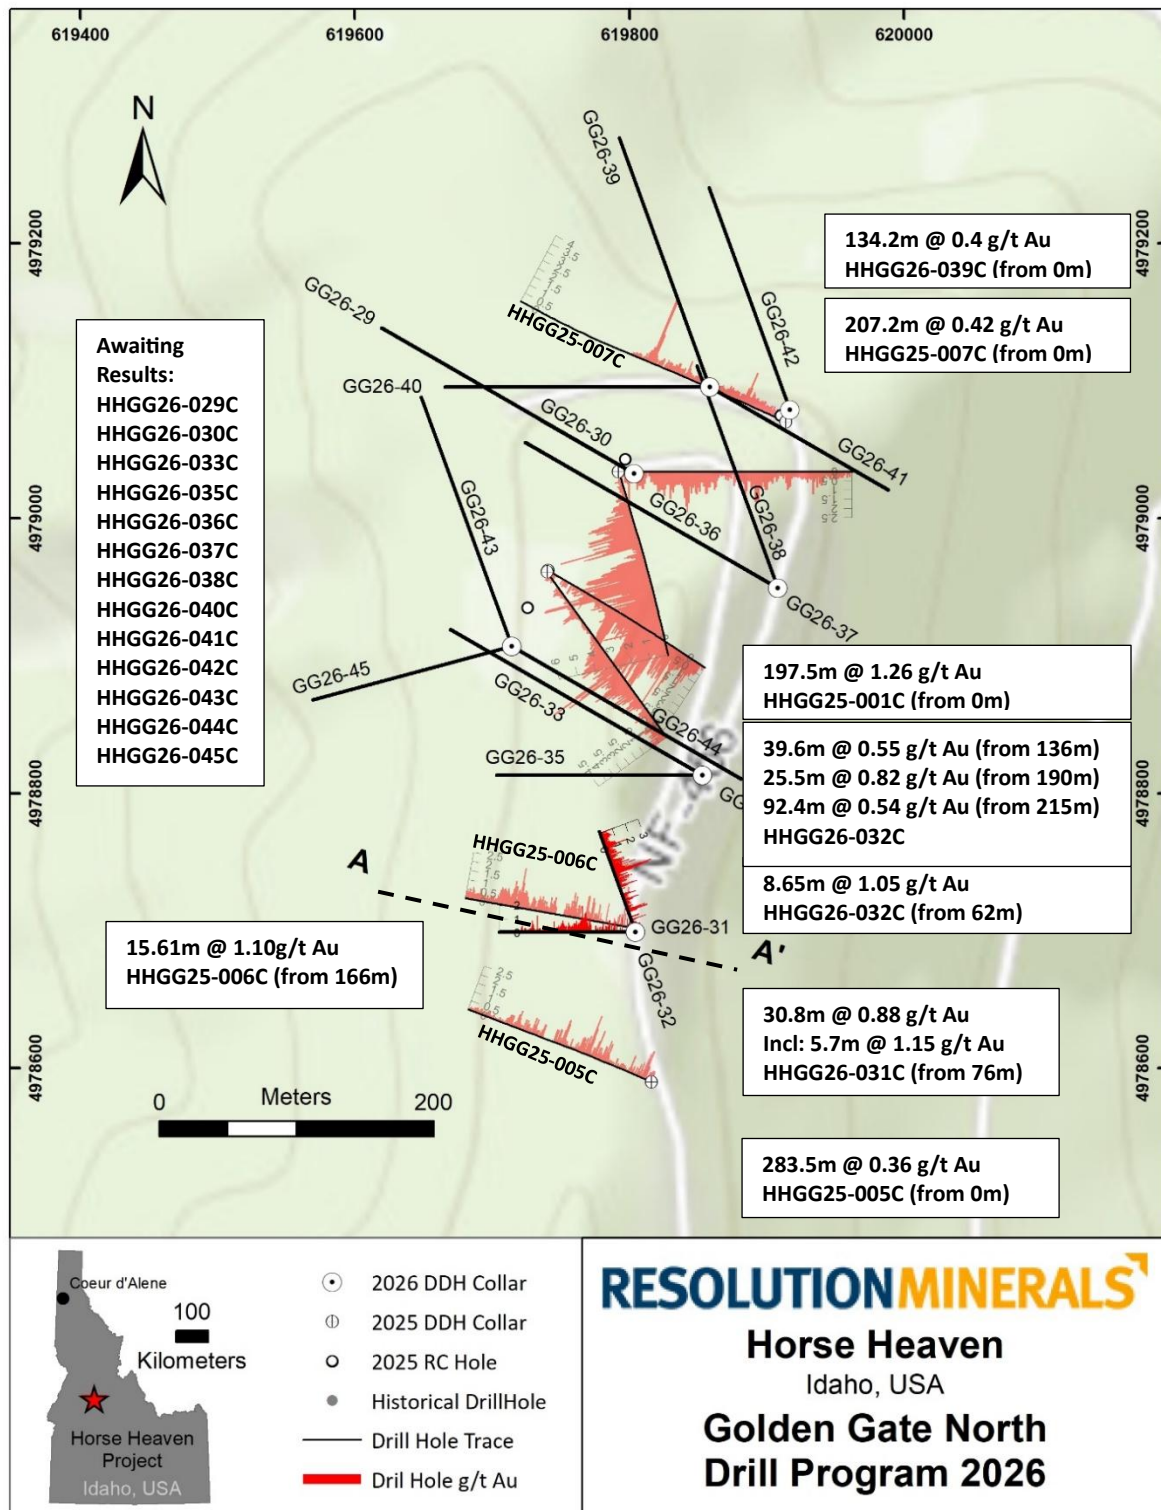


Figure 3: Resolution's Golden Gate North – Location of drill holes 2026 with reported drill hole gold assays for drill holes in 2026 and 2025 as histograms (red) and location of Cross section in Figure 2.

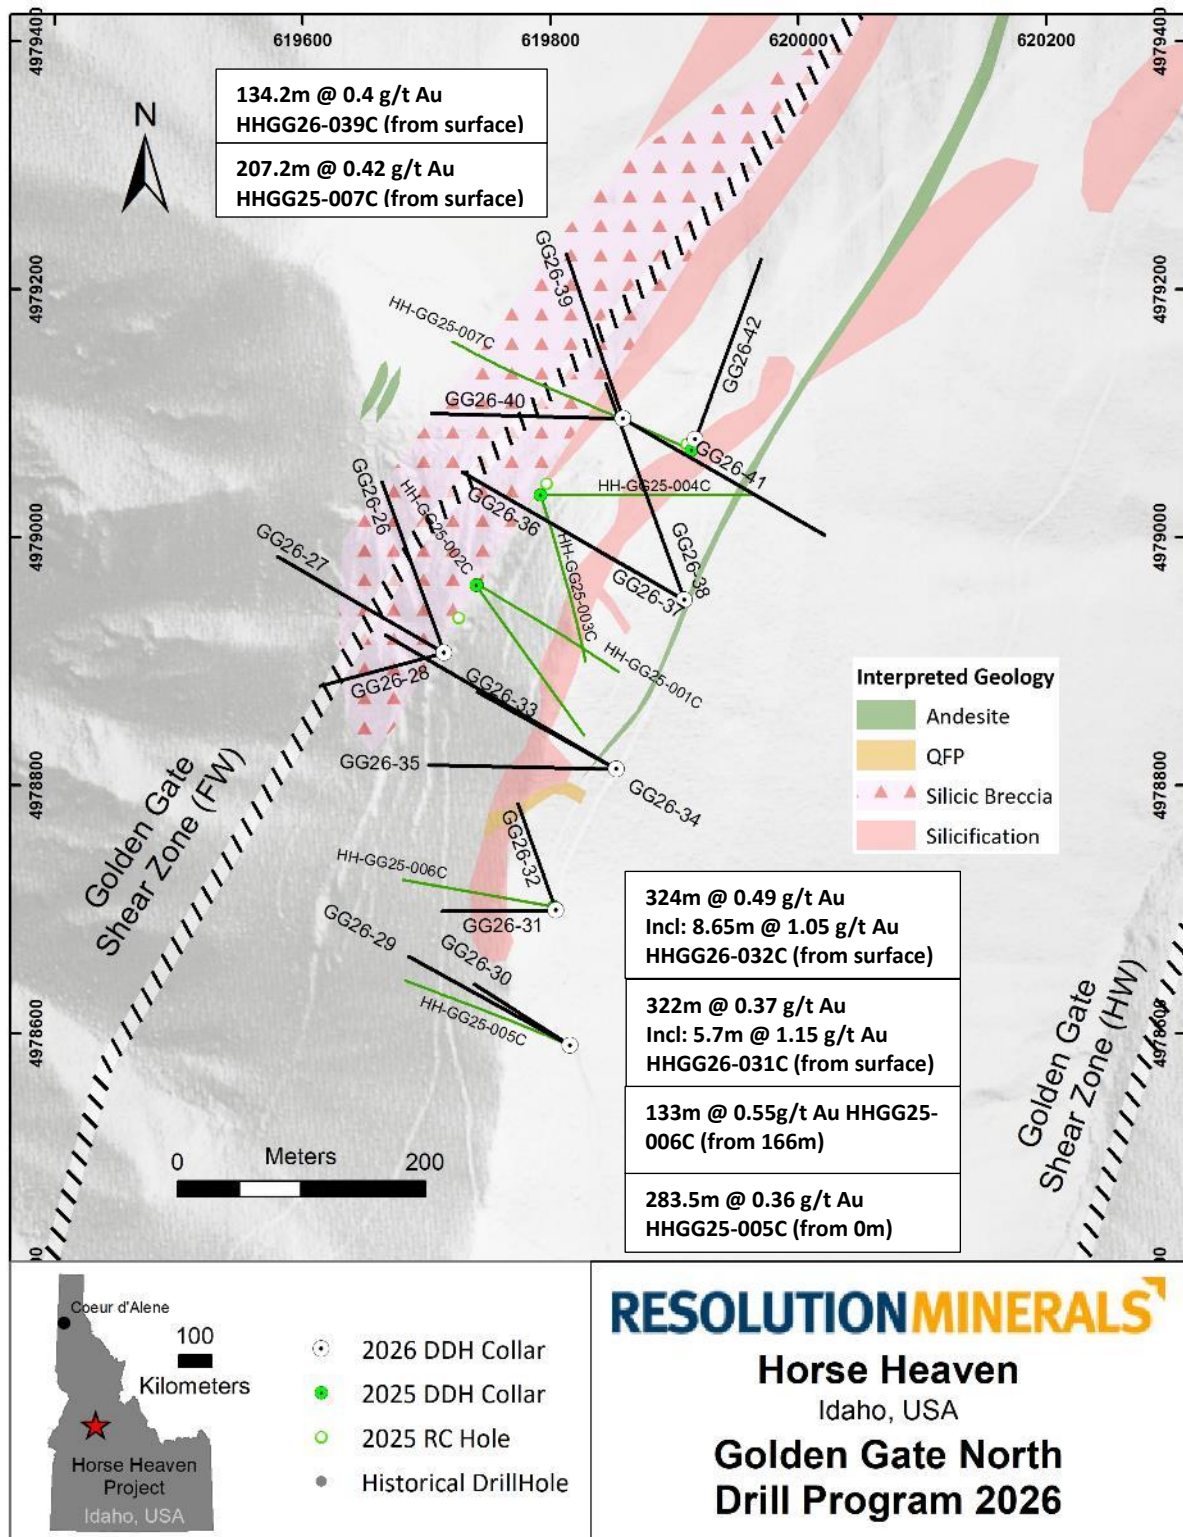


Figure 4: Resolution's Golden Gate North – Location of drill holes for 2026 (black) and drill holes for 2025 (green) over interpreted geology.

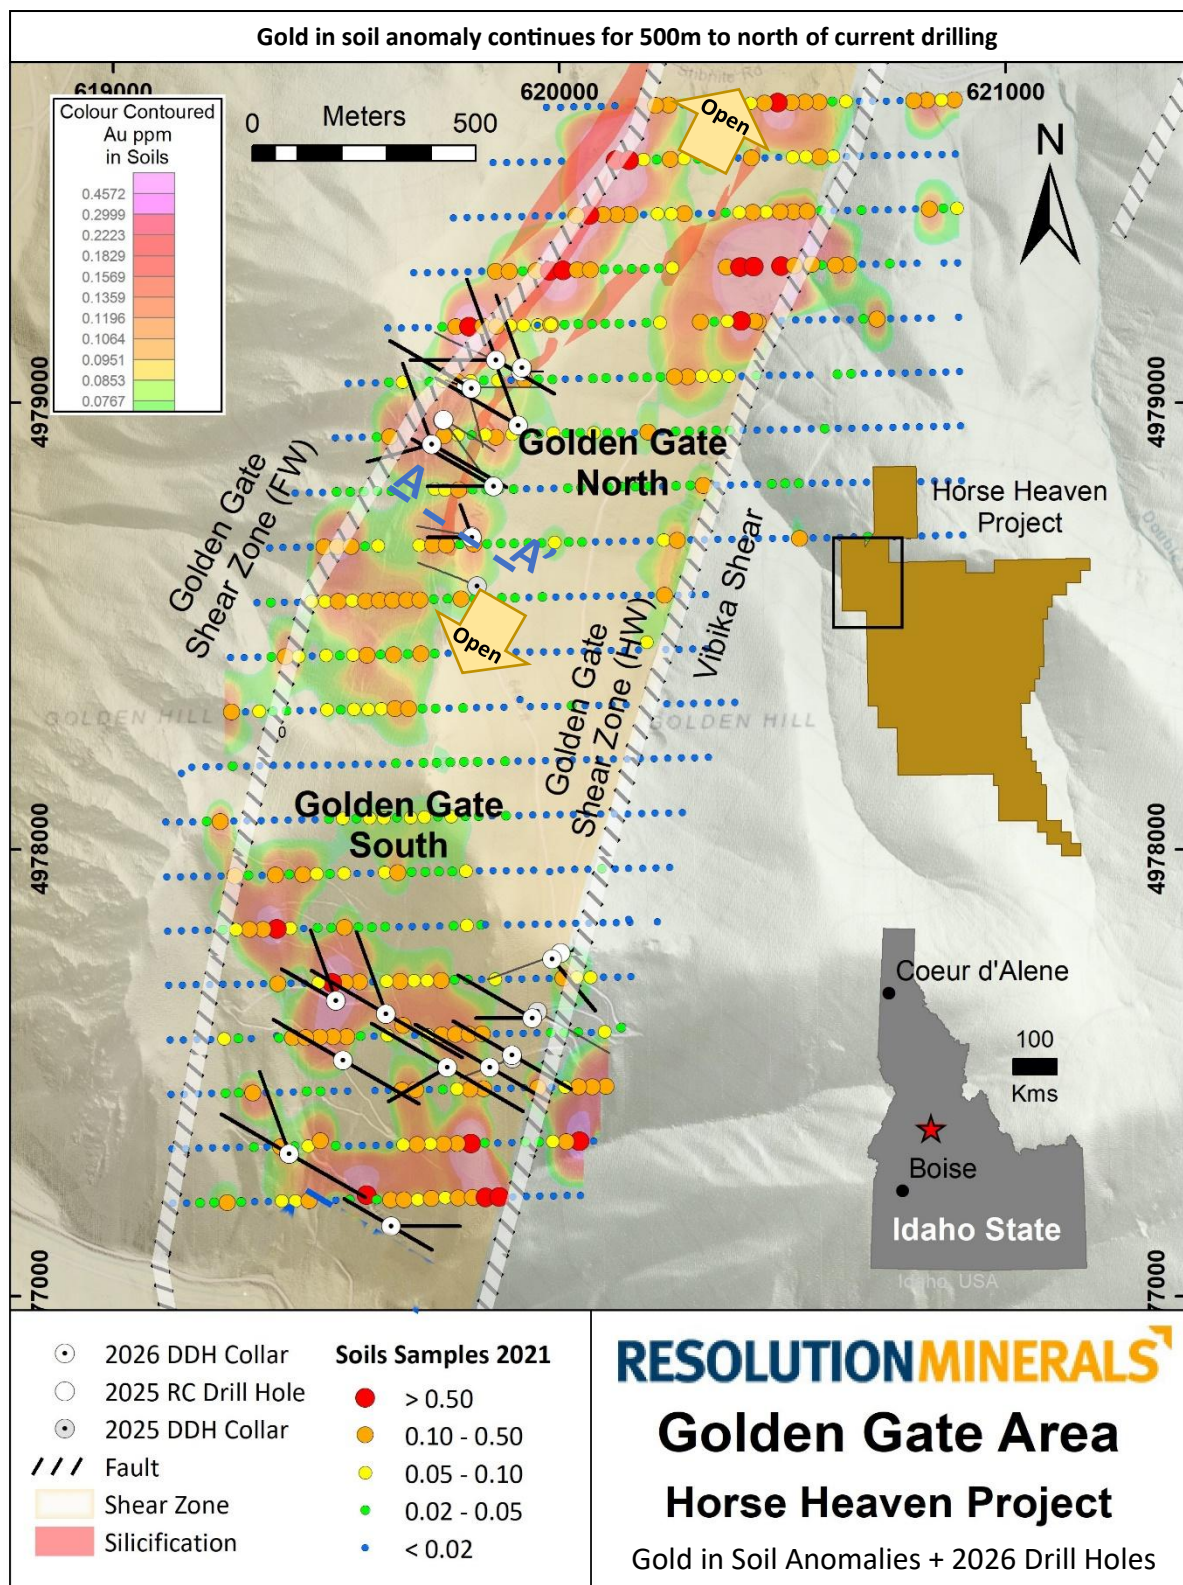


Figure 5: Resolution's Golden Gate within the Horse Heaven Project – Coloured gold results in soil samples demonstrate the potentially mineralised package of rocks. Location of drill holes overlain on gold-in-soil-samples with the location of Cross section in Figure 2. Gold-in-soil-samples emphasises the continuity of gold mineralisation between Golden Gate South and Golden Gate North and between drilled areas (from ASX announcement 11 June 2025).

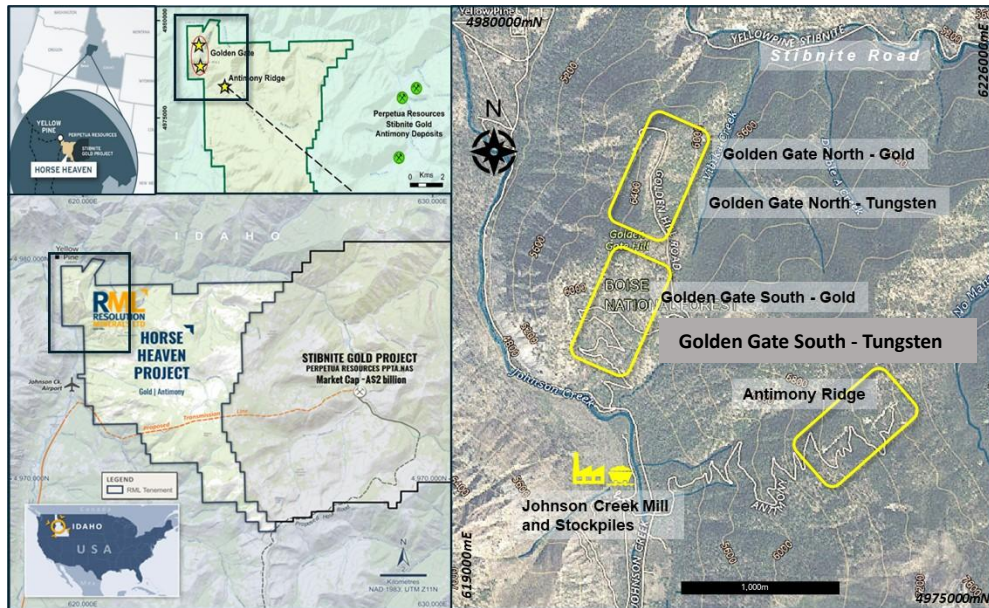


Figure 6: Resolution's Horse Heaven Antimony-Tungsten-Gold-Silver Project

Next Steps

Resolution is completing the processing of drill results from the 2026, with a further 32 holes to be released. On a parallel basis, permitting for the planned 2027 exploration program at both Antimony Ridge and Golden Gate are progressing rapidly, with various field studies nearing completion to feed into the Environmental Assessment process. Additionally, progress is being made on developing a plan to process existing tungsten stockpiles, and ongoing metallurgical testing is advancing.

Authorised for release by the Board of Resolution Minerals Ltd.

For further information, please contact:

Aharon Zaetz
 Executive Director
 Resolution Minerals Ltd
 M: +61 424 743 098
ari@resolutionminerals.com

Jane Morgan
 Investor Relations
 Jane Morgan Management
 M: +61 405 555 618
jm@janemorganmanagement.com.au

Competent Person's Statement

The information in this report that relates to exploration results relating to metallurgy, is based on and fairly represents information reviewed and compiled by Mr Ross Brown BSc (Hons), M AusIMM, Principal Geologist/director of exploration consulting firm, Riviere Minerals Pty. Ltd, who is a Member of the Australasian Institute of Mining and Metallurgy. Mr Brown has sufficient experience, which is relevant to the exploration activities, style of mineralisation and types of deposits under consideration, and to the activity which has been undertaken, to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Riviere Minerals is consulting to Resolutions Minerals Limited and consents to the inclusion in this announcement of the matters based on their information in the form and context in which it appears.

JORC cross references

The Company confirms it is not aware of any new information or data that materially affects the information cross referenced in this announcement and further to "Agreement to Acquire Major US Antimony Project and Placement" on 11 June 2025, "Drilling to Expand Footprint at Horse Heaven" on 8 September 2025, "Exceptional Rock Chip and Soil Results from Antimony Ridge" on 15 September 2025, "Exceptional Rock Chip and Soil Results Update" on 24 September 2025, "Significant Gold Discovery at Horse Heaven Project" on 28 October 2025, "Significant Gold Discoveries Continue at Golden Gate" on 3 November 2025, "Golden Gate Discovery Grows with Multiple Gold Intercepts" on 2 December 2025, "Further Ultra High Grade Antimony and Silver Results" on 14 January 2026, "New Gold Discovery at Golden Gate South" on 9 February 2026, "Gold & Significant Tungsten Mineralisation in Drilling" on 17 February 2026, "Major Drilling Program Planned to Test Golden Gate Scale" on 18 March 2026, "Exceptional Tungsten Grade Identified in Stockpile Material" on 26 March 2026, "Antimony Ridge Model Shows Extensive Vein Swarms" on 10 April 2026, "Antimony Trioxide Produced from Antimony Ridge" on 14 April 2026, "Tungsten Concentrates Produced from Golden Gate" on 28 April 2026, "Tungsten and Gold Drilling Underway and High Gold Recoveries" on 15 May 2026, and "First 2026 Gold and Tungsten Drilling Proving Encouraging" on 21 May 2026, "Drill Program Progressing Well at Horse Heaven" on 1 July 2026 and clarified on 13 July 2026, "Major Gold Extension Confirmed at Golden Gate" on 24 August 2026 and "Latest Gold Assays Extend Golden Gate Mineralisation" on 15 September 2026. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original announcements.

Forward Looking Statements

This announcement may contain forward-looking statements. These statements relate to the Company's expectations, beliefs, intentions or strategies regarding the future. These statements can be identified by the use of words like "anticipate", "believe", "intend", "estimate", "expect", "may", "plan", "project", "will", "should", "seek" and similar words or expressions containing same. These forward-looking statements reflect the Company's views and assumptions with respect to future events as of the date of this release and are subject to a variety of unpredictable risks, uncertainties, and other unknowns. Actual and future results and trends could differ materially from those set forth in such statements due to various factors, many of which are beyond our ability to control or predict. These include, but are not limited to, risks or uncertainties associated with the acquisition and divestment of projects, joint venture and other contractual risks, metal prices, exploration, development and operating risks, competition, production risks, sovereign risks, regulatory risks including environmental regulation and liability and potential title disputes, availability and terms of capital and general economic and business conditions.

Given these uncertainties, no one should place undue reliance on any forward-looking statements attributable to the Company, or any of its affiliates or persons acting on its behalf. Subject to any continuing obligations under applicable law, the Company disclaims any obligation or undertaking to disseminate any updates or revisions to any forward-looking statements in this announcement to reflect any change in expectations in relation to any forward-looking statements or any change in events, conditions or circumstances on which any such statement is based.

Appendix A: Table 1: Reported Drill Hole Locations

Hole ID	Drill Type	Diameter	Drill Hole Location					Elevation (m)	Dip	Az	EOH (m)
			Grid	Datum	Zone	Easting	Northing				
HH-GG26-01C	Core	HQ3	UTM	NAD83	11T	619623.1	4977156.8	1567.9	-60	300	245.06
HH-GG26-02C	Core	HQ3	UTM	NAD83	11T	619623.1	4977156.8	1567.9	-60	120	210.45
HH-GG26-03C	Core	HQ3	UTM	NAD83	11T	619623.1	4977156.8	1567.9	-60	90	308.10
HH-GG26-04C	Core	HQ3	UTM	NAD83	11T	619395.0	4977319.0	1612.6	-50	300	274.50
HH-GG26-05C	Core	HQ3	UTM	NAD83	11T	619395.0	4977319.0	1612.6	-50	340	274.50
HH-GG26-06C	Core	HQ3	UTM	NAD83	11T	619395.0	4977319.0	1612.6	-50	120	304.80
HH-GG26-31C	Core	HQ3	UTM	NAD83	11T	619804.5	4978699.0	1989.4	-75	270	383.65
HH-GG26-32C	Core	HQ3	UTM	NAD83	11T	619804.5	4978699.0	1989.4	-75	340	360.65
HH-GG26-39C	Core	HQ3	UTM	NAD83	11T	619858.5	4979095.6	1967.2	-50	340	221.15

Appendix B: Table 2: Drill Hole Gold Assays - HH-GG26-0031C and 032C HH-GG26-0031C ASSAY RESULTS – Core HQ – Gold Results (Au-AA23) Ag (ME-ICP61)

Golden Gate	HH-GG-26-031C		Core HQ		
SAMPLE	From	To	Length	Au	Ag
ID	(m)	(m)	(m)	(g/t)	ppm
P401151	0.00	3.05	3.05	0.626	0.9
P401153	3.05	6.10	3.05	0.149	<0.5
P401155	6.10	7.05	0.95	0.009	<0.5
P401157	7.05	8.75	1.70	0.071	<0.5
P401159	8.75	9.96	1.21	<0.005	<0.5
P401161	9.96	11.17	1.21	<0.005	<0.5
P401163	11.17	12.38	1.21	<0.005	<0.5
P401165	12.38	13.59	1.21	<0.005	<0.5
P401167	13.59	14.82	1.23	0.366	0.6
P401169	14.82	15.40	0.58	0.122	<0.5
P401171	15.40	16.43	1.03	1.11	0.5
P401172	16.43	17.62	1.19	0.171	3.3
P401173	17.62	19.04	1.42	0.224	<0.5
P401174	19.04	20.45	1.41	0.397	<0.5
P401175	20.45	21.75	1.30	0.446	0.5
P401176	21.75	22.35	0.60	0.275	<0.5
P401177	22.35	22.66	0.31	0.489	<0.5
P401178	22.66	23.60	0.94	1.04	0.6
P401179	23.60	24.65	1.05	<0.005	<0.5
P401180	24.65	27.20	2.55	0.024	0.5
P401181	27.20	28.17	0.97	0.031	<0.5
P401182	28.17	29.14	0.97	0.011	<0.5
P401183	29.14	30.10	0.96	0.018	<0.5
P401184	30.10	31.24	1.14	0.105	<0.5
P401185	31.24	33.55	2.31	0.242	<0.5
P401186	33.55	34.68	1.13	0.2	<0.5
P401187	34.68	35.81	1.13	0.078	<0.5
P401188	35.81	36.93	1.12	0.025	<0.5
P401189	36.93	37.65	0.72	1.13	0.7
P401191	37.65	38.97	1.32	0.281	<0.5
P401192	38.97	40.29	1.32	0.016	<0.5
P401193	40.29	41.60	1.31	0.204	<0.5
P401194	41.60	43.10	1.50	0.126	<0.5
P401195	43.10	44.22	1.12	0.419	<0.5
P401196	44.22	45.33	1.11	0.041	<0.5
P401197	45.33	46.53	1.20	0.011	<0.5
P401198	46.53	47.73	1.20	0.006	<0.5
P401199	47.73	48.93	1.20	<0.005	<0.5
P401200	48.93	50.13	1.20	<0.005	<0.5
P401201	50.13	51.33	1.20	<0.005	<0.5
P401202	51.33	52.50	1.17	0.063	<0.5
P401203	52.50	53.65	1.15	0.543	<0.5
P401204	53.65	54.60	0.95	0.008	<0.5
P401205	54.60	55.55	0.95	<0.005	<0.5
P401206	55.55	56.55	1.00	<0.005	<0.5
P401207	56.55	57.55	1.00	0.048	<0.5
P401208	57.55	58.70	1.15	0.835	<0.5
P401209	58.70	59.85	1.15	0.042	<0.5
P401211	59.85	61.00	1.15	0.649	<0.5
P401212	61.00	62.13	1.13	0.384	<0.5

Golden Gate	HH-GG-26-031C		Core HQ		
SAMPLE	From	To	Length	Au	Ag
ID	(m)	(m)	(m)	(g/t)	ppm

P401213	62.13	63.25	1.12	0.067	<0.5
P401214	63.25	64.34	1.09	0.253	<0.5
P401215	64.34	65.43	1.09	0.227	<0.5
P401216	65.43	66.52	1.09	0.048	<0.5
P401217	66.52	67.50	0.98	0.714	0.9
P401218	67.50	68.75	1.25	0.101	<0.5
P401219	68.75	70.33	1.58	0.046	<0.5
P401220	70.33	71.40	1.07	0.032	<0.5
P401221	71.40	72.15	0.75	0.888	0.8
P401222	72.15	73.40	1.25	0.754	0.8
P401223	73.40	74.70	1.30	0.929	1.8
P401224	74.70	76.20	1.50	0.519	<0.5
P401225	76.20	77.70	1.50	0.124	<0.5
P401226	77.70	79.20	1.50	0.213	<0.5
P401227	79.20	80.70	1.50	0.453	<0.5
P401228	80.70	82.20	1.50	0.385	<0.5
P401229	82.20	83.70	1.50	0.534	0.7
P401231	83.70	85.20	1.50	0.52	<0.5
P401232	85.20	86.70	1.50	0.225	<0.5
P401233	86.70	88.20	1.50	0.302	<0.5
P401234	88.20	89.70	1.50	0.169	<0.5
P401235	89.70	91.20	1.50	0.736	<0.5
P401236	91.20	92.70	1.50	0.269	<0.5
P401237	92.70	93.80	1.10	0.439	0.7
P401238	93.80	95.00	1.20	0.433	<0.5
P401239	95.00	95.83	0.83	0.295	<0.5
P401240	95.83	96.10	0.27	0.078	4.8
P401241	96.10	97.60	1.50	0.206	0.6
P401242	97.60	98.76	1.16	0.154	<0.5
P401243	98.76	100.10	1.34	0.47	<0.5
P401244	100.10	101.35	1.25	0.377	0.8
P401245	101.35	102.58	1.23	0.115	<0.5
P401246	102.58	104.10	1.52	0.137	<0.5
P401247	104.10	105.20	1.10	0.24	<0.5
P401248	105.20	105.91	0.71	0.405	20.1
P401250	105.91	107.40	1.49	0.18	0.5
P401251	107.40	108.90	1.50	0.235	2.2
P401252	108.90	110.40	1.50	0.293	1.1
P401253	110.40	111.40	1.00	0.546	0.7
P401254	111.40	112.44	1.04	0.364	1.4
P401255	112.44	112.85	0.41	0.519	1.1
P401256	112.85	114.40	1.55	0.01	<0.5
P401257	114.40	115.90	1.50	0.005	<0.5
P401258	115.90	117.40	1.50	<0.005	<0.5
P401259	117.40	118.95	1.55	<0.005	<0.5
P401260	118.95	120.07	1.12	<0.005	<0.5
P401261	120.07	121.60	1.53	<0.005	<0.5
P401262	121.60	123.10	1.50	<0.005	<0.5
P401263	123.10	124.10	1.00	0.005	<0.5
P401264	124.10	125.05	0.95	0.006	<0.5

Golden Gate	HH-GG-26-031C		Core HQ		
SAMPLE	From	To	Length	Au	Ag
ID	(m)	(m)	(m)	(g/t)	ppm
P401265	125.05	125.75	0.70	0.213	<0.5
P401266	125.75	127.30	1.55	0.633	0.8
P401267	127.30	127.97	0.67	0.904	1.2
P401268	127.97	129.32	1.35	1.08	1.3
P401270	129.32	130.80	1.48	1.065	1.3
P401271	130.80	132.30	1.50	0.555	0.6
P401272	132.30	133.80	1.50	0.484	0.8
P401273	133.80	135.30	1.50	0.749	0.8
P401274	135.30	136.10	0.80	0.91	2
P401275	136.10	137.25	1.15	1.12	0.9
P401276	137.25	138.30	1.05	0.73	0.7
P401277	138.30	139.55	1.25	0.407	0.8
P401278	139.55	140.10	0.55	0.069	0.9
P401280	140.10	141.60	1.50	1.5	0.7
P401281	141.60	143.10	1.50	1.41	1.6
P401282	143.10	144.60	1.50	0.557	1.1
P401283	144.60	145.77	1.17	1.145	1.1
P401284	145.77	146.80	1.03	0.842	0.8
P401285	146.80	147.80	1.00	0.996	0.5
P401286	147.80	149.35	1.55	0.336	8
P401288	149.35	150.45	1.10	1.98	1.4
P401291	150.45	151.30	0.85	1.215	1.2
P401293	151.30	152.80	1.50	0.96	1.3
P401294	152.80	154.30	1.50	0.695	0.8
P401295	154.30	155.40	1.10	0.932	1.2
P401296	155.40	156.52	1.12	0.741	1.2
P401297	156.52	157.31	0.79	0.28	1
P401299	157.31	158.30	0.99	0.33	0.9
P401300	158.30	159.26	0.96	0.62	0.9
P401301	159.26	159.76	0.50	0.491	0.8
P401303	159.76	160.70	0.94	0.736	0.8
P401304	160.70	161.65	0.95	0.607	5.9
P401305	161.65	162.45	0.80	0.661	3
P401307	162.45	164.00	1.55	0.512	0.5
P401308	164.00	165.50	1.50	0.626	1.7
P401309	165.50	167.00	1.50	0.897	1.2
P401311	167.00	168.36	1.36	0.688	0.9
P401312	168.36	169.55	1.19	0.579	0.8
P401313	169.55	171.05	1.50	0.417	1.6
P401314	171.05	172.43	1.38	0.726	0.6
P401315	172.43	173.80	1.37	0.576	0.5
P401317	173.80	174.60	0.80	0.688	0.9
P401319	174.60	175.24	0.64	0.272	0.5
P401321	175.24	176.15	0.91	0.488	4.2
P401322	176.15	177.06	0.91	0.495	0.6
P401324	177.06	177.95	0.89	0.225	2.8
P401326	177.95	179.33	1.38	0.558	0.6
P401327	179.33	180.70	1.37	0.468	1.4
P401328	180.70	182.10	1.40	0.416	<0.5
P401329	182.10	183.60	1.50	0.447	1.1

Golden Gate	HH-GG-26-031C		Core HQ		
SAMPLE	From	To	Length	Au	Ag
ID	(m)	(m)	(m)	(g/t)	ppm
P401331	183.60	184.83	1.23	0.394	1.4
P401332	184.83	186.05	1.22	0.536	1
P401333	186.05	187.10	1.05	0.327	<0.5
P401334	187.10	188.00	0.90	0.629	0.7
P401335	188.00	189.00	1.00	0.765	1.4
P401336	189.00	189.96	0.96	0.293	<0.5
P401337	189.96	190.55	0.59	0.246	<0.5
P401338	190.55	191.80	1.25	0.447	0.7
P401339	191.80	192.60	0.80	0.273	<0.5
P401340	192.60	193.65	1.05	0.256	23.1
P401341	193.65	195.00	1.35	0.215	<0.5
P401342	195.00	196.50	1.50	0.528	0.6
P401343	196.50	197.60	1.10	0.214	0.6
P401344	197.60	199.01	1.41	0.488	0.6
P401345	199.01	200.42	1.41	0.497	<0.5
P401346	200.42	201.82	1.40	0.473	0.7
P401347	201.82	203.15	1.33	0.681	3.7
P401348	203.15	204.28	1.13	0.457	15.6
P401349	204.28	205.50	1.22	0.921	0.8
P401351	205.50	206.53	1.03	0.62	0.9
P401352	206.53	207.74	1.21	0.429	0.6
P401353	207.74	208.95	1.21	0.711	0.5
P401354	208.95	211.50	2.55	0.547	0.7
P401355	211.50	212.67	1.17	0.398	0.8
P401356	212.67	213.84	1.17	0.428	0.6
P401357	213.84	215.00	1.16	0.416	0.5
P401358	215.00	216.00	1.00	0.505	<0.5
P401359	216.00	216.90	0.90	0.552	0.9
P401360	216.90	218.30	1.40	0.273	0.5
P401361	218.30	219.70	1.40	0.376	<0.5
P401362	219.70	220.90	1.20	0.409	0.5
P401363	220.90	221.60	0.70	0.384	0.7
P401364	221.60	222.65	1.05	0.245	0.5
P401365	222.65	223.35	0.70	0.437	<0.5
P401366	223.35	224.30	0.95	0.227	<0.5
P401367	224.30	225.70	1.40	0.092	0.5
P401368	225.70	226.45	0.75	0.119	<0.5
P401369	226.45	227.75	1.30	0.317	<0.5
P401371	227.75	228.75	1.00	0.169	1
P401373	228.75	229.60	0.85	0.876	1.1
P401375	229.60	231.00	1.40	0.082	<0.5
P401377	231.00	232.34	1.34	0.078	<0.5
P401379	232.34	233.68	1.34	0.233	0.7
P401381	233.68	235.02	1.34	0.294	0.6
P401383	235.02	236.20	1.18	0.145	2.6
P401385	236.20	237.70	1.50	0.112	2.6
P401387	237.70	238.85	1.15	0.068	0.6
P401388	238.85	240.00	1.15	0.094	1.3
P401389	240.00	241.15	1.15	0.089	<0.5
P401391	241.15	242.30	1.15	0.188	0.8



Golden Gate	HH-GG-26-031C		Core HQ		
SAMPLE	From	To	Length	Au	Ag
ID	(m)	(m)	(m)	(g/t)	ppm

P401392	242.30	243.45	1.15	0.26	0.5
P401393	243.45	244.60	1.15	0.074	1.4
P401395	244.60	246.03	1.43	0.409	0.7
P401397	246.03	246.97	0.94	0.416	0.6
P401399	246.97	247.91	0.94	0.355	0.8
P401401	247.91	248.85	0.94	0.524	0.9
P401403	248.85	249.84	0.99	0.215	0.6
P401404	249.84	250.53	0.69	0.402	1.9
P401405	250.53	251.84	1.31	0.269	<0.5
P401406	251.84	253.15	1.31	0.158	<0.5
P401407	253.15	254.29	1.14	0.28	<0.5
P401408	254.29	255.43	1.14	0.133	<0.5
P401409	255.43	256.56	1.13	0.354	0.8
P401411	256.56	257.57	1.01	0.466	1.4
P401412	257.57	258.56	0.99	0.388	<0.5
P401413	258.56	259.72	1.16	0.393	1
P401414	259.72	262.30	2.58	0.214	3.7
P401415	262.30	263.20	0.90	0.198	0.6
P401416	263.20	265.00	1.80	0.13	2.3
P401417	265.00	265.80	0.80	0.145	3.4
P401418	265.80	268.20	2.40	0.188	0.9
P401419	268.20	270.90	2.70	0.359	<0.5
P401420	270.90	271.60	0.70	0.242	<0.5
P401421	271.60	272.50	0.90	0.355	<0.5
P401422	272.50	274.50	2.00	0.261	<0.5
P401423	274.50	275.45	0.95	0.184	<0.5
P401424	275.45	276.70	1.25	1.285	<0.5
P401425	276.70	277.10	0.40	0.191	<0.5
P401426	277.10	277.70	0.60	0.136	<0.5
P401427	277.70	278.95	1.25	0.264	0.5
P401428	278.95	280.00	1.05	0.236	<0.5
P401429	280.00	281.00	1.00	0.248	1.1
P401431	281.00	282.00	1.00	0.204	<0.5
P401432	282.00	283.10	1.10	0.179	<0.5
P401433	283.10	284.00	0.90	0.133	1.3
P401434	284.00	285.20	1.20	0.14	1
P401435	285.20	286.70	1.50	0.352	0.6
P401436	286.70	288.20	1.50	0.536	<0.5
P401437	288.20	289.15	0.95	0.659	<0.5
P401438	289.15	290.30	1.15	0.473	<0.5
P401439	290.30	291.45	1.15	0.883	<0.5
P401440	291.45	292.60	1.15	0.447	<0.5
P401441	292.60	294.00	1.40	0.194	<0.5
P401442	294.00	295.32	1.32	0.344	<0.5
P401443	295.32	296.64	1.32	0.274	<0.5
P401444	296.64	297.95	1.31	0.358	<0.5
P401445	297.95	299.10	1.15	0.171	<0.5
P401446	299.10	300.15	1.05	0.249	<0.5
P401447	300.15	301.32	1.17	0.26	<0.5
P401448	301.32	302.64	1.32	0.285	<0.5
P401450	302.64	303.65	1.01	0.239	<0.5



Golden Gate	HH-GG-26-031C		Core HQ		
SAMPLE	From	To	Length	Au	Ag
ID	(m)	(m)	(m)	(g/t)	ppm
P401451	303.65	304.50	0.85	0.211	<0.5
P401452	304.50	305.66	1.16	0.207	<0.5
P401453	305.66	306.82	1.16	0.206	<0.5
P401454	306.82	308.05	1.23	0.252	<0.5
P401455	308.05	309.20	1.15	0.145	<0.5
P401456	309.20	310.35	1.15	0.351	<0.5
P401457	310.35	311.50	1.15	0.299	<0.5
P401458	311.50	312.65	1.15	0.361	<0.5
P401459	312.65	313.80	1.15	0.178	0.5
P401460	313.80	314.80	1.00	0.193	<0.5
P401461	314.80	315.70	0.90	0.349	<0.5
P401462	315.70	316.72	1.02	0.171	0.6
P401463	316.72	317.77	1.05	0.166	0.8
P401464	317.77	318.75	0.98	0.199	0.9
P401465	318.75	319.40	0.65	0.145	<0.5
P401466	319.40	320.60	1.20	0.58	1.1
P401467	320.60	321.80	1.20	0.401	0.5
P401468	321.80	323.25	1.45	0.103	<0.5
P401469	323.25	324.64	1.39	0.172	1.7
P401471	324.64	326.03	1.39	0.103	<0.5
P401472	326.03	327.42	1.39	0.109	<0.5
P401473	327.42	328.81	1.39	0.112	<0.5
P401474	328.81	330.20	1.39	0.159	<0.5
P401475	330.20	331.00	0.80	0.116	<0.5
P401476	331.00	331.85	0.85	0.088	<0.5
P401477	331.85	333.22	1.37	0.16	<0.5
P401478	333.22	334.65	1.43	0.192	<0.5
P401479	334.65	336.00	1.35	0.082	<0.5
P401480	336.00	337.70	1.70	0.104	<0.5
P401481	337.70	338.70	1.00	0.173	<0.5
P401482	338.70	339.90	1.20	0.01	<0.5
P401483	339.90	341.60	1.70	0.006	<0.5
P401484	341.60	342.60	1.00	0.005	<0.5
P401485	342.60	343.00	0.40	0.01	<0.5
P401486	343.00	343.50	0.50	0.072	16.2
P401487	343.50	344.65	1.15	0.105	<0.5
P401488	344.65	345.83	1.18	0.096	<0.5
P401489	345.83	347.00	1.17	0.198	<0.5
P401491	347.00	348.17	1.17	0.107	<0.5
P401492	348.17	349.35	1.18	0.121	<0.5
P401493	349.35	349.75	0.40	0.211	<0.5
P401494	349.75	350.83	1.08	0.101	<0.5
P401495	350.83	351.93	1.10	0.073	<0.5
P401496	351.93	353.10	1.17	0.09	<0.5
P401497	353.10	354.40	1.30	0.086	<0.5
P401498	354.40	355.70	1.30	0.116	<0.5
P401499	355.70	357.00	1.30	0.091	<0.5
P401500	357.00	357.80	0.80	0.083	<0.5
P401501	357.80	358.65	0.85	0.148	<0.5
P401502	358.65	359.90	1.25	0.077	<0.5
P401503	359.90	361.15	1.25	0.045	<0.5

Golden Gate	HH-GG-26-031C		Core HQ		
SAMPLE	From	To	Length	Au	Ag
ID	(m)	(m)	(m)	(g/t)	ppm

P401504	361.15	362.40	1.25	0.056	<0.5
P401505	362.40	363.65	1.25	0.02	<0.5
P401506	363.65	364.90	1.25	0.029	<0.5
P401507	364.90	366.13	1.23	<0.005	<0.5
P401508	366.13	367.59	1.46	<0.005	<0.5
P401509	367.59	369.95	2.36	<0.005	<0.5
P401511	369.95	371.75	1.80	<0.005	<0.5
P401512	371.75	373.70	1.95	<0.005	<0.5
P401513	373.70	375.40	1.70	<0.005	<0.5
P401514	375.40	376.78	1.38	<0.005	<0.5
P401515	376.78	378.15	1.37	<0.005	<0.5
P401516	378.15	379.53	1.38	<0.005	<0.5
P401517	379.53	380.91	1.38	<0.005	<0.5
P401518	380.91	382.29	1.38	<0.005	<0.5
P401519	382.29	383.65	1.36	<0.005	<0.5



HH-GG26-032C ASSAY RESULTS – Core HQ – Gold Results (Au-AA23) Ag (ME-ICP61)

Golden Gate	HH-GG-26-032C		Core HQ		
SAMPLE	From	To	Interval	Au	Ag
ID	(m)	(m)	(m)	g/t	ppm
P401551	0.00	3.25	3.25	0.516	0.5
P401553	3.25	6.17	2.92	0.102	<0.5
P401555	6.17	7.17	1.00	0.029	<0.5
P401557	7.17	9.15	1.98	<0.005	<0.5
P401559	9.15	10.15	1.00	<0.005	<0.5
P401561	10.15	11.17	1.02	0.039	<0.5
P401563	11.17	12.55	1.38	0.52	<0.5
P401565	12.55	13.93	1.38	0.53	<0.5
P401567	13.93	15.07	1.14	0.63	<0.5
P401569	15.07	16.20	1.13	0.226	<0.5
P401571	16.20	17.34	1.14	0.01	<0.5
P401573	17.34	18.48	1.14	0.011	<0.5
P401575	18.48	19.60	1.12	0.04	<0.5
P401577	19.60	20.88	1.28	0.005	<0.5
P401578	20.88	22.15	1.27	0.007	<0.5
P401579	22.15	24.40	2.25	0.567	<0.5
P401580	24.40	25.75	1.35	0.249	0.5
P401581	25.75	26.75	1.00	0.16	<0.5
P401582	26.75	27.75	1.00	0.304	0.6
P401583	27.75	29.00	1.25	0.21	<0.5
P401584	29.00	30.50	1.50	0.149	<0.5
P401585	30.50	31.45	0.95	0.36	0.5
P401586	31.45	32.58	1.13	0.114	<0.5
P401587	32.58	33.71	1.13	0.029	<0.5
P401588	33.71	34.85	1.14	0.023	<0.5
P401589	34.85	36.03	1.18	0.028	<0.5
P401591	36.03	37.20	1.17	0.034	<0.5
P401592	37.20	38.20	1.00	0.092	<0.5
P401593	38.20	39.20	1.00	0.429	0.5
P401595	39.20	40.00	0.80	1.12	<0.5
P401597	40.00	40.80	0.80	0.636	<0.5
P401599	40.80	42.04	1.24	0.206	<0.5
P401601	42.04	43.28	1.24	0.057	<0.5
P401603	43.28	45.75	2.47	0.136	<0.5
P401605	45.75	46.65	0.90	0.11	<0.5
P401606	46.65	48.80	2.15	0.701	0.5
P401607	48.80	49.60	0.80	0.243	<0.5
P401608	49.60	50.45	0.85	0.034	<0.5
P401609	50.45	51.00	0.55	0.057	<0.5
P401612	51.00	52.03	1.03	0.06	<0.5
P401613	52.03	54.10	2.07	0.088	<0.5
P401614	54.10	55.16	1.06	0.013	<0.5
P401615	55.16	56.22	1.06	<0.005	<0.5
P401616	56.22	57.30	1.08	<0.005	<0.5
P401617	57.30	58.15	0.85	0.005	<0.5
P401618	58.15	59.00	0.85	0.086	<0.5
P401619	59.00	60.50	1.50	0.137	<0.5
P401620	60.50	61.50	1.00	0.142	<0.5
P401621	61.50	62.50	1.00	0.145	<0.5

Golden Gate	HH-GG-26-032C		Core HQ		
SAMPLE	From	To	Interval	Au	Ag
ID	(m)	(m)	(m)	g/t	ppm
P401622	62.50	63.50	1.00	0.713	1.7
P401624	63.50	64.78	1.28	0.438	1.2
P401626	64.78	66.06	1.28	1.475	1.2
P401628	66.06	67.34	1.28	1.49	1.7
P401631	67.34	68.75	1.41	0.909	1.1
P401633	68.75	70.15	1.40	1.005	1.1
P401635	70.15	71.15	1.00	1.37	10.4
P401637	71.15	72.60	1.45	0.48	40.2
P401638	72.60	73.90	1.30	0.287	0.9
P401639	73.90	74.87	0.97	0.276	1.8
P401640	74.87	76.25	1.38	0.357	<0.5
P401641	76.25	77.54	1.29	0.366	<0.5
P401642	77.54	78.83	1.29	0.526	<0.5
P401643	78.83	80.12	1.29	0.391	1.2
P401644	80.12	81.41	1.29	0.262	<0.5
P401645	81.41	82.70	1.29	0.222	<0.5
P401646	82.70	83.85	1.15	0.152	0.6
P401647	83.85	84.85	1.00	0.23	<0.5
P401648	84.85	85.85	1.00	0.504	0.6
P401649	85.85	87.28	1.43	0.308	<0.5
P401651	87.28	88.70	1.42	0.338	0.5
P401652	88.70	90.00	1.30	0.362	<0.5
P401653	90.00	91.26	1.26	0.249	<0.5
P401654	91.26	92.56	1.30	0.385	<0.5
P401655	92.56	93.50	0.94	0.231	<0.5
P401656	93.50	94.55	1.05	0.156	<0.5
P401657	94.55	95.61	1.06	0.458	<0.5
P401658	95.61	96.67	1.06	0.666	<0.5
P401659	96.67	97.75	1.08	0.702	0.8
P401660	97.75	98.65	0.90	0.727	3.9
P401661	98.65	100.00	1.35	1.14	0.8
P401662	100.00	101.35	1.35	0.425	<0.5
P401663	101.35	102.70	1.35	0.409	0.7
P401664	102.70	104.05	1.35	0.213	0.7
P401665	104.05	105.40	1.35	0.141	0.8
P401666	105.40	106.25	0.85	0.148	<0.5
P401667	106.25	107.44	1.19	0.411	<0.5
P401668	107.44	108.63	1.19	0.343	<0.5
P401670	108.63	110.04	1.41	0.259	<0.5
P401671	110.04	111.27	1.23	0.362	0.9
P401672	111.27	112.50	1.23	0.241	<0.5
P401673	112.50	113.60	1.10	1.055	1.4
P401674	113.60	114.80	1.20	0.369	0.6
P401675	114.80	116.00	1.20	0.651	6.8
P401676	116.00	117.20	1.20	0.326	0.7
P401677	117.20	118.95	1.75	0.021	<0.5
P401678	118.95	120.00	1.05	0.005	<0.5
P401679	120.00	121.15	1.15	<0.005	<0.5
P401680	121.15	122.20	1.05	<0.005	<0.5
P401681	122.20	123.20	1.00	<0.005	<0.5
P401682	123.20	124.30	1.10	<0.005	<0.5

Golden Gate	HH-GG-26-032C		Core HQ		
SAMPLE	From	To	Interval	Au	Ag
ID	(m)	(m)	(m)	g/t	ppm
P401683	124.30	125.85	1.55	<0.005	<0.5
P401684	125.85	127.25	1.40	<0.005	<0.5
P401685	127.25	128.63	1.38	<0.005	<0.5
P401686	128.63	130.00	1.37	<0.005	<0.5
P401687	130.00	130.45	0.45	<0.005	0.5
P401688	130.45	131.70	1.25	0.425	1.4
P401689	131.70	132.70	1.00	<0.005	<0.5
P401691	132.70	133.70	1.00	0.005	<0.5
P401692	133.70	134.68	0.98	0.022	<0.5
P401693	134.68	135.87	1.19	0.175	2.9
P401694	135.87	137.05	1.18	0.63	<0.5
P401695	137.05	138.50	1.45	0.318	0.6
P401696	138.50	139.57	1.07	1.375	<0.5
P401697	139.57	140.64	1.07	1.18	<0.5
P401698	140.64	142.50	1.86	0.541	<0.5
P401699	142.50	143.85	1.35	0.18	<0.5
P401700	143.85	144.90	1.05	0.294	<0.5
P401701	144.90	145.60	0.70	0.281	<0.5
P401702	145.60	146.98	1.38	0.308	<0.5
P401703	146.98	148.35	1.37	0.291	<0.5
P401704	148.35	149.00	0.65	0.236	<0.5
P401705	149.00	150.00	1.00	0.612	<0.5
P401706	150.00	150.90	0.90	0.756	0.9
P401707	150.90	151.87	0.97	0.748	0.8
P401708	151.87	153.09	1.22	0.603	0.8
P401709	153.09	154.31	1.22	0.414	0.6
P401711	154.31	155.55	1.24	0.351	0.8
P401712	155.55	156.75	1.20	0.924	1
P401713	156.75	158.20	1.45	0.378	17.6
P401714	158.20	159.51	1.31	0.56	1.5
P401715	159.51	160.32	0.81	1.215	<0.5
P401716	160.32	161.65	1.33	0.871	1
P401717	161.65	162.63	0.98	0.991	64.4
P401718	162.63	164.70	2.07	0.26	1.7
P401719	164.70	166.05	1.35	0.319	<0.5
P401720	166.05	167.55	1.50	0.658	1.1
P401721	167.55	169.00	1.45	0.93	1.2
P401722	169.00	170.80	1.80	0.534	0.7
P401723	170.80	171.85	1.05	0.171	<0.5
P401724	171.85	172.90	1.05	0.397	<0.5
P401725	172.90	174.20	1.30	0.214	1.1
P401726	174.20	175.50	1.30	0.497	1.6
P401727	175.50	176.80	1.30	1.4	0.8
P401728	176.80	177.70	0.90	0.673	<0.5



Golden Gate	HH-GG-26-032C		Core HQ		
SAMPLE	From	To	Interval	Au	Ag
ID	(m)	(m)	(m)	g/t	ppm
P401730	177.70	178.85	1.15	2.63	1.5
P401731	178.85	179.95	1.10	2.16	1.6
P401732	179.95	181.10	1.15	1.955	2.2
P401733	181.10	182.25	1.15	2.9	1.3
P401734	182.25	183.45	1.20	2.14	1.7
P401735	183.45	184.20	0.75	0.764	0.8
P401736	184.20	185.48	1.28	1.335	0.8
P401737	185.48	186.76	1.28	0.915	13.9
P401738	186.76	188.05	1.29	0.801	3.7
P401739	188.05	188.90	0.85	1.115	0.9
P401740	188.90	190.17	1.27	1.22	0.8
P401741	190.17	191.43	1.26	0.838	0.5
P401742	191.43	192.70	1.27	0.715	0.7
P401743	192.70	193.82	1.12	0.585	0.7
P401744	193.82	195.30	1.48	0.8	0.8
P401745	195.30	196.30	1.00	1.785	1
P401746	196.30	197.30	1.00	0.775	<0.5
P401747	197.30	198.30	1.00	0.746	0.5
P401748	198.30	199.80	1.50	0.788	<0.5
P401749	199.80	201.30	1.50	0.559	<0.5
P401751	201.30	202.80	1.50	1.365	0.9
P401752	202.80	204.00	1.20	0.902	0.8
P401753	204.00	205.24	1.24	0.85	0.6
P401754	205.24	206.45	1.21	0.295	<0.5
P401755	206.45	207.43	0.98	0.361	0.6
P401756	207.43	208.40	0.97	0.885	1.1
P401757	208.40	209.50	1.10	1.095	1.9
P401758	209.50	210.60	1.10	0.919	1
P401759	210.60	211.54	0.94	0.741	1
P401760	211.54	212.95	1.41	0.674	0.9
P401761	212.95	213.90	0.95	1.12	1.2
P401762	213.90	214.85	0.95	0.738	0.8
P401763	214.85	215.65	0.80	0.592	0.8
P401764	215.65	216.78	1.13	0.403	0.8
P401765	216.78	217.90	1.12	0.324	0.5
P401766	217.90	219.25	1.35	0.265	0.7
P401767	219.25	220.23	0.98	0.319	0.6
P401768	220.23	221.20	0.97	0.315	1.1
P401769	221.20	223.30	2.10	0.463	0.7
P401771	223.30	224.45	1.15	0.735	1.2
P401772	224.45	225.86	1.41	0.679	1.6
P401773	225.86	227.25	1.39	0.556	1.5
P401774	227.25	228.75	1.50	0.497	1
P401775	228.75	230.25	1.50	1.055	1.1
P401776	230.25	231.55	1.30	0.28	<0.5
P401777	231.55	232.50	0.95	0.275	<0.5
P401778	232.50	233.57	1.07	0.241	0.9
P401779	233.57	234.35	0.78	0.77	1.3
P401780	234.35	235.63	1.28	0.558	0.7
P401781	235.63	236.91	1.28	0.741	0.8
P401782	236.91	237.90	0.99	0.176	0.6
P401783	237.90	239.40	1.50	0.557	0.9
P401784	239.40	240.60	1.20	0.635	0.8

P401785	240.60	242.00	1.40	0.722	0.9
P401786	242.00	243.17	1.17	0.622	2.5
P401787	243.17	244.35	1.18	0.451	1.1
P401788	244.35	245.40	1.05	0.42	0.7
P401789	245.40	246.27	0.87	0.274	0.6
P401791	246.27	247.13	0.86	0.548	0.9
P401792	247.13	248.21	1.08	0.394	0.5
P401793	248.21	249.29	1.08	0.202	0.5
P401794	249.29	250.37	1.08	0.27	0.6
P401795	250.37	251.45	1.08	0.739	0.7
P401796	251.45	252.50	1.05	0.795	1
P401797	252.50	253.70	1.20	0.604	<0.5
P401798	253.70	254.90	1.20	0.476	<0.5
P401799	254.90	256.60	1.70	0.977	0.9
P401800	256.60	258.10	1.50	1.635	1.9
P401801	258.10	259.40	1.30	0.953	0.6
P401802	259.40	261.95	2.55	0.871	0.6
P401803	261.95	263.85	1.90	0.757	0.7
P401804	263.85	264.90	1.05	0.839	1.5
P401805	264.90	265.90	1.00	0.714	<0.5
P401806	265.90	266.75	0.85	0.553	0.7
P401807	266.75	268.05	1.30	0.304	0.8
P401808	268.05	268.86	0.81	0.409	1.2
P401809	268.86	270.75	1.89	0.52	1.8
P401811	270.75	272.00	1.25	0.324	1.2
P401812	272.00	272.95	0.95	0.331	1
P401813	272.95	273.90	0.95	0.423	0.5
P401814	273.90	276.00	2.10	0.471	<0.5
P401815	276.00	277.50	1.50	0.472	1.7
P401816	277.50	278.20	0.70	0.315	8.3
P401817	278.20	279.80	1.60	0.467	0.7
P401818	279.80	280.75	0.95	0.623	<0.5
P401819	280.75	281.65	0.90	0.45	3.1
P401820	281.65	282.55	0.90	0.575	0.7
P401821	282.55	283.71	1.16	0.571	0.6
P401822	283.71	284.68	0.97	0.794	1
P401823	284.68	286.17	1.49	0.695	0.5
P401824	286.17	287.55	1.38	0.354	<0.5
P401825	287.55	288.40	0.85	0.733	<0.5
P401826	288.40	289.25	0.85	0.57	0.5
P401827	289.25	290.40	1.15	0.328	0.8
P401828	290.40	291.47	1.07	0.673	<0.5
P401829	291.47	292.45	0.98	0.405	<0.5
P401831	292.45	293.54	1.09	0.558	1.2
P401832	293.54	294.63	1.09	0.333	0.7
P401833	294.63	296.35	1.72	0.322	<0.5
P401834	296.35	296.80	0.45	0.578	0.5
P401835	296.80	297.50	0.70	0.091	<0.5
P401836	297.50	298.60	1.10	0.486	<0.5
P401837	298.60	300.00	1.40	1.205	0.7
P401838	300.00	300.80	0.80	0.316	0.7
P401839	300.80	301.95	1.15	0.289	0.9

Golden Gate	HH-GG-26-032C		Core HQ		
SAMPLE	From	To	Interval	Au	Ag
ID	(m)	(m)	(m)	g/t	ppm
P401840	301.95	303.00	1.05	0.192	0.8
P401841	303.00	304.13	1.13	0.258	<0.5
P401842	304.13	305.24	1.11	0.392	<0.5
P401843	305.24	306.35	1.11	0.39	0.6
P401844	306.35	308.05	1.70	0.277	0.5
P401845	308.05	309.30	1.25	0.137	0.8
P401846	309.30	311.10	1.80	0.122	0.6
P401847	311.10	311.85	0.75	0.091	<0.5
P401848	311.85	313.10	1.25	0.09	<0.5
P401849	313.10	314.35	1.25	0.177	0.5
P401851	314.35	315.60	1.25	0.247	0.6
P401852	315.60	316.95	1.35	0.112	<0.5
P401853	316.95	318.19	1.24	0.137	<0.5
P401854	318.19	319.43	1.24	0.201	0.6
P401855	319.43	320.67	1.24	0.241	0.9
P401856	320.67	321.90	1.23	0.229	0.5
P401857	321.90	323.40	1.50	0.218	<0.5
P401858	323.40	324.25	0.85	0.325	<0.5
P401859	324.25	325.15	0.90	0.171	0.8
P401860	325.15	326.23	1.08	0.147	0.8
P401861	326.23	327.30	1.07	0.059	0.5
P401862	327.30	328.68	1.38	0.173	0.5
P401863	328.68	330.06	1.38	0.148	0.5
P401864	330.06	331.44	1.38	0.083	<0.5
P401865	331.44	332.45	1.01	0.145	0.6
P401866	332.45	333.05	0.60	0.065	0.5
P401867	333.05	334.45	1.40	0.006	<0.5
P401868	334.45	335.88	1.43	<0.005	<0.5
P401869	335.88	337.30	1.42	<0.005	<0.5
P401871	337.30	338.64	1.34	0.005	<0.5
P401872	338.64	340.00	1.36	<0.005	<0.5
P401873	340.00	341.34	1.34	0.006	<0.5
P401874	341.34	342.65	1.31	<0.005	<0.5
P401875	342.65	344.00	1.35	<0.005	<0.5
P401876	344.00	345.30	1.30	0.012	<0.5
P401877	345.30	346.45	1.15	<0.005	<0.5
P401878	346.45	347.70	1.25	<0.005	<0.5
P401879	347.70	348.75	1.05	<0.005	<0.5
P401880	348.75	349.90	1.15	0.01	<0.5
P401881	349.90	351.15	1.25	<0.005	<0.5
P401882	351.15	352.40	1.25	<0.005	2.7
P401883	352.40	353.65	1.25	<0.005	<0.5
P401884	353.65	354.42	0.77	<0.005	1
P401885	354.42	355.45	1.03	<0.005	<0.5
P401886	355.45	356.35	0.90	<0.005	<0.5
P401887	356.35	357.35	1.00	<0.005	<0.5
P401888	357.35	359.10	1.75	<0.005	<0.5
P401889	359.10	360.65	1.55	<0.005	0.5



HH-GG26-0039C ASSAY RESULTS – Core HQ – Gold Results (Au-AA23) Ag (ME-ICP61)

SAMPLE ID	From (m)	To (m)	Length (m)	Au (g/t)	Ag (ppm)
P280201	0.00	6.10	6.10	0.157	0.7
P280202	6.10	9.15	3.05	0.396	7.5
P280203	9.15	11.50	2.35	0.394	0.7
P280204	11.50	12.30	0.80	0.607	0.8
P280205	12.30	14.15	1.85	0.574	1.1
P280206	14.15	15.25	1.10	0.458	0.6
P280207	15.25	16.25	1.00	0.272	<0.5
P280208	16.25	17.70	1.45	0.207	<0.5
P280209	17.70	18.30	0.60	0.354	0.6
P280210	18.30	21.35	3.05	0.506	<0.5
P280211	21.35	23.40	2.05	0.572	<0.5
P280212	23.40	24.50	1.10	0.671	<0.5
P280213	24.50	26.90	2.40	0.288	0.5
P280214	26.90	27.80	0.90	0.166	5.9
P280215	27.80	30.50	2.70	0.499	0.5
P280216	30.50	31.75	1.25	0.3	0.8
P280217	31.75	33.55	1.80	0.584	0.8
P280218	33.55	35.75	2.20	0.315	0.5
P280219	35.75	36.30	0.55	0.174	1
P280221	36.30	37.42	1.12	0.14	<0.5
P280222	37.42	38.70	1.28	0.187	<0.5
P280223	38.70	39.65	0.95	0.211	<0.5
P280224	39.65	40.45	0.80	0.102	<0.5
P280225	40.45	42.65	2.20	0.098	<0.5
P280226	42.65	45.67	3.02	0.507	<0.5
P280227	45.67	47.10	1.43	0.176	<0.5
P280228	47.10	48.80	1.70	0.226	0.5
P280229	48.80	49.95	1.15	0.402	0.8
P280230	49.95	51.20	1.25	0.235	0.9
P280231	51.20	52.55	1.35	0.221	0.8
P280232	52.55	54.90	2.35	0.343	0.8
P280233	54.90	55.85	0.95	0.52	2.5
P280234	55.85	57.15	1.30	0.486	2.5
P280235	57.15	58.35	1.20	0.491	2.9
P280236	58.35	59.55	1.20	0.494	2.5
P280237	59.55	60.85	1.30	0.48	2.1
P280238	60.85	62.00	1.15	0.54	3.6
P280239	62.00	63.20	1.20	0.46	3.7
P280241	63.20	64.45	1.25	0.233	0.7
P280242	64.45	65.77	1.32	0.225	0.9
P280243	65.77	67.10	1.33	0.235	0.8
P280244	67.10	68.10	1.00	0.284	0.8
P280245	68.10	69.10	1.00	0.378	0.7
P280246	69.10	70.15	1.05	0.347	1.2
P280247	70.15	71.43	1.28	0.269	1.2
P280248	71.43	72.60	1.17	0.195	0.8
P280249	72.60	73.70	1.10	0.166	2.4
P280250	73.70	74.85	1.15	0.098	0.9
P280251	74.85	76.35	1.50	0.066	1.1
P280252	76.35	77.00	0.65	0.084	0.5
P280253	77.00	78.50	1.50	0.125	1.4

Golden Gate	HH-GG-26-039C		Core HQ		
SAMPLE ID	From (m)	To (m)	Length (m)	Au (g/t)	Ag (ppm)
P280254	78.50	79.80	1.30	0.104	0.7
P280255	79.80	82.53	2.73	0.175	0.7
P280256	82.53	83.93	1.40	0.57	0.9
P280257	83.93	85.65	1.72	0.421	1.4
P280258	85.65	87.00	1.35	0.398	0.6
P280260	87.00	88.70	1.70	0.373	1.3
P280261	88.70	91.50	2.80	0.7	6
P280262	91.50	94.42	2.92	0.586	0.7
P280263	94.42	97.30	2.88	0.624	0.7
P280264	97.30	98.42	1.12	0.357	0.6
P280265	98.42	100.65	2.23	0.545	<0.5
P280266	100.65	101.43	0.78	0.555	<0.5
P280267	101.43	103.37	1.94	0.686	<0.5
P280268	103.37	104.75	1.38	0.443	<0.5
P280269	104.75	105.45	0.70	0.406	<0.5
P280270	105.45	106.75	1.30	0.097	<0.5
P280271	106.75	107.53	0.78	0.623	<0.5
P280272	107.53	108.65	1.12	0.528	<0.5
P280273	108.65	108.95	0.30	0.299	<0.5
P280274	108.95	110.18	1.23	0.415	<0.5
P280275	110.18	111.40	1.22	0.543	<0.5
P280276	111.40	111.90	0.50	0.05	<0.5
P280277	111.90	112.53	0.63	0.628	<0.5
P280278	112.53	113.08	0.55	0.834	0.6
P280279	113.08	113.55	0.47	0.347	<0.5
P280281	113.55	114.30	0.75	0.782	<0.5
P280282	114.30	115.15	0.85	0.49	<0.5
P280283	115.15	116.39	1.24	0.454	<0.5
P280284	116.39	117.63	1.24	0.325	<0.5
P280285	117.63	118.95	1.32	0.35	<0.5
P280286	118.95	120.10	1.15	0.442	<0.5
P280287	120.10	120.60	0.50	0.485	<0.5
P280288	120.60	122.00	1.40	0.981	0.7
P280289	122.00	123.46	1.46	0.847	0.6
P280290	123.46	125.00	1.54	0.576	<0.5
P280291	125.00	127.20	2.20	0.762	<0.5
P280292	127.20	131.15	3.95	0.524	0.7
P280293	131.15	134.20	3.05	0.3	0.5
P280294	134.20	137.25	3.05	0.115	<0.5
P280295	137.25	140.30	3.05	0.149	<0.5
P280296	140.30	142.30	2.00	0.118	<0.5
P280297	142.30	143.35	1.05	0.174	<0.5
P280298	143.35	144.30	0.95	0.105	<0.5
P280299	144.30	145.67	1.37	0.124	<0.5
P280301	145.67	147.10	1.43	0.132	<0.5
P280302	147.10	148.20	1.10	0.17	<0.5
P280303	148.20	149.35	1.15	0.285	0.5
P280304	149.35	150.82	1.47	0.238	<0.5
P280305	150.82	152.50	1.68	0.341	<0.5
P280306	152.50	153.78	1.28	0.087	0.6
P280307	153.78	155.06	1.28	0.107	<0.5
P280308	155.06	156.34	1.28	0.096	0.8
P280309	156.34	158.60	2.26	0.099	<0.5
P280310	158.60	160.00	1.40	0.136	<0.5



Golden Gate	HH-GG-26-039C		Core HQ		
SAMPLE	From	To	Length	Au	Ag
ID	(m)	(m)	(m)	(g/t)	(ppm)
P280311	160.00	162.15	2.15	0.149	<0.5
P280312	162.15	164.30	2.15	0.008	<0.5
P280313	164.30	165.40	1.10	0.005	<0.5
P280314	165.40	166.90	1.50	0.006	<0.5
P280315	166.90	168.40	1.50	<0.005	<0.5
P280316	168.40	169.90	1.50	<0.005	<0.5
P280317	169.90	171.40	1.50	<0.005	<0.5
P280318	171.40	172.90	1.50	<0.005	<0.5
P280319	172.90	174.40	1.50	<0.005	<0.5
P280321	174.40	175.38	0.98	0.005	<0.5
P280322	175.38	176.90	1.52	<0.005	<0.5
P280323	176.90	177.87	0.97	<0.005	<0.5
P280324	177.87	178.83	0.96	<0.005	<0.5
P280325	178.83	179.65	0.82	0.006	<0.5
P280326	179.65	180.43	0.78	<0.005	<0.5
P280327	180.43	181.20	0.77	0.017	<0.5
P280328	181.20	182.42	1.22	<0.005	<0.5
P280329	182.42	183.64	1.22	<0.005	<0.5
P280330	183.64	184.85	1.21	<0.005	<0.5
P280331	184.85	186.05	1.20	<0.005	<0.5
P280332	186.05	188.35	2.30	<0.005	<0.5
P280333	188.35	189.50	1.15	<0.005	<0.5
P280334	189.50	190.83	1.33	<0.005	<0.5
P280335	190.83	192.15	1.32	<0.005	<0.5
P280336	192.15	193.51	1.36	<0.005	<0.5
P280337	193.51	194.87	1.36	<0.005	<0.5
P280338	194.87	196.23	1.36	<0.005	<0.5
P280339	196.23	197.59	1.36	<0.005	<0.5
P280341	197.59	198.95	1.36	0.006	<0.5
P280342	198.95	200.31	1.36	<0.005	<0.5
P280343	200.31	201.67	1.36	<0.005	<0.5
P280344	201.67	203.03	1.36	<0.005	<0.5
P280345	203.03	204.35	1.32	<0.005	<0.5
P280346	204.35	205.80	1.45	<0.005	<0.5
P280347	205.80	207.25	1.45	<0.005	<0.5
P280348	207.25	208.54	1.29	<0.005	<0.5
P280349	208.54	210.45	1.91	0.005	<0.5
P280350	210.45	211.85	1.40	<0.005	<0.5
P280351	211.85	213.50	1.65	<0.005	<0.5
P280352	213.50	215.00	1.50	<0.005	<0.5
P280353	215.00	216.55	1.55	<0.005	<0.5
P280354	216.55	217.60	1.05	<0.005	<0.5
P280355	217.60	218.75	1.15	<0.005	<0.5
P280356	218.75	220.20	1.45	<0.005	<0.5
P280357	220.20	221.15	0.95	<0.005	<0.5

Appendix C: JORC Code, 2012 Edition

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i> <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> <i>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i>	- This announcement provides an update of the Company's 2026 drill program recently completed at its Horse Heaven Project in Idaho, USA, and contains exploration results of three drill holes with the ID reference HH-GG26-031C and HH-GG26-032C. - Reported exploration results (data) includes: drill hole type, drill hole location (UTM metric) and drill hole parameters (dip, azimuth, altitude and end of hole data); sample data; assay data; and geological data. Supporting data includes drill collar locations in UTM metric data, together with dip, azimuth, altitude and end of hole data. - Reported assay data is for gold. - Please note that the primary data of the core samples (start, finish, interval) were converted from imperial feet measurements to metric metres in this announcement. Note that the operating jurisdiction uses imperial measurement system. - The assay data is derived independent professional laboratory services company of submitted core samples from HH-GG26-031C, HH-GG26-032C and HH-GG26-039C. - HH-GG26-031C HH-GG26-032C and HH-GG26-039C are diamond core holes. Sample intervals are contiguous and range in length individually from 2.2ft to 5.2ft (averaging 4.5ft). The samples are half-cut core prepared by industry standard core cutting saw by qualified personnel. - Samples were taken for the majority of the hole depth except where rock voids were encountered. - Geological data is derived from detailed geological and geotechnical logging by qualified personnel.

Criteria	JORC Code explanation	Commentary
		- Drill core sample assay results of the above-mentioned holes are included in this announcement. - References to mineralised intersects are included in this announcement.
Drilling techniques	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	- The Drilled Holes are diamond core drill holes that were drilled by Evolve Exploration Ltd using two Multipower MP1500 modular core rigs providing HQ diamond drill core. - The drill core is oriented. The core orientation method is conducted using the ACTxCore Orientation System.
Drill sample recovery	- Method of recording and assessing core and chip sample recoveries and results assessed. - Measures taken to maximise sample recovery and ensure representative nature of the samples. - Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	Drill core recovery of the drilled holes have been consistently high (a function of the solid lithologies) approaching 100%. Lower core recovery rates are sometimes observed in fault zones, with the most significant losses usually occurring near the top of the drill hole, close to the collar, with core recoveries of approximately 50% recovery. This lower core recovery represents <1% of the total length of the drill hole.
Logging	- Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. - Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. - The total length and percentage of the relevant intersections logged.	- Drill core was logged for lithology, alteration, mineralisation, structure (geotechnical) using oriented core to a level which has enabled preliminary interpretations relating to style of mineralisation, host and thickness. At this stage no Mineral Resource Estimates, mining studies or metallurgical studies are appropriate. - Drill core is also logged for RQD and Core recovery. - Drill core is then digitally photographed wet while whole after logging. - The logging, as described above is both quality and quantitative. 100% of the relevant intersections were logged as per above.

Criteria	JORC Code explanation	Commentary
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	- The HQ core was halved using a diamond core saw and sampled on geological intervals approximating 0.2m to 1.5m in length. The smallest intervals selected to specifically target mineralised veins have used down to 0.2m intervals. The 1.5 metre interval is most commonly applied across the core. - Drill core was halved using an electric powered core saw by RML contract staff who maintain possession of the core at its Antimony Camp facility. - Half-cut core samples were bagged and tagged using bar-coded sample tags and were securely stored prior to shipment at the Antimony Camp facility. - Half cut core samples were transported by RML contractors under lock and key to ALS prep' lab' facility in Twin Falls, ID. No third-party shippers were involved in the shipping process; chain of custody forms were exchanged at ALS Minerals in Twin Falls and a copy kept on file. The remaining boxed cut core are kept at a secure locked facility at Antimony Camp, ID. - ALS Minerals Twin Falls prep' lab' logs in the samples using the sample tag bar codes provided. Samples were then crushed to 70% less than 2mm, rotary split off 250g, pulverise split to better than 85% passing 75 microns. - All samples were then shipped to ALS Minerals analytical laboratory in Vancouver, British Columbia.
Quality of assay data and laboratory tests	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis</i>	- Gold was assayed by analytical method Au-AA23: Au by fire assay and AAS 30g nominal sample weight. - Silver (Ag) analysis was by analytical method ME-ICP61. Multielement analysis was by analytical method ME-ICP61: 34 elements by HF-HNO3-HClO4 acid digestion, HCl

Criteria	JORC Code explanation	Commentary
	<i>including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i>	leach and ICP-AES. Quantitatively dissolves nearly all elements for the majority of geological materials. Only the most resistive minerals, such as Zircons, are only partially dissolved. - No geophysical tools, spectrometers, handheld XRF instruments, etc.. were used in the generation of the assay data. - Certified reference materials (CRM) from an ISO certified supplier were inserted randomly into the sample stream at a ratio of 2%. CRMs were obtained for Meg LLC of Reno, Nevada; two separate CRMs were used for gold: a low grade and high-grade standard. - Blank material was inserted randomly in the sample stream at a ratio of 2%. Blank material is commercially available pea-gravel that has been previously tested for gold concentrations.t. - Duplicates samples were collected by quarter cutting the core at randomly selected intervals. Two quarter-cut portions of core were sent for analysis; the remaining half is kept at a secure facility. Core intervals of poor recovery were not used for duplicate samples. Duplicate core samples were inserted into the sample stream at a ratio of 2%.
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i> <i>The use of twinned holes.</i> <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> <i>Discuss any adjustment to assay data.</i>	No verification of the "significant intersections" has been completed to date by either independent or alternative company personnel. The company acknowledges the material nature of the results and is planning a program of select verification assays. Such were the immediacy of the results, these verifications were not possible prior to the release of the initial results.

Criteria	JORC Code explanation	Commentary
		- The Company is confident that its sample security processes are adequate for the interim period. - The announcement details drill holes HH-GG26-031C and HH-GG26-032C. that were drilled on the same platform but were drilled with different directions and dips (Figure 3). By this HH-GG26-031C and HH-GG26-032C, and HH-GG25-006C are fanned holes. No holes are twinned (same collar, same azimuth, same dip). HH-GG26-039C was drilled about 500m north of HH-GG26-031C & HH-GG26-032C. - Sample results, certificates and results were sent via email to RML site contractors in Antimony Camp where results are analysed and interpreted. - No assay adjustments have been carried out.
Location of data points	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> <i>Specification of the grid system used.</i> <i>Quality and adequacy of topographic control.</i>	The locations of the Drilled Holes were achieved using handheld GPS programmed into the local coordinate system. The accuracy of the GPS is in line with best practice standards.
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i> <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> <i>Whether sample compositing has been applied.</i>	- The assay data spacing of HH-GG26-031C HH-GG26-032C and HH-GG26-039C, the length and frequency of each sample and the collective coverage of the drill holes are best practise in terms of hole sample representativeness. - In terms of geological data spacing associated with the Drilled Holes every metre of these holes was logged, with details of lithology, alteration, mineralisation recorded to sub-metre detail.
Orientation of data in relation to	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and</i>	The Drilled Holes have a drill direction that is approaching perpendicular to the regional trend (lithologically and structurally) and

Criteria	JORC Code explanation	Commentary
geological structure	<i>the extent to which this is known, considering the deposit type.</i> <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	also approaching perpendicular to the known mineralisation. The purpose of the Drilled Holes was to test the possible extension of known gold and tungsten mineralisation at surface at depth along strike from past drill holes and past surface sample results and to test the occurrence of gold in un-oxidised rocks at depth. Cautionary Note: There is currently insufficient data pertaining to sampling orientation and the local-scale orientation of mineralisation to determine the true width of the gold intervals in these holes. Additional holes in all directions are required to determine whether the gold mineralisation is broadly pervasive or (to various degrees) spatially constrained. For example, if the gold mineralisation is broadly pervasive, then the gold intervals in this announcement are true widths. If the gold mineralisation is spatially constrained, then the gold intervals in this announcement are not true widths. Based in increasing data, the gold mineralisation is interpreted as being broadly pervasive in association with a structurally-controlled repeating host sequence of country-rock granites and fault breccias
Sample security	<i>The measures taken to ensure sample security.</i>	All drill core samples were delivered directly to RML's geologists on site where they remain under direct supervision at a secure site.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	The competent person is unaware of the undertaking of audits or reviews for sampling technique and data, other than its own review.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	- Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, past sites, wilderness or national park and environmental settings. - The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	- This announcement refers to exploration results regarding drill core at Golden Gate, a project within the one larger project, Horse Heaven project in Idaho USA, comprising seven hundred and twenty-nine (729) U.S. Federal lode mining claims covering 14,580 acres and includes seven hundred and nineteen (719) mining claims and ten lode mining claims referred as the Oberbillig Group. - The competent person understands that the mining claims are all in good standing.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	No exploration results reported in this announcement were performed by other parties.
Geology	Deposit type, geological setting and style of mineralisation.	- The project area is dominated by Cretaceous-aged granitic rocks relating to intrusive phases associated with the Atlanta Lobe of the Idaho Batholith. These largely granodiorite rocks have intruded Neoproterozoic-aged metasediments, comprising quartzites (which are dominant) calc-silicates, marble and black shale. The area and broader region is affected by broad regional folding and N-S, NNE-SSW, and NE-SW faults. - Gold, antimony, tungsten and silver mineralisation is associated with hydrothermally altered and fractured granodiorites.
Drillhole Information	- A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drillholes: - easting and northing of the drillhole collar - elevation or RL (Reduced Level –	The drillhole information for the Drilled Holes is included in a table (Table1) with drill collar location data, altitude, dip, azimuth, and end of hole.

Criteria	JORC Code explanation	Commentary
	elevation above sea level in metres) of the drillhole collar ○ dip and azimuth of the hole ○ down hole length and interception depth ○ hole length. • If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	
Data aggregation methods	• In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. • Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. • The assumptions used for any reporting of metal equivalent values should be clearly stated.	• In reporting downhole gold intersections results of HH-GG26-031C, HH-GG26-032C and HH-GG26-039C no maximum and minimum truncations or cut off grades were used. • In reporting downhole gold intersections/intervals, assay results of HH-GG26-031C and HH-GG26-032C and HH-GG26-039C weighted averages were required due to the fact that sample lengths were variant (between 2.2ft and 5.2ft). The sample interval length was multiplied by the sample assay data then divided by the total length of the interval. • No metal equivalents were used in this announcement.
Relationship between mineralisation widths and intercept lengths	• These relationships are particularly important in the reporting of Exploration Results. • If the geometry of the mineralisation with respect to the drillhole angle is known, its nature should be reported. • If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	• With reference to the Drilled Holes, these holes were drilled close to perpendicular across the prospect-scale orientation of the known mineralisation. • There is insufficient data pertaining to the gold mineralisation identified the Drilled Holes to allow conclusive statements concerning the sampling orientation and the local-scale orientation of mineralisation. Therefore the true width nature of

Criteria	JORC Code explanation	Commentary
		the reported widths of the mineralisation is not known.
Diagrams	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drillhole collar locations and appropriate sectional views.</i>	- A drill hole location plan and cross section are provided with geolocation information (coordinates, northing and scale bar) showing the locations of the Drilled Holes. Legends are included within each figure (where appropriate) and when additional explanation is required, this is given to the figure caption. - A drill hole location plan and cross section are provided in this announcement to provide a sense of location of the hole in relation: to i) other drill holes; and ii) intersected mineralisation. The cross sections include a geological interpretation
Balanced reporting	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	This announcement is considered to be fair and balanced with respect to the exploration results, being a drilling update.
Other substantive exploration data	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	There is no other material data associated with the Drilled Holes not mentioned in this announcement.
Further work	<i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	- The Drilled Holes, subject of this announcement, are part of a large diamond core drill program of 42 holes for 12,236m (40,144 ft), which is now completed. - Drill hole results will be released on an ongoing basis.