

Further Significant Drilling Results Returned from the Gordons Gold Project

- Reconnaissance RC and Air-core drilling continues to demonstrate the potential to make new gold discoveries at multiple prospects near Kalgoorlie in Western Australia, highlights include

Star of Gordon Prospect – RC drilling

- **10m @ 8.4g/t Au** from 43m including **1m @ 52.5g/t Au** (YRLRC630) located directly down dip from recent RC intercepts;
- **8m @ 4.7g/t Au** from 15m including **1m @ 13.3g/t Au** (YRLRC513)¹
- **10m @ 2.5g/t Au** from 27m including **1m @ 8.6g/t Au** (YRLRC514)¹
- Extensional drilling to 180m vertical depth completed – results pending

Malone Prospect – RC drilling

- **8m @ 1.3g/t Au** from 88m including **2m @ 2.0g/t Au** (YRLRC619)
- **8m @ 0.8g/t Au** from 144m including **1m @ 4.6g/t Au** (YRLRC638A)
- **20m @ 0.6g/t Au** from 92m and **4m @ 0.6g/t Au** from 140m to end-of-hole (YRLRC638 – 4m composite assay)
- Additional RC and diamond holes completed – results pending

Malone Prospect – Air-core drilling

- **7m @ 0.3g/t Au** from 37m including **1m @ 0.9g/t Au** (YRLAC653)
- **6m @ 0.8g/t Au** from 43m including **1m @ 4.1g/t Au** and **4m @ 2.3g/t Au** from 53m including **1m @ 8.8g/t Au** (YRLAC657)
- Multiple significant four metre composite intercepts have been returned from the end of another 13 new holes generating new priority RC targets

Bradman Prospect – RC drilling

- **32m @ 0.2g/t Au** from 80m, **12m @ 2.2g/t Au** from 256m including **4m @ 5.2g/t Au** and **4m @ 1.8g/t Au** from 284m (YRLRC646 – 4m composite assay)

The Cleft Prospect – RC drilling

- **2m @ 14.4g/t Au** from 88m including **1m @ 24.3g/t Au** (YRLRC610)
- **1m @ 2.7g/t Au** from 142m (YRLRC609B)

- RC drilling is continuing at the Gordons Dam and Star of Gordons prospects until numerous Aircore, RC and diamond drilling results are received from the Malone, Andrews and Bradman prospects in order to evaluate and prioritise new drilling targets.

¹ Refer to YRL ASX announcement dated 1 July & 27 May 2021.



Registered Address

Yandal Resources Limited
ACN 108 753 608 ABN 86 108 753 608

A 159 Stirling Highway
Nedlands WA 6009
P PO Box 1104
Nedlands WA 6909

Board Members

Lorry Hughes	Managing Director/CEO
Katina Law	Non-Executive Director
Tim Kennedy	Chairman
Bianca Taveira	Company Secretary

T +61 8 9389 9021
E yandal@yandalresources.com.au
W www.yandalresources.com.au

Gold Projects

Ironstone Well (100% owned)	
Barwidgee (100% owned)	
Mt McClure (100% owned)	
Gordons (100% owned)	
Shares on Issue	100,439,953
Share Price	\$0.49
Market Cap	\$49M
ASX Code	YRL

Yandal Resources Ltd (ASX: YRL, “Yandal Resources” or the “Company”) is pleased to provide an update on exploration activities at the 100%-owned Gordons gold project in Western Australia (Figure 1).

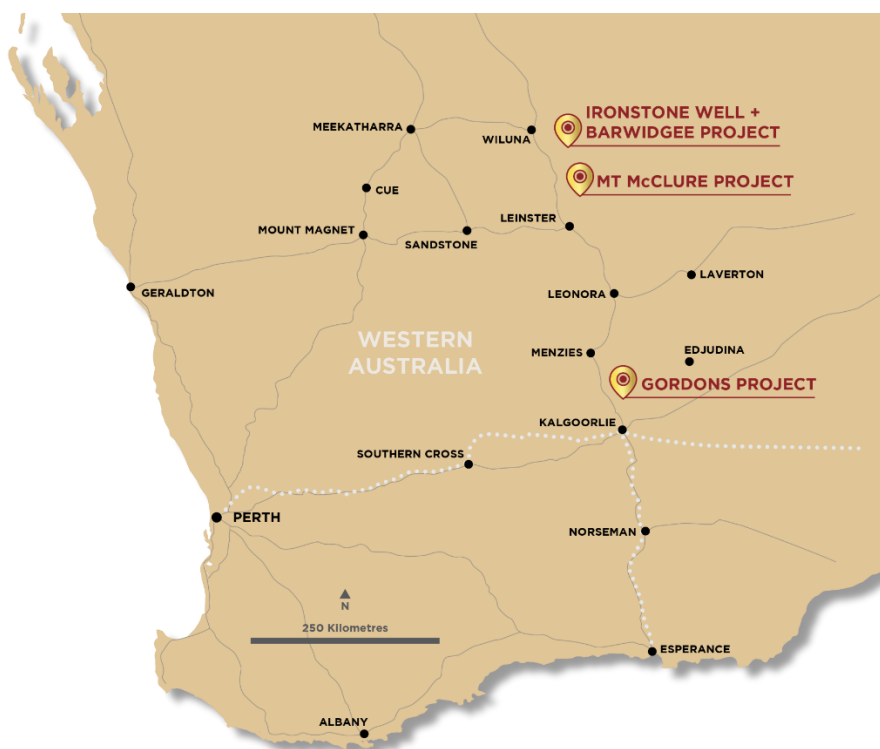


Figure 1 – Yandal Resources’ gold project locations.

Star of Gordon Prospect

The prospect is located 2km directly NNW along strike from the Gordon Sirdar underground gold mine which is owned and operated by FMR Investments Pty Ltd (“FMR”) (Figure 4). FMR are currently mining ~60,000t of ore per month using conventional underground mining methods and transporting the ore via road haulage for processing at their mill in Coolgardie.

Individual 1m fire-assay results have been received from five of nine reverse circulation (“RC”) holes for 1,650m completed during the June and September Quarters to follow-up reconnaissance RC drilling results over a 1.4km strike length¹ (Figures 2 & 3). Four metre composite results have also been returned from one hole (YRLRC0632). The holes have returned some highly encouraging downhole results from shallow depths including;

- **10m @ 8.4g/t Au** from 43m including **1m @ 52.5g/t Au** (YRLRC630)
- **12m @ 1.1g/t Au** from 44m including **4m @ 3.0g/t Au** (YRLRC632)²
- **9m @ 0.9g/t Au** from 54m including **1m @ 1.8g/t Au** (YRLRC629)
- **2m @ 1.0g/t Au** from 14m including **1m @ 1.2g/t Au** (YRLRC628)

The high-grade intercept in hole YRLRC630 is particularly encouraging as it is part of a broader transitional and bedrock intercept of **45m @ 2.0g/t Au** from 18m and is located directly down dip from significant intercepts in holes YRLRC513 and 514 as follows;

- **8m @ 4.7g/t Au from 15m including 1m @ 13.3g/t Au** (YRLRC513)¹
- **10m @ 2.5g/t Au from 27m including 1m @ 8.6g/t Au** (YRLRC514)¹.

¹ Refer to YRL ASX announcement dated 1 July & 27 May 2021, ² A composite assay result.

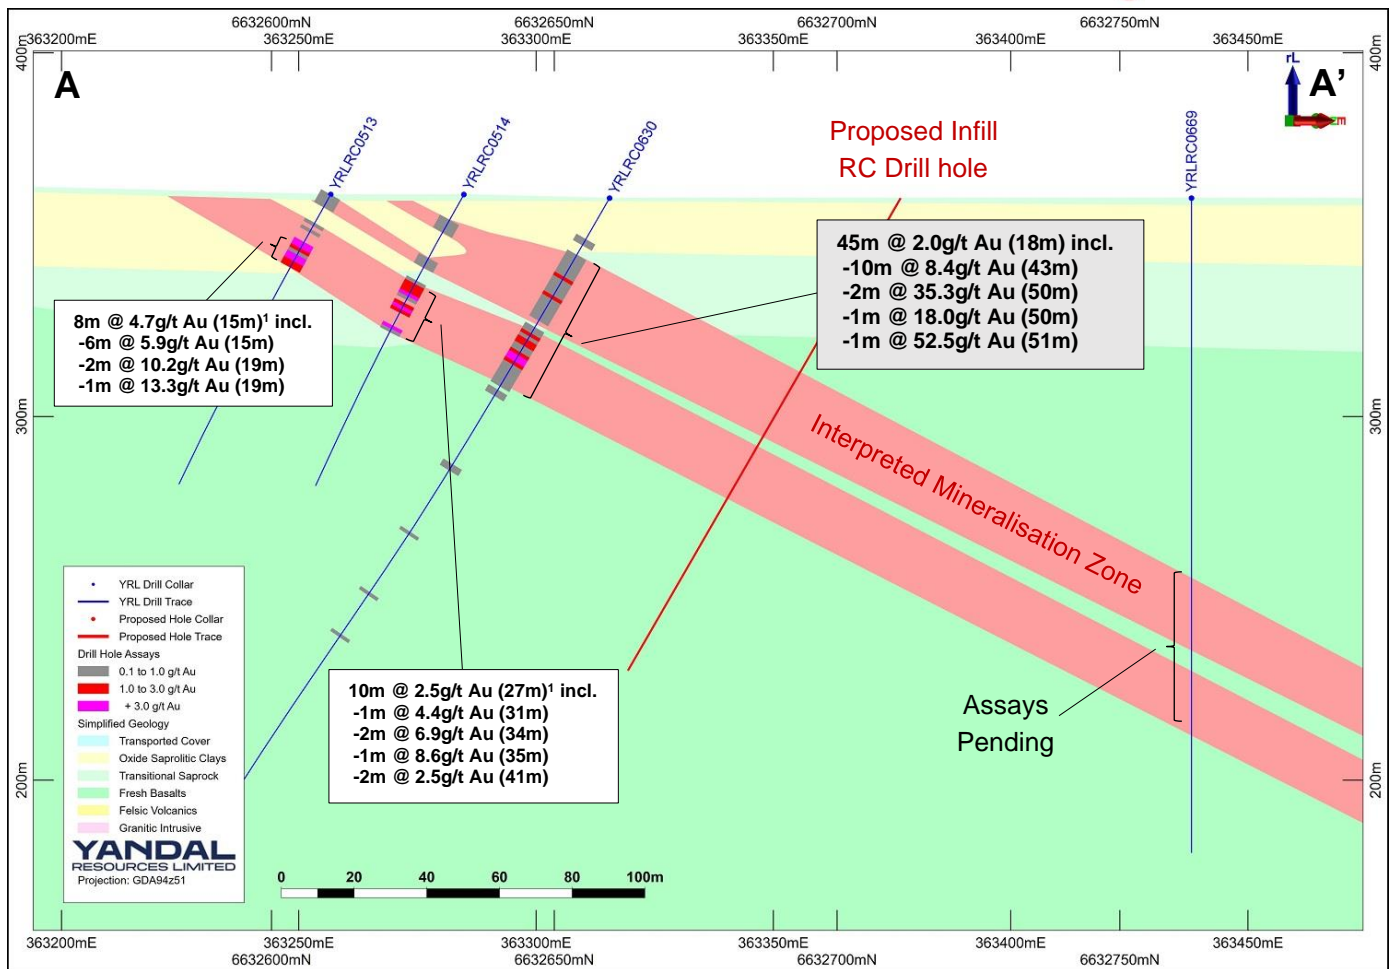


Figure 2 – Cross Section plan of the Star of Gordon gold prospect (refer Figure 3 for location).

The depth to fresh rock is very shallow (20-40m) in the Star of Gordon prospect area and RC and diamond drilling is required to assess the depth potential. To date gold mineralisation has been intersected within strongly oxidised to transitional material and in primary rocks. The mineralisation is contained within disseminated sulphides and quartz veins within a mafic package that is interpreted to be partially intruded by porphyry and dolerite rocks.

As an immediate follow-up to the shallow high-grade intercepts a three hole RC program to provide an initial test of the depth potential was undertaken. The holes were drilled vertically to depths of 180m and the geology encountered is interpreted to have confirmed the relatively shallow dip of the mineralised zone.

Sulphides and quartz veining have been noted by rig geologists in the vicinity of the target zone which could indicate gold mineralisation extends up to 250m down dip – assays pending.

Preparation to conduct new heritage surveys to cover the entire Star of Gordon area at an advanced stage and a survey is planned to commence in the December Quarter. Approvals to conduct substantial new infill and extensional RC drill programs including initial diamond drilling is also underway. It is currently anticipated that extensional RC drilling will recommence in October.

¹ Refer to YRL ASX announcement dated 1 July & 27 May 2021.


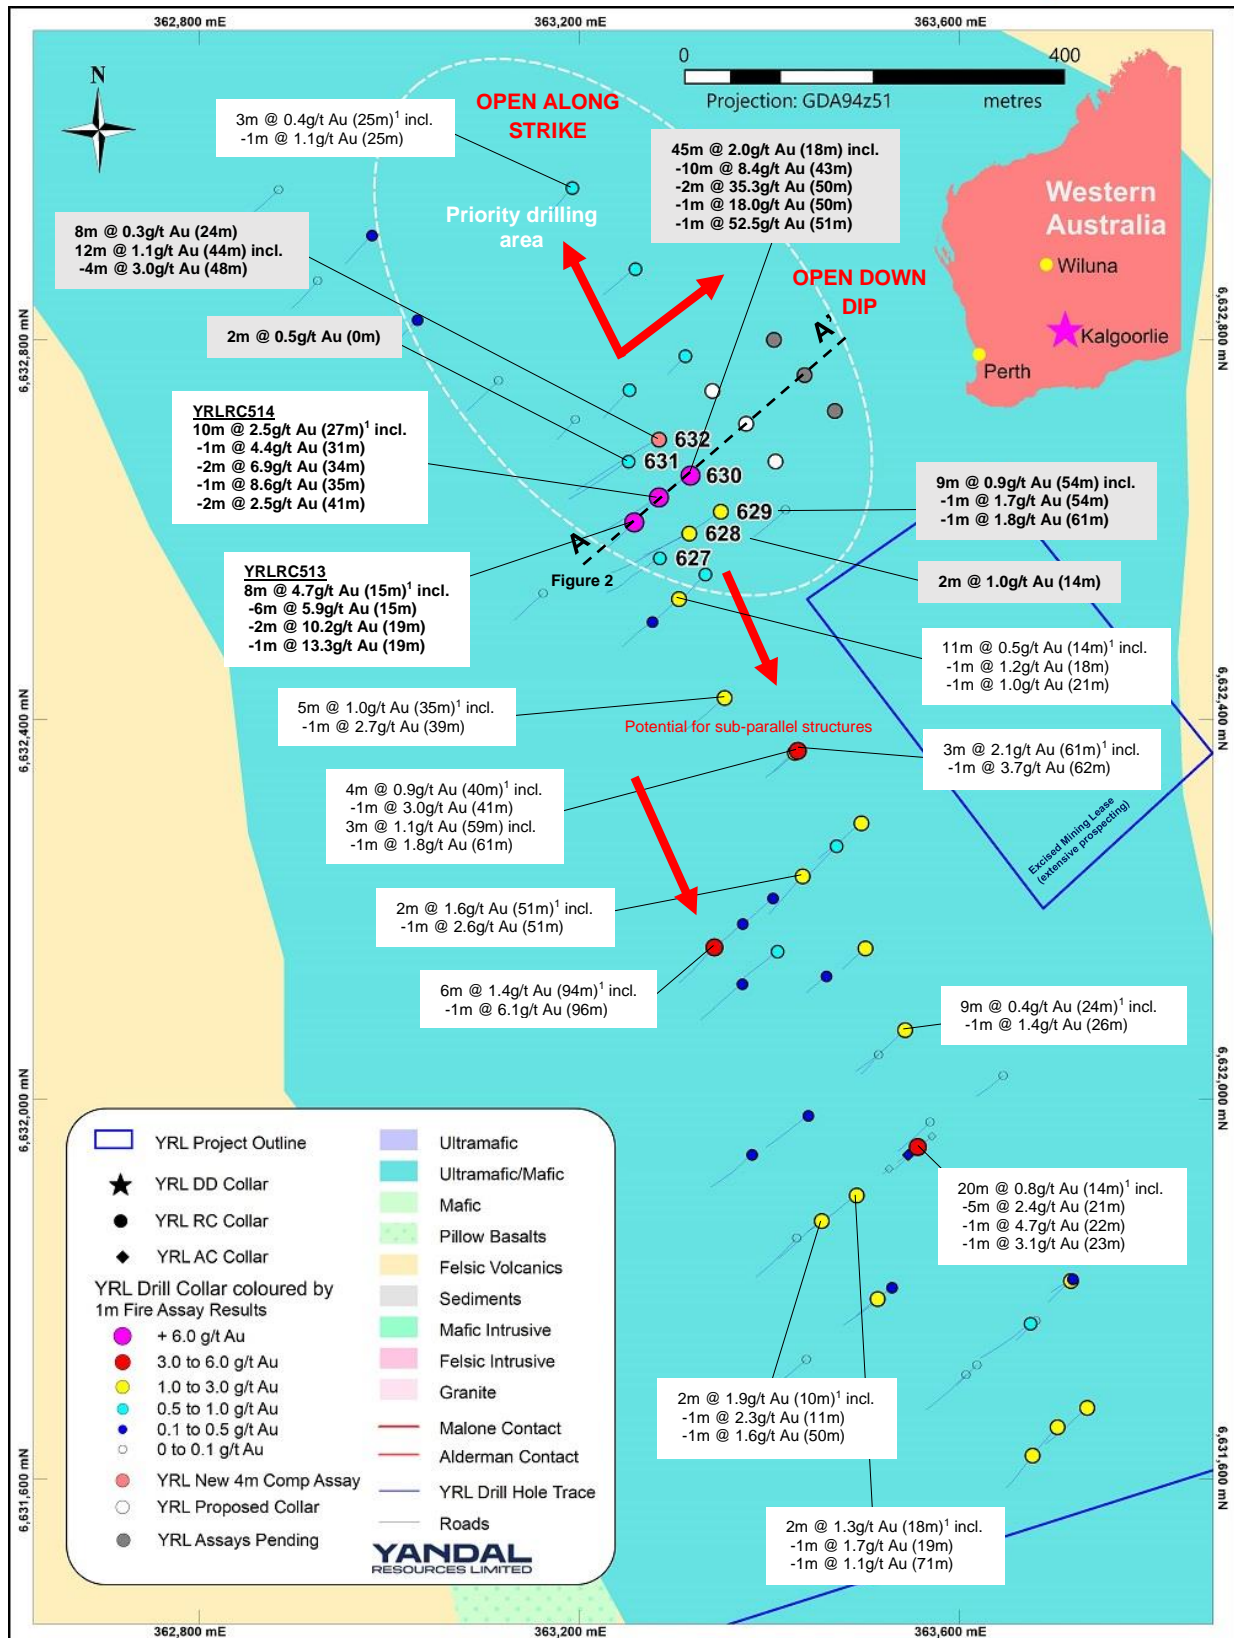


Figure 3 – Plan view drill collar map for the Star of Gordon prospect coloured by maximum gold grade projected to the drill collar, recent/new downhole intercepts and follow-up holes with assays pending¹.

¹ Refer to YRL ASX announcement dated 1 July & 27 May 2021.

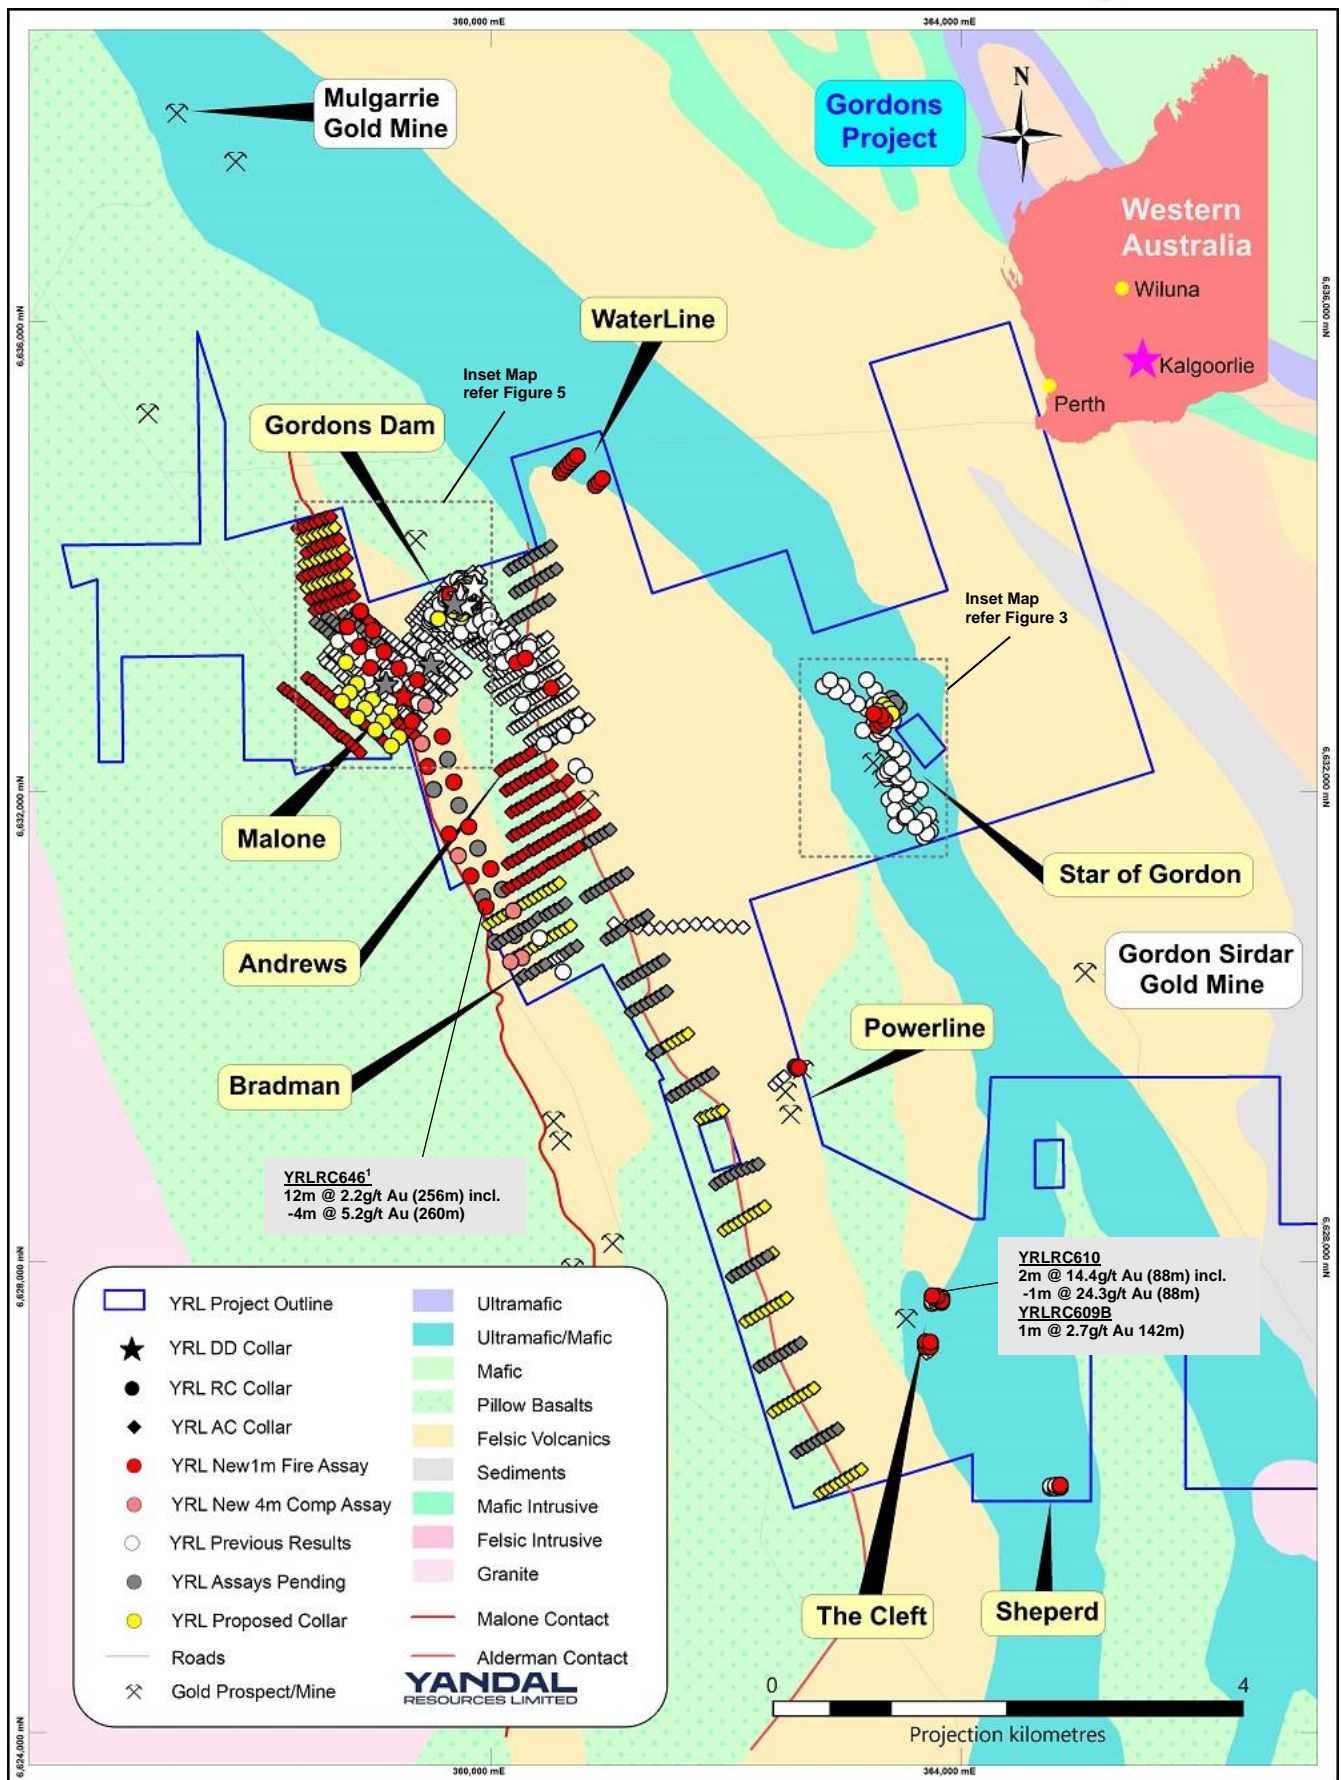

¹ A composite assay result.

Figure 4 – Location map of key prospects within the Gordons Gold project in relation to nearby operating third party gold mines, project tenure and regional geology.

Malone, Gordons Dam, Andrews and Bradman Prospects

At the **Malone Prospect** (Figures 4 & 5) individual 1m fire-assay results have been received from 13 reconnaissance reverse circulation ("RC") holes and composite aqua-regia assays have been received from one hole (Total of 2,239m). The holes were completed in the June and September Quarters and have returned some encouraging results including;

- **8m @ 1.3g/t Au** from 88m including **2m @ 2.0g/t Au** (YRLRC619)
- **8m @ 0.8g/t Au** from 144m including **1m @ 4.6g/t Au** (YRLRC638A)
- **20m @ 0.6g/t Au** from 92m and **4m @ 0.6g/t Au** from 140m to end-of-hole (YRLRC638)².

Several additional RC holes have been completed to test for extensions to mineralisation at depth and along strike from mineralisation related to the Malone felsic-mafic contact (Figure 5). The area initially tested equates to ~3km along strike – assays pending.

A four hole diamond drilling program for 1,852.2m was completed in September to test depth extensions and improve the geological understanding of the area in a jog position of the Malone contact where high-grade oxide and primary RC intercepts had previously been discovered¹.

Three holes (YRLDD0009-11) were drilled on the same west-east section and YRLDD0013 was located on a west-east section a further 200m north along strike (Figure 5). All holes were drilled towards the south-west and successfully intersected the felsic-mafic contact penetrating well into the mafic sequence.

The felsic unit consists of an aphanitic (very fine grained) rhyolitic extrusive and it is located in the hangingwall to a mafic package of volcanogenic sediments (siltstone/sandstone/agglomerate) and pillow basalts which have been intruded by several phases of porphyry rocks. Widespread disseminated, quartz-vein and shear/fault hosted sulphides occur throughout the entire mafic package and within a number of porphyry units. The system is strongly carbonate-sericite-pyrite altered and contains intense quartz veining oriented in multiple directions.

Assay results have been returned from hole YRLDD0009 & 10 with multiple low level gold intervals defined within several units (Table 1). Highlights include;

YRLDD0009

- **0.40m @ 1.3g/t Au** from 107.30m
- **1.05m @ 0.5g/t Au** from 116.25m
- **1.15m @ 0.6g/t Au** from 253.55m

YRLDD0010

- **3.70m @ 0.3g/t Au** from 82.00m including **1.00m @ 0.8g/t Au**
- **2.00m @ 0.5g/t Au** from 287.10m
- **0.40m @ 1.7g/t Au** from 361.65m

The core from the remaining two holes is currently undergoing geological logging, cutting and assaying with results anticipated during the December Quarter.

¹ Refer to YRL ASX announcement dated 1 July & 27 May 2021. ² A composite assay result.

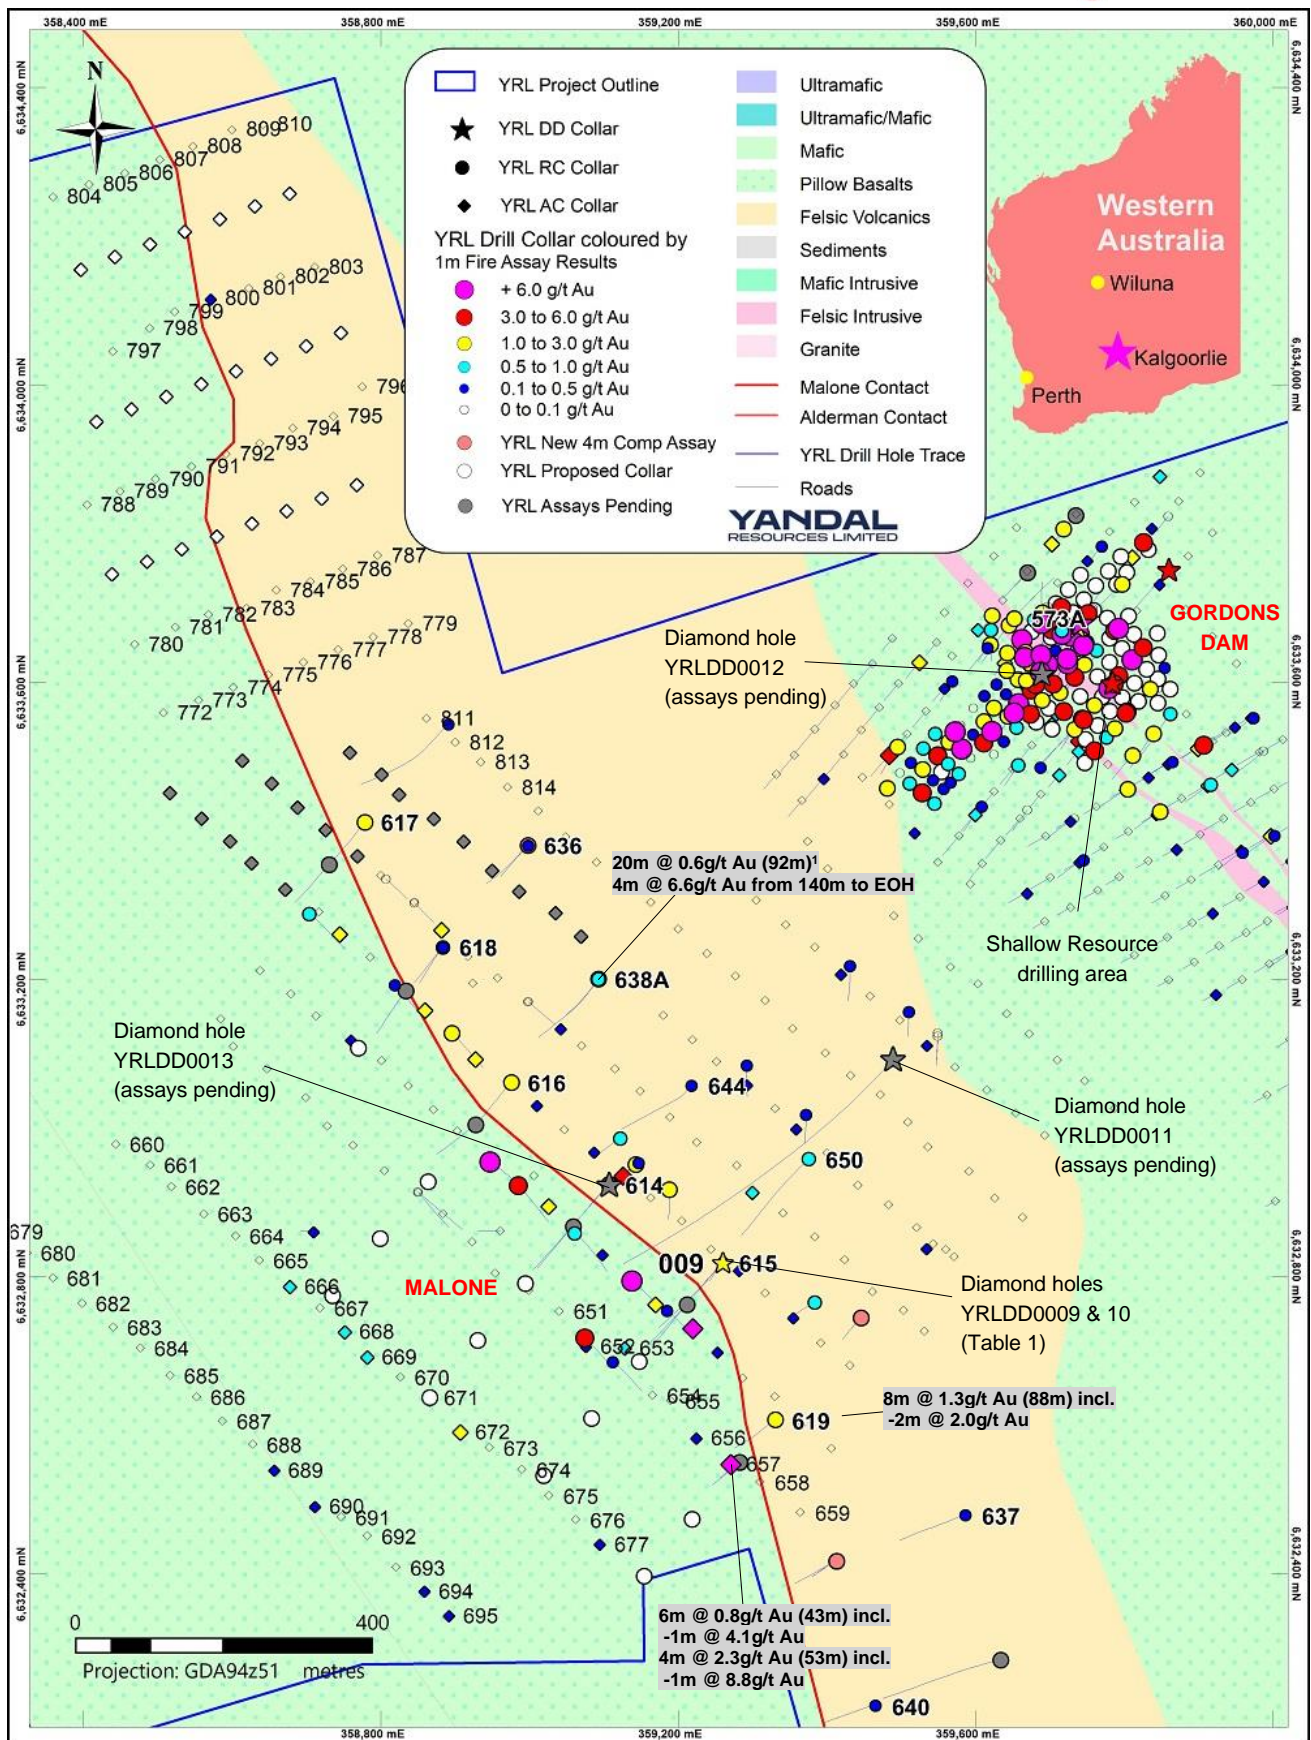


Figure 5 – Plan view drilling collar map coloured by maximum gold grade (g/t Au) projected to the drill collar, for the Gordons Dam and Malone prospects and interpreted geology (Refer to Tables 1-3 for all new results).

¹ A composite assay result.

In addition 4m composite and some individual 1m samples have been returned from 87 Air-core ("AC") drill holes for 6,080m in areas adjacent to and potentially related to the Malone contact (Table 2 & 3). A number of highly encouraging results have extended the area of anomalous mineralisation including;

- **6m @ 0.8g/t Au** from 43m including **1m @ 4.1g/t Au**; and
- **4m @ 2.3g/t Au** from 53m including **1m @ 8.8g/t Au** (YRLAC657)
- **4m @ 660ppb Au** from 68m (YRLAC669)*
- **12m @ 430ppb Au** from 64m including **4m @ 1,080ppb Au** (YRLAC671)*
- **1m @ 1,190ppb Au** from 76m (YRLAC672)
- **4m @ 355ppb Au** from 96m and **4m @ 281ppb Au** from 112m (YRLAC694)

At the **Gordons Dam Prospect** (Figures 4 & 5) individual fire-assay results have been received from four holes for 379m. The holes have returned some encouraging results including;

- **2m @ 1.0g/t Au** from 45m including **1m @ 1.7g/t Au** (YRLRC573A)
- **2m @ 1.1g/t Au** from 47m (YRLRC573B).

In addition a single diamond hole for 261.50m was completed with the aim to improve the structural understanding of high-grade mineralisation at depth. Assays are pending for the hole with assay results expected to be available in the December Quarter.

As part of initial feasibility study and mining approvals a 4,500m shallow RC program has commenced with the aim to infill known mineralisation areas to provide sufficient data for the compilation of an initial Mineral Resource Estimate ("MRE"). The initial MRE is planned for completion in the March Quarter 2022.

At the **Andrews Prospect** (Figure 4) individual fire-assay results have been received from 11 RC holes (1,949m) and 61 reconnaissance AC holes (7,926m). The holes were targeting potential extensions to mineralisation south from the Malone prospect in similar geological settings. The holes have returned some encouraging RC results including;

- **9m @ 1.4g/t Au** from 95m including **2m @ 3.9g/t Au** (YRLRC622)
- **1m @ 1.7g/t Au** from 125m (YRLRC623)
- **2m @ 1.0g/t Au** from 110m (YRLRC624)

Encouraging AC results include;

- **8m @ 180ppb Au** from 32m (YRLAC705)*
- **8m @ 170ppb Au** from 36m (YRLAC711)*
- **8m @ 393ppb Au** from 56m including **4m @ 705ppb Au** (YRLAC716)*
- **4m @ 570ppb Au** from 28m (YRLRC740)

The results are currently being reviewed in order to prioritise follow-up RC targets for commencement in the December Quarter.

At the **Bradman Prospect** (Figure 4) composite assay results have been received from one RC hole (314m) and 15 reconnaissance AC holes (840m). The holes were targeting potential extensions to mineralisation south from the Malone prospect in similar geological settings. The holes have returned some encouraging RC results including;

- **32m @ 0.2g/t Au** from 80m; and
- **4m @ 0.4g/t Au** from 140m; and
- **12m @ 2.2g/t Au** from 256m including **4m @ 5.2g/t Au**; and
- **4m @ 1.8g/t Au** from 284m (YRLRC646)

Encouraging AC results include;

- **17m @ 65ppb Au** from 40m to end-of-hole (YRLAC762)*
- **16m @ 100ppb Au** from 48m (YRLAC764)*
- **4m @ 125ppb Au** from 64m **to end-of-hole** (YRLAC766)*.

The results are currently being reviewed in order to prioritise follow-up RC drill targets for testing in the December Quarter.

At the **Waterline Prospect** (Figure 4) fire-assay results have been received from nine RC holes (648m). The holes were targeting potential extensions to some anomalous historic reconnaissance drilling results. The holes have returned some encouraging results including;

- **14m @ 0.2g/t Au** from 50m (YRLRC594)
- **2m @ 1.0g/t Au** from 56m (YRLRC599).

At the **Powerline, Sheperd and Porphyry Prospects** (Figure 4) fire-assay results have been received from a total of nine RC holes (666m). The holes were targeting potential extensions to some anomalous historic reconnaissance drilling results. The holes returned low level results as listed in Table 2.

The results are currently being reviewed in order to prioritise any follow-up RC drilling.

At the **Cleft Prospect** (Figure 4) fire-assay results have been received from seven RC holes (852m). The holes were targeting potential extensions to some anomalous recent and historic reconnaissance drilling results. The holes have returned some encouraging results including;

- **2m @ 14.4g/t Au** from 88m including 1m @ 24.3g/t Au (YRLRC610)
- **1m @ 2.7g/t Au** from 142m (YRLRC609B).

The results are currently being reviewed in order to prioritise follow-up RC targets for possible commencement in the December Quarter.

Next Steps

Key exploration activities planned during the December Quarter include;

- Receive and interpret pending AC, RC and diamond drill assays from the Malone, Gordons Dam, Star of Gordon, Andrews, Bradman, Challenger, Parmelia, Success and HMS Sulphur prospects;
- Assess potential to compile an open pit MRE and commence feasibility studies for the Gordons Dam prospect;
- Commence detailed planning and execution of heritage surveys over key prospect areas within the Ironstone Well and Barwidgee projects including priority areas adjacent to and along strike from the Flushing Meadows, Oblique, Quarter Moon, Flinders Park and Sims Find prospects.

Table 1 – RC/DD drill collar locations, depth, orientation and final down hole assay results - Gordons project.

Hole Id	North (m)	East (m)	Depth (m)	Dip (Deg.)	Azi. (Deg.)	From (m)	To (m)	Interval (m)	Au1 g/t (FA50)	Au2 g/t (FA50)
Star of Gordon Prospect RC Intervals (>0.1g/t Au)										
YRLRC0627	6632571	363285	150	-60	240	4	8	4	0.3	
				including		5	6	1	0.6	0.8
						19	20	1	0.3	
						54	55	1	0.1	
						62	63	1	0.2	
						81	82	1	0.2	
YRLRC0628	6632597	363316	186	-60	240	0	4	4	0.1	
						12	16	4	0.6	
				including		14	16	2	1.0	
				including		14	15	1	1.2	1.2
						20	27	7	0.1	
						37	38	1	0.2	
						44	45	1	0.2	
						50	52	2	0.1	
						72	73	1	0.1	
						140	141	1	0.1	
YRLRC0629	6632620	363349	216	-60	240	17	28	11	0.2	
						52	66	14	0.7	
				including		54	63	9	0.9	
				including		54	55	1	1.7	
				including		61	62	1	1.8	1.8
						72	73	1	0.2	
						79	80	1	0.3	
YRLRC0630	6632658	363317	204	-60	240	12	15	3	0.2	
						18	63	45	2.0	
				including		43	53	10	8.4	
				including		50	52	2	35.3	
				including		50	51	1	17.6	18.0
				including		51	52	1	33.4	52.5
						107	108	1	0.4	
						127	128	1	0.1	
						141	142	1	0.2	
YRLRC0631	6632673	363252	150	-60	240	0	2	2	0.5	
						17	18	1	0.5	0.7
						78	79	1	0.2	
YRLRC0632*	6632696	363284	204	-60	240	24	32	8	0.3	
						44	56	12	1.1	
				including		48	52	4	3.0	2.7
YRLRC0667	6632726	363469	180	-90	360	Assays Pending				
YRLRC0668	6632801	363405	180	-90	360	Assays Pending				
YRLRC0669	6632764	363437	180	-90	360	Assays Pending				
Gordons Dam Prospect RC Intervals (>0.1g/t Au)										
YRLRC0573A	6633686	359651	49	-60	40	9	10	1	0.1	
						16	17	1	0.1	

Hole Id	North (m)	East (m)	Depth (m)	Dip (Deg.)	Azi. (Deg.)	From (m)	To (m)	Interval (m)	Au1 g/t (FA50)	Au2 g/t (FA50)
						41	42	1	0.3	
						45	47	2	1.0	
				including		45	46	1	1.7	1.7
YRLRC0573B	6633686	359651	84	-60	40	16	17	1	0.3	
						47	49	2	1.1	
				including		47	48	1	2.0	1.9
						53	55	2	0.4	
						60	63	3	0.2	
						77	78	1	0.1	
						80	81	1	0.1	
YRLRC0612	6633106	360220	120	-60	240	56	57	1	0.1	
						92	93	1	0.7	0.7
YRLRC0613	6633143	360293	126	-60	240	93	94	1	0.6	0.6
Gordons Dam Prospect Diamond Intervals (>0.1g/t Au)										
YRLDD0012	6633613	359689	261.5	-60	40	Assays Pending				
Malone Prospect RC Intervals (>0.1g/t Au)										
YRLRC0614	6632926	359107	85	-60	220	64	66	2	0.3	
						71	81	10	0.1	
YRLRC0615	6632821	359260	72	-60	220	20	21	1	0.1	
						23	24	1	0.1	
YRLRC0615	6632821	359260	66	-60	220	23	24	1	0.1	
YRLRC0616	6633063	358976	150	-60	220	66	67	1	0.3	
						72	75	3	1.2	
				including		72	74	2	1.7	
				including		72	73	1	2.1	2.3
						105	107	2	0.1	
						113	114	1	0.3	
						139	140	1	0.1	
YRLRC0617	6633413	358779	150	-60	220	68	70	2	0.6	
						87	90	3	0.2	
YRLRC0618	6633245	358884	126	-60	220	76	77	1	0.2	
						79	80	1	0.2	
						100	102	2	0.5	
YRLRC0618A	6633245	358884	150	-60	220	78	79	1	0.2	
						100	101	1	0.2	
YRLRC0619	6632609	359331	150	-60	220	46	47	1	0.1	
						88	101	13	0.9	
				including		88	96	8	1.3	
				including		88	90	2	2.0	
YRLRC0634	6633545	358891	270	-60	220	226	227	1	0.1	
						234	235	1	0.1	
YRLRC0636	6633382	358998	114	-60	220	82	83	1	0.2	
YRLRC0638*	6633202	359093	144	-60	220	92	112	20	0.6	
						140	144	4	0.6#	0.7#
YRLRC0638A	6633202	359093	240	-60	220	97	116	19	0.3	

Hole Id	North (m)	East (m)	Depth (m)	Dip (Deg.)	Azi. (Deg.)	From (m)	To (m)	Interval (m)	Au1 g/t (FA50)	Au2 g/t (FA50)
				including		107	108	1	1.3	1.3
						144	152	8	0.8	
				including		147	148	1	4.6	4.3
						221	222	1	0.9	
YRLRC0644	6633059	359218	252	-60	220	90	92	2	0.2	
						149	150	1	0.3	
YRLRC0650	6632960	359376	270	-60	220	24	26	2	0.5	
						65	69	4	0.1	
						72	76	4	0.3	
						79	80	1	0.4	
						185	186	1	0.2	
Malone Prospect Diamond Intervals (>0.1g/t Au)										
YRLDD0009	6632821	359260	337.0	-60	220	0	41.6	Not assayed		
						74.00	75.00	1.00	0.2	
						89.00	92.00	3.00	0.2	
						107.30	108.20	0.90	0.6	
				including		107.30	107.70	0.40	1.3	1.3
						110.65	113.50	2.85	0.2	
						116.25	117.30	1.05	0.5	
						118.00	119.00	1.00	0.1	
						121.00	123.00	2.00	0.1	
						159.30	159.60	0.30	0.2	
						166.93	167.30	0.37	0.1	
						179.90	180.50	0.60	0.2	
						188.00	189.00	1.00	0.1	
						192.90	193.50	0.60	0.1	
						243.00	244.00	1.00	0.1	
						253.55	254.70	1.15	0.6	
				including		253.90	254.70	0.80	0.7	0.7
						261.40	261.80	0.40	0.1	
						263.50	264.00	0.50	0.1	
						266.50	267.50	1.00	0.2	
						274.70	277.25	2.55	0.2	
						283.00	284.00	1.00	0.1	
						288.00	289.00	1.00	0.4	
						291.50	292.20	0.70	0.4	
						301.30	302.1	0.80	0.1	
						304.60	307.0	2.48	0.1	
						329.90	332.0	2.10	0.2	
YRLDD0010	6632821	359260	397.6	-75	220	0	74.60	Not assayed		
						82.00	85.70	3.70	0.3	
				including		84.00	85.00	1.00	0.8	0.8
						87.00	90.00	3.00	0.3	
						95.00	95.75	0.75	0.6	
						114.40	115.20	0.80	0.7	0.7
						122.00	123.0	1.00	0.3	

Hole Id	North (m)	East (m)	Depth (m)	Dip (Deg.)	Azi. (Deg.)	From (m)	To (m)	Interval (m)	Au1 g/t (FA50)	Au2 g/t (FA50)
						287.10	289.1	2.00	0.5	
						323.00	324.0	1.00	0.1	
						340.00	340.95	0.95	0.4	0.4
						361.65	363.60	1.95	0.5	
				including		361.65	362.05	0.40	1.3	1.7
						390.20	391.20	1.00	0.1	
						393.20	394.60	1.40	0.2	
YRLDD0011	6633095	359489	814.3	-60	220	Assays Pending				
YRLDD0013	6632926	359107	305.3	-60	220	Assays Pending				
Andrews Prospect RC Intervals (>0.1g/t Au)										
YRLRC0620	6632419	359413	90	-60	250			NSA>0.1g/t Au		
YRLRC0622	6631651	359644	168	-60	250	93	94	1	0.1	
						95	104	9	1.4	
				including		97	100	3	3.0	
				including		97	99	2	3.9	
						114	115	1	1.3	1.2
						117	118	1	0.1	
						120	121	1	0.1	
						124	130	6	0.3	
						138	139	1	0.1	
						144	145	1	0.4	
						150	151	1	0.3	
						165	166	1	0.2	
YRLRC0623	6631293	359830	168	-60	250	76	79	3	0.4	
						100	101	1	0.2	
						106	107	1	0.1	
						118	119	1	0.2	
						123	126	3	0.6	
				including		125	126	1	1.5	1.7
YRLRC0624	6631032	359959	192	-60	250	86	87	1	1.0	0.9
						90	91	1	0.1	
						96	97	1	0.2	
						126	127	1	0.3	
						130	132	2	1.0	
YRLRC0637	6632481	359586	252	-60	250	110	111	1	2.1	
YRLRC0639	6632092	359686	252	-60	250			NSA>0.1g/t Au		
YRLRC0641	6631712	359811	216	-60	250			NSA>0.1g/t Au		
YRLRC0640	6632225	359465	113	-60	250	95	96	1	0.1	
YRLRC0640A	6632225	359465	150	-60	250			NSA>0.1g/t Au		
YRLRC0643	6631355	359999	198	-60	250	143	144	1	0.2	
						151	153	2	0.1	
						157	163	6	0.2	
						171	174	3	0.4	
				including		171	172	1	0.9	0.9
						188	189	1	0.1	
YRLRC0647	6631467	359722	150	-60	250	Assays Pending				

Hole Id	North (m)	East (m)	Depth (m)	Dip (Deg.)	Azi. (Deg.)	From (m)	To (m)	Interval (m)	Au1 g/t (FA50)	Au2 g/t (FA50)
Bradman Prospect RC Intervals (>0.1g/t Au)*										
YRLRC0646	6630599	360262	314	-90	360	52	60	8	0.1	
						80	112	32	0.2	
						140	144	4	0.4	0.4
						164	188	24	0.1	
						196	204	8	0.1	
						256	288	12	2.2	
				including		260	264	4	5.0	5.2
						284	288	4	1.8	1.8
YRLRC0648	6630565	360169	290	-90	360	Assays Pending				
Waterline Prospect RC Intervals (>0.1g/t Au)										
YRLRC0593	6634615	360890	60	-60	225	31	32	1	0.1	
YRLRC0594	6634644	360918	72	-60	225	50	64	14	0.2	
				including		60	61	1	0.8	
YRLRC0595	6634672	360946	60	-60	225			NSA>0.1g/t Au		
YRLRC0596	6634725	360592	60	-60	225			NSA>0.1g/t Au		
YRLRC0597	6634753	360620	90	-60	225			NSA>0.1g/t Au		
YRLRC0598	6634781	360648	102	-60	225			NSA>0.1g/t Au		
YRLRC0599	6634809	360677	72	-60	225	56	58	2	1.0	
				including		56	57	1	1.9	1.9
YRLRC0600	6634838	360705	60	-60	225			NSA>0.1g/t Au		
YRLRC0601	6634866	360733	72	-60	225			NSA>0.1g/t Au		
Powerline Prospect RC Intervals (>0.1g/t Au)										
YRLRC0602	6629655	362600	60	-60	240			NSA>0.1g/t Au		
YRLRC0603	6629664	362615	60	-60	240			NSA>0.1g/t Au		
YRLRC0604	6629664	362615	60	-60	240			NSA>0.1g/t Au		
Sheperd Prospect RC Intervals (>0.1g/t Au)										
YRLRC0633	6626095	364836	78	-60	180			NSA>0.1g/t Au		
YRLRC0635	6626115	364836	108	-60	180	72	73	1	0.2	
						96	97	1	0.2	
Porphyry Prospect RC Intervals (>0.1g/t Au)										
YRLRC0605	6627291	363692	60	-60	180	38	39	1	0.2	
						47	48	1	0.1	
YRLRC0606	6627331	363692	90	-60	180	20	21	1	0.1	
YRLRC0607	6627288	363732	90	-60	180	28	29	1	0.2	
						58	59	1	0.3	
						76	77	1	0.1	
						82	83	1	0.1	
YRLRC0608	6627328	363732	60	-60	180	0	1	1	0.1	
						3	4	1	0.1	
						26	29	3	0.1	
						41	42	1	0.2	
						48	49	1	0.2	0.2

Hole Id	North (m)	East (m)	Depth (m)	Dip (Deg.)	Azi. (Deg.)	From (m)	To (m)	Interval (m)	Au1 g/t (FA50)	Au2 g/t (FA50)
The Cleft Prospect RC Intervals (>0.1g/t Au)										
YRLRC0609	6627695	363790	90	-60	180	70	71	1	0.1	
						78	79	1	0.1	
						85	88	3	0.1	
YRLRC0609A	6627695	363790	60	-60	180			NSA>0.1g/t Au		
YRLRC0609B	6627695	363790	150	-60	180	46	47	1	0.3	0.3
						66	67	1	0.1	
						104	105	1	0.3	
						142	143	1	2.7	2.7
						148	149	1	0.1	
YRLRC0610	6627683	363830	120	-60	180	52	59	7	0.1	
						67	69	2	0.4	
						75	76	1	0.2	
						88	90	2	14.4	
				including		88	89	1	24.3	22.9
YRLRC0611	6627708	363830	90	-60	180	Assays Pending				
YRLRC0625	6627720	363790	180	-60	180	84	85	1	0.7	0.8
						162	163	1	0.8	
						169	177	8	0.2	
YRLRC0626	6627723	363750	162	-60	180	68	69	1	0.2	
						142	143	1	0.1	
						146	147	1	0.1	
						151	156	5	0.2	
						161	162	1	0.8#	

Table 2 – AC drill collar locations, depth, orientation and final down hole assay results - Gordons gold project.

Hole Id	North (m)	East (m)	Depth (m)	Dip (Deg.)	Azi. (Deg.)	From (m)	To (m)	Interval (m)	Au1 g/t (FA50)	Au2 g/t (FA50)
Malone Prospect AC Intervals (>0.10g/t Au)										
YRLAC0652	6632719	359074	88	-90	360	82	83	1	0.1	
YRLAC0653	6632687	359112	44	-90	360	37	44	7	0.3#	
				including		42	43	1	0.9#	0.9#
YRLAC0656	6632591	359227	70	-90	360	58	60	2	0.1	
YRLAC0657	6632558	359265	74	-90	360	43	49	6	0.8	
				including		43	44	1	4.1	3.9
						53	57	4	2.3	
				including		53	54	1	8.8	8.6
						67	68	1	0.3	
						72	74	2	0.2#	
YRLAC0666	6632791	358677	90	-90	360	84	90	6	0.3#	
				including		89	90	1	0.8#	0.8#

Table 3 – AC drill collar locations, depth, orientation and composite down hole assay results for Gordons gold project.

Hole Id	North (m)	East (m)	Depth (m)	Dip (Deg.)	Azi. (Deg.)	From (m)	To (m)	Interval (m)	Au1 ppb (AR50)	Au2 ppb (AR50)
Malone Prospect AC Intervals (>30ppb Au)*										
YRLAC0651	6632751	359035	92	-90	360	80	92	12	27#	
YRLAC0652	6632719	359074	88	-90	360	0	4	4	37	
						12	20	8	35	
						56	84	28	66	
YRLAC0653	6632687	359112	44	-90	360	16	20	4	68	
						36	44	8	420#	
				including		40	44	4	686#	
YRLAC0654	6632655	359150	64	-90	360			NSA>30ppb Au		
YRLAC0655	6632623	359189	75	-90	360	60	64	4	41	
						72	75	3	35#	
YRLAC0656	6632591	359227	70	-90	360	56	60	4	170	
YRLAC0657	6632558	359265	74	-90	360	40	74	34	479#	
				including		52	56	4	3,426	3,260
YRLAC0658	6632526	359304	72	-90	360			NSA>30ppb Au		
YRLAC0659	6632494	359342	55	-90	360			NSA>30ppb Au		
YRLAC0660	6632984	358447	56	-90	360			NSA>30ppb Au		
YRLAC0661	6632952	358486	68	-90	360			NSA>30ppb Au		
YRLAC0662	6632919	358524	73	-90	360			NSA>30ppb Au		
YRLAC0663	6632887	358562	69	-90	360	60	68	8	35	
YRLAC0664	6632855	358600	96	-90	360			NSA>30ppb Au		
YRLAC0665	6632823	358639	82	-90	360			NSA>30ppb Au		
YRLAC0666	6632791	358677	90	-90	360	84	90	6	584#	
				including		88	90	2	1,009#	975#
YRLAC0667	6632759	358715	67	-90	360			NSA>30ppb Au		

Hole Id	North (m)	East (m)	Depth (m)	Dip (Deg.)	Azi. (Deg.)	From (m)	To (m)	Interval (m)	Au1 ppb (AR50)	Au2 ppb (AR50)
YRLAC0668	6632727	358754	72	-90	360	60	68	8	420	
				including		64	68	4	750	
YRLAC0669	6632695	358792	72	-90	360	68	72	4	610#	660#
YRLAC0670	6632662	358830	57	-90	360	52	56	4	30	50
YRLAC0671	6632630	358869	76	-90	360	64	76	12	430#	
				including		64	68	4	1,080	1,020
YRLAC0672	6632598	358907	77	-90	360	76	77	1	1,190#	1,180#
YRLAC0673	6632566	358945	79	-90	360	72	79	7	75#	
YRLAC0674	6632534	358984	84	-90	360				NSA>30ppb Au	
YRLAC0675	6632502	359022	65	-90	360	48	52	4	40	
YRLAC0676	6632470	359060	69	-90	360	60	68	8	65	
YRLAC0677	6632437	359098	78	-90	360	60	68	8	270	290
						76	78	2	40#	
YRLAC0678	6632895	358242	35	-90	360				NSA>30ppb Au	
YRLAC0679	6632863	358280	52	-90	360	48	52	4	40#	
YRLAC0680	6632831	358319	43	-90	360				NSA>30ppb Au	
YRLAC0681	6632798	358357	64	-90	360	60	64	4	90#	
YRLAC0682	6632766	358395	90	-90	360	16	20	4	40	
						84	88	4	30	
YRLAC0683	6632734	358434	90	-90	360	80	84	4	70	
YRLAC0684	6632702	358472	30	-90	360				NSA>30ppb Au	
YRLAC0685	6632670	358510	57	-90	360				NSA>30ppb Au	
YRLAC0686	6632638	358549	84	-90	360	44	48	4	88	
						80	84	4	84#	91#
YRLAC0687	6632606	358587	60	-90	360				NSA>30ppb Au	
YRLAC0688	6632573	358625	80	-90	360				NSA>30ppb Au	
YRLAC0689	6632541	358663	81	-90	360	60	76	16	95	
YRLAC0690	6632509	358702	106	-90	360	72	84	12	304	
YRLAC0691	6632477	358740	88	-90	360				NSA>30ppb Au	
YRLAC0692	6632445	358778	110	-90	360	96	100	4	35	41
YRLAC0693	6632413	358817	105	-90	360				NSA>30ppb Au	
YRLAC0694	6632381	358855	101	-90	360	32	36	4	31	40
						96	100	4	355	332
YRLAC0695	6632348	358893	126	-90	360	112	116	4	281	245
YRLAC0772	6633559	358508	25	-90	360				NSA>30ppb Au	
YRLAC0773	6633576	358555	30	-90	360				NSA>30ppb Au	
YRLAC0774	6633593	358602	36	-90	360				NSA>30ppb Au	
YRLAC0775	6633610	358649	68	-90	360				NSA>30ppb Au	
YRLAC0776	6633627	358696	73	-90	360				NSA>30ppb Au	
YRLAC0777	6633644	358743	80	-90	360				NSA>30ppb Au	
YRLAC0778	6633661	358790	65	-90	360				NSA>30ppb Au	
YRLAC0779	6633679	358837	72	-90	360				NSA>30ppb Au	
YRLAC0780	6633653	358474	30	-90	360				NSA>30ppb Au	
YRLAC0781	6633670	358521	48	-90	360				NSA>30ppb Au	
YRLAC0782	6633687	358568	68	-90	360				NSA>30ppb Au	
YRLAC0783	6633704	358615	56	-90	360				NSA>30ppb Au	
YRLAC0784	6633721	358661	63	-90	360				NSA>30ppb Au	

Hole Id	North (m)	East (m)	Depth (m)	Dip (Deg.)	Azi. (Deg.)	From (m)	To (m)	Interval (m)	Au1 ppb (AR50)	Au2 ppb (AR50)
YRLAC0785	6633738	358708	57	-90	360			NSA>30ppb Au		
YRLAC0786	6633755	358755	75	-90	360			NSA>30ppb Au		
YRLAC0787	6633773	358802	63	-90	360			NSA>30ppb Au		
YRLAC0788	6633841	358405	84	-90	360			NSA>30ppb Au		
YRLAC0789	6633858	358452	66	-90	360	60	64	4	37	29
YRLAC0790	6633875	358499	42	-90	360			NSA>30ppb Au		
YRLAC0791	6633892	358546	52	-90	360			NSA>30ppb Au		
YRLAC0792	6633909	358593	51	-90	360			NSA>30ppb Au		
YRLAC0793	6633926	358640	84	-90	360			NSA>30ppb Au		
YRLAC0794	6633943	358687	89	-90	360	84	89	5	33#	
YRLAC0795	6633960	358734	61	-90	360			NSA>30ppb Au		
YRLAC0796	6633978	358781	106	-90	360			NSA>30ppb Au		
YRLAC0797	6634063	358431	73	-90	360			NSA>30ppb Au		
YRLAC0798	6634080	358478	59	-90	360			NSA>30ppb Au		
YRLAC0799	6634097	358525	54	-90	360			NSA>30ppb Au		
YRLAC0800	6634114	358572	85	-90	360	64	68	4	101	110
YRLAC0801	6634131	358619	96	-90	360	88	96	8	63#	
YRLAC0802	6634148	358666	66	-90	360			NSA>30ppb Au		
YRLAC0803	6634166	358713	38	-90	360			NSA>30ppb Au		
YRLAC0804	6634251	358362	72	-90	360			NSA>30ppb Au		
YRLAC0805	6634268	358409	88	-90	360			NSA>30ppb Au		
YRLAC0806	6634285	358456	68	-90	360			NSA>30ppb Au		
YRLAC0807	6634302	358503	58	-90	360	56	57	1	46#	55#
YRLAC0808	6634319	358550	69	-90	360			NSA>30ppb Au		
YRLAC0809	6634336	358597	55	-90	360			NSA>30ppb Au		
YRLAC0810	6634353	358644	56	-90	360			NSA>30ppb Au		
YRLAC0811	6633553	358859	73	-90	360			NSA>30ppb Au		
YRLAC0812	6633520	358897	46	-90	360			NSA>30ppb Au		
YRLAC0813	6633488	358935	60	-90	360			NSA>30ppb Au		
YRLAC0814	6633456	358974	54	-90	360			NSA>30ppb Au		
Andrews Prospect AC Intervals (>30ppb Au)*										
YRLAC0696	6632196	360088	28	-60	240	24	28	4	58#	52#
YRLAC0697	6632221	360132	58	-60	240	52	56	4	25	31
YRLAC0698	6632246	360175	43	-60	240	36	40	4	78	75
YRLAC0699	6632271	360218	43	-60	240	40	43	3	33#	28#
YRLAC0700	6632296	360261	48	-60	240	36	44	8	128	
YRLAC0701	6632321	360305	44	-60	240			NSA>30ppb Au		
YRLAC0702	6632346	360348	32	-60	240			NSA>30ppb Au		
YRLAC0703	6632015	360135	62	-60	240			NSA>30ppb Au		
YRLAC0704	6632040	360178	26	-60	240			NSA>30ppb Au		
YRLAC0705	6632065	360222	40	-60	240	32	40	8	180#	
YRLAC0706	6632090	360265	75	-60	240			NSA>30ppb Au		
YRLAC0707	6632115	360308	48	-60	240			NSA>30ppb Au		
YRLAC0708	6632140	360351	32	-60	240			NSA>30ppb Au		
YRLAC0709	6632165	360395	30	-60	240			NSA>30ppb Au		
YRLAC0710	6632190	360438	56	-60	240			NSA>30ppb Au		

Hole Id	North (m)	East (m)	Depth (m)	Dip (Deg.)	Azi. (Deg.)	From (m)	To (m)	Interval (m)	Au1 ppb (AR50)	Au2 ppb (AR50)
YRLAC0711	6632215	360481	44	-60	240	36	44	8	170#	
YRLAC0712	6632240	360525	26	-60	240				NSA>30ppb Au	
YRLAC0713	6631834	360182	51	-60	240				NSA>30ppb Au	
YRLAC0714	6631859	360225	50	-60	240				NSA>30ppb Au	
YRLAC0715	6631884	360268	45	-60	240	40	44	4	54	
YRLAC0716	6631909	360312	105	-60	240	56	64	8	393	
				including		56	60	4	655	705
YRLAC0717	6631934	360355	46	-60	240	44	46	2	92#	
YRLAC0718	6631959	360398	66	-60	240	60	66	6	45#	
YRLAC0719	6631984	360441	43	-60	240				NSA>30ppb Au	
YRLAC0720	6632009	360485	48	-60	240				NSA>30ppb Au	
YRLAC0721	6632034	360528	67	-60	240	60	64	4	74	65
YRLAC0722	6632059	360571	75	-60	240				NSA>30ppb Au	
YRLAC0723	6632084	360615	36	-60	240	32	36	4	49#	45#
YRLAC0724	6632109	360658	28	-60	240				NSA>30ppb Au	
YRLAC0725	6631628	360185	19	-60	240				NSA>30ppb Au	
YRLAC0726	6631653	360228	39	-60	240				NSA>30ppb Au	
YRLAC0727	6631678	360272	36	-60	240				NSA>30ppb Au	
YRLAC0728	6631703	360315	41	-60	240				NSA>30ppb Au	
YRLAC0729	6631728	360358	88	-60	240	64	88	24	71#	
				including		84	88	4	202#	191#
YRLAC0730	6631753	360402	85	-60	240				NSA>30ppb Au	
YRLAC0731	6631778	360445	32	-60	240				NSA>30ppb Au	
YRLAC0732	6631803	360488	88	-60	240				NSA>30ppb Au	
YRLAC0733	6631828	360531	58	-60	240	52	56	4	35#	40#
YRLAC0734	6631853	360575	70	-60	240				NSA>30ppb Au	
YRLAC0735	6631878	360618	36	-60	240				NSA>30ppb Au	
YRLAC0736	6631903	360661	55	-60	240				NSA>30ppb Au	
YRLAC0737	6631928	360705	57	-60	240				NSA>30ppb Au	
YRLAC0738	6631953	360748	58	-60	240				NSA>30ppb Au	
YRLAC0739	6631397	360145	50	-60	240	12	16	4	44	39
						44	48	4	74	67
YRLAC0740	6631422	360188	48	-60	240	28	32	4	552	570
YRLAC0741	6631447	360232	27	-60	240	24	27	3	119#	131#
YRLAC0742	6631472	360275	66	-60	240				NSA>30ppb Au	
YRLAC0743	6631497	360318	60	-60	240				NSA>30ppb Au	
YRLAC0744	6631522	360362	60	-60	240				NSA>30ppb Au	
YRLAC0745	6631547	360405	78	-60	240				NSA>30ppb Au	
YRLAC0746	6631572	360448	74	-60	240				NSA>30ppb Au	
YRLAC0747	6631597	360492	52	-60	240				NSA>30ppb Au	
YRLAC0748	6631622	360535	43	-60	240				NSA>30ppb Au	
YRLAC0749	6631647	360578	45	-60	240	12	16	4	35	29
						44	45	1	55#	49#
YRLAC0750	6631672	360621	43	-60	240	16	20	4	44	49
						40	43	3	48#	39#
YRLAC0751	6631697	360665	69	-60	240	64	69	5	148#	157#
YRLAC0752	6631722	360708	67	-60	240				NSA>30ppb Au	

Hole Id	North (m)	East (m)	Depth (m)	Dip (Deg.)	Azi. (Deg.)	From (m)	To (m)	Interval (m)	Au1 ppb (AR50)	Au2 ppb (AR50)
YRLAC0753	6631747	360751	60	-60	240				NSA>30ppb Au	
YRLAC0754	6631772	360795	63	-60	240				NSA>30ppb Au	
YRLAC0755	6631797	360838	61	-60	240				NSA>30ppb Au	
YRLAC0756	6631822	360881	48	-60	240				NSA>30ppb Au	
Bradman Prospect AC Intervals (>30ppb Au)*										
YRLAC0757	6631191	360149	58	-60	240	0	4	4	40	
YRLAC0758	6631216	360192	42	-60	240	0	4	4	32	
YRLAC0759	6631241	360235	43	-60	240	32	36	4	41	
YRLAC0760	6631266	360278	31	-60	240				NSA>30ppb Au	
YRLAC0761	6631291	360322	41	-60	240				NSA>30ppb Au	
YRLAC0762	6631316	360365	57	-60	240	40	57	17	65#	
						40	44	4	167	170
						including				
YRLAC0763	6631341	360408	69	-60	240				NSA>30ppb Au	
YRLAC0764	6631366	360452	77	-60	240	48	64	16	100	
YRLAC0765	6631391	360495	72	-60	240	0	4	4	31	
						60	64	4	39	
YRLAC0766	6631416	360538	68	-60	240	0	4	4	35	
						64	68	4	123#	125#
YRLAC0767	6631441	360582	65	-60	240	0	4	4	42	
						60	64	4	143	
YRLAC0768	6631466	360625	63	-60	240	0	4	4	35	
YRLAC0769	6631491	360668	65	-60	240	56	65	9	68#	
YRLAC0770	6631516	360711	49	-60	240				NSA>30ppb Au	
YRLAC0771	6631541	360755	40	-60	240				NSA>30ppb Au	

Notes to Tables 1-3; 1. An accurate dip and strike and the controls on mineralisation are only interpreted and the true width of mineralisation is unknown at this stage. 2. For AC and RC drilling, 4m composite samples are submitted are analysed using a 50g Aqua Regia digest with Flame AAS gold finish (0.01ppm detection limit), for DD drilling samples are analysed using a 50g fire assay with ICP-MS finish gold analysis (0.01ppm detection limit) by Aurum Laboratories in Beckenham, Western Australia. 3. Au1 is the original assay, Au2 is the highest grade from duplicate or repeat samples if they have been completed. 4. g/t (grams per tonne). 5. Intersections are calculated over intervals >0.10g/t or as indicated. 6. Drill type AC = Air-core, RC = Reverse Circulation, DD = Diamond. 7. Coordinates are in GDA94, MGA Z51. 8. # denotes an end of hole assay. 9. ABD denotes hole abandoned before target depth. 10. NSA denotes no significant assay. 11. * denotes a 4m composite assay unless otherwise indicated.

About Yandal Resources Limited

Yandal Resources listed on the ASX in December 2018 and has a portfolio of advanced gold exploration projects in the highly prospective Yandal and Norseman-Wiluna Greenstone Belts of Western Australia.

Yandal Resources' Board has a track record of successful discovery, mine development and production.

November 2020 Mineral Resource Estimate Summary Table – Flushing Meadows Gold Deposit

Material Type	Indicated			Inferred			Total		
	Tonnes	Au (g/t)	Oz	Tonnes	Au (g/t)	Oz	Tonnes	Au (g/t)	Oz
Laterite	89,853	1.26	3,631	86,671	1.23	3,422	176,524	1.24	7,054
Oxide	2,015,900	1.33	86,071	2,246,845	1.10	79,389	4,262,745	1.21	165,420
Transition	35,223	1.20	1,360	1,160,471	1.10	40,966	1,195,695	1.10	42,325
Fresh				1,751,484	0.95	53,440	1,751,484	0.95	53,440
Total	2,140,976	1.32	91,062	5,245,471	1.05	177,217	7,386,448	1.13	268,352

* Reported above 0.5g/t Au lower cut-off grade, refer to Yandal Resources Ltd ASX announcement dated 4 November 2020 for full details.

Competent Person Statement

The information in this document that relates to Exploration Results, geology and data compilation is based on information compiled by Mr Trevor Saul, a Competent Person who is a Member of The Australasian Institute of Mining and Metallurgy. Mr Saul is the Exploration Manager for the Company, is a full-time employee and holds shares and options in the Company.

Mr Saul has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Saul consents to the inclusion in this announcement of the matters based on this information in the form and context in which it appears.

The information in this announcement that relates to the Flushing Meadows Mineral Resource Estimate is based on information compiled and generated by Andrew Bewsher, an employee of BM Geological Services Pty Ltd ("BMGS"). Both Andrew Bewsher and BMGS hold shares in the company. BMGS consents to the inclusion, form and context of the relevant information herein as derived from the original resource reports. Mr Bewsher has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activity which is being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the JORC 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'.

Authorised by the board of Yandal Resources

For further information please contact:

Lorry Hughes
 Managing Director
 Yandal Resources Limited
 yandal@yandalresources.com.au

Bianca Taveira
 Company Secretary
 +61 8 9389 9021
 yandal@yandalresources.com.au

Appendix 1 – Gordons Gold Project JORC Code (2012) Table 1, Section 1 and 2

Mr Trevor Saul, Exploration Manager of Yandal Resources compiled the information in Section 1 and Section 2 of the following JORC Table 1 and is the Competent Person for those sections. The following Table and Sections are provided to ensure compliance with the JORC Code (2012 edition) requirements for the reporting of Mineral Resources.

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</i>	<ul style="list-style-type: none"> 4m composite samples taken with a sample scoop thrust into the RC sample bag which is laid out in individual metres in a plastic bag on the ground. 1m single splits taken using a cone splitter at time of drilling, if 4m composites are anomalous (>100-200ppb or lower depending on location), 1m single splits are submitted for analyses. Average sample weights about 3.0kg for 4m composites and 2.0-3.0kg for 1m samples. For AC drilling samples laid out on the ground and sampled as above. Average weights are 2.0-3.0kg for composites and 3.0-4.0kg for singles. For diamond drilling ("DD") HQ or NQ is cut in half and assayed.
	<i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i>	<ul style="list-style-type: none"> For RC and AC drilling regular air and manual cleaning of cyclone to remove hung up clays where present. For all drilling methods, regular standards are submitted during composite analysis and standards, blanks and duplicates for 1m samples. Based on statistical analysis and cross checks of these results, there is no evidence to suggest the samples are not representative. Standards & replicate assays taken by the laboratory.
	<i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</i>	<ul style="list-style-type: none"> AC, RC and DD drilling was used to obtain 1m samples (or smaller in the case of DD) from which approximately 2.0-3.0kg sample was pulverised to produce a 50g Aqua Regia digest with Flame AAS gold finish (0.01ppm detection limit) for AC samples and a 50g fire assay with ICP-MS (inductively coupled plasma - mass spectrometry) finish gold analysis (0.01ppm detection limit) for RC/DD samples by Aurum Laboratories in Beckenham, Western Australia. Samples assayed for Au, As, Cu, Pb, Zn and Ag for AC composites and Au only for RC and DD. Drilling intersected oxide, transitional and primary mineralisation to a maximum drill depth below 250m.
Drilling techniques	<i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	<ul style="list-style-type: none"> RC drilling with a 4' ½ inch face sampling hammer bit. AC drilling used a 3' ½ inch blade bit. DD drilling used a roller bit down to hard then HQ and NQ sized rods.
Drill sample recovery	<p><i>Method of recording and assessing core and chip sample recoveries and results assessed.</i></p> <p><i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i></p> <p><i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i></p>	<ul style="list-style-type: none"> RC and AC recovery and meterage was assessed by comparing drill chip volumes or (sample bags for RC) for individual meters. Estimates of sample recoveries were recorded. Routine checks for correct sample depths are undertaken every RC rod (6m). DD recoveries were estimated by the drillers and written on core blocks. RC sample recoveries were visually checked for recovery, moisture and contamination. The cyclone was routinely cleaned ensuring no material build up. Due to the generally good/standard drilling conditions and powerful drilling rig the geologist believes the RC and AC samples are representative, some bias would occur in the advent of poor sample recovery which was logged where rarely encountered. At depth there were some wet samples and these are recorded on geological logs.

Criteria	JORC Code explanation	Commentary
Logging	<p><i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i></p> <p><i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i></p> <p><i>The total length and percentage of the relevant intersections logged.</i></p>	<ul style="list-style-type: none"> RC, AC and DD logging is routinely completed on one metre intervals at the rig or yard by the geologist. The log was made to standard logging descriptive sheets and transferred into Micromine software on a computer once back at the office. Logging was qualitative in nature. All intervals logged for AC and RC drilling completed during drill program with a representative sample placed into chip trays.
Sub-sampling techniques and sample preparation	<p><i>If core, whether cut or sawn and whether quarter, half or all core taken.</i></p> <p><i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i></p> <p><i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i></p> <p><i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i></p> <p><i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i></p> <p><i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i></p>	<ul style="list-style-type: none"> DD, AC and RC samples taken. AC and RC samples were collected from the drill rig by spearing each 1m collection bag (RC) or from the ground (AC) and compiling a 4m composite sample. Single splits were automatically taken by the rig cone splitter for RC. Wet or dry samples were noted in the logs. For Yandal Resources Ltd samples, duplicate 1m samples were taken in the field, with standards and blanks inserted with the 1m and 4m samples for analyses. 1m samples were consistent and weighed approximately 3.0-4.0kg for RC (2.0-3.0kg for AC) and it is common practice to review 1m results and then review sampling procedures to suit. Once samples arrived in Perth, further work including duplicates and QC was undertaken at the laboratory. Yandal Resources Ltd has determined that at the Gordons Dam prospect there is sufficient data for a MRE and an initial one is planned upon completion upon receipt of all pending results and QA/QC re-sample and re-assay programs (however the deposit is open in many directions). Mineralisation mostly occurs within intensely oxidised saprolitic and palaeochannel clays after altered mafic, porphyry and felsic rocks (typical greenstone geology). The sample size is standard practice in the WA Goldfields to ensure representivity.
Quality of assay data and laboratory tests	<p><i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i></p> <p><i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i></p> <p><i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i></p>	<ul style="list-style-type: none"> The composite 4m AC samples were assayed using a 50g Aqua Regia digest with Flame AAS gold finish (0.01ppm detection limit) finish Au, Ag, As, Cu, Pb and Zn analysis (0.01ppm detection limit) by Aurum Laboratories in Beckenham, Western Australia for gold only. Initial 4m samples were assayed by Aqua Regia with fire assay checks (0.01ppm detection limit). RC and DD sampling assayed for Au only. No geophysical assay tools were used. Laboratory QA/QC involves the use of internal lab standards using certified reference material, blanks, splits and replicates as part of the in-house procedures. QC results (blanks, duplicates, standards) were in line with commercial procedures, reproducibility and accuracy. These comparisons were deemed satisfactory. Some re-splitting with an onsite three-tier riffle splitter has been undertaken in the palaeochannel area for analyses from RC samples. A number of samples have been selected for future metallurgical testing. A number of 1m residues from RC assays are planned to be analysed at other laboratories for comparison.
Verification of sampling and assaying	<p><i>The verification of significant intersections by either independent or alternative company personnel.</i></p> <p><i>The use of twinned holes.</i></p> <p><i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i></p>	<ul style="list-style-type: none"> Work was supervised by senior Aurum Laboratory staff experienced in metals assaying. QC data reports confirming the sample quality have been supplied. Data storage as PDF/XL files on company PC in the Perth office. No data was adjusted. Significant intercepts are reported in Tables 1-3 by Mr Trevor Saul of Yandal Resources and were generated by compositing to the indicated downhole thickness. A 30ppb Au lower cut-off was used for AC results (0.10g/t Au for RC and DD) and intersections generally calculated with a maximum of 2m of

Criteria	JORC Code explanation	Commentary
	<i>Discuss any adjustment to assay data.</i>	internal dilution.
Location of data points	<p><i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i></p> <p><i>Specification of the grid system used.</i></p> <p><i>Quality and adequacy of topographic control.</i></p>	<ul style="list-style-type: none"> All drill collar locations were initially pegged and surveyed using a hand held Garmin GPS, accurate to within 3-5m. Holes were drilled at various spacings dependent on prospect assessment. All reported coordinates are referenced to the GDA. The topography is very flat at the location of the Gordons Dam prospect. Down hole surveys utilised a proshot camera at the end of hole plus every 30m while pulling out of the hole. Grid MGA94 Zone 51. Topography is very flat, small differences in elevation between drill holes will have little effect on mineralisation widths on initial interpretation. All new holes and some available historic holes have been surveyed by DGPS as well as a surveyed topographical surface for compilation of MRE's. The topographic surface has been generated by using the hole collar surveys. It is considered to be of sufficient quality to be valid for this stage of exploration.
Data spacing and distribution	<p><i>Data spacing for reporting of Exploration Results.</i></p> <p><i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i></p> <p><i>Whether sample compositing has been applied.</i></p>	<ul style="list-style-type: none"> Holes were variably spaced in accordance with the collar details/coordinates supplied in Tables 1 & 2. The hole spacing was determined by the Company to be sufficient when combined with confirmed historic drilling results to explore effectively. The sample spacing and the appropriateness of each hole to be included to make up data points for a Mineral Resource has not been determined. It will depend on results from all the drilling and geological interpretations when complete.
Orientation of data in relation to geological structure	<p><i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i></p> <p><i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i></p>	<ul style="list-style-type: none"> No, drilling angle or vertical holes is deemed to be appropriate to intersect the supergene mineralisation and potential residual dipping structures and is appropriate for the current stage of the prospects. At depth angle holes have been used to intersect the interpreted dipping lodes. True widths are often calculated depending upon the geometry. The relationship between the drilling orientation and the orientation of mineralised structures is not considered to have introduced a sampling bias. Given the style of mineralisation and drill spacing/method, it is the most common routine for delineating shallow gold resources in Australia. Angle holes are the most appropriate for exploration style and Resource style drilling for the type and location of mineralisation intersected.
Sample security	<i>The measures taken to ensure sample security.</i>	<ul style="list-style-type: none"> Samples were collected on site under supervision of the responsible geologist. The work site is on a pastoral station. Once collected samples were wrapped and transported to Perth for analysis. Dispatch and consignment notes were delivered and checked for discrepancies. Sample security for historical samples was highly variable and dependent on the exploration company however most of the companies working in the area are considered leaders in improving the sample security, QAQC procedures and exploration procedures.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	<ul style="list-style-type: none"> No Audits have been commissioned.

Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<p>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</p> <p>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</p>	<ul style="list-style-type: none"> The new drilling was conducted on the following tenements: Gordons Project – M27/502, P27/2214, P27/2338, P27/2339, E27/601 and E27/570. The tenements are 100% owned by the Company. The tenements are in good standing and no known impediments exist. E27/570 is subject to a Net Smelter Royalty of 2%, being payable to PVW Resources Ltd on all product mined from the tenement.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	<ul style="list-style-type: none"> Previous workers in the area include among others, North Ltd, Delta Gold Ltd, Aurion Gold Ltd, Placer Dome Asia Pacific, Barmenco Investments, Mt Kersey Mining NL, Gutnick Resources NL, Pacific Arc Exploration, Geopeko, Flinders Resources Ltd, Kesli Chemicals Pty Ltd and Windsor Resources NL.
Geology	Deposit type, geological setting and style of mineralisation.	<ul style="list-style-type: none"> Archaean Orogenic Gold mineralisation hosted within the Boorara domain of the Kalgoorlie Terrane within the Norseman-Wiluna Archaean greenstone belt. The granite-greenstone belt is approximately 600 km long and is characterised by very thick, possibly rift controlled accumulations of ultramafic, mafic and felsic volcanics, intrusive and sedimentary rocks. It is one of the granite / greenstone terrains of the Yilgarn Craton of WA.
Drill hole Information	<p>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</p> <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. <p>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</p>	<ul style="list-style-type: none"> See Tables 1-3. All holes reported from the current program are listed in Tables 1-3 or can be viewed in Yandal's other ASX releases during 2019-2021. Other hole collars in the immediate area of the Gordons Dam prospect have been included for diagrammatic purposes and Mr Saul considers listing all of the drilling details is prohibitive and would not improve transparency or materiality of the report. Plan view diagrams are shown in the report of all drilling collars in close proximity to the new drilling for exploration context in Figures 2-5. No information is excluded.
Data aggregation methods	<p>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</p> <p>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</p> <p>The assumptions used for any reporting of metal equivalent values should be clearly stated.</p>	<ul style="list-style-type: none"> No weighting or averaging calculations were made, assays reported and compiled are as tabulated in Tables 1-3. All assay intervals reported in Tables 1-3 are typically 1m downhole intervals above 0.10g/t Au lower cut-off for RC/DD drilling (interval width as indicated for DD drilling). For AC drilling the interval is composited downhole interval as indicated above a 30ppb Au lower cut-off. There is occasionally small samples such as 1m or 2m when the hole was completed to depth that was not a multiple of 4 for AC drilling. No metal equivalent calculations were applied.

Criteria	JORC Code explanation	Commentary
Relationship between mineralisation widths and intercept lengths	<p><i>These relationships are particularly important in the reporting of Exploration Results.</i></p> <p><i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i></p> <p><i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</i></p>	<ul style="list-style-type: none"> • Oxide and Transitional mineralisation is generally flat lying (blanket like) while mineralisation at depth is generally steeper dipping. Further orientation studies are required. • Drill intercepts and true width appear to be close to each other, or within reason allowing for the minimum intercept width of 1m. Yandal Resources Ltd estimates that the true width is variable but probably around 80-100% of the intercepted widths. • Given the nature of AC and RC drilling, the minimum width and assay is 1m. • Given the highly variable geology and mineralisation including supergene mineralisation and structurally hosted gold mineralisation there is no project wide relationship between the widths and intercept lengths.
Diagrams	<p><i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i></p>	<ul style="list-style-type: none"> • See Figures 2-5 and Tables 1-3.
Balanced reporting	<p><i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i></p>	<ul style="list-style-type: none"> • Summary results for all holes as 4m AC assays > 30ppb Au are shown in Table 3, all holes as 1m or less RC/DD assays > 0.10g/t Au for the current drilling. • Diagrammatic results are shown in Figures 2-5.
Other substantive exploration data	<p><i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i></p>	<ul style="list-style-type: none"> • There have been no historical Mineral Resource Estimates. • There has been no historic mining at the Gordons Dam or Malone prospects as they are new discoveries. There has been minor historic (early 1900's) underground workings on a number of lodes in proximity to the Star of Gordon prospect.
Further work	<p><i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i></p> <p><i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i></p>	<ul style="list-style-type: none"> • Additional exploration including AC, RC and DD drilling and or geophysical surveys to advance known prospects is warranted. Additional exploration drilling is likely if new programs can be approved by the Company.