

ASX ANNOUNCEMENT

10 December 2020

ASX: BSX

Blackstone Continues to Deliver at King Cobra and Ban Chang

Blackstone Minerals Limited ("Blackstone" or the "Company") is pleased to report continued drilling success at King Cobra and Ban Chang, part of its flagship Ta Khoa Nickel-Cu-PGE project in Vietnam (Refer to Figure 8).

King Cobra Discovery Zone (KCZ) - Ban Phuc

- Successful infill and extensional drilling results at KCZ delivers **some of the best intercepts to date** and upgrades confidence in the Ban Phuc Disseminated Sulfide (DSS) deposit (Refer to Figures 5, 6 & 7 and Tables 1&2);
- Significant intercepts from current reporting at KCZ and Ban Phuc include:

BP20-30 incl.	127.2m @ 0.38% Ni, 0.03% Cu, 0.01% Co & 0.09g/t PGE ¹ from 20.65m 14.45m @ 0.77% Ni, 0.15% Cu, 0.02% Co & 0.18g/t PGE from 122.7m
BP20-31 incl.	21.3m @ 0.71% Ni, 0.09% Cu, 0.01% Co & 0.18g/t PGE from 48.7m 11m @ 0.95% Ni, 0.13% Cu, 0.01% Co & 0.24g/t PGE from 59m
BP20-32	149.2m @ 0.42% Ni, 0.06% Cu, 0.01% Co & 0.08g/t PGE from 3m
BP20-34 incl.	127.6m @ 1.17% Ni, 0.22% Cu, 0.02% Co & 0.24g/t PGE from 14m 85m @ 1.36% Ni, 0.27% Cu, 0.03% Co & 0.25g/t PGE from 22m
BP20-35 incl.	96.1m @ 0.83% Ni, 0.17% Cu, 0.02% Co & 0.26g/t PGE from 18.4m 50.2m @ 1.05% Ni, 0.2% Cu, 0.02% Co & 0.4g/t PGE from 45m
BP20-39 incl.	166.1m @ 0.75% Ni, 0.16% Cu, 0.01% Co & 0.29g/t PGE from 6.3m 79.8m @ 1.12% Ni, 0.27% Cu, 0.02% Co & 0.45g/t PGE from 10.5m

¹ Platinum (Pt) + Palladium (Pd) + Gold (Au)

- The Ban Phuc DSS deposit underpins the Company's maiden Indicated Mineral Resource of **44.3Mt @ 0.52% Ni for 229kt Ni** and recently announced Scoping Study which demonstrates **an economically robust nickel sulfide project to produce downstream Nickel:Cobalt:Manganese (NCM) precursor products for the Lithium-ion battery industry** (Refer to ASX announcement from 14 October 2020);

Ban Chang - Massive Sulfide Nickel

- Blackstone continues to target **Massive Sulfide Vein (MSV) prospects analogous to the previously mined Ban Phuc MSV**, where previous owners successfully mined 975kt of high-grade ore at average grades of 2.4% Ni & 1.0% Cu from an average vein width of 1.3m;
- Following initial drill holes at Ban Chang which intersected high-grade massive sulfide nickel over a 1.2km strike length, recent drilling success continues to support

the Company's strategy to delineate a maiden resource at Ban Chang to supplement ongoing studies (Refer to Figure 2, 3 & 4 and Tables 1 & 2 and ASX announcements from 11 August 2020 & 2 September 2020);

- Significant intercepts from current reporting at Ban Chang include:

BC20-16 incl.	5.65m @ 1.04% Ni, 1.16% Cu, 0.05% Co & 0.71g/t PGE from 55.1m 1.92m @ 2.1% Ni, 2.56% Cu, 0.11% Co & 1.46g/t PGE from 58.9m
BC20-19 incl.	15.8m @ 0.47% Ni, 0.25% Cu, 0.03% Co & 0.21g/t PGE from 41.8m 1.9m @ 1.21% Ni, 0.48% Cu, 0.07% Co & 0.7g/t PGE from 55.6m
BC20-20 incl.	3.85m @ 0.81% Ni, 0.57% Cu, 0.05% Co & 0.36g/t PGE from 46.0m 1.7m @ 1.45% Ni, 1.08% Cu, 0.08% Co & 0.60g/t PGE from 48.15m
BC 20-26 incl.	16.3m @ 0.58% Ni, 0.37% Cu, 0.04% Co & 0.3g/t PGE from 54m 0.55m @ 1.49% Ni, 1.63% Cu, 0.09% Co & 0.49g/t PGE from 62.9m

Exploration:

- Blackstone has commenced drilling at the recently announced high priority Ni-Cu-PGE target at the King Snake prospect;
- **Nine active drill rigs** continuing activity at KCZ, Ban Chang, Ta Cuong and Ban Khoa;
- Further drill programs are being designed to systematically assess 25 massive sulfide opportunities identified by the Company in support of a Ta Khoa Pre-Feasibility Study (PFS).

Blackstone Minerals' Managing Director Scott Williamson commented:

"Successful infill and extensional drilling at KCZ continues to deliver broad, consistent mineralisation and increases confidence in the compelling metrics presented in our recent Scoping Study. The drilling results reinforce our view that the project benefits from higher grades of the KCZ which can be accessed in the early years.

Blackstone will continue to systematically test our 25 MSV prospects, and a maiden resource at the Company's first such target, Ban Chang, is being targeted for the first quarter of 2021. Through the delineation of additional MSV deposits, we see potential to increase annual nickel production and reduce initial capital requirements via a staged approach which would involve Blackstone utilising the existing 450ktpa concentrator at Ta Khoa."

Blackstone Minerals Limited (ASX: BSX / OTCQB: BLSTF / FRA: B9S) recently released a Scoping Study for its flagship Ta Khoa Project (Refer to ASX announcement from 14 October 2020). The Scoping Study which features annual production of ~12.7ktpa Ni over a 8.5 year project life is underpinned by the Ban Phuc DSS deposit, and has robust economics that generates ~US\$665m in NPV₈, a pre-tax project level IRR of 45% and a capital payback period of 2.5 years (from first production).

The Company is now advancing the Ta Khoa Project through to a Pre-Feasibility Study, which will contemplate the option to mine higher grade MSV deposits within the Ta Khoa district. The discovery of higher grade MSV deposits have the potential to reduce upfront

capital requirements by enabling the Company to restart the existing Ban Phuc concentrator (450ktpa).

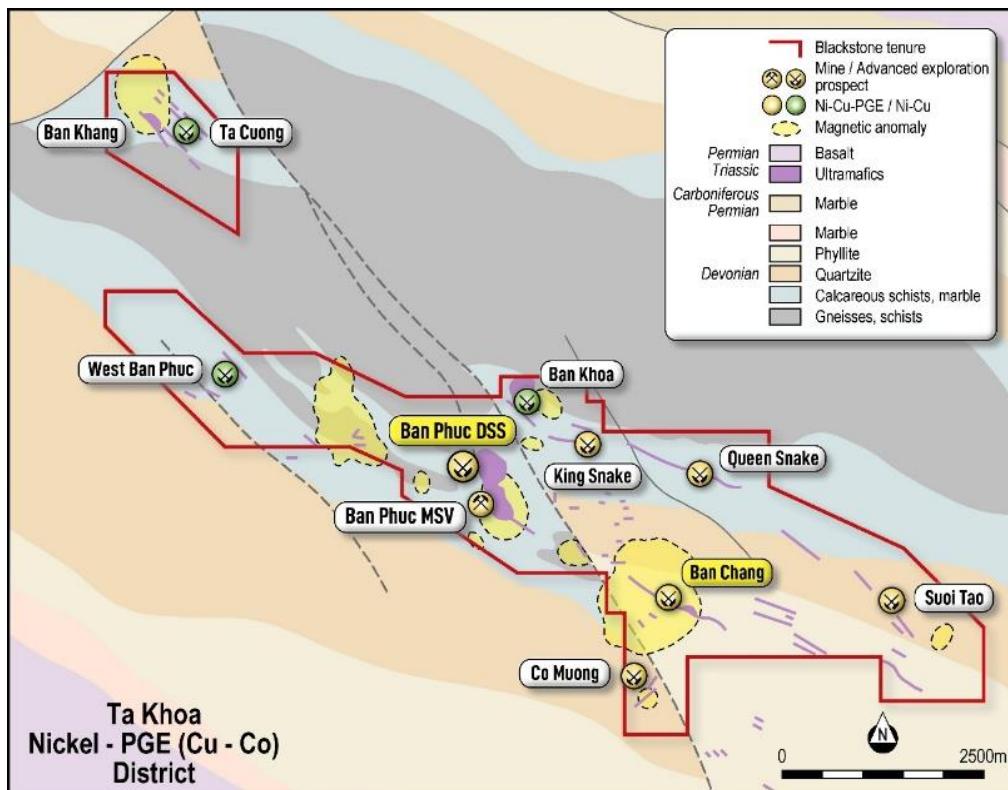


Figure 1: Ta Khoa Nickel-PGE (Cu-Co) district

Ban Chang

The first higher grade MSV deposit targeted for a JORC compliant resource in early 2021 is the Ban Chang Prospect. Ban Chang is located 2.5km south-east of the processing facility and the Ban Phuc deposit adjacent to the Chim Van - Co Muong fault system. The prospect geology consists of a tremolitic dyke swarm within phyllites, sericite schists and quartzites of the Devonian Ban Cai Formation (Refer to Figure 1).

The known mineralization style is mainly veins and lenses of massive sulfide as well as DSS hosted within tremolite dykes. The dyke swarm is approximately 900m long and varies between 5m and 60m wide. The dykes and massive sulfide are interpreted to be hosted within a splay (and subsidiary structures) off the major regional Chim Van - Co Muong fault system.

The West Zone is a 420m long zone of interpreted bifurcating MSV lenses. This zone strikes NW-SE and dips moderately to the SW. The Central Zone is consistent in strike and dip with the West Zone, defined by a weathered gossan which is 200m long and up to 1.4m wide and containing 0.18-0.27% Ni and 1.29-1.38% Cu. The prospect area was historically mapped and trench sampled (19 trenches) by Vietnamese geologists in the 1960-63 period. The largest intersection obtained in this period was in Adit Level 13 which intersected patchy zones of weak nickel-copper mineralisation. Channel samples included 3.9m at 1.07% Ni & 0.95% Cu including 1.1m at 1.62% Ni & 1.48% Cu. Drill hole BLK 4 intersected a zone of 1.7m at 1.89% Ni & 0.91% Cu from 62.9m. Drill hole BLK 2 intersected a 1m wide MSV within schist grading 2.65% Ni & 1.07% Cu from 58.5m down hole.

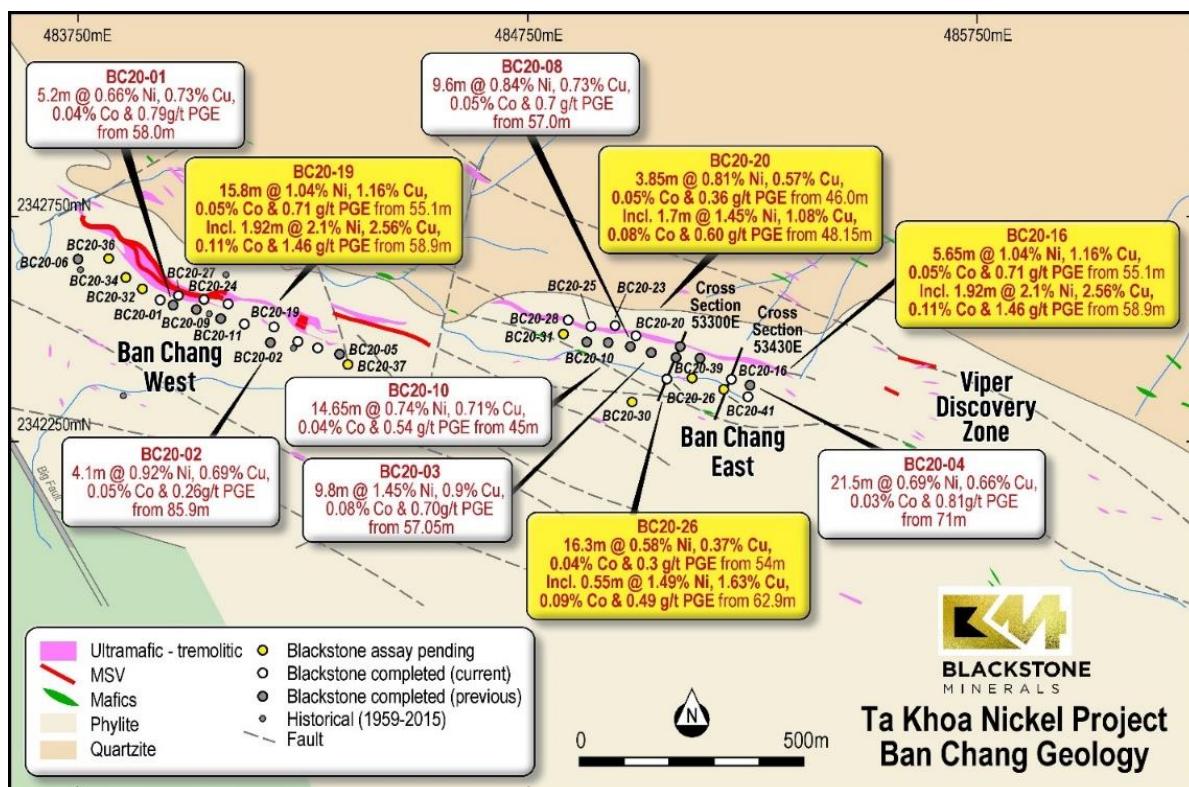


Figure 2: Ban Chang Geology showing current and previous drill holes. (Refer to tables 1 & 2).

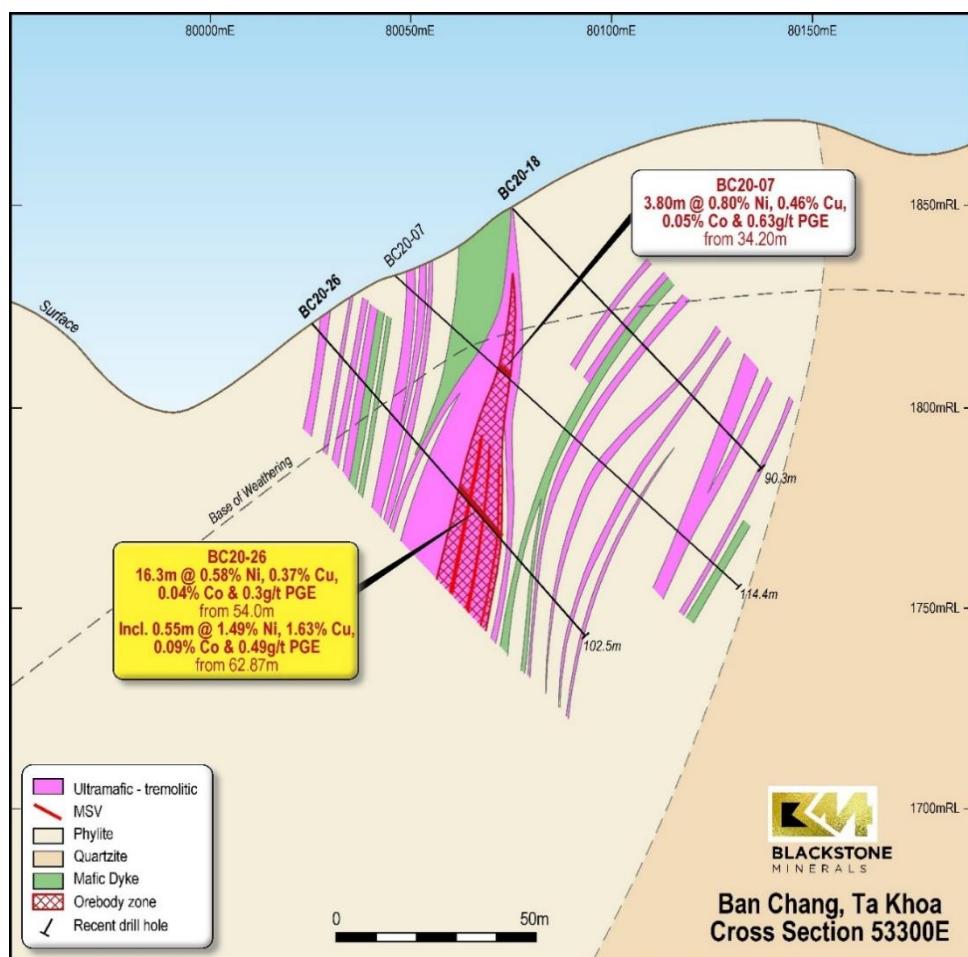


Figure 3: Ban Chang Cross Section 53300E showing drill hole BC20-26

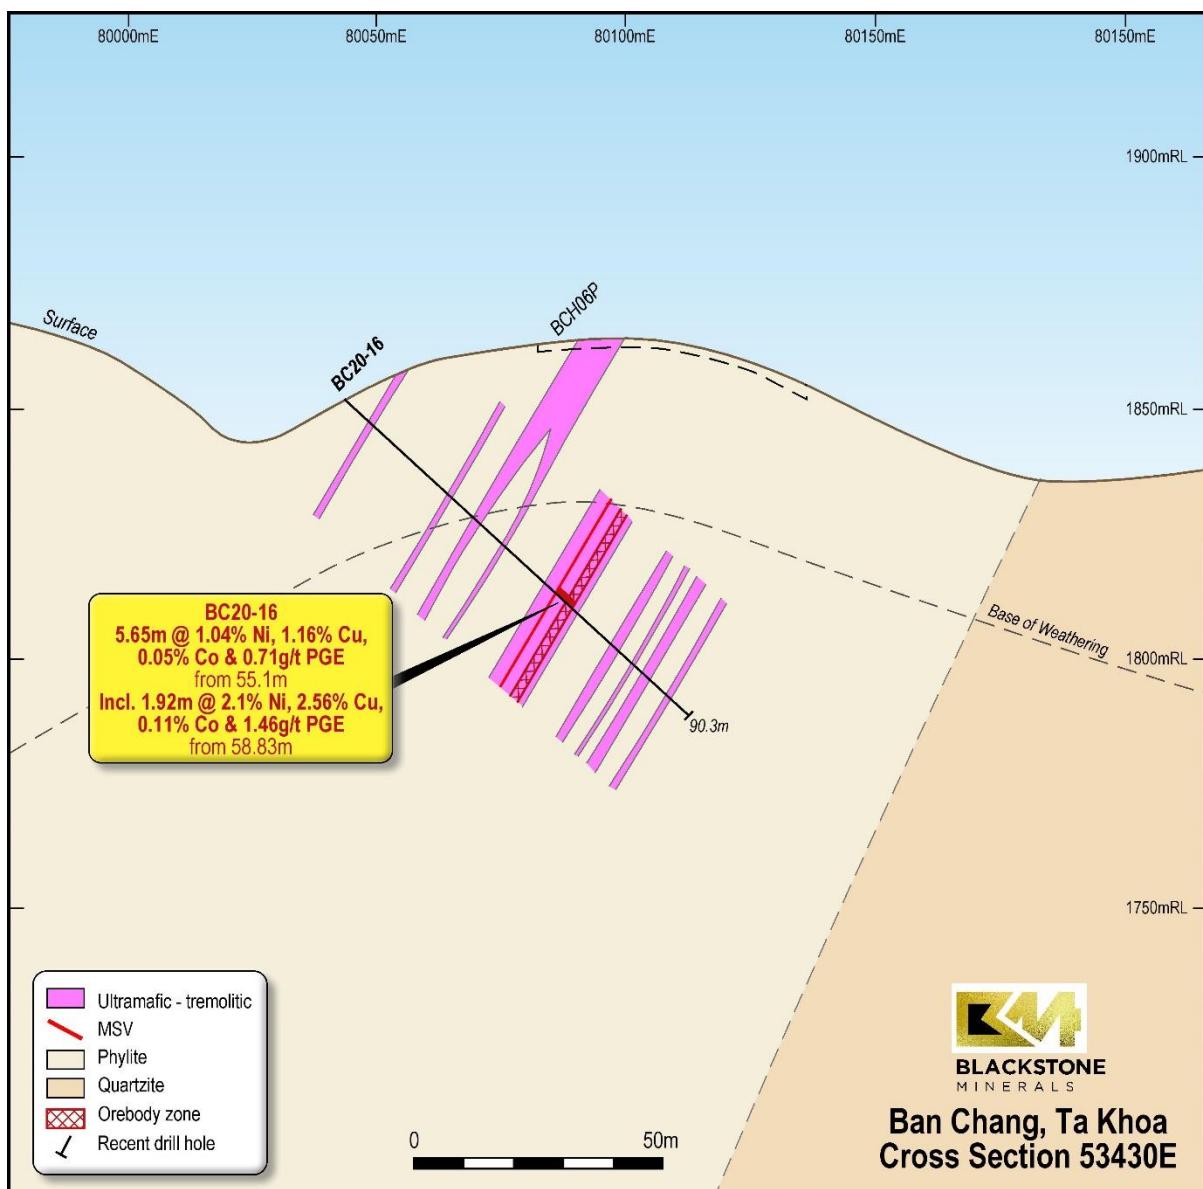


Figure 4: Ban Chang Cross Section 53430E showing drill hole BC20-16

King Cobra Discovery Zone

Following the outcomes of the Ta Khoa Project Scoping Study (Refer to ASX Announcement from 14 October 2020), Blackstone has been successful with additional infill and extensional drilling at KCZ.

The Company's maiden Indicated Mineral Resource 44.3Mt @ 0.52% Ni for 229kt Ni and Inferred Mineral Resource of 14.3Mt @ 0.35% for 50kt Ni, included drilling data announced to the ASX prior to 27 July 2020 (up to and including drill hole BP20-23). Subsequent drilling, including current reporting (also refer to ASX announcement from 30 July 2020) have targeted extensions at the KCZ and have been designed to infill and increase the geological confidence of the Ban Phuc DSS deposit.

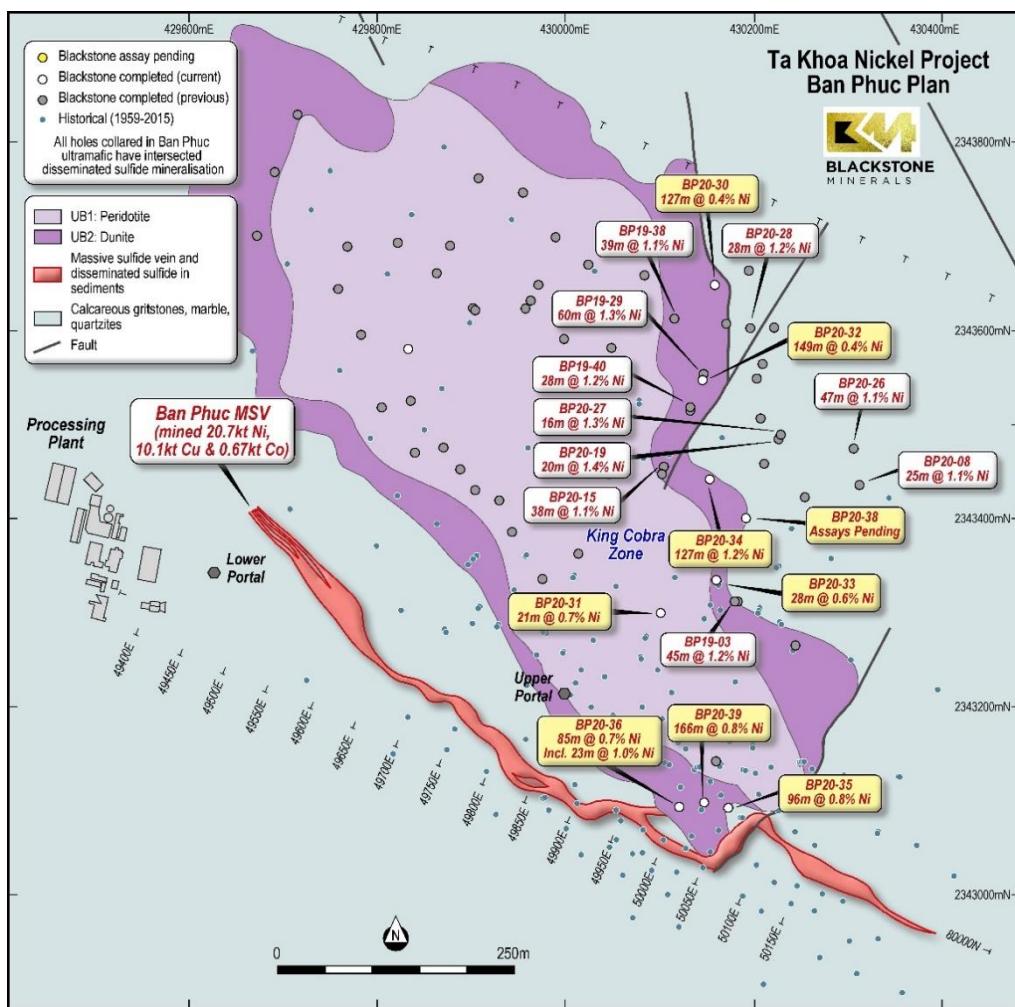


Figure 5: Plan View showing Ban Phuc DSS drill hole collar locations and KCZ. (Refer to tables 1 & 2).

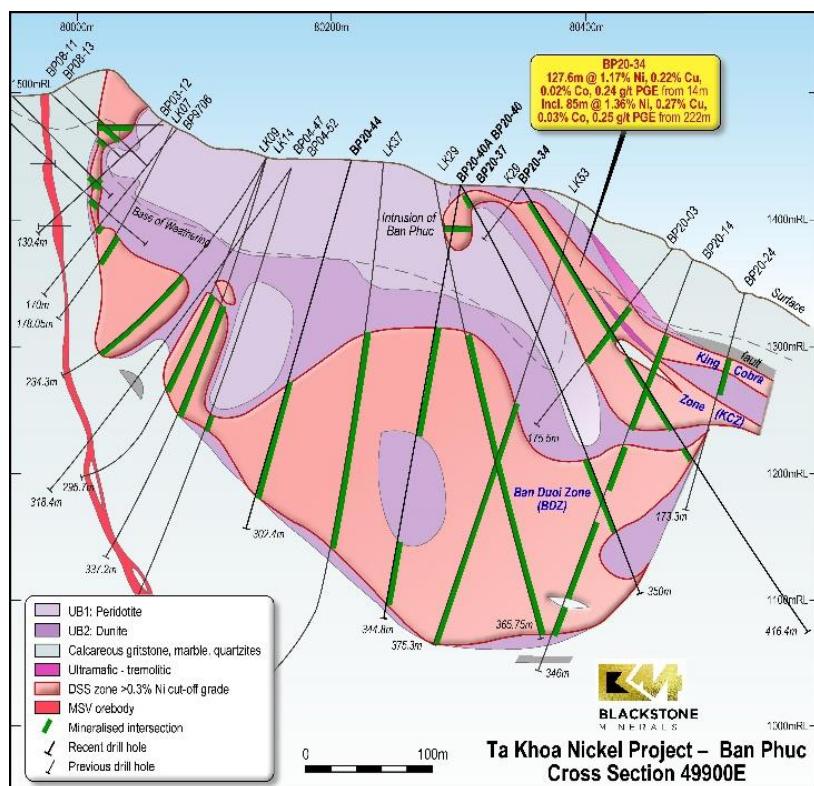


Figure 6: Ban Phuc Cross Section 49900E showing maiden drill hole BP20-34

The current reporting includes some of the most significant intercepts recorded at the Ban Phuc DSS deposit to date, and KCZ in particular has the potential to add shallow, high grade tonnes to the Ban Phuc DSS maiden resource estimate and hence significant upside to the value of the project.


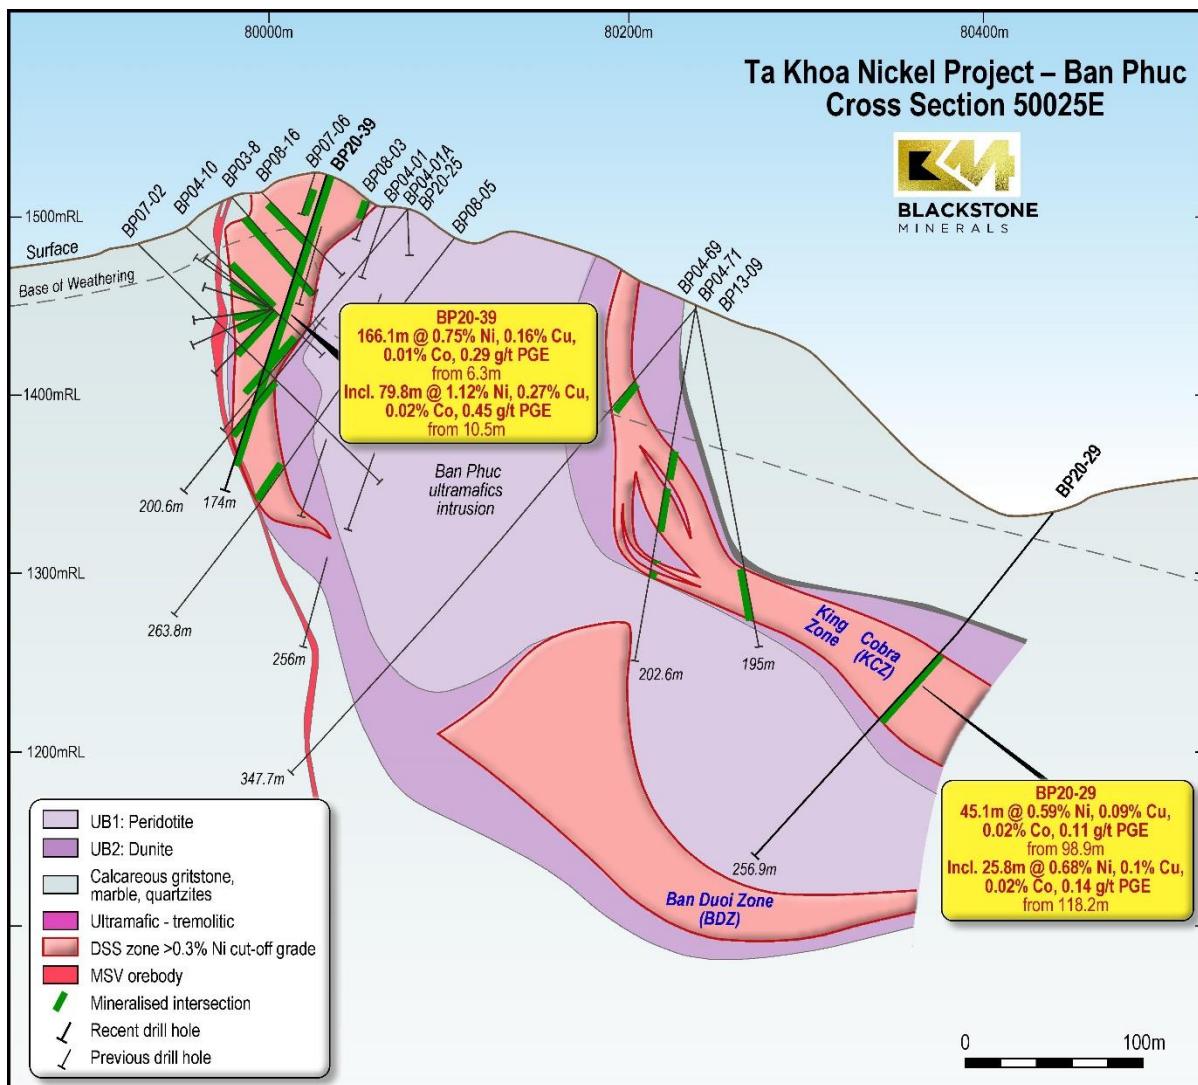


Figure 7: Ban Phuc Cross Section 50026 showing maiden drill holes BP20-29 and BP20-39

Ta Khoa Nickel-Cu-PGE Project - Next Steps

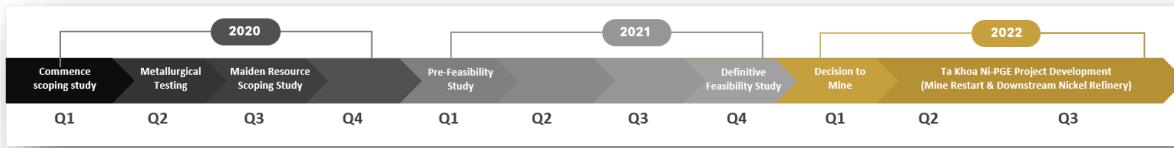

Blackstone Minerals delivered a Maiden Resource in Q3, focused initially on the DSS at Ban Phuc and continues to investigate the potential to restart the existing Ban Phuc concentrator through focused exploration on both MSV and DSS deposits. Blackstone delivered a Scoping Study on the downstream processing facility at Ta Khoa. The Scoping Study provided details for joint venture partners to formalise the next stage of investment.

Blackstone has commenced metallurgical testing on the Ban Phuc DSS deposit with an aim to develop a flow sheet for a product suitable for the lithium-ion battery industry. In addition, Blackstone Minerals will investigate the potential to develop downstream processing infrastructure in Vietnam to produce a downstream nickel and cobalt product to supply Asia's growing lithium-ion battery industry.



Figure 8: Ta Khoa Nickel-Cu-PGE Project location

The Ta Khoa Nickel-Cu-PGE Project in northern Vietnam includes an existing modern nickel mine, which has been under care and maintenance since 2016 due to falling nickel prices. Existing infrastructure includes an internationally designed 450ktpa processing plant. Previous project owners focused mining and exploration efforts primarily on the MSV at Ban Phuc. Blackstone plans to explore both MSV and DSS targets throughout the project, initially within a 5km radius of the existing processing facility. Blackstone will conduct further geophysics on the MSV and DSS targets and continue its maiden drilling campaign.

Authorised by the Managing Director of Blackstone Minerals Limited**Authorised by:**

Scott Williamson
Managing Director
+61 8 9425 5217
scott@blackstoneminerals.com.au

For more information, please contact:

Nathan Ryan
Media Enquiries
+61 420 582 887
nathan@nwrcommunications.com.au

Patrick Chang
Corporate Development
+61 8 9425 5217
patrick@blackstoneminerals.com.au

About Blackstone

Blackstone Minerals Limited (ASX: BSX / OTCQB: BLSTF / FRA: B9S) is developing the district scale Ta Khoa Project in Northern Vietnam where the company has a maiden resource and scoping study for the large-scale Ban Phuc Nickel-PGE deposit. The Ta Khoa Nickel-Copper-PGE Project has existing modern mine infrastructure built to International Standards including a 450ktpa processing plant and permitted mine facilities. Blackstone also owns a large land holding at the Gold Bridge project within the BC porphyry belt in British Columbia, Canada with large scale drill targets prospective for high grade gold-cobalt-copper mineralisation. In Australia, Blackstone is exploring for nickel and gold in the Eastern Goldfields and gold in the Pilbara region of Western Australia. Blackstone has a board and management team with a proven track record of mineral discovery and corporate success.

Competent Person Statement

The information in this report that relates to Exploration Results and Exploration Targets is based on information compiled by Mr Andrew Radonjic, a Director and Technical Consultant of the company, who is a Member of The Australasian Institute of Mining and Metallurgy. Mr Andrew Radonjic has sufficient experience which is relevant to the style of mineralisation and type of deposits under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Andrew Radonjic consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

The information in this report that relates to Mineral Resource Estimation in respect of the Ta Khoa Nickel Project is based on information compiled by BM Geological Services (BMGS) under the supervision of Andrew Bewsher, a director of BMGS and Member of the Australian Institute of Geoscientists with over 21 years of experience in the mining and exploration industry in Australia and Vietnam in a multitude of commodities including nickel, copper and precious metals. Mr Bewsher has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Bewsher consents to the inclusion of the Mineral Resource Estimate in this report on that information in the form and context in which it appears.

The Company confirms that all material assumptions and parameters underpinning the Mineral Resource Estimates as reported within the Scoping Study in market announcement dated 14 October 2020 continue to apply and have not materially changed, and that it is not aware of any new information or data that materially affects the information that has been included in this announcement.

Forward Looking Statements

This report contains certain forward-looking statements. The words "expect", "forecast", "should", "projected", "could", "may", "predict", "plan", "will" and other similar expressions

are intended to identify forward looking statements. Indications of, and guidance on, future earnings, cash flow costs and financial position and performance are also forward-looking statements. Forward looking statements, opinions and estimates included in this announcement are based on assumptions and contingencies which are subject to change without notice, as are statements about market and industry trends, which are based on interpretations of current market conditions. Forward looking statements are provided as a general guide only and should not be relied on as a guarantee of future performance. Forward looking statements may be affected by a range of variables that could cause actual results or trends to differ materially. These variations, if materially adverse, may affect the timing or the feasibility of the development of the Ta Khoa Nickel Project.

Blackstone concluded it has a reasonable basis for providing these forward-looking statements and believes it has reasonable basis to expect it will be able to fund development of the project. However, a number of factors could cause actual results or expectations to differ materially from the results expressed or implied in the forward-looking statements. Given the uncertainties involved, investors should not make any investment decisions based solely on the results of this study. The project development schedule assumes the completion of a Pre-Feasibility Study (PFS) by early 2021 and a DFS by late 2021. Development approvals and investment permits will be sought from the relevant Vietnamese authorities in early 2021. Delays in any one of these key activities could result in a delay to the commencement of construction (planned for early 2022). This could lead on to a delay to first production, planned for 2023. The Company's stakeholder and community engagement programs will reduce the risk of project delays. Please note these dates are indicative only.

The JORC-compliant Mineral Resource estimate forms the basis for the Scoping Study in the market announcement dated 14 October 2020. Over the life of mine considered in the Scoping Study, 83% of the processed Mineral Resource originates from Indicated Mineral Resources and 18% from Inferred Mineral Resources; 76% of the processed Mineral Resource during the payback period will be from Indicated Mineral Resources. The viability of the development scenario envisaged in the Scoping Study therefore does not depend on Inferred Mineral Resources. There is a low level of geological confidence associated with Inferred Mineral Resources and there is no certainty that further exploration work will result in the determination of Indicated Mineral Resources or that the production target itself will be realised. The Inferred Mineral Resources are not the determining factors in project viability.

Table 1

New Ban Phuc and Ban Chang drill hole locations, orientations and mineralised intersections. PGE = Pt+Pd+Au.
 Complete assay interval data in Table 2,
 All coordinates UTM Zone48N WGS84, Surveys by Leica 1203+ total station system.

Hole	East	North	RL m	Azi (°)	Dip (°)	End of hole m	From m	To m	Interval m	Ni %	Cu %	Co %	PGE g/t	Pt g/t	Pd g/t	Au g/t	Recovery %
BP20-29	430498	2343368	329	202	-52	256.9	98.9	144	45.1	0.59	0.09	0.02	0.11	0.04	0.05	0.02	100
includes						118.2	144		25.8	0.68	0.1	0.02	0.14	0.05	0.06	0.02	100
BP20-30	430353	2343542	314	202	-45	213.1	20.65	147.8	127.15	0.38	0.03	0.01	0.09	0.04	0.04	0.01	99.2
includes						122.7	137.15		14.45	0.77	0.15	0.02	0.18	0.08	0.08	0.02	100
BP20-31	430296	2343193	448	112	-60	318	48.7	70	21.3	0.71	0.09	0.01	0.18	0.08	0.07	0.03	98.9
includes						59	70		11	0.95	0.13	0.01	0.24	0.1	0.09	0.05	100
and ¹						184.45	314		129.55	0.32	<0.01	<0.01	0.04	0.02	0.01	0.01	98.9
BP20-32	430340	2343444	377	22	-65	175.8	3	152.15	149.15	0.42	0.06	0.01	0.08	0.03	0.03	0.02	95.3
BP20-33	430355	2343227	427	22	-60	367.7	322.8	351	28.2	0.57	0.08	0.01	0.22	0.08	0.1	0.03	96.8
includes						336	348.3		12.3	0.84	0.14	0.02	0.41	0.15	0.2	0.06	100
BP20-34	430347	2343334	425	22	-58	416.4	14	141.6	127.6	1.17	0.22	0.02	0.24	0.1	0.1	0.04	100
includes						22	107		85	1.36	0.27	0.03	0.25	0.1	0.1	0.05	100
and						158.25	224		65.75	0.38	0.05	0.01	0.14	0.06	0.07	0.01	100
and						241	251		10	0.66	0.14	0.02	0.14	0.06	0.07	0.01	100
BP20-35 ²	430368	2342985	511	202	-66	115.2	18.4	114.5	96.1	0.83	0.17	0.02	0.26	0.11	0.11	0.04	99
Includes ³						45	95.2		50.2	1.05	0.2	0.02	0.4	0.16	0.18	0.06	100
BP20-36 ⁴	430314	2342987	528	202	-72	89.3	4	89.3	85.3	0.67	0.1	0.01	0.26	0.12	0.11	0.03	99
includes						15.6	38.3		22.7	0.99	0.13	0.02	0.23	0.1	0.08	0.05	97
BP20-37	430330	2343288	425	22	-60	350	7.2	20	12.8	0.41	0.02	0.01	0.06	0.03	0.03	<0.01	100
and						255	297		42	0.47	0.06	0.01	0.2	0.09	0.09	0.02	100
includes						280.3	297		16.7	0.71	0.14	0.02	0.24	0.1	0.11	0.03	100
BP20-38	430386	2343293	394	22	-60	342.2	pending										
BP20-39	430341	2342990	524	202	-72	174	6.3	172.4	166.1	0.75	0.16	0.01	0.29	0.12	0.13	0.04	99
includes						10.5	90.3		79.8	1.12	0.27	0.02	0.45	0.18	0.21	0.06	99
BC20-13	432418	2341831	663	22	-50	100.6	67.45	70.75	3.3	0.48	0.48	0.03	0.38	0.16	0.19	0.03	100
includes						67.45	68.27		0.82	1.17	0.4	0.07	0.9	0.45	0.4	0.05	100
and						70.55	70.75		0.2	1.32	1.57	0.08	0.78	0.29	0.45	0.03	100
BC20-14	433425	2341750	852	22	-45	108.1	no significant intersection										
BC20-15	432535	2341793	678	22	-50	100	68.6	69.85	1.25	0.55	0.52	0.03	0.39	0.22	0.15	0.02	100
includes						68.6	69		0.4	1.52	0.42	0.09	1.13	0.66	0.45	0.02	100
BC20-16	433495	2341705	852	22	-45	90.3	55.1	60.75	5.65	1.04	1.16	0.05	0.71	0.15	0.52	0.04	100
includes						58.83	60.75		1.92	2.1	2.56	0.11	1.46	0.34	1.06	0.06	100
BC20-17	432578	2341779	677	22	-50	91.8	69.7	69.77	0.07	0.58	0.98	0.03	0.8	0.22	0.51	0.06	100
BC20-18	433384	2341783	850	22	-50	90.3	no significant intersection										
BC20-19	432484	2341825	681	22	-50	80	41.75	57.5	15.75	0.47	0.25	0.03	0.21	0.1	0.1	0.01	100
included						55.6	57.5		1.9	1.21	0.48	0.07	0.7	0.35	0.32	0.02	100
BC20-20	433286	2341802	812	22	-45	75.4	46	49.85	3.85	0.81	0.57	0.05	0.36	0.13	0.21	0.02	100
includes						48.15	49.85		1.7	1.45	1.08	0.08	0.6	0.2	0.37	0.03	100
BC20-21	432380	2341879	663	22	-45	80	no significant intersection										
BC20-22	433533	2341664	864	22	-73	150.1	no significant intersection										
BC20-23	433241	2341827	809	22	-45	73.2	22.1	23.3	1.2	0.34	0.17	0.02	0.15	0.06	0.08	0.01	100
BC20-24	432325	2341886	643	22	-45	85.5	0.55	1.5	0.95	0.93	0.34	0.05	0.27	0.08	0.14	0.05	100
and ⁵						32.5	35.05		2.55	0.4	0.32	0.02	na	na	na	na	100
BC20-25	433188	2341823	791	22	-50	66.7	no significant intersection										
BC20-26	433366	2341737	819	22	-50	102.5	54	70.3	16.3	0.58	0.37	0.04	0.3	0.15	0.14	0.01	100
includes						62.87	63.42		0.55	1.49	1.63	0.09	0.49	0.14	0.31	0.04	100
BC20-27	432270	2341899	640	22	-45	70	42.32	43	0.68	2.56	0.65	0.14	0.97	0.39	0.56	0.02	100
BC20-28 ⁵	433138	2341844	779	22	-50	84.3	15.2	17.2	2	0.17	0.22	0.01	na	na	na	na	100
BC20-29	432230	2341883	629	22	-45	83	63.6	64.8	1.2	0.51	0.16	0.03	0.27	0.11	0.15	0.01	100
includes						63.6	63.75		0.15	2.65	0.08	0.14	0.99	0.35	0.63	0.01	100
BC20-30	433313	2341728	792	15	-50	143	no significant intersection										

Notes:

¹ terminated before final target depth because of drill rig limitations² 16.1m of interval reserved for metallurgical test work³ 10.1m of interval reserved for metallurgical test work⁴ 2.5m of interval reserved for metallurgical test work & ended in DSS sulfides⁵ not assayed for Au, Pt & Pd

Table 2

Drill hole assays, preparation by SGS, Hai Phong, assays by ALS Geochemistry, Perth (see Appendix One for assay methods). Note: na denotes assay result not available (element was not determined), < is less than method detection limit.

Hole	From m	To m	Interval m	Ni ppm	Cu ppm	Co ppm	Pt g/t	Pd g/t	Au g/t
BP20-29	30.55	30.8	0.25	123	258	65	<0.005	<0.001	0.003
BP20-29	64.5	65.35	0.85	845	77	31	0.005	0.004	0.005
BP20-29	65.35	68.1	2.75	152	138	18	<0.005	0.001	0.008
BP20-29	68.1	70	1.9	209	237	29	<0.005	0.004	0.008
BP20-29	70	72	2	141	148	16	<0.005	0.001	0.001
BP20-29	72	74	2	959	248	66	<0.005	0.004	0.002
BP20-29	74	75.7	1.7	2610	264	141	0.009	0.01	0.007
BP20-29	75.7	77.65	1.95	2520	318	157	0.007	0.008	0.004
BP20-29	77.65	79.7	2.05	3050	863	200	0.008	0.01	0.01
BP20-29	79.7	81.7	2	2490	1080	283	0.008	0.015	0.009
BP20-29	81.7	83.7	2	2890	995	249	0.014	0.016	0.004
BP20-29	83.7	85.9	2.2	2900	517	162	0.012	0.016	0.004
BP20-29	85.9	87.9	2	2800	527	175	0.011	0.012	0.003
BP20-29	87.9	89.8	1.9	2740	682	169	0.018	0.019	0.003
BP20-29	89.8	90.9	1.1	3420	1260	156	0.016	0.018	0.008
BP20-29	90.9	92.9	2	2690	73	121	0.006	0.006	0.003
BP20-29	92.9	94.9	2	2940	36	118	0.007	0.004	0.005
BP20-29	94.9	96.9	2	2670	3	100	<0.005	0.003	0.003
BP20-29	96.9	98.9	2	3170	6	113	0.006	0.008	0.005
BP20-29	98.9	100.7	1.8	5050	379	127	0.029	0.042	0.008
BP20-29	100.7	101.45	0.75	4380	3470	169	0.012	0.017	0.011
BP20-29	101.45	103.4	1.95	5740	856	183	0.03	0.035	0.011
BP20-29	103.4	105.4	2	3330	887	160	0.017	0.02	0.007
BP20-29	105.4	107.4	2	4270	623	165	0.031	0.031	0.005
BP20-29	107.4	109.3	1.9	4330	594	155	0.036	0.038	0.006
BP20-29	109.3	110.3	1	5680	1050	186	0.036	0.051	0.008
BP20-29	110.3	112	1.7	7430	1560	220	0.048	0.071	0.009
BP20-29	112	114	2	4300	599	142	0.035	0.047	0.01
BP20-29	114	116	2	4440	503	160	0.038	0.048	0.023
BP20-29	116	118.2	2.2	4760	650	185	0.037	0.05	0.022
BP20-29	118.2	120	1.8	11000	1930	239	0.101	0.102	0.042
BP20-29	120	122	2	7900	1140	181	0.061	0.064	0.016
BP20-29	122	122.75	0.75	3130	141	103	0.016	0.026	0.011
BP20-29	122.75	124.8	2.05	7820	1160	170	0.037	0.062	0.029
BP20-29	124.8	126	1.2	4570	1150	136	0.018	0.023	0.015
BP20-29	126	127.95	1.95	2670	129	109	0.005	0.006	0.005
BP20-29	127.95	130	2.05	5370	1310	175	0.033	0.038	0.019
BP20-29	130	132	2	7850	1510	227	0.053	0.054	0.025
BP20-29	132	132.75	0.75	4570	447	116	0.115	0.089	0.016
BP20-29	132.75	134.5	1.75	9150	905	181	0.053	0.059	0.042
BP20-29	134.5	136.6	2.1	4770	110	107	0.071	0.077	0.01
BP20-29	136.6	137.9	1.3	10750	878	185	0.067	0.093	0.032
BP20-29	137.9	139	1.1	4510	215	99	0.063	0.061	0.011
BP20-29	139	140.75	1.75	4390	446	109	0.06	0.06	0.013
BP20-29	140.75	142.4	1.65	8560	2190	229	0.064	0.07	0.053
BP20-29	142.4	144	1.6	7970	955	197	0.054	0.064	0.032
BP20-29	144	146	2	2930	133	82	0.025	0.033	0.004
BP20-29	146	148	2	3040	58	100	0.021	0.024	0.003
BP20-29	148	150	2	2630	5	69	0.005	0.004	0.001
BP20-29	150	152	2	2800	2	87	0.005	<0.001	0.001
BP20-29	152	154	2	2740	13	110	<0.005	<0.001	0.002
BP20-29	154	156	2	3000	4	94	<0.005	<0.001	0.005
BP20-29	156	158	2	2640	2	92	0.005	<0.001	0.002
BP20-29	158	160	2	2670	4	86	<0.005	0.002	0.006
BP20-29	160	162	2	2630	2	82	<0.005	<0.001	0.002
BP20-29	162	165	3	2540	34	84	<0.005	<0.001	0.001
BP20-29	165	168	3	2630	14	85	0.009	<0.001	<0.001
BP20-29	168	171	3	2630	17	80	<0.005	<0.001	0.003
BP20-29	171	174	3	2680	14	82	0.005	<0.001	0.001
BP20-29	174	177	3	2690	15	81	<0.005	<0.001	0.002
BP20-29	177	180	3	2620	19	77	0.005	<0.001	0.003

Hole	From m	To m	Interval m	Ni ppm	Cu ppm	Co ppm	Pt g/t	Pd g/t	Au g/t
BP20-29	180	183	3	2740	30	74	<0.005	<0.001	0.002
BP20-29	183	186	3	2390	18	61	<0.005	<0.001	0.006
BP20-29	186	189	3	2670	17	72	0.009	<0.001	0.005
BP20-29	189	192	3	2810	13	76	<0.005	<0.001	0.003
BP20-29	192	195	3	2760	13	75	<0.005	<0.001	0.002
BP20-29	195	198	3	2290	50	67	<0.005	<0.001	0.005
BP20-29	198	201	3	2770	12	79	<0.005	<0.001	0.002
BP20-29	201	204	3	2810	16	77	0.007	<0.001	0.002
BP20-29	204	207	3	2880	13	80	<0.005	<0.001	0.005
BP20-29	207	210	3	2800	12	76	<0.005	<0.001	<0.001
BP20-29	210	213	3	2800	12	77	<0.005	0.014	<0.001
BP20-29	213	216	3	2710	14	76	<0.005	<0.001	0.001
BP20-29	216	219	3	2740	10	77	<0.005	<0.001	<0.001
BP20-29	219	222	3	2820	11	79	<0.005	<0.001	0.002
BP20-29	222	225	3	2720	18	76	<0.005	<0.001	0.003
BP20-29	225	228	3	2810	9	77	<0.005	0.001	0.002
BP20-29	228	231	3	2740	11	73	<0.005	<0.001	0.003
BP20-29	231	234	3	2840	10	80	<0.005	<0.001	<0.001
BP20-29	234	237	3	2740	13	76	0.024	0.001	0.007
BP20-29	237	240	3	2770	13	79	<0.005	<0.001	0.001
BP20-29	240	243	3	2820	8	80	<0.005	<0.001	0.001
BP20-29	243	246	3	2750	9	76	<0.005	<0.001	0.002
BP20-29	246	249	3	2790	9	80	<0.005	<0.001	0.001
BP20-29	249	250.5	1.5	2640	10	75	<0.005	<0.001	0.001
BP20-29	250.5	252.5	2	2500	22	70	<0.005	<0.001	0.004
BP20-30	20.65	22.7	2.05	4900	404	111	0.043	0.063	0.011
BP20-30	22.7	24.7	2	6370	1100	147	0.072	0.086	0.029
BP20-30	24.7	27	2.3	2830	570	128	0.015	0.02	0.015
BP20-30	27	28.8	1.8	2440	379	93	0.02	0.022	0.004
BP20-30	28.8	30.5	1.7	2570	480	115	0.022	0.024	0.008
BP20-30	30.5	32.6	2.1	3170	343	125	0.026	0.028	0.008
BP20-30	32.6	34.8	2.2	6000	846	154	0.059	0.063	0.025
BP20-30	34.8	36.8	2	6340	859	179	0.07	0.088	0.035
BP20-30	36.8	38.8	2	2790	62	92	0.013	0.026	0.005
BP20-30	38.8	41.2	2.4	2820	159	116	0.015	0.027	0.003
BP20-30	41.2	41.9	0.7	3480	757	130	0.065	0.057	0.018
BP20-30	41.9	44	2.1	2700	120	111	0.031	0.028	0.006
BP20-30	44	45	1	3110	29	96	0.023	0.032	0.006
BP20-30	45	47	2	3150	26	109	0.036	0.034	0.006
BP20-30	47	49	2	2680	131	102	0.014	0.017	0.003
BP20-30	49	51	2	2960	404	112	0.024	0.027	0.008
BP20-30	51	53	2	2870	95	117	0.03	0.036	0.008
BP20-30	53	54.8	1.8	2820	31	116	0.028	0.035	0.004
BP20-30	54.8	56.8	2	3290	119	123	0.028	0.032	0.01
BP20-30	56.8	58.8	2	3730	31	115	0.064	0.053	0.006
BP20-30	58.8	60.8	2	3580	84	103	0.043	0.051	0.004
BP20-30	60.8	62.8	2	2840	2	68	0.014	0.029	0.004
BP20-30	62.8	64.8	2	2830	3	80	0.01	0.022	0.007
BP20-30	64.8	66.3	1.5	2850	2	89	0.008	0.015	0.006
BP20-30	66.3	68.8	2.5	2900	1	96	0.008	0.025	0.004
BP20-30	68.8	71.3	2.5	2620	2	69	0.04	0.024	0.003
BP20-30	71.3	73.3	2	2680	2	95	0.01	0.023	0.003
BP20-30	73.3	75.3	2	3400	13	108	0.04	0.035	0.008
BP20-30	75.3	77.3	2	3940	70	118	0.038	0.035	0.01
BP20-30	77.3	79.3	2	3470	144	101	0.011	0.02	0.006
BP20-30	79.3	81.3	2	3610	54	103	0.032	0.035	0.005
BP20-30	81.3	83	1.7	3890	51	86	0.018	0.025	0.007
BP20-30	83	85	2	3080	1	81	0.034	0.035	0.006
BP20-30	85	87	2	3290	3	111	0.053	0.042	0.007
BP20-30	87	89	2	3670	1	77	0.06	0.044	0.01
BP20-30	89	90.3	1.3	2820	1	54	<0.005	0.007	0.001
BP20-30	90.3	91	0.7	1240	33	44	<0.005	0.005	<0.001
BP20-30	91	92.5	1.5	2540	29	76	0.01	0.017	0.002
BP20-30	92.5	94.5	2	2480	21	75	0.01	0.008	<0.001
BP20-30	94.5	96.5	2	3040	38	118	0.015	0.023	0.01
BP20-30	96.5	98.5	2	2310	3	72	<0.005	0.004	<0.001

Hole	From m	To m	Interval m	Ni ppm	Cu ppm	Co ppm	Pt g/t	Pd g/t	Au g/t
BP20-30	98.5	100.5	2	2610	3	80	<0.005	0.001	<0.001
BP20-30	100.5	102.7	2.2	2440	3	77	0.009	0.026	0.001
BP20-30	102.7	105	2.3	2810	2	66	0.013	0.015	0.001
BP20-30	105	107	2	4240	114	143	0.04	0.059	0.009
BP20-30	107	109.2	2.2	3510	173	117	0.029	0.047	0.018
BP20-30	109.2	111.2	2	2880	232	100	0.052	0.05	0.004
BP20-30	111.2	113.2	2	2820	66	89	0.042	0.034	0.004
BP20-30	113.2	115.2	2	3840	121	101	0.038	0.043	0.014
BP20-30	115.2	116.45	1.25	2820	458	85	0.031	0.036	0.007
BP20-30	116.45	118	1.55	2840	76	88	0.028	0.035	0.006
BP20-30	118	119.8	1.8	3490	92	145	0.022	0.027	0.006
BP20-30	119.8	120.7	0.9	3830	383	112	0.014	0.011	0.005
BP20-30	120.7	122.7	2	4370	1260	132	0.027	0.034	0.009
BP20-30	122.7	124.3	1.6	9060	2080	208	0.047	0.053	0.03
BP20-30	124.3	125.8	1.5	3620	184	137	0.03	0.042	0.009
BP20-30	125.8	127.8	2	7520	1700	212	0.052	0.062	0.019
BP20-30	127.8	129.8	2	6960	1520	200	0.047	0.062	0.019
BP20-30	129.8	131.8	2	8550	2130	244	0.088	0.092	0.022
BP20-30	131.8	133.8	2	8020	1380	188	0.087	0.091	0.028
BP20-30	133.8	135.6	1.8	8320	1100	182	0.119	0.118	0.026
BP20-30	135.6	137.15	1.55	8840	1480	183	0.184	0.148	0.04
BP20-30	137.15	137.7	0.55	3520	287	81	0.04	0.051	0.009
BP20-30	137.7	139.7	2	3830	239	107	0.032	0.038	0.008
BP20-30	139.7	141.7	2	5200	247	141	0.264	0.105	0.012
BP20-30	141.7	143.7	2	3790	207	111	0.048	0.047	0.003
BP20-30	143.7	145.8	2.1	3210	5	80	0.006	0.007	0.003
BP20-30	145.8	147.8	2	3680	8	141	0.029	0.025	0.004
BP20-30	147.8	150.45	2.65	2920	2	98	<0.005	0.001	0.002
BP20-30	150.45	152.4	1.95	2540	3	85	<0.005	0.003	0.002
BP20-30	152.4	154.4	2	2650	1	83	<0.005	<0.001	0.001
BP20-30	154.4	157	2.6	2910	1	91	<0.005	0.001	<0.001
BP20-30	157	159.75	2.75	2850	9	94	<0.005	0.001	0.001
BP20-30	159.75	162.8	3.05	2760	41	87	0.011	0.002	0.001
BP20-30	162.8	165.8	3	2600	16	87	<0.005	<0.001	0.001
BP20-30	165.8	168.8	3	2780	19	91	0.007	0.006	0.001
BP20-30	168.8	171.8	3	2510	14	85	0.015	0.01	0.001
BP20-30	171.8	174.8	3	2630	19	84	0.01	0.004	0.001
BP20-30	174.8	177.2	2.4	2780	10	95	<0.005	0.001	0.001
BP20-30	177.2	178	0.8	654	4	34	<0.005	<0.001	<0.001
BP20-30	178	181	3	2850	11	89	0.007	0.003	0.001
BP20-30	181	184	3	2540	26	75	0.015	0.001	0.004
BP20-30	184	185.1	1.1	1470	20	63	<0.005	<0.001	0.001
BP20-30	185.1	188	2.9	2940	80	81	0.014	0.003	0.001
BP20-30	188	191	3	2760	8	91	<0.005	0.001	0.001
BP20-30	191	194	3	2490	13	83	<0.005	0.001	<0.001
BP20-30	194	197	3	2660	8	87	<0.005	<0.001	0.001
BP20-30	197	200	3	2700	12	89	<0.005	0.001	0.002
BP20-30	200	203	3	2580	17	85	0.029	0.004	0.003
BP20-30	203	206	3	2670	10	87	<0.005	0.002	<0.001
BP20-30	206	209	3	2280	19	70	0.01	0.001	0.001
BP20-30	209	211	2	2720	15	88	<0.005	0.001	0.001
BP20-30	211	213.1	2.1	2730	16	85	<0.005	<0.001	0.001
BP20-31	46	48.7	2.7	2760	78	66	0.071	0.075	0.006
BP20-31	48.7	49.9	1.2	3530	53	85	0.048	0.06	0.004
BP20-31	49.9	51	1.1	2840	20	85	0.005	0.01	0.007
BP20-31	51	53	2	4540	318	108	0.023	0.028	0.01
BP20-31	53	55	2	4240	582	114	0.01	0.013	0.018
BP20-31	55	57	2	5180	662	113	0.073	0.065	0.012
BP20-31	57	59	2	5300	773	99	0.125	0.104	0.014
BP20-31	59	61	2	6850	583	127	0.068	0.053	0.016
BP20-31	61	63	2	5280	662	81	0.049	0.036	0.023
BP20-31	63	65	2	9340	1320	132	0.082	0.07	0.04
BP20-31	65	66	1	11300	2840	133	0.075	0.123	0.063
BP20-31	66	68	2	11200	1230	148	0.068	0.089	0.063
BP20-31	68	70	2	14000	1770	185	0.244	0.198	0.106
BP20-31	70	71	1	2810	34	75	0.019	0.005	0.005

Hole	From m	To m	Interval m	Ni ppm	Cu ppm	Co ppm	Pt g/t	Pd g/t	Au g/t
BP20-31	71	73	2	2100	58	51	0.093	0.008	0.006
BP20-31	73	75	2	2260	400	58	0.01	0.004	0.003
BP20-31	75	77	2	2540	31	70	0.019	0.006	0.005
BP20-31	77	78	1	2900	31	75	0.009	0.008	0.005
BP20-31	78	81	3	2880	32	75	0.005	0.007	0.002
BP20-31	81	84	3	2850	18	78	0.007	0.004	0.002
BP20-31	84	87	3	3030	36	86	0.01	0.005	0.001
BP20-31	87	90	3	2930	16	81	0.015	0.004	0.001
BP20-31	90	93	3	2950	24	79	0.021	0.003	0.001
BP20-31	93	96	3	2840	32	77	0.007	0.004	<0.001
BP20-31	184.45	186.45	2	4510	68	76	0.062	0.11	0.021
BP20-31	186.45	190	3.55	2600	44	66	0.015	0.022	0.008
BP20-31	190	193	3	3890	24	91	0.006	0.004	0.014
BP20-31	193	196	3	4490	39	97	0.035	0.041	0.015
BP20-31	196	199	3	3620	26	84	0.022	0.015	0.006
BP20-31	199	202	3	3690	34	87	<0.005	0.003	0.008
BP20-31	202	205	3	3540	27	89	<0.005	0.005	0.006
BP20-31	205	208	3	3140	35	74	0.01	0.009	0.006
BP20-31	208	211	3	3820	20	92	0.014	0.01	0.004
BP20-31	211	214	3	3220	29	80	0.015	0.004	0.003
BP20-31	214	217	3	3360	24	85	<0.005	0.002	0.004
BP20-31	217	220	3	3440	23	86	0.005	0.003	0.004
BP20-31	220	223	3	3240	29	81	0.007	0.005	0.003
BP20-31	223	226	3	3240	20	83	<0.005	0.002	0.003
BP20-31	226	229	3	3260	29	79	0.013	0.008	0.002
BP20-31	229	232	3	3340	19	87	0.009	<0.001	0.003
BP20-31	232	235	3	2980	24	80	0.01	0.001	0.002
BP20-31	235	236	1	3100	51	80	0.005	0.002	0.002
BP20-31	237.4	240	2.6	2820	21	76	0.032	0.005	0.001
BP20-31	240	243	3	3820	34	83	0.043	0.01	0.005
BP20-31	243	245	2	3170	13	83	0.021	0.001	0.002
BP20-31	245	247	2	3000	18	78	0.008	0.004	0.002
BP20-31	247	250	3	2510	18	68	0.008	0.001	0.006
BP20-31	250	253	3	3140	27	72	0.024	0.008	0.004
BP20-31	253	255	2	2770	11	72	0.008	0.002	0.002
BP20-31	255	257	2	3080	7	84	0.02	0.002	0.002
BP20-31	257	259	2	3100	9	86	0.009	0.002	0.002
BP20-31	259	261	2	3070	12	83	0.018	0.005	0.043
BP20-31	261	263	2	3200	12	87	0.019	0.002	0.001
BP20-31	263	265	2	3040	13	83	0.021	0.002	0.002
BP20-31	265	267	2	2900	11	81	0.023	0.002	0.002
BP20-31	267	269	2	3060	14	85	0.031	0.005	0.02
BP20-31	269	271	2	3030	17	84	0.026	0.003	0.007
BP20-31	271	273	2	2960	18	84	0.021	0.002	0.006
BP20-31	273	275	2	2970	13	84	0.027	0.003	0.009
BP20-31	275	277	2	2940	20	84	0.017	0.002	0.006
BP20-31	277	279	2	2930	32	84	0.008	0.001	0.003
BP20-31	279	281	2	2500	34	72	<0.005	0.001	0.003
BP20-31	281	283	2	2750	24	78	0.006	0.001	0.004
BP20-31	283	284	1	2700	43	72	0.005	0.002	0.001
BP20-31	284	287	3	2020	22	47	0.007	0.002	0.004
BP20-31	287	290	3	2600	50	61	0.014	0.003	0.002
BP20-31	290	293	3	3030	27	78	0.019	0.003	0.004
BP20-31	293	296	3	3120	21	82	0.013	0.004	0.025
BP20-31	296	299	3	3160	34	84	0.013	0.003	0.005
BP20-31	299	302	3	3120	33	81	0.009	0.004	0.005
BP20-31	302	305	3	3130	53	76	0.006	0.003	0.004
BP20-31	305	308	3	3140	55	75	0.051	0.004	0.005
BP20-31	308	311	3	3060	59	73	0.006	0.003	0.007
BP20-31	311	314	3	3060	49	75	0.009	0.003	0.006
BP20-31	314	316	2	2990	39	79	0.01	0.004	0.007
BP20-31	316	318	2	2860	43	72	0.008	0.003	0.007
BP20-32	3	5	2	7630	1880	192	0.071	0.055	0.132
BP20-32	5	7	2	6410	1020	181	0.051	0.039	0.021
BP20-32	7	10	3	9270	2150	220	0.053	0.057	0.031
BP20-32	10	13.4	3.4	7150	727	174	0.034	0.046	0.02

Hole	From m	To m	Interval m	Ni ppm	Cu ppm	Co ppm	Pt g/t	Pd g/t	Au g/t
BP20-32	13.4	15	1.6	7370	1420	140	0.055	0.047	0.03
BP20-32	15	17	2	5540	1100	150	0.06	0.042	0.034
BP20-32	17	19	2	3330	223	123	0.023	0.013	0.007
BP20-32	19	21	2	3040	214	120	0.012	0.012	0.003
BP20-32	21	23	2	3210	286	129	0.005	0.01	0.025
BP20-32	23	24.5	1.5	2390	59	112	<0.005	0.005	0.003
BP20-32	24.5	27	2.5	4530	722	131	0.028	0.026	0.014
BP20-32	27	29	2	3960	453	111	0.031	0.021	0.006
BP20-32	29	31	2	4080	636	93	0.03	0.027	0.011
BP20-32	31	32.9	1.9	7160	1750	151	0.06	0.066	0.036
BP20-32	32.9	34.5	1.6	7900	1820	161	0.09	0.065	0.036
BP20-32	34.5	37	2.5	4730	843	113	0.029	0.039	0.029
BP20-32	37	39.3	2.3	4500	506	128	0.02	0.028	0.012
BP20-32	39.3	41.3	2	6570	1100	140	0.08	0.078	0.046
BP20-32	41.3	43.6	2.3	6150	586	108	0.047	0.046	0.027
BP20-32	43.6	45.6	2	3640	237	80	0.014	0.025	0.009
BP20-32	45.6	47.6	2	2230	152	67	0.019	0.026	0.007
BP20-32	47.6	49.6	2	2250	215	71	0.009	0.019	0.005
BP20-32	49.6	51.6	2	3390	211	94	0.02	0.039	0.007
BP20-32	51.6	53.6	2	3550	139	92	0.03	0.038	0.005
BP20-32	53.6	55.5	1.9	4720	414	119	0.04	0.046	0.019
BP20-32	55.5	58	2.5	6180	1160	142	0.053	0.066	0.048
BP20-32	58	60	2	4200	832	152	0.021	0.025	0.014
BP20-32	60	62	2	2280	180	127	0.008	0.017	0.004
BP20-32	62	64	2	4130	717	137	0.041	0.028	0.014
BP20-32	64	66	2	4720	1040	159	0.037	0.039	0.014
BP20-32	66	68	2	3980	524	128	0.032	0.03	0.008
BP20-32	68	70.2	2.2	3530	403	128	0.023	0.025	0.009
BP20-32	70.2	73	2.8	3380	608	122	0.028	0.025	0.009
BP20-32	73	74.5	1.5	2760	284	119	0.03	0.028	0.007
BP20-32	74.5	76	1.5	6720	1165	175	0.088	0.078	0.021
BP20-32	76	78	2	3260	325	119	0.028	0.026	0.016
BP20-32	78	80	2	7010	1270	171	0.036	0.046	0.02
BP20-32	80	82	2	4940	850	159	0.034	0.034	0.019
BP20-32	82	84	2	2780	349	126	0.017	0.016	0.009
BP20-32	84	86.2	2.2	2290	59	129	0.008	0.009	0.005
BP20-32	86.2	88.2	2	8290	1705	183	0.083	0.088	0.031
BP20-32	88.2	90.8	2.6	8420	1370	199	0.102	0.097	0.026
BP20-32	90.8	92.8	2	4510	476	140	0.038	0.049	0.013
BP20-32	92.8	94.6	1.8	2810	392	111	0.012	0.011	0.013
BP20-32	94.6	95.5	0.9	1180	282	60	0.006	0.006	0.009
BP20-32	95.5	97.8	2.3	1840	340	84	0.02	0.014	0.004
BP20-32	97.8	99.8	2	3330	604	149	0.022	0.019	0.01
BP20-32	99.8	101.8	2	4140	888	171	0.028	0.027	0.012
BP20-32	101.8	103.8	2	2610	271	139	0.015	0.014	0.015
BP20-32	103.8	105.8	2	3240	677	160	0.017	0.018	0.015
BP20-32	105.8	107	1.2	2060	295	139	0.011	0.006	0.01
BP20-32	107	108	1	2450	452	174	0.014	0.016	0.014
BP20-32	108	110	2	1910	98	144	0.01	0.009	0.006
BP20-32	110	112	2	2430	417	144	0.014	0.016	0.009
BP20-32	112	114	2	4600	546	161	0.044	0.045	0.013
BP20-32	114	116	2	3210	461	133	0.035	0.022	0.014
BP20-32	116	118	2	3010	12	116	0.013	0.015	0.007
BP20-32	118	120	2	2270	14	100	<0.005	0.002	0.002
BP20-32	120	122	2	2600	66	104	0.005	0.009	0.006
BP20-32	122	124	2	2430	325	83	0.006	0.005	0.007
BP20-32	124	126	2	5570	438	191	0.027	0.049	0.009
BP20-32	126	128	2	3450	98	86	0.053	0.035	0.01
BP20-32	128	130	2	3750	942	160	0.013	0.015	0.017
BP20-32	130	132	2	4230	1035	161	0.038	0.042	0.009
BP20-32	132	134	2	2660	376	149	0.019	0.018	0.006
BP20-32	134	136	2	2760	81	96	0.014	0.02	0.008
BP20-32	136	138.7	2.7	2360	20	79	0.01	0.01	0.002
BP20-32	138.7	139.8	1.1	2410	256	92	<0.005	0.007	0.006
BP20-32	139.8	141	1.2	2330	53	82	0.01	0.009	0.002
BP20-32	141	143	2	2830	128	87	0.032	0.043	0.005

Hole	From m	To m	Interval m	Ni ppm	Cu ppm	Co ppm	Pt g/t	Pd g/t	Au g/t
BP20-32	143	145	2	3920	144	113	0.042	0.051	0.008
BP20-32	145	147	2	2770	10	101	0.009	0.015	0.003
BP20-32	147	149	2	3100	8	103	0.046	0.042	0.011
BP20-32	149	151.65	2.65	2540	93	67	0.024	0.017	0.008
BP20-32	151.65	152.15	0.5	3800	1315	185	0.039	0.016	0.035
BP20-32	152.15	154	1.85	2490	117	84	0.017	0.016	0.003
BP20-32	154	156	2	2540	113	97	0.029	0.027	0.007
BP20-32	160	161.5	1.5	2980	559	119	0.028	0.033	0.004
BP20-32	161.5	163	1.5	3100	27	106	0.036	0.023	0.006
BP20-33	70.2	72	1.8	2840	110	104	0.017	0.018	0.011
BP20-33	72	75	3	1570	157	73	0.021	0.015	0.01
BP20-33	75	77.3	2.3	2270	105	97	0.027	0.029	0.003
BP20-33	78	80	2	2590	127	90	0.014	0.013	0.009
BP20-33	322.8	325	2.2	3090	3	53	<0.005	0.003	0.003
BP20-33	325	327.5	2.5	4460	605	139	0.046	0.045	0.022
BP20-33	327.5	330	2.5	2640	9	65	0.01	0.011	0.012
BP20-33	330	332	2	3050	12	124	0.011	0.014	0.008
BP20-33	332	334	2	4090	354	110	0.048	0.049	0.02
BP20-33	334	336	2	3980	426	109	0.043	0.047	0.016
BP20-33	336	338	2	8280	1270	147	0.127	0.162	0.086
BP20-33	338	339.5	1.5	11350	1900	195	0.273	0.364	0.065
BP20-33	339.5	341	1.5	11500	2290	204	0.243	0.333	0.072
BP20-33	341	342	1	4420	166	121	0.069	0.089	0.019
BP20-33	342	343.6	1.6	7020	751	132	0.116	0.161	0.047
BP20-33	343.6	344.8	1.2	3200	210	93	0.03	0.035	0.017
BP20-33	344.8	346	1.2	9440	2060	156	0.189	0.259	0.065
BP20-33	346	348.3	2.3	9350	2040	174	0.133	0.149	0.07
BP20-33	348.3	351	2.7	4070	752	130	0.036	0.048	0.014
BP20-33	352.2	355	2.8	2990	104	110	0.019	0.02	0.007
BP20-33	355.2	357.5	2.3	2280	33	79	<0.005	0.003	0.02
BP20-33	357.5	358.3	0.8	1880	264	70	<0.005	0.007	0.005
BP20-34	10.3	11.7	1.4	2200	66	72	0.026	0.021	0.005
BP20-34	11.7	14	2.3	2780	51	98	0.021	0.027	0.006
BP20-34	14	16	2	4460	408	134	0.022	0.026	0.013
BP20-34	16	18	2	3940	1170	118	0.025	0.026	0.033
BP20-34	18	20.2	2.2	4570	1620	112	0.04	0.044	0.02
BP20-34	20.5	22	1.5	7830	606	162	0.066	0.056	0.013
BP20-34	22	24	2	13950	2490	253	0.211	0.108	0.054
BP20-34	24	26	2	18250	3560	285	0.135	0.143	0.085
BP20-34	26	28	2	17450	2850	305	0.104	0.132	0.045
BP20-34	28	30	2	13050	3090	207	0.136	0.138	0.055
BP20-34	30	32	2	14150	3110	303	0.106	0.111	0.046
BP20-34	32	34	2	12000	1900	247	0.117	0.086	0.037
BP20-34	34	36	2	10850	1990	256	0.072	0.084	0.03
BP20-34	36	38	2	7540	1100	187	0.07	0.057	0.023
BP20-34	38	40	2	7890	1400	186	0.049	0.055	0.021
BP20-34	40	42	2	14750	2310	341	0.087	0.104	0.034
BP20-34	42	44	2	12550	2760	253	0.082	0.111	0.033
BP20-34	44	46	2	10450	2170	218	0.116	0.077	0.026
BP20-34	46	48	2	11200	2320	250	0.096	0.082	0.03
BP20-34	48	50	2	8460	1940	236	0.08	0.055	0.018
BP20-34	50	52.4	2.4	8680	1610	244	0.058	0.065	0.02
BP20-34	52.4	54	1.6	4830	1340	166	0.041	0.033	0.015
BP20-34	54	56	2	18800	2930	397	0.142	0.13	0.034
BP20-34	56	58	2	11500	2110	241	0.114	0.097	0.031
BP20-34	58	60	2	14850	1950	299	0.097	0.117	0.033
BP20-34	60	62	2	13100	1680	262	0.066	0.1	0.026
BP20-34	62	64	2	8090	1080	197	0.058	0.051	0.017
BP20-34	64	66	2	8240	1220	210	0.239	0.049	0.017
BP20-34	66	68	2	6230	1390	170	0.029	0.03	0.011
BP20-34	68	69.5	1.5	10900	1980	206	0.093	0.076	0.026
BP20-34	69.5	71.5	2	9020	1990	200	0.07	0.072	0.03
BP20-34	71.5	73	1.5	15250	4370	302	0.066	0.134	0.049
BP20-34	73	75	2	13700	3930	258	0.107	0.121	0.052
BP20-34	75	77	2	18950	3640	333	0.041	0.166	0.064
BP20-34	77	79	2	16050	4170	309	0.114	0.124	0.042

Hole	From m	To m	Interval m	Ni ppm	Cu ppm	Co ppm	Pt g/t	Pd g/t	Au g/t
BP20-34	79	81.6	2.6	22300	4160	380	0.306	0.173	0.071
BP20-34	81.6	83.9	2.3	11850	1980	211	0.048	0.076	0.027
BP20-34	83.9	85.3	1.4	24100	5740	355	0.093	0.206	0.068
BP20-34	85.3	87	1.7	16700	3440	251	0.152	0.126	0.051
BP20-34	87	89	2	18850	3320	270	0.099	0.165	0.049
BP20-34	89	92	3	13700	2600	218	0.069	0.123	0.041
BP20-34	92	95	3	20900	5020	309	0.092	0.186	0.08
BP20-34	95	98.2	3.2	17550	3350	269	0.112	0.131	0.053
BP20-34	98.2	100	1.8	19300	3310	294	0.118	0.156	0.042
BP20-34	100	102	2	12750	2640	232	0.065	0.088	0.048
BP20-34	102	104.7	2.7	11150	2270	210	0.058	0.086	0.042
BP20-34	104.7	107	2.3	13050	3870	256	0.127	0.149	0.131
BP20-34	113.2	114.2	1	11150	1290	211	0.263	0.281	0.033
BP20-34	114.2	115.5	1.3	5850	652	124	0.179	0.152	0.02
BP20-34	115.5	117.8	2.3	8310	897	164	0.084	0.081	0.019
BP20-34	117.8	119.1	1.3	4500	314	102	0.025	0.033	0.006
BP20-34	119.1	121	1.9	7200	622	158	0.051	0.053	0.02
BP20-34	121	123	2	6990	628	152	0.056	0.053	0.012
BP20-34	123	125	2	7460	773	155	0.077	0.086	0.017
BP20-34	125	127	2	8000	989	168	0.066	0.075	0.026
BP20-34	127	128.8	1.8	10900	1345	201	0.122	0.129	0.046
BP20-34	128.8	130.5	1.7	5450	964	109	0.035	0.048	0.013
BP20-34	130.5	133	2.5	8890	1350	169	0.116	0.101	0.041
BP20-34	133	135	2	11100	1750	183	0.132	0.159	0.052
BP20-34	135	137.1	2.1	12200	1950	187	0.156	0.151	0.069
BP20-34	137.1	140.35	3.25	5170	244	103	0.059	0.065	0.015
BP20-34	140.35	141.6	1.25	8170	998	158	0.166	0.21	0.041
BP20-34	141.6	144	2.4	2790	346	92	0.03	0.033	0.011
BP20-34	156.5	157.9	1.4	2850	20	64	<0.005	0.01	0.002
BP20-34	158.25	160.25	2	3650	302	86	0.064	0.053	0.007
BP20-34	160.25	162	1.75	5710	515	110	0.191	0.176	0.025
BP20-34	162	164.4	2.4	4160	77	103	0.073	0.073	0.008
BP20-34	164.4	167	2.6	3120	4	104	0.03	0.027	0.007
BP20-34	167	169	2	4070	25	110	0.115	0.124	0.054
BP20-34	169	172	3	3530	16	71	0.055	0.053	0.006
BP20-34	172	174	2	4110	60	137	0.072	0.094	0.013
BP20-34	174	176	2	2930	4	91	0.11	0.083	0.006
BP20-34	180	182	2	2880	5	97	0.032	0.034	0.004
BP20-34	184	187	3	4580	449	122	0.416	0.58	0.012
BP20-34	187	189	2	3730	144	126	0.024	0.029	0.007
BP20-34	189	191	2	7530	1670	167	0.059	0.067	0.034
BP20-34	191	192	1	5690	1180	169	0.046	0.047	0.013
BP20-34	192	193.2	1.2	4800	792	138	0.042	0.044	0.01
BP20-34	193.2	195.7	2.5	3680	683	138	0.02	0.027	0.017
BP20-34	195.7	198	2.3	2950	150	111	0.013	0.015	0.003
BP20-34	201	204	3	3750	223	131	0.022	0.019	0.004
BP20-34	204	206	2	4220	695	157	0.032	0.039	0.011
BP20-34	206	208	2	3460	753	181	0.018	0.021	0.01
BP20-34	208	210.2	2.2	3110	351	137	0.012	0.013	0.006
BP20-34	210.2	211.2	1	2260	82	127	0.016	0.016	0.003
BP20-34	211.2	213	1.8	3750	425	150	0.024	0.026	0.004
BP20-34	213	214.6	1.6	4410	727	174	0.01	0.01	0.007
BP20-34	214.6	217	2.4	4100	599	175	0.016	0.009	0.003
BP20-34	217	218.65	1.65	3680	1770	236	0.026	0.03	0.008
BP20-34	218.65	220.4	1.75	1775	724	197	0.005	0.004	0.005
BP20-34	220.4	221.8	1.4	3420	1200	224	0.008	0.008	0.031
BP20-34	221.8	223.2	1.4	2660	371	147	0.005	0.008	0.013
BP20-34	223.2	224	0.8	4090	745	144	<0.005	<0.001	0.019
BP20-34	241	243	2	3970	424	124	0.077	0.073	0.01
BP20-34	243	245	2	8700	2360	271	0.087	0.09	0.017
BP20-34	245	247.1	2.1	6440	1290	216	0.057	0.072	0.006
BP20-34	247.1	249	1.9	7460	1500	239	0.038	0.061	0.009
BP20-34	249	251	2	6500	1230	195	0.048	0.071	0.011
BP20-34	392	394	2	46	60	19	<0.005	<0.001	0.002
BP20-34	394	396	2	104	75	20	<0.005	<0.001	0.001
BP20-34	396	398	2	75	130	30	<0.005	<0.001	0.015

Hole	From m	To m	Interval m	Ni ppm	Cu ppm	Co ppm	Pt g/t	Pd g/t	Au g/t
BP20-34	398	400	2	127	199	40	<0.005	<0.001	0.001
BP20-34	400	402	2	82	263	104	0.014	0.002	0.002
BP20-34	402	404	2	89	185	81	<0.005	<0.001	0.004
BP20-34	404	406.3	2.3	89	187	77	<0.005	<0.001	0.001
BP20-34	406.3	408.3	2	85	113	35	<0.005	<0.001	<0.001
BP20-34	408.3	410.2	1.9	78	228	73	<0.005	<0.001	<0.001
BP20-34	410.2	412.6	2.4	95	307	71	<0.005	<0.001	0.002
BP20-34	412.6	415	2.4	55	36	13	<0.005	<0.001	0.001
BP20-35	18.4	20	1.6	3060	38	99	0.034	0.004	0.007
BP20-35	20	22	2	3020	31	96	0.052	0.014	0.014
BP20-35	22	24	2	3740	47	114	0.061	0.048	0.026
BP20-35	24	26	2	4380	84	107	0.072	0.087	0.009
BP20-35	26	28	2	4090	88	105	0.06	0.055	0.011
BP20-35	28	30.4	2.4	2790	15	89	0.053	0.044	0.008
BP20-35	30.4	33	2.6	6280	743	116	0.047	0.052	0.019
BP20-35	33	35	2	6630	1320	127	0.049	0.045	0.042
BP20-35	35	37	2	7950	1290	170	0.061	0.062	0.066
BP20-35	37	39	2	8850	1520	198	0.08	0.101	0.054
BP20-35	39	41	2	11800	1840	254	0.101	0.112	0.04
BP20-35	41	43	2	9020	2460	209	0.095	0.077	0.035
BP20-35	43	45	2	5720	3810	197	0.046	0.052	0.029
BP20-35	45	47.5	2.5	8060	2360	191	0.039	0.038	0.033
BP20-35	47.5	49	1.5	11550	3650	238	0.103	0.098	0.061
BP20-35	49	50.5	1.5	10750	1410	229	0.114	0.113	0.036
BP20-35	50.5	52.5	2	1155	1490	40	<0.005	0.004	0.018
BP20-35	52.5	53.5	1	10700	431	214	0.106	0.114	0.04
BP20-35	53.5	54.9	1.4	9580	2330	187	0.116	0.118	0.045
BP20-35	54.9	56.8	1.9	10900	2240	237	0.124	0.121	0.068
BP20-35	56.8	57.5	0.7	7040	1390	135	0.052	0.079	0.031
BP20-35	57.5	59	1.5	10450	828	185	0.117	0.153	0.043
BP20-35	61	63	2	8930	1230	156	0.159	0.154	0.059
BP20-35	63	65	2	8810	653	174	0.098	0.084	0.026
BP20-35	65	67	2	12800	937	218	0.143	0.183	0.041
BP20-35	69	71	2	14700	3240	211	0.244	0.297	0.105
BP20-35	71	73	2	14250	1940	211	0.241	0.248	0.085
BP20-35	73	74.7	1.7	8740	1070	145	0.048	0.071	0.041
BP20-35	76.8	79	2.2	10350	2630	188	0.072	0.077	0.045
BP20-35	79	81	2	12050	5080	228	0.098	0.138	0.057
BP20-35	81	83	2	14300	2610	183	0.373	0.37	0.119
BP20-35	83	85	2	9990	1590	154	0.287	0.342	0.082
BP20-35	87	88.6	1.6	13950	1920	201	0.484	0.568	0.125
BP20-35	88.6	89.7	1.1	6690	1120	117	0.218	0.287	0.042
BP20-35	89.7	92	2.3	13350	1520	207	0.318	0.234	0.071
BP20-35	94	95.2	1.2	8670	2150	180	0.054	0.099	0.049
BP20-35	95.2	95.45	0.25	291	12	96	<0.005	<0.001	<0.001
BP20-35	95.45	98	2.55	6470	2960	197	0.03	0.044	0.042
BP20-35	100	102	2	7860	2900	241	0.032	0.044	0.054
BP20-35	102	104	2	6620	2260	226	0.043	0.04	0.031
BP20-35	104	106	2	5640	1490	199	0.05	0.039	0.019
BP20-35	108	109.6	1.6	9900	3430	307	0.096	0.055	0.061
BP20-35	109.6	111	1.4	3390	880	136	0.022	0.021	0.005
BP20-35	113	114.4	1.4	5540	1400	208	0.048	0.029	0.001
BP20-35	114.4	114.5	0.1	11650	5960	425	0.06	0.106	0.012
BP20-35	114.5	115.2	0.7	1720	949	60	0.013	0.009	0.005
BP20-36	4	6.15	2.15	5330	4400	169	0.105	0.024	0.014
BP20-36	6.15	6.8	0.65	4630	3300	227	0.022	0.021	0.015
BP20-36	6.8	8.8	2	3780	2170	146	0.019	0.015	0.006
BP20-36	8.8	10.8	2	8480	512	158	0.034	0.025	0.036
BP20-36	10.8	12.8	2	6900	569	146	0.009	0.017	0.022
BP20-36	12.8	14	1.2	7660	2130	203	0.039	0.037	0.034
BP20-36	14	15.6	1.6	7780	1470	179	0.036	0.039	0.021
BP20-36	15.6	17.7	2.1	10100	2710	204	0.053	0.053	0.032
BP20-36	17.7	19.7	2	9730	1490	164	0.063	0.043	0.022
BP20-36	19.7	21.3	1.6	9900	1250	205	0.053	0.042	0.032
BP20-36	21.3	23	1.7	12850	2090	209	0.038	0.043	0.032
BP20-36	23	25	2	11050	2080	165	0.049	0.047	0.053

Hole	From m	To m	Interval m	Ni ppm	Cu ppm	Co ppm	Pt g/t	Pd g/t	Au g/t
BP20-36	25	27	2	8240	771	131	0.218	0.184	0.019
BP20-36	27	28.5	1.5	7360	817	124	0.169	0.145	0.029
BP20-36	28.5	30	1.5	9910	1360	135	0.154	0.11	0.062
BP20-36	30	32	2	7340	529	130	0.05	0.045	0.032
BP20-36	32	34	2	8640	568	132	0.077	0.066	0.061
BP20-36	34	34.7	0.7	9200	1350	115	0.062	0.061	0.06
BP20-36	34.7	36.3	1.6	15950	1450	210	0.177	0.136	0.141
BP20-36	36.3	38.3	2	9140	965	143	0.113	0.097	0.068
BP20-36	38.3	40.3	2	6480	736	129	0.076	0.077	0.052
BP20-36	40.3	42.7	2.4	4890	339	114	0.067	0.056	0.024
BP20-36	42.7	44.7	2	6710	313	155	0.028	0.043	0.03
BP20-36	44.7	46.7	2	5320	1270	114	0.056	0.063	0.076
BP20-36	46.7	49	2.3	3210	38	103	0.275	0.135	0.005
BP20-36	49	51	2	3250	45	99	0.1	0.106	0.003
BP20-36	51	53.3	2.3	3690	160	107	0.203	0.221	0.01
BP20-36	53.3	55.4	2.1	3320	100	108	0.118	0.077	0.006
BP20-36	55.4	57.5	2.1	4520	409	124	0.14	0.169	0.018
BP20-36	57.5	59	1.5	11450	1825	171	0.428	0.516	0.069
BP20-36	59	60.5	1.5	14300	3250	186	0.151	0.277	0.105
BP20-36	60.5	62.1	1.6	7180	1060	161	0.24	0.226	0.031
BP20-36	62.1	63.9	1.8	6340	1270	156	0.104	0.18	0.033
BP20-36	63.9	66	2.1	3620	280	115	0.046	0.066	0.009
BP20-36	66	68	2	4630	475	129	0.102	0.079	0.032
BP20-36	68	70	2	3710	298	122	0.041	0.053	0.009
BP20-36	70	71.05	1.05	3080	48	102	0.042	0.031	0.004
BP20-36	71.05	73.35	2.3	6910	936	135	0.237	0.227	0.037
BP20-36	73.35	75.3	1.95	3430	98	113	0.048	0.048	0.005
BP20-36	75.3	77.3	2	3420	162	108	0.038	0.047	0.006
BP20-36	77.3	78.9	1.6	4750	341	126	0.292	0.199	0.01
BP20-36	78.9	80.3	1.4	4850	289	114	0.468	0.508	0.026
BP20-36	80.3	82	1.7	4650	389	112	0.254	0.254	0.022
BP20-36	82	83.4	1.4	5050	405	121	0.281	0.163	0.016
BP20-36	83.4	85.4	2	5750	809	128	0.107	0.142	0.027
BP20-36	87.9	89.3	1.4	5350	363	128	0.108	0.122	0.015
BP20-37	5.2	7.2	2	2630	458	78	0.081	0.083	0.003
BP20-37	7.2	9.2	2	3830	104	104	0.042	0.048	0.005
BP20-37	9.2	11.2	2	5000	89	133	0.039	0.032	0.005
BP20-37	11.2	13	1.8	4500	116	112	0.022	0.026	0.004
BP20-37	13.7	15	1.3	4660	66	128	0.036	0.031	0.004
BP20-37	15	17	2	3980	314	80	0.015	0.023	0.004
BP20-37	17	18.5	1.5	3400	187	100	0.008	0.018	0.003
BP20-37	18.5	20	1.5	3160	226	95	0.017	0.036	0.001
BP20-37	227	229	2	2640	1	86	<0.005	0.001	0.002
BP20-37	229	232	3	2610	13	85	<0.005	<0.001	0.001
BP20-37	232	235	3	2690	9	84	<0.005	<0.001	0.002
BP20-37	235	238	3	2490	9	68	<0.005	<0.001	0.001
BP20-37	238	240	2	2990	3	84	<0.005	<0.001	0.007
BP20-37	240	242	2	3080	2	96	<0.005	<0.001	0.004
BP20-37	242	244.6	2.6	2960	2	89	0.006	<0.001	0.001
BP20-37	244.6	247	2.4	3010	3	87	0.012	0.006	0.002
BP20-37	247	250	3	2910	2	95	<0.005	0.001	0.002
BP20-37	250	253	3	2930	2	87	<0.005	<0.001	0.002
BP20-37	253	255	2	2770	2	89	0.005	<0.001	0.002
BP20-37	255	257.5	2.5	3220	161	126	0.195	0.097	0.034
BP20-37	257.5	258.2	0.7	1430	423	41	0.046	0.034	0.003
BP20-37	259	261.7	2.7	3360	4	142	0.067	0.103	0.006
BP20-37	261.7	264	2.3	2950	3	83	0.036	0.034	0.003
BP20-37	264	266	2	3930	327	125	0.216	0.205	0.027
BP20-37	266	268	2	3530	4	84	0.094	0.107	0.01
BP20-37	268	270	2	2840	3	90	0.006	<0.001	0.002
BP20-37	270	272	2	2870	8	94	<0.005	<0.001	0.003
BP20-37	272	274	2	2800	4	88	0.005	0.002	0.004
BP20-37	274	277	3	3220	4	87	0.123	0.116	0.008
BP20-37	277	280.3	3.3	2770	14	105	0.11	0.06	0.006
BP20-37	280.3	283	2.7	7540	1250	154	0.136	0.154	0.041
BP20-37	283	285	2	9060	2150	219	0.148	0.157	0.048

Hole	From m	To m	Interval m	Ni ppm	Cu ppm	Co ppm	Pt g/t	Pd g/t	Au g/t
BP20-37	285	288	3	4100	1090	173	0.039	0.047	0.015
BP20-37	288	290	2	4590	838	187	0.046	0.054	0.022
BP20-37	290	293	3	7650	1365	174	0.093	0.111	0.03
BP20-37	293	295	2	9850	1910	238	0.132	0.174	0.042
BP20-37	295	297	2	7590	1335	161	0.1	0.106	0.043
BP20-37	297	299	2	2870	5	85	0.016	0.007	0.001
BP20-37	299	301	2	2830	5	90	<0.005	0.001	0.001
BP20-37	301	303	2	2830	9	95	0.045	0.02	0.001
BP20-37	303	305	2	2560	61	90	0.055	0.021	0.002
BP20-37	305	308	3	2780	13	87	0.02	0.002	0.001
BP20-37	308	311	3	2640	27	89	<0.005	0.004	0.001
BP20-37	311	313	2	2700	20	89	0.071	0.02	0.001
BP20-37	313	316	3	2720	22	89	<0.005	0.004	0.001
BP20-37	316	318	2	2690	29	95	0.016	0.003	0.003
BP20-37	318	321	3	2750	8	89	<0.005	0.002	0.002
BP20-37	321	324	3	2810	2	94	0.011	0.007	0.005
BP20-37	324	326.5	2.5	2910	7	94	0.03	0.009	0.004
BP20-37	326.5	330	3.5	2870	112	120	0.008	0.012	0.005
BP20-37	330	332	2	2750	306	125	0.043	0.052	0.002
BP20-37	332	335	3	2830	89	122	0.01	0.014	0.004
BP20-37	335	338	3	2770	16	106	0.018	0.016	0.005
BP20-37	338	340	2	3180	2	89	0.048	0.039	0.003
BP20-37	340	342.2	2.2	3170	5	131	0.016	0.02	0.003
BP20-37	342.5	344	1.5	2890	69	107	0.018	0.025	0.004
BP20-37	344	346	2	1180	448	65	0.005	0.007	0.001
BP20-39	6.3	8.1	1.8	4350	2420	93	0.072	0.034	0.008
BP20-39	8.1	10.5	2.4	6170	5290	143	0.08	0.036	0.032
BP20-39	10.5	12.4	1.9	8360	4730	178	0.082	0.041	0.032
BP20-39	12.4	14	1.6	6880	6160	175	0.095	0.046	0.07
BP20-39	14	16	2	6150	2900	142	0.091	0.055	0.029
BP20-39	16	18	2	9350	3050	184	0.098	0.084	0.031
BP20-39	18	20	2	9750	3060	169	0.091	0.078	0.048
BP20-39	20	22	2	9190	3110	181	0.099	0.077	0.042
BP20-39	22.4	24.5	2.1	8980	3070	172	0.162	0.08	0.041
BP20-39	24.5	26.8	2.3	10300	2330	198	0.099	0.085	0.023
BP20-39	27.15	28.7	1.55	14450	2300	217	0.216	0.238	0.031
BP20-39	28.7	29.9	1.2	14400	1770	211	0.286	0.23	0.052
BP20-39	29.9	32.3	2.4	8780	2350	166	0.106	0.106	0.039
BP20-39	32.3	34.2	1.9	11800	2290	166	0.249	0.346	0.071
BP20-39	34.6	37.4	2.8	10000	5220	161	0.208	0.229	0.069
BP20-39	38.8	39.7	0.9	12200	2640	151	0.17	0.202	0.054
BP20-39	39.7	41	1.3	9190	1530	108	0.154	0.169	0.052
BP20-39	41.8	44	2.2	14650	1990	184	0.298	0.373	0.058
BP20-39	44	46	2	13700	4470	169	0.249	0.317	0.131
BP20-39	46	48	2	12850	5660	186	0.134	0.19	0.05
BP20-39	48	50	2	9960	3120	195	0.114	0.133	0.032
BP20-39	50	52	2	10200	3070	189	0.082	0.115	0.032
BP20-39	52	54	2	9420	2180	164	0.076	0.096	0.041
BP20-39	54	56	2	11750	1550	153	0.15	0.201	0.054
BP20-39	56	58	2	11200	1890	136	0.322	0.288	0.078
BP20-39	58	60	2	8910	1200	121	0.259	0.212	0.053
BP20-39	60	62	2	9070	1390	111	0.131	0.191	0.063
BP20-39	62	64	2	5290	540	76	0.062	0.071	0.019
BP20-39	64	66.6	2.6	9430	1190	142	0.174	0.161	0.035
BP20-39	66.6	67.9	1.3	7260	2670	111	0.057	0.079	0.102
BP20-39	67.9	70	2.1	11900	2120	164	0.176	0.175	0.059
BP20-39	70	72	2	11800	1300	152	0.211	0.332	0.088
BP20-39	72	74	2	15450	3020	188	0.411	0.58	0.134
BP20-39	74	76	2	14050	1880	170	0.524	0.763	0.087
BP20-39	76	78	2	10700	2120	151	0.184	0.219	0.093
BP20-39	78	80	2	11900	2080	172	0.175	0.208	0.069
BP20-39	80	81.8	1.8	10650	2710	165	0.204	0.184	0.057
BP20-39	81.8	83.9	2.1	13400	2570	189	0.178	0.245	0.083
BP20-39	83.9	86	2.1	16100	3220	210	0.182	0.296	0.109
BP20-39	86	88	2	12800	1830	190	0.203	0.276	0.06
BP20-39	88	90.3	2.3	24000	3840	321	0.331	0.349	0.115

Hole	From m	To m	Interval m	Ni ppm	Cu ppm	Co ppm	Pt g/t	Pd g/t	Au g/t
BP20-39	90.3	91.5	1.2	5560	579	112	0.177	0.221	0.036
BP20-39	91.5	93.4	1.9	7120	934	142	0.251	0.253	0.039
BP20-39	93.4	95	1.6	5270	443	114	0.096	0.123	0.028
BP20-39	95	96.8	1.8	5360	346	109	0.278	0.328	0.021
BP20-39	96.8	98.8	2	7560	276	134	0.244	0.299	0.029
BP20-39	98.8	101	2.2	3120	38	89	0.058	0.04	0.007
BP20-39	101	102.85	1.85	1350	199	65	0.008	0.005	0.006
BP20-39	102.85	105	2.15	2970	173	105	0.031	0.04	0.004
BP20-39	105	108	3	3220	39	108	0.014	0.01	0.006
BP20-39	108	111	3	3050	6	100	0.008	0.004	0.005
BP20-39	111	114	3	2960	7	100	<0.005	0.004	0.003
BP20-39	114	117	3	3010	44	107	0.008	0.005	0.005
BP20-39	117	119.25	2.25	4000	262	114	0.083	0.093	0.011
BP20-39	119.25	121.2	1.95	5660	549	126	0.138	0.138	0.019
BP20-39	121.2	122	0.8	3320	305	105	0.007	0.015	0.01
BP20-39	122	123	1	15900	3890	327	0.306	0.268	0.091
BP20-39	123	125	2	4860	411	140	0.053	0.095	0.012
BP20-39	125	127	2	3320	57	111	0.014	0.02	0.005
BP20-39	127	128.4	1.4	3570	42	115	0.023	0.016	0.006
BP20-39	128.4	130.4	2	7010	759	122	0.16	0.192	0.029
BP20-39	130.4	132.4	2	4450	211	140	0.036	0.021	0.008
BP20-39	132.4	134.45	2.05	8200	1070	226	0.075	0.05	0.027
BP20-39	134.45	136	1.55	3020	57	91	0.016	0.014	0.004
BP20-39	136	138	2	2850	7	103	0.006	0.001	0.004
BP20-39	138	140	2	2940	17	96	<0.005	0.005	0.004
BP20-39	140	141.7	1.7	2040	833	77	<0.005	0.002	0.038
BP20-39	141.7	142.7	1	359	18	76	<0.005	<0.001	<0.001
BP20-39	142.7	145	2.3	2900	42	104	0.008	0.012	0.003
BP20-39	145	148	3	2990	96	113	0.012	0.012	0.003
BP20-39	148	150.25	2.25	3090	48	111	0.007	0.006	0.004
BP20-39	150.25	152.8	2.55	4610	1060	144	0.06	0.065	0.017
BP20-39	152.8	155	2.2	2760	51	107	0.008	0.007	0.004
BP20-39	155	157	2	3540	270	130	0.017	0.018	0.007
BP20-39	157	159	2	5060	882	163	0.03	0.028	0.023
BP20-39	159	161	2	4340	1200	148	0.023	0.022	0.022
BP20-39	161	163.25	2.25	2750	310	109	0.014	0.007	0.008
BP20-39	163.25	165	1.75	5230	1050	162	0.031	0.037	0.022
BP20-39	165	166.4	1.4	3390	723	129	0.014	0.016	0.01
BP20-39	166.4	168.5	2.1	6900	1100	192	0.103	0.046	0.009
BP20-39	168.5	169.65	1.15	7590	2190	187	0.094	0.058	0.006
BP20-39	169.65	171.6	1.95	2890	156	75	0.013	0.017	0.004
BP20-39	172	172.4	0.4	9320	1180	188	0.05	0.094	0.005
BC20-13	3	4	1	356	130	61	na	na	na
BC20-13	4	5	1	261	118	56	na	na	na
BC20-13	31.45	33	1.55	285	82	63	na	na	na
BC20-13	33	34	1	515	96	74	na	na	na
BC20-13	34	35	1	186	114	61	na	na	na
BC20-13	35	35.8	0.8	175	99	58	na	na	na
BC20-13	35.8	36.8	1	120	121	22	na	na	na
BC20-13	36.8	37.8	1	131	76	18	na	na	na
BC20-13	37.8	38.5	0.7	74	55	17	na	na	na
BC20-13	38.5	39.05	0.55	11	13	7	<0.005	<0.001	<0.001
BC20-13	39.05	40.1	1.05	562	58	60	0.006	0.004	0.004
BC20-13	40.1	41.1	1	443	200	82	<0.005	0.002	0.001
BC20-13	41.1	42.5	1.4	557	60	67	<0.005	0.002	0.002
BC20-13	42.5	43.3	0.8	869	275	85	0.007	0.009	0.003
BC20-13	43.3	44	0.7	901	180	84	0.01	0.013	0.001
BC20-13	44	45	1	1075	233	95	0.014	0.016	<0.001
BC20-13	45	46	1	1125	207	90	0.012	0.016	0.002
BC20-13	46	47	1	1595	523	114	0.025	0.031	0.013
BC20-13	47	48	1	1455	549	115	0.02	0.024	0.017
BC20-13	48	49	1	1495	271	112	0.019	0.021	0.012
BC20-13	49	50	1	1620	480	120	0.017	0.023	0.013
BC20-13	50	51	1	1425	298	109	0.011	0.017	0.004
BC20-13	51	52	1	1530	238	117	0.01	0.016	0.003
BC20-13	52	53	1	1355	202	107	0.006	0.01	0.002

Hole	From m	To m	Interval m	Ni ppm	Cu ppm	Co ppm	Pt g/t	Pd g/t	Au g/t
BC20-13	53	54.2	1.2	2080	687	140	0.025	0.034	0.012
BC20-13	54.2	55	0.8	1610	640	126	0.019	0.024	0.003
BC20-13	55	56	1	1740	763	138	0.019	0.027	0.003
BC20-13	56	57	1	1490	478	117	0.016	0.018	0.002
BC20-13	57	58.05	1.05	1545	448	115	0.011	0.017	0.004
BC20-13	58.05	59.3	1.25	963	1365	93	<0.005	0.119	0.007
BC20-13	59.3	60.6	1.3	940	1450	57	<0.005	0.018	0.027
BC20-13	60.6	61.6	1	84	61	12	<0.005	0.002	0.001
BC20-13	61.6	62.6	1	81	74	13	<0.005	0.001	0.002
BC20-13	62.6	63.45	0.85	77	154	14	<0.005	0.001	0.001
BC20-13	63.45	64.75	1.3	602	124	63	<0.005	0.002	0.001
BC20-13	64.75	65.75	1	1130	201	81	0.008	0.011	0.002
BC20-13	65.75	66.1	0.35	1045	638	91	0.023	0.025	0.006
BC20-13	66.1	67.45	1.35	1210	213	83	<0.005	0.005	0.002
BC20-13	67.45	68.12	0.67	10100	4580	616	0.408	0.416	0.053
BC20-13	68.12	68.27	0.15	19000	1445	1100	0.662	0.355	0.029
BC20-13	68.27	69	0.73	2600	9090	175	0.132	0.231	0.04
BC20-13	69	69.3	0.3	798	1915	62	0.013	0.012	0.008
BC20-13	69.3	70.55	1.25	1160	1760	65	<0.005	0.019	0.008
BC20-13	70.55	70.75	0.2	13150	15650	794	0.29	0.452	0.03
BC20-13	70.75	72	1.25	918	4470	81	0.007	0.009	0.004
BC20-13	72	73	1	58	110	11	<0.005	0.001	0.003
BC20-13	73	74	1	30	41	13	<0.005	<0.001	0.002
BC20-13	76.1	76.45	0.35	1210	398	106	na	na	na
BC20-13	78.05	79.05	1	20	47	23	na	na	na
BC20-13	79.45	80.6	1.15	8	38	22	na	na	na
BC20-13	82.6	83.6	1	297	78	53	na	na	na
BC20-13	83.6	84.8	1.2	554	98	62	na	na	na
BC20-13	84.8	86	1.2	59	41	15	na	na	na
BC20-13	86	87.15	1.15	29	34	12	na	na	na
BC20-13	87.15	87.7	0.55	328	108	58	na	na	na
BC20-13	91.55	92.55	1	442	49	54	na	na	na
BC20-13	97	98	1	223	103	52	na	na	na
BC20-14	6.9	8	1.1	777	314	160	na	na	na
BC20-14	8	9	1	944	258	185	na	na	na
BC20-14	9	10.5	1.5	570	206	86	na	na	na
BC20-14	13.4	15	1.6	417	102	69	na	na	na
BC20-14	15	16.2	1.2	524	99	69	na	na	na
BC20-14	16.5	17.2	0.7	552	89	61	na	na	na
BC20-14	17.5	18.6	1.1	317	119	46	na	na	na
BC20-14	18.6	19.6	1	322	172	48	na	na	na
BC20-14	22.3	23.6	1.3	532	99	66	na	na	na
BC20-14	29.45	30.45	1	1030	113	73	na	na	na
BC20-14	30.45	31.45	1	384	112	41	na	na	na
BC20-14	34.25	35.5	1.25	504	48	66	na	na	na
BC20-14	35.5	36.65	1.15	595	60	81	na	na	na
BC20-14	40.8	41.8	1	133	75	44	na	na	na
BC20-14	53.1	53.5	0.4	351	77	64	na	na	na
BC20-14	56.65	57.05	0.4	288	46	44	na	na	na
BC20-14	59.7	60.8	1.1	276	70	38	na	na	na
BC20-14	63.25	63.9	0.65	580	89	66	na	na	na
BC20-14	64.1	64.75	0.65	303	44	52	na	na	na
BC20-14	66.45	66.8	0.35	220	53	43	na	na	na
BC20-14	67.65	68	0.35	370	50	55	na	na	na
BC20-14	68.2	68.65	0.45	292	48	55	na	na	na
BC20-14	71.6	71.8	0.2	143	29	17	na	na	na
BC20-14	73.4	73.8	0.4	402	80	54	na	na	na
BC20-14	76.65	77.2	0.55	406	52	51	na	na	na
BC20-14	80.6	81.1	0.5	608	58	67	na	na	na
BC20-14	91.45	92.3	0.85	272	86	54	na	na	na
BC20-14	92.3	93	0.7	59	31	13	na	na	na
BC20-14	93.7	95.1	1.4	312	61	54	na	na	na
BC20-14	99.8	100.15	0.35	328	52	56	na	na	na
BC20-14	102.05	102.45	0.4	43	167	39	na	na	na
BC20-14	103.45	105.05	1.6	365	48	54	na	na	na
BC20-14	105.05	105.8	0.75	91	52	19	na	na	na

Hole	From m	To m	Interval m	Ni ppm	Cu ppm	Co ppm	Pt g/t	Pd g/t	Au g/t
BC20-15	30	31.05	1.05	351	80	73	na	na	na
BC20-15	35.1	35.4	0.3	290	216	39	na	na	na
BC20-15	46.6	47.95	1.35	323	87	62	na	na	na
BC20-15	51.8	53	1.2	210	72	55	na	na	na
BC20-15	53	54	1	2950	2000	244	na	na	na
BC20-15	56.15	57.5	1.35	515	73	63	na	na	na
BC20-15	57.5	59	1.5	374	93	63	na	na	na
BC20-15	65.9	67.35	1.45	71	152	14	<0.005	0.002	0.006
BC20-15	67.35	68.6	1.25	233	76	51	<0.005	0.002	0.004
BC20-15	68.6	69	0.4	15150	4150	904	0.66	0.45	0.018
BC20-15	69	69.5	0.5	1330	5640	89	<0.005	0.01	0.015
BC20-15	69.5	69.85	0.35	553	5630	55	0.011	0.008	0.022
BC20-15	69.85	71	1.15	157	285	13	<0.005	0.003	0.003
BC20-15	71	72.15	1.15	128	184	17	<0.005	0.001	0.005
BC20-15	72.15	73	0.85	32	72	30	<0.005	<0.001	0.001
BC20-15	73	74.05	1.05	45	45	34	<0.005	<0.001	<0.001
BC20-15	86.35	87.5	1.15	12	12	21	na	na	na
BC20-15	87.5	88.9	1.4	8	12	21	na	na	na
BC20-15	96.9	97.6	0.7	381	81	46	na	na	na
BC20-15	97.95	98.3	0.35	133	163	46	na	na	na
BC20-16	0	0.55	0.55	423	120	107	na	na	na
BC20-16	5.35	6.3	0.95	617	165	196	na	na	na
BC20-16	7.4	7.7	0.3	399	154	116	na	na	na
BC20-16	12.85	13.25	0.4	361	59	43	na	na	na
BC20-16	20.65	21.2	0.55	1045	51	113	na	na	na
BC20-16	22.6	23	0.4	261	74	69	na	na	na
BC20-16	26.05	27.2	1.15	279	61	62	na	na	na
BC20-16	27.9	28.25	0.35	418	102	68	na	na	na
BC20-16	33.3	34.2	0.9	479	88	60	na	na	na
BC20-16	34.2	35.1	0.9	546	93	59	na	na	na
BC20-16	36.2	36.5	0.3	191	87	48	na	na	na
BC20-16	38.6	40.2	1.6	314	65	58	na	na	na
BC20-16	40.5	41.2	0.7	571	79	68	na	na	na
BC20-16	44.1	44.45	0.35	295	63	52	na	na	na
BC20-16	48.6	48.9	0.3	607	78	60	na	na	na
BC20-16	51	52	1	57	252	14	<0.005	0.006	0.01
BC20-16	52	53	1	651	1180	60	0.011	0.008	0.026
BC20-16	53	54	1	861	257	79	0.018	0.018	0.006
BC20-16	54	55.1	1.1	193	111	48	<0.005	<0.001	0.001
BC20-16	55.1	56.3	1.2	2960	1730	172	0.06	0.067	0.019
BC20-16	56.3	57.45	1.15	3300	2060	195	0.077	0.081	0.011
BC20-16	57.45	57.71	0.26	33900	5540	1620	0.148	0.307	0.011
BC20-16	57.71	58.03	0.32	2700	2390	135	0.021	0.047	0.007
BC20-16	58.03	58.83	0.8	1745	12350	136	<0.005	0.778	0.069
BC20-16	58.83	59.15	0.32	5450	46800	735	0.141	4.12	0.117
BC20-16	59.15	59.83	0.68	35600	14700	1590	0.409	0.415	0.02
BC20-16	59.83	60.25	0.42	8220	23600	419	0.537	0.594	0.058
BC20-16	60.25	60.75	0.5	22000	28500	1160	0.213	0.376	0.066
BC20-16	60.75	61.55	0.8	802	7440	56	0.008	2.65	0.212
BC20-16	61.55	61.8	0.25	352	2650	73	<0.005	0.004	0.065
BC20-16	61.8	63	1.2	70	122	14	<0.005	0.003	0.003
BC20-16	63	64	1	50	53	12	0.007	0.066	0.015
BC20-16	67.1	67.55	0.45	609	671	67	na	na	na
BC20-16	70	70.3	0.3	265	84	49	na	na	na
BC20-16	70.7	71.4	0.7	52	39	41	na	na	na
BC20-16	74.85	75.55	0.7	106	53	41	na	na	na
BC20-16	77.8	78.9	1.1	260	77	53	na	na	na
BC20-16	78.9	79.95	1.05	206	109	50	na	na	na
BC20-16	82.2	82.6	0.4	648	350	70	na	na	na
BC20-16	84.05	85.25	1.2	315	91	52	na	na	na
BC20-16	89.2	89.7	0.5	657	79	63	na	na	na
BC20-17	8.6	9	0.4	197	55	57	na	na	na
BC20-17	17.5	18.65	1.15	265	82	34	na	na	na
BC20-17	20.55	21	0.45	168	68	30	na	na	na
BC20-17	28.65	29.75	1.1	507	85	61	na	na	na
BC20-17	37	37.8	0.8	226	61	59	na	na	na

Hole	From m	To m	Interval m	Ni ppm	Cu ppm	Co ppm	Pt g/t	Pd g/t	Au g/t
BC20-17	47.25	48.2	0.95	285	95	51	na	na	na
BC20-17	54.6	55.45	0.85	249	158	59	na	na	na
BC20-17	57.25	57.95	0.7	495	65	62	na	na	na
BC20-17	61.7	62	0.3	84	84	39	na	na	na
BC20-17	66.45	66.9	0.45	223	200	36	na	na	na
BC20-17	67.75	68.2	0.45	66	73	13	<0.005	0.002	0.003
BC20-17	68.2	68.85	0.65	375	79	53	0.011	0.007	0.001
BC20-17	68.85	69.7	0.85	45	256	11	<0.005	0.003	0.013
BC20-17	69.7	69.77	0.07	5830	9790	299	0.224	0.509	0.062
BC20-17	69.77	70.03	0.26	207	290	27	<0.005	0.013	0.003
BC20-17	70.03	71	0.97	54	51	14	<0.005	0.003	0.003
BC20-17	75.45	76	0.55	337	75	65	na	na	na
BC20-17	77.4	78.1	0.7	391	65	54	na	na	na
BC20-17	78.85	79.2	0.35	197	98	44	na	na	na
BC20-17	80.7	81.4	0.7	657	49	62	na	na	na
BC20-18	35	35.9	0.9	479	44	62	na	na	na
BC20-18	39.9	41	1.1	624	122	67	na	na	na
BC20-18	41.4	42.4	1	75	34	45	na	na	na
BC20-18	43.2	44	0.8	71	35	42	na	na	na
BC20-18	47	48	1	261	73	54	na	na	na
BC20-18	59.7	60.7	1	514	62	59	na	na	na
BC20-18	64.9	65.5	0.6	680	59	65	na	na	na
BC20-18	75.2	75.9	0.7	529	29	58	na	na	na
BC20-18	76.2	77.5	1.3	174	82	39	na	na	na
BC20-18	77.5	79	1.5	341	99	56	na	na	na
BC20-18	81.05	82.4	1.35	239	87	59	na	na	na
BC20-19	26.4	28	1.6	1110	204	93	na	na	na
BC20-19	28	29	1	1225	346	100	0.017	0.014	0.004
BC20-19	29	30	1	1580	465	114	0.018	0.025	0.006
BC20-19	30	31	1	1900	628	129	0.032	0.043	0.006
BC20-19	31	32.5	1.5	1690	454	113	0.029	0.031	0.006
BC20-19	32.5	34	1.5	1465	171	108	0.015	0.02	0.002
BC20-19	34	35	1	1825	316	118	0.017	0.024	0.01
BC20-19	35	36	1	2260	672	146	0.027	0.042	0.014
BC20-19	36	37	1	2550	1230	148	0.027	0.037	0.012
BC20-19	37	38	1	2030	831	130	0.016	0.022	0.003
BC20-19	38	39	1	2080	590	144	0.022	0.027	0.003
BC20-19	39	40	1	1665	595	129	0.015	0.025	0.004
BC20-19	40	41.75	1.75	2230	1410	163	0.022	0.049	0.006
BC20-19	41.75	42.75	1	7980	991	542	0.014	0.103	0.01
BC20-19	42.75	43.75	1	3000	1500	209	0.04	0.073	0.006
BC20-19	43.75	44.75	1	5220	3270	364	0.047	0.065	0.011
BC20-19	44.75	45.55	0.8	4400	1925	315	0.041	0.067	0.007
BC20-19	45.55	45.8	0.25	16600	3200	1190	0.093	0.227	0.013
BC20-19	45.8	46.35	0.55	5090	6050	364	0.076	0.05	0.004
BC20-19	46.35	47	0.65	6740	14050	486	0.042	0.056	0.022
BC20-19	47	48.2	1.2	346	64	61	<0.005	0.003	0.001
BC20-19	48.4	50	1.6	3480	1645	197	0.134	0.084	0.01
BC20-19	50	51	1	3410	2500	190	0.175	0.133	0.052
BC20-19	51	52	1	2510	1110	158	0.037	0.058	0.016
BC20-19	52	53	1	1985	813	122	0.086	0.079	0.015
BC20-19	53	54	1	1905	763	123	0.027	0.04	0.017
BC20-19	54	55	1	1490	459	104	0.02	0.029	0.006
BC20-19	55	55.6	0.6	3960	1310	230	0.071	0.101	0.014
BC20-19	55.6	56.6	1	10600	5100	595	0.306	0.239	0.024
BC20-19	56.6	57.5	0.9	13700	4570	735	0.409	0.416	0.024
BC20-19	57.5	58.5	1	1100	2650	50	na	na	na
BC20-20	14.55	16	1.45	1950	716	160	0.015	0.024	0.002
BC20-20	16	17	1	1820	925	134	0.016	0.028	0.006
BC20-20	17	17.9	0.9	2030	1100	131	0.022	0.033	0.008
BC20-20	17.9	19.4	1.5	2010	464	121	0.022	0.03	0.006
BC20-20	19.4	20.5	1.1	1940	599	129	0.027	0.041	0.008
BC20-20	20.5	21.5	1	1570	1090	126	0.031	0.036	0.008
BC20-20	22	23.2	1.2	1945	445	120	0.037	0.039	0.01
BC20-20	23.5	24.4	0.9	1190	342	87	0.019	0.028	<0.001
BC20-20	24.7	26	1.3	1500	203	100	0.011	0.018	0.002

Hole	From m	To m	Interval m	Ni ppm	Cu ppm	Co ppm	Pt g/t	Pd g/t	Au g/t
BC20-20	26	27	1	1235	209	91	0.005	0.011	<0.001
BC20-20	27	28	1	1760	169	99	<0.005	0.007	<0.001
BC20-20	28	29	1	1235	157	86	<0.005	0.001	<0.001
BC20-20	29	30	1	1640	233	97	0.005	0.008	0.009
BC20-20	30	31	1	2460	343	136	0.015	0.024	0.002
BC20-20	31	32	1	1605	309	123	0.027	0.025	0.008
BC20-20	32	33	1	2730	1030	164	0.026	0.049	0.02
BC20-20	33	34	1	2350	1080	148	0.037	0.053	0.019
BC20-20	34	35	1	1465	591	101	0.016	0.02	0.007
BC20-20	35	36	1	2120	418	113	0.026	0.028	0.007
BC20-20	36	37	1	1520	519	107	0.017	0.027	0.009
BC20-20	37	38	1	1945	542	120	0.02	0.027	0.007
BC20-20	38	39	1	2720	835	153	0.039	0.052	0.012
BC20-20	39	40	1	2250	536	127	0.03	0.034	0.009
BC20-20	40	41	1	2990	1010	161	0.049	0.056	0.011
BC20-20	41	42	1	1195	166	83	0.005	0.008	0.006
BC20-20	42	43	1	1765	564	125	0.021	0.027	0.007
BC20-20	43	44	1	1705	500	124	0.019	0.024	0.005
BC20-20	44	45	1	1240	477	88	0.009	0.012	0.004
BC20-20	45	46	1	2130	799	138	0.031	0.042	0.007
BC20-20	46	47	1	3050	1670	184	0.053	0.081	0.011
BC20-20	47	48.15	1.15	2920	1800	172	0.103	0.071	0.011
BC20-20	48.15	48.8	0.65	14250	5060	762	0.266	0.442	0.015
BC20-20	48.8	49.3	0.5	25600	15400	1340	0.243	0.345	0.052
BC20-20	49.3	49.85	0.55	4600	13400	366	0.07	0.305	0.022
BC20-20	51.9	52.6	0.7	642	122	75	na	na	na
BC20-20	54.5	55.5	1	214	75	48	na	na	na
BC20-21	1	2	1	722	249	69	na	na	na
BC20-21	2	3	1	563	234	73	na	na	na
BC20-21	3	4	1	493	291	66	na	na	na
BC20-21	4	5	1	395	299	58	na	na	na
BC20-21	5	6	1	597	458	75	na	na	na
BC20-21	6	7	1	423	222	63	na	na	na
BC20-21	7	8	1	370	152	67	na	na	na
BC20-21	8	9	1	357	149	63	na	na	na
BC20-21	11.55	12.55	1	576	576	59	na	na	na
BC20-21	13.55	14	0.45	599	439	57	na	na	na
BC20-21	15.2	16.3	1.1	328	854	21	na	na	na
BC20-21	17	17.45	0.45	96	1520	8	na	na	na
BC20-21	19.5	21	1.5	634	756	47	na	na	na
BC20-21	21.45	22	0.55	285	137	36	na	na	na
BC20-21	35.2	36.5	1.3	93	37	40	na	na	na
BC20-21	43.2	44.8	1.6	127	48	25	na	na	na
BC20-21	46	46.9	0.9	3	8	20	na	na	na
BC20-21	56.65	57.65	1	247	39	39	na	na	na
BC20-21	60.6	61.4	0.8	200	107	47	na	na	na
BC20-21	62.8	64.05	1.25	258	99	51	na	na	na
BC20-21	65.8	67	1.2	253	123	51	na	na	na
BC20-21	67	68	1	455	106	62	na	na	na
BC20-22	5	5.7	0.7	680	103	39	na	na	na
BC20-22	7	7.5	0.5	647	112	23	na	na	na
BC20-22	20	20.6	0.6	577	177	98	na	na	na
BC20-22	26.6	27.3	0.7	392	65	39	na	na	na
BC20-22	45.3	46.4	1.1	183	65	19	na	na	na
BC20-22	51.4	53.1	1.7	918	94	93	na	na	na
BC20-22	54	55.1	1.1	652	108	75	na	na	na
BC20-22	71	72.5	1.5	656	58	69	na	na	na
BC20-22	76	76.8	0.8	256	74	66	na	na	na
BC20-22	78.3	79	0.7	269	66	64	na	na	na
BC20-22	79	79.5	0.5	50	44	16	na	na	na
BC20-22	79.5	80.6	1.1	438	83	65	na	na	na
BC20-22	87.55	88.8	1.25	372	86	59	na	na	na
BC20-22	92.8	93.4	0.6	333	102	52	na	na	na
BC20-22	96.9	97.9	1	196	143	53	na	na	na
BC20-22	97.9	98.8	0.9	278	64	55	na	na	na
BC20-22	101.9	102.9	1	546	105	69	na	na	na

Hole	From m	To m	Interval m	Ni ppm	Cu ppm	Co ppm	Pt g/t	Pd g/t	Au g/t
BC20-22	102.9	103.7	0.8	481	103	60	na	na	na
BC20-22	103.9	104.4	0.5	356	66	56	na	na	na
BC20-22	105.9	106.8	0.9	533	58	68	na	na	na
BC20-22	109.5	110.55	1.05	84	69	36	na	na	na
BC20-22	123	124.4	1.4	351	59	48	na	na	na
BC20-22	130.1	131.6	1.5	398	101	61	na	na	na
BC20-22	137.45	138.2	0.75	185	42	51	na	na	na
BC20-22	142.1	142.9	0.8	190	16	29	na	na	na
BC20-22	147.2	148.3	1.1	61	29	43	na	na	na
BC20-22	148.65	149.2	0.55	338	77	65	na	na	na
BC20-23	6.5	7	0.5	176	61	26	na	na	na
BC20-23	7.35	8.4	1.05	276	86	46	na	na	na
BC20-23	11.6	12.3	0.7	234	73	55	na	na	na
BC20-23	17.1	17.6	0.5	368	65	15	<0.005	0.003	0.001
BC20-23	17.6	18.9	1.3	121	79	8	<0.005	0.002	0.004
BC20-23	18.9	20	1.1	324	132	44	<0.005	0.002	0.001
BC20-23	20	21.1	1.1	509	135	53	<0.005	0.002	<0.001
BC20-23	21.1	22.1	1	300	158	44	<0.005	0.002	0.003
BC20-23	22.1	22.4	0.3	3200	204	108	0.005	0.013	0.001
BC20-23	22.4	23.3	0.9	3490	2170	240	0.084	0.107	0.007
BC20-23	23.3	24.1	0.8	2560	657	147	0.028	0.033	0.002
BC20-23	24.1	25.3	1.2	573	587	36	<0.005	0.01	0.003
BC20-23	25.3	26	0.7	679	371	45	<0.005	0.008	0.002
BC20-23	26	26.5	0.5	178	47	18	<0.005	<0.001	0.001
BC20-23	26.5	27.15	0.65	720	91	80	0.005	0.003	0.001
BC20-23	39.1	39.6	0.5	825	51	73	na	na	na
BC20-23	40.1	40.6	0.5	347	71	40	na	na	na
BC20-23	48.8	49.4	0.6	407	134	80	na	na	na
BC20-23	49.8	50.8	1	59	129	37	na	na	na
BC20-23	54.8	56.15	1.35	192	40	41	na	na	na
BC20-23	57.2	58.4	1.2	50	58	27	na	na	na
BC20-23	58.4	59.4	1	292	22	27	na	na	na
BC20-23	59.4	60.4	1	498	14	47	na	na	na
BC20-23	60.4	61.4	1	366	32	43	na	na	na
BC20-23	61.4	62.1	0.7	89	37	18	na	na	na
BC20-23	62.1	63.5	1.4	61	49	17	na	na	na
BC20-23	63.5	64.4	0.9	438	97	55	na	na	na
BC20-24	0.55	1.5	0.95	9260	3400	452	0.081	0.141	0.049
BC20-24	1.5	3.3	1.8	1230	172	55	<0.005	0.004	0.001
BC20-24	3.3	4.3	1	3190	827	177	0.021	0.023	0.003
BC20-24	4.3	5.3	1	4340	680	245	0.013	0.019	0.003
BC20-24	5.3	6.3	1	2340	165	107	na	na	na
BC20-24	6.3	7.3	1	1600	201	76	na	na	na
BC20-24	7.3	8.3	1	943	179	56	na	na	na
BC20-24	8.3	9.3	1	888	86	66	na	na	na
BC20-24	9.3	10.3	1	935	135	60	na	na	na
BC20-24	10.3	11.3	1	3110	777	149	na	na	na
BC20-24	11.3	12.5	1.2	2170	189	121	na	na	na
BC20-24	12.85	14	1.15	2450	1640	172	na	na	na
BC20-24	14	14.55	0.55	752	430	35	na	na	na
BC20-24	14.55	16	1.45	5820	2290	233	na	na	na
BC20-24	16.4	17.5	1.1	155	182	16	na	na	na
BC20-24	24.7	26	1.3	607	63	51	na	na	na
BC20-24	26	27.4	1.4	170	70	32	na	na	na
BC20-24	27.4	28.4	1	196	143	27	na	na	na
BC20-24	28.4	29.5	1.1	792	144	73	na	na	na
BC20-24	29.5	30.5	1	1220	276	95	na	na	na
BC20-24	30.5	31.5	1	1250	178	87	na	na	na
BC20-24	31.5	32.5	1	1580	564	109	na	na	na
BC20-24	32.5	33.5	1	4400	1650	233	na	na	na
BC20-24	33.5	35.05	1.55	3660	4180	214	na	na	na
BC20-24	35.05	36.1	1.05	475	3110	29	na	na	na
BC20-24	40.95	41.95	1	114	61	27	na	na	na
BC20-24	41.95	42.75	0.8	564	83	58	na	na	na
BC20-24	42.75	43.75	1	50	33	16	na	na	na
BC20-24	45.9	46.4	0.5	443	8	62	na	na	na

Hole	From m	To m	Interval m	Ni ppm	Cu ppm	Co ppm	Pt g/t	Pd g/t	Au g/t
BC20-24	67.9	68.9	1	59	33	12	na	na	na
BC20-24	68.9	70.2	1.3	225	102	52	na	na	na
BC20-24	70.2	71.2	1	48	33	12	na	na	na
BC20-24	74.1	75.5	1.4	102	36	18	na	na	na
BC20-24	75.5	76.5	1	376	24	41	na	na	na
BC20-24	76.5	77.15	0.65	363	71	50	na	na	na
BC20-24	77.15	78.2	1.05	103	53	26	na	na	na
BC20-24	79.5	80.5	1	205	83	51	na	na	na
BC20-24	80.5	81.4	0.9	192	79	49	na	na	na
BC20-24	81.4	82	0.6	53	44	13	na	na	na
BC20-25	3.8	4.7	0.9	292	269	59	na	na	na
BC20-25	5	6	1	364	182	61	na	na	na
BC20-25	6.55	7.5	0.95	362	115	45	na	na	na
BC20-25	7.5	8.5	1	348	85	43	na	na	na
BC20-25	8.5	9.5	1	252	141	49	na	na	na
BC20-25	9.5	10.5	1	474	167	83	na	na	na
BC20-25	10.5	11.5	1	594	129	137	na	na	na
BC20-25	11.5	12.5	1	249	352	37	na	na	na
BC20-25	12.5	13.5	1	101	304	10	na	na	na
BC20-25	13.5	14.5	1	159	450	14	na	na	na
BC20-25	14.5	15.5	1	222	521	28	na	na	na
BC20-25	15.5	16.5	1	291	817	41	na	na	na
BC20-25	16.5	17.5	1	600	449	47	na	na	na
BC20-25	17.5	18.25	0.75	470	535	37	na	na	na
BC20-25	18.25	18.35	0.1	590	1760	46	na	na	na
BC20-25	18.35	19.2	0.85	316	1775	32	na	na	na
BC20-25	19.2	20	0.8	153	1250	17	na	na	na
BC20-25	20	21	1	352	38	51	na	na	na
BC20-25	21	22	1	430	63	53	na	na	na
BC20-25	22	23.2	1.2	500	71	48	na	na	na
BC20-25	23.2	24.6	1.4	161	100	20	na	na	na
BC20-25	24.6	25.3	0.7	35	54	13	na	na	na
BC20-25	30.4	31.8	1.4	1080	532	101	na	na	na
BC20-25	34.55	35	0.45	279	67	54	na	na	na
BC20-25	39.4	40.4	1	361	55	53	na	na	na
BC20-25	42.5	43.5	1	283	126	53	na	na	na
BC20-25	43.5	44.65	1.15	227	47	60	na	na	na
BC20-25	52.2	52.9	0.7	304	62	61	na	na	na
BC20-25	57.65	58.4	0.75	242	71	62	na	na	na
BC20-25	62.8	63.4	0.6	433	102	60	na	na	na
BC20-26	1	2	1	475	93	66	na	na	na
BC20-26	2	3	1	538	55	55	na	na	na
BC20-26	3	4.5	1.5	397	78	75	na	na	na
BC20-26	9.25	10.15	0.9	223	61	30	na	na	na
BC20-26	13.35	14.3	0.95	185	56	30	0.011	0.008	0.001
BC20-26	14.3	15.25	0.95	151	50	25	0.009	0.007	0.002
BC20-26	16.6	18	1.4	344	52	48	0.006	0.004	0.001
BC20-26	18.65	20	1.35	315	54	50	<0.005	0.001	0.007
BC20-26	20	21.2	1.2	534	81	72	<0.005	0.003	<0.001
BC20-26	23	24.2	1.2	666	72	71	<0.005	0.003	<0.001
BC20-26	28.65	29.7	1.05	256	68	58	<0.005	0.002	0.002
BC20-26	29.7	30.7	1	486	60	76	<0.005	0.002	0.002
BC20-26	30.7	31.95	1.25	271	73	61	<0.005	0.001	<0.001
BC20-26	32.45	33.35	0.9	96	73	45	<0.005	<0.001	0.001
BC20-26	34.25	35.3	1.05	396	75	57	0.007	0.008	0.001
BC20-26	35.3	36.5	1.2	330	58	49	<0.005	0.003	0.001
BC20-26	39.3	40.6	1.3	587	151	75	0.008	0.01	0.002
BC20-26	40.6	41.6	1	55	37	15	<0.005	0.001	<0.001
BC20-26	41.6	42.6	1	113	104	22	<0.005	0.002	<0.001
BC20-26	42.6	43.3	0.7	978	262	92	0.029	0.031	0.001
BC20-26	43.3	44.3	1	1095	282	87	0.015	0.019	0.001
BC20-26	44.3	45.3	1	1530	354	103	0.047	0.063	0.01
BC20-26	45.3	46.3	1	1580	522	111	0.044	0.05	0.004
BC20-26	46.3	47.3	1	2230	935	145	0.068	0.081	0.005
BC20-26	47.3	48.1	0.8	1735	764	126	0.053	0.052	0.003
BC20-26	48.1	49	0.9	1510	701	115	0.033	0.037	0.006

Hole	From m	To m	Interval m	Ni ppm	Cu ppm	Co ppm	Pt g/t	Pd g/t	Au g/t
BC20-26	49	50	1	1685	786	121	0.044	0.048	0.021
BC20-26	50	51	1	2160	1310	161	0.062	0.062	0.005
BC20-26	51	52.1	1.1	2990	1540	191	0.059	0.099	0.007
BC20-26	52.1	53	0.9	2130	1300	151	0.062	0.063	0.007
BC20-26	53	54	1	2190	1480	146	0.065	0.072	0.009
BC20-26	54	54.85	0.85	3100	1750	199	0.086	0.121	0.009
BC20-26	54.85	55.8	0.95	3860	2450	246	0.116	0.151	0.015
BC20-26	55.8	56.7	0.9	5050	4090	330	0.124	0.18	0.025
BC20-26	56.7	57.66	0.96	4720	3710	307	0.193	0.101	0.011
BC20-26	57.66	57.75	0.09	30700	32400	2250	0.274	0.136	0.04
BC20-26	57.75	58.4	0.65	4040	1960	255	0.143	0.107	0.012
BC20-26	58.4	58.52	0.12	19350	2340	1230	0.014	0.47	0.026
BC20-26	58.52	59.3	0.78	4700	2720	308	0.192	0.128	0.014
BC20-26	59.3	59.8	0.5	266	67	75	<0.005	0.002	<0.001
BC20-26	59.8	60.8	1	4610	1790	302	0.283	0.166	0.007
BC20-26	60.8	61.8	1	4020	2210	259	0.138	0.112	0.005
BC20-26	61.8	62.87	1.07	5630	3880	371	0.214	0.143	0.015
BC20-26	62.87	63.12	0.25	22600	21000	1400	0.047	0.479	0.055
BC20-26	63.12	63.42	0.3	8520	12300	524	0.219	0.169	0.034
BC20-26	63.42	64.6	1.18	4680	2100	308	0.15	0.14	0.007
BC20-26	64.6	65.7	1.1	7870	5950	520	0.193	0.234	0.02
BC20-26	65.7	66.8	1.1	7400	3480	484	0.199	0.214	0.011
BC20-26	66.8	68.32	1.52	8450	2800	523	0.221	0.204	0.01
BC20-26	68.32	68.73	0.41	927	700	82	0.012	0.02	0.003
BC20-26	68.73	68.9	0.17	7840	42600	434	<0.005	0.027	0.044
BC20-26	68.9	69.6	0.7	924	1250	50	<0.005	0.025	0.003
BC20-26	69.6	69.9	0.3	79	245	20	<0.005	<0.001	<0.001
BC20-26	69.9	70.3	0.4	17650	822	658	<0.005	0.015	<0.001
BC20-26	70.3	71.3	1	53	162	13	<0.005	<0.001	<0.001
BC20-26	71.3	72.35	1.05	61	80	14	<0.005	<0.001	<0.001
BC20-26	72.35	72.7	0.35	707	152	70	0.011	0.009	0.001
BC20-26	72.7	73.25	0.55	371	150	39	<0.005	0.043	0.002
BC20-26	73.25	73.8	0.55	714	183	87	0.007	0.005	<0.001
BC20-26	76	77	1	617	123	71	na	na	na
BC20-26	77	77.8	0.8	881	123	81	na	na	na
BC20-26	81.3	82.3	1	264	91	57	na	na	na
BC20-27	13.9	14.9	1	640	71	49	na	na	na
BC20-27	34.65	35.6	0.95	79	51	7	na	na	na
BC20-27	35.6	36	0.4	483	85	47	na	na	na
BC20-27	37	38.4	1.4	612	150	70	na	na	na
BC20-27	38.4	39.6	1.2	892	142	83	na	na	na
BC20-27	39.6	41	1.4	172	217	19	<0.005	0.002	0.003
BC20-27	41	42.32	1.32	502	495	40	<0.005	0.003	0.007
BC20-27	42.32	43	0.68	25600	6450	1370	0.393	0.555	0.021
BC20-27	43	44.8	1.8	463	573	36	<0.005	0.014	0.006
BC20-27	44.8	45.7	0.9	444	83	61	<0.005	0.003	0.001
BC20-27	45.7	46.6	0.9	241	79	36	na	na	na
BC20-27	47.2	48.7	1.5	231	66	49	na	na	na
BC20-27	48.7	49.8	1.1	258	92	66	na	na	na
BC20-27	49.8	50.8	1	210	23	57	na	na	na
BC20-27	50.8	51.8	1	83	47	50	na	na	na
BC20-27	51.8	52.8	1	689	200	81	na	na	na
BC20-28	2.8	3.65	0.85	171	114	63	na	na	na
BC20-28	7.4	8	0.6	212	873	40	na	na	na
BC20-28	11.2	12.2	1	381	482	63	na	na	na
BC20-28	12.2	13.2	1	552	588	97	na	na	na
BC20-28	13.2	14.2	1	670	573	65	na	na	na
BC20-28	14.2	15.2	1	557	719	79	na	na	na
BC20-28	15.2	16.2	1	1440	1240	119	na	na	na
BC20-28	16.2	17.2	1	1915	3140	104	na	na	na
BC20-28	17.2	18.2	1	462	804	80	na	na	na
BC20-28	18.2	19.2	1	497	1360	45	na	na	na
BC20-28	19.2	20.1	0.9	164	1650	10	na	na	na
BC20-28	20.1	21	0.9	197	995	9	na	na	na
BC20-28	26.1	27.1	1	139	128	51	na	na	na
BC20-28	36	37	1	183	15	29	na	na	na

Hole	From m	To m	Interval m	Ni ppm	Cu ppm	Co ppm	Pt g/t	Pd g/t	Au g/t
BC20-28	37	38	1	332	53	52	na	na	na
BC20-28	38	39	1	247	44	42	na	na	na
BC20-28	40.3	41	0.7	196	31	40	na	na	na
BC20-28	44	45.5	1.5	430	61	52	na	na	na
BC20-28	46.1	47.2	1.1	414	65	52	na	na	na
BC20-28	77.35	78.3	0.95	8	24	15	na	na	na
BC20-28	78.3	79.4	1.1	25	5	12	na	na	na
BC20-28	79.4	80.7	1.3	103	25	46	na	na	na
BC20-28	80.7	82.1	1.4	338	37	44	na	na	na
BC20-29	39.2	40.8	1.6	551	96	58	na	na	na
BC20-29	63.15	63.6	0.45	265	2370	30	<0.005	0.01	0.013
BC20-29	63.6	63.75	0.15	26500	779	1360	0.354	0.633	0.012
BC20-29	63.75	64.8	1.05	2020	1670	139	0.07	0.084	0.006
BC20-29	64.8	65.5	0.7	905	1760	55	<0.005	0.019	0.009
BC20-29	65.5	66.2	0.7	459	574	29	<0.005	0.008	0.003
BC20-29	66.2	67.45	1.25	51	55	35	<0.005	<0.001	0.002
BC20-29	67.45	68.5	1.05	75	57	43	<0.005	<0.001	0.001
BC20-29	68.5	69.6	1.1	78	63	49	na	na	na
BC20-30	0.8	1.8	1	485	127	89	na	na	na
BC20-30	1.8	2.8	1	528	96	84	na	na	na
BC20-30	2.8	3.8	1	374	103	75	na	na	na
BC20-30	10.6	12	1.4	312	58	63	na	na	na
BC20-30	35.4	36.9	1.5	739	79	68	na	na	na
BC20-30	57.3	58.8	1.5	216	45	47	na	na	na
BC20-30	60.8	61.8	1	225	85	55	na	na	na
BC20-30	71.45	72.5	1.05	303	65	45	na	na	na
BC20-30	72.5	73.7	1.2	589	57	70	na	na	na
BC20-30	81.6	82.4	0.8	382	70	62	na	na	na
BC20-30	85.5	86.4	0.9	104	41	44	na	na	na
BC20-30	92.4	93.4	1	256	89	53	na	na	na
BC20-30	97.7	98.7	1	482	132	59	na	na	na
BC20-30	102.3	103	0.7	552	79	66	na	na	na
BC20-30	117.65	118.6	0.95	266	47	49	na	na	na
BC20-30	118.6	120	1.4	268	53	45	na	na	na
BC20-30	138.5	139.5	1	745	89	67	na	na	na

Appendix One

JORC Code, 2012 Edition | 'Table 1' Report

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections).

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> Assays are reported for 29 diamond core drill holes for a total of 4493 m of drilling. The drill core was cut by diamond core saw and continuous quarter (NQ) core sample taken for assay according to lithological criteria in intervals ranging from 0.07 m to 3.55 m with a mean of 1.6 m. Sample weights for assay ranged from approx. 0.1 to 7 kg with a mean of c. 2 kg. Drilling and sampling were both supervised by a suitably qualified geologist. For the Company's best understanding of previous owner's drilling please refer to previous Blackstone Minerals' announcements to the ASX and additionally available from http://blackstoneminerals.com.au.
Drilling techniques	<ul style="list-style-type: none"> Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> The drilling was of HQ (64mm) and NQ (48mm) diameter and was conducted by drilling contractor Intergeo using Longyear diamond coring rigs and Ban Phuc Nickel Mines using GX-1TD diamond coring rigs. Selected core runs were orientated with a REFLEX ACTIII or spear tools.
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> Recoveries were calculated by Ban Phuc Nickel Mines personnel by measuring recovered core length vs downhole interval length. Drill core recovery through the reported mineralised zones ranged from 95 to 100 % (see Table 1). There is no discernible correlation between grades and core recovery.
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography. The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> All of the drill core was qualitatively geologically logged by a suitably qualified Ban Phuc Nickel Mines geologist. Sulfide mineral abundances were visually estimated. The detail of geological logging is considered sufficient for mineral exploration. 29 holes for 4493 m were logged and 1922 m selected for assay on the basis of the visual presence of sulfides.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. 	<ul style="list-style-type: none"> The drill core was cut lengthwise by diamond core saw and continuous half or quarter core sample bagged for assay in intervals according to lithological criteria determined by a Ban Phuc Nickel Mines geologist. Sampling intervals ranged from 0.07 m to 3.55 m with a mean of 1.6 m. Continuous remnant core has been retained in the trays for future reference or sampling as necessary. Duplicate quarter core samples were collected.

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> Sample weights for assay ranged from approx. 0.1 to 7 kg each with a mean of 2 kg. The bagged core samples were submitted to SGS Hai Phong, Vietnam ('SGS') where the quarter core samples were dried and crushed to -5 mm, then a 250 g was split from each and pulverised to 85 % passing 75 microns to produce the analytical pulps which were then dispatched to ALS Geochemistry, Perth WA ('ALS') for assay.
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established. 	<ul style="list-style-type: none"> Ni, Cu and Co were determined at ALS by industry standard nitric + perchloric + hydrofluoric + hydrochloric acid digest with ICP-AES finish. Pt, Pd and Au were determined at ALS by industry standard 50 g fire assay and ICP-AES finish. Approx. one commercially certified assay standard per 25 core samples was inserted by Blackstone Minerals in each sample submission. All standards reported within 10 % of the Ni, Cu, Co, Pt, Pd and Au reference values for the grade ranges of interest. Approximately one crushed rock blank per 25 samples was included in the submission and reported below 100 ppm for Ni, Cu and Co, and less than 20 ppb for Au, Pt and Pd. Quarter core duplicates were included at a rate of approx. 1 per 25 samples and sampling error is considered acceptable.
Verification of sampling and assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> The assay results are compatible with the observed mineralogy, historic mining and exploration results (please refer to previous Blackstone Minerals' announcements to the ASX and additionally available from http://blackstoneminerals.com.au). Twinned holes were not used. Primary data is stored and documented in industry standard ways. Assay data is as reported by ALS and has not been adjusted in any way. Remnant assay pulps are currently held in storage by the assay laboratory.
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> Drill hole collar location was determined by Leica 1203+ total station survey to centimetre accuracy. The holes were down hole orientation surveyed using a Deviflex non-magnetic survey tool. Co-ordinates were recorded in Ban Phuc Mine Grid and UTM Zone 48N WGS84 grid and coordinate system. Topographic control is provided by a precision Ban Phuc Nickel Mines Digital Terrain Model.
Data spacing and distribution	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. Whether the data-spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	<ul style="list-style-type: none"> The drilling is within and peripheral to a previously broadly drilled (50 m to >100 m drill spacing) parts of the Ban Phuc and Ban Chang deposits. Drilling was conducted on the Ban Phuc Mine Grid. All visibly altered or mineralised zones in the drill core were sampled and assayed (see above). Non-composited data is reported.

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> It is anticipated that with further drilling the reported drill results will be sufficient to establish mineral resources for Ban Chang, and the new King Cobra Zone results will be incorporated in a resource update for the Ban Phuc DSS body.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> Previous drilling and interpretation indicate the reported drill holes are suitably orientated to test the target zones. Structural orientations determined from drill core suggest the reported sulfide intervals are close to true thickness for Ban Chang. The Ban Phuc holes were drilled in a range of orientations with respect to the mineralised zones for resource definition and metallurgical purposes. Relevant cross sections are included in the announcement.
Sample security	<ul style="list-style-type: none"> The measures taken to ensure sample security. 	<ul style="list-style-type: none"> The chain of custody for the drill core samples from collection to dispatch to assay laboratory was managed by Ban Phuc Nickel Mines personnel. Sample numbers were unique and did not include any locational information useful to non-Ban Phuc Nickel Mines and non-Blackstone Minerals personnel. The level of security is considered appropriate.
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> The assay results agree well with the observed mineralogy, historic mining and exploration results (refer to previous Blackstone Minerals announcements to the ASX and additionally available from http://blackstoneminerals.com.au). Further drilling is planned to refine the shape and extents of the mineralised zones.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section)

Criteria	Explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> The drilling was located within the Ta Khoa Concession and is covered by the Foreign Investment Licence, 522 G/P, which Ban Phuc Nickel Mines Joint Venture Enterprise (BPNMJVE) was granted on January 29th, 1993. An Exploration Licence issued by the Ministry of Natural Resources and Environment covering 34.8 km² within the Ta Khoa Concession is currently in force. Blackstone Minerals Limited owns 90% of Ban Phuc Nickel Mines.
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> The first significant work on the Ban Phuc nickel deposit and various adjacent prospects including Ban Chang was by the Vietnamese Geological Survey in the 1959-1963 period. The next significant phase of exploration and mining activity was by Asian Mineral Resources from 1996 to 2018, including mining of the Ban Phuc massive sulfide vein mining during the 2013 to 2016 period. The project, plant and infrastructure has been on care and maintenance since 2016.

Criteria	Explanation	Commentary
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> The late Permian Ta Khoa nickel-copper-sulfide deposits and prospects are excellent examples of the globally well-known and economically exploited magmatic nickel - copper sulfide deposits. The identified nickel and copper sulfide mineralisation within the project include disseminated, net texture and massive sulfide types. The disseminated and net textured mineralisation occurs within dunite adcumulate intrusions, while the massive sulfide veins typically occur in the adjacent metasedimentary wallrocks and usually associated with narrow ultramafic dykes. For more detail of the deposit and regional geology see Mapleson and Grguric N43-101 Technical Report on the Ta Khoa (Ni Cu Co PGE) Prospects Son La Province, Vietnam available from System for Electronic Document Analysis and Retrieval (www.sedar.com) for Asian Minerals Resources Limited. A recent summary of the geology of the Ban Phuc intrusion can be found in Wang et al 2018, A synthesis of magmatic Ni-Cu-(PGE) sulfide deposits in the ~260 Ma Emeishan large igneous province, SW China and northern Vietnam, Journal of Asian Earth Sciences 154.
Drill hole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> easting and northing of the drill hole collar; elevation or RL (Reduced Level - elevation above sea level in metres) of the drill hole collar; dip and azimuth of the hole down hole length and interception depth; hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<ul style="list-style-type: none"> Drill hole coordinates, depth, orientation, hole length and assay results are given in Tables 1 and 2. For the Company's best understanding of previous owners drilling please refer to previous Blackstone Minerals announcements to the ASX and additionally available from http://blackstoneminerals.com.au
Data aggregation methods	<ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> Assay results given in Table 2 represent the drill core intervals as sampled and assayed. Upper cuts have not been applied. Metal equivalent values are not used.
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement 	<ul style="list-style-type: none"> All intervals reported in Table 1 are down hole. Structural orientations determined from orientated drill core suggest that the reported intersections and intervals are >80% of the true thicknesses for Ban Chang.

Criteria	Explanation	Commentary
	to this effect (e.g. 'down hole length, true width not known').	<ul style="list-style-type: none"> The Ban Phuc intersections range from c. 30% to >90% of true thickness. Appropriate drill sections are included in the body of this release.
Diagrams	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> Appropriate exploration plan and sections are included in the body of this release.
Balanced reporting	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced, to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> All drill results given in Table 2 represent the intervals as sampled and assayed.
Other substantive exploration data	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> Appropriate exploration plan and sections are included in the body of this release. For the Company's best understanding of previous owners drilling please refer to previous Blackstone Minerals announcements to the ASX and additionally available from http://blackstoneminerals.com.au
Further work	<ul style="list-style-type: none"> The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> Blackstone Minerals proposes to conduct further drilling and associated activities to better define and extend the identified mineralised zones. An appropriate exploration plan is included in the body of this release.