

30 October 2025

Iltani delivers maiden Orient East JORC Mineral Resource Estimate

Silver and base metals explorer **Iltani Resources Limited** (ASX: ILT, "Iltani" or "the Company") is pleased to announce a maiden Orient East JORC Resource at its Orient East Silver-Indium deposit, part of the larger Orient Silver-Indium Project located near Herberton, Northern Queensland.

HIGHLIGHTS:

- Iltani delivers a Maiden JORC Mineral Resource Estimate (MRE) for the Orient East Silver-Indium deposit of:
 - 12.6 Mt @ 128 g/t Ag Eq. (60 g/t Ag Eq. cut-off grade)
 - 19.8 Mt @ 98 g/t Ag Eq. (30 g/t Ag Eq. cut-off grade)
- Total Orient MRE (Orient West & Orient East) increases to:
 - 34.2 Mt @ 110.4 g/t Ag Eq. (60 g/t Ag Eq. cut-off grade)
 - 62.5 Mt @ 81.5 g/t Ag Eq. (30 g/t Ag Eq. cut-off grade)
- A substantial part of the Orient East Exploration Target remains to be converted to a Mineral Resource. The updated Orient East Exploration Target is:
 - 6.5 – 7.9 Mt @ 120 – 147 g/t Ag Eq. (60 g/t Ag Eq. cut-off grade)
 - 10.9 – 13.3 Mt @ 88 – 108 g/t Ag Eq. (30 g/t Ag Eq. cut-off grade)
- Total Orient Exploration Target (Orient West & Orient East) is:
 - 15.4 – 18.8 Mt @ 95 – 117 g/t Ag Eq. (60 g/t Ag Eq. cut-off grade)
 - 35.9 – 43.3 Mt @ 64 – 78 g/t Ag Eq. (30 g/t Ag Eq. cut-off grade)
- All MRE areas at Orient remain open and there is substantial potential to increase the Orient MRE (extending known mineralisation, conversion of existing Exploration Targets and discovery of new mineralisation)
- The Orient West and East MRE and Exploration Targets were modelled and estimated by independent mining consultant Mining One.

The potential quantity and grade of the Exploration Target is conceptual in nature. There has been insufficient exploration to estimate a Mineral Resource and it is uncertain if further exploration will result in the estimation of a Mineral Resource. The Exploration Target has been prepared in accordance with the 2012 Edition of The Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves ('the JORC Code')

For full details of the Orient West Mineral Resource see Iltani Resources Limited ASX announcement "Maiden Orient West JORC Mineral Resource Estimate" dated 31 July 2025.

This document is available to view at www.iltaniresources.com.au. The Company confirms that it is not aware of any new information or data that materially affects the information included in the release and that all material assumptions and parameters underpinning the estimates in the release continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Persons' findings are presented have not been materially modified from the release

Orient East Maiden MRE of 12.6 Mt @ 128 g/t Ag Eq. (60 g/t cut-off grade)

Table 1 Orient East JORC Resource Estimate (60 g/t Ag Eq. cut-off grade)

	Resource Parameters						Contained Metal				
	Tonnes	Ag	In	Pb	Zn	Ag Eq.	Ag	In	Pb	Zn	Ag Eq.
Category	Mt	g/t	g/t	%	%	g/t	Moz	t	Kt	Kt	Moz
Indicated	9.4	37	7	0.93	0.96	121	11.2	66	88	90	36.8
Inferred	3.1	45	17.9	1.14	1.09	148	4.6	56	36	34	15.0
Total	12.6	39	9.7	0.98	0.99	128	15.8	122	124	124	51.8

Orient West MRE of 21.6 Mt @ 100.5 g/t Ag Eq. (60 g/t Ag Eq. cut-off grade)

Table 2 Orient West JORC Resource Estimate (60 g/t Ag Eq. cut-off grade)

	Resource Parameters						Contained Metal				
	Tonnes	Ag	In	Pb	Zn	Ag Eq.	Ag	In	Pb	Zn	Ag Eq.
Category	Mt	g/t	g/t	%	%	g/t	Moz	t	Kt	Kt	Moz
Indicated	12.1	27.8	22.0	0.59	0.85	101.7	10.8	265	71	103	39.5
Inferred	9.6	25.8	20.0	0.60	0.85	99.0	7.9	191	57	81	30.4
Total	21.6	26.9	21.1	0.59	0.85	100.5	18.7	456	128	184	69.9

Orient Project MRE of 34.2 Mt @ 110.4 g/t Ag Eq. (60 g/t Ag Eq. cut-off grade)

Table 3 Orient Project JORC Resource Estimate (60 g/t Ag Eq. cut-off grade)

	Resource Parameters						Contained Metal				
	Tonnes	Ag	In	Pb	Zn	Ag Eq.	Ag	In	Pb	Zn	Ag Eq.
Category	Mt	g/t	g/t	%	%	g/t	Moz	t	Kt	Kt	Moz
Indicated	21.5	31.8	15.4	0.74	0.90	110.1	22.0	332	159	193	76.1
Inferred	12.7	30.5	19.5	0.73	0.91	111.0	12.4	247	93	115	45.3
Total	34.2	31.3	16.9	0.74	0.90	110.4	34.4	579	252	308	121.4

Orient Project Exploration Target Estimate of 15.4 – 18.8 Mt @ 95 – 117 g/t Ag Eq. (60 g/t Ag Eq. cut-off grade)

Table 4 Orient Project Exploration Target Estimate (60 g/t Ag Eq. cut-off grade)

		Resource Parameters					
		Tonnes	Ag	In	Pb	Zn	Ag Eq.
		Mt	g/t	g/t	%	%	g/t
Orient East	Min	6.5	34.7	19.7	0.89	0.88	120.0
	Max	7.9	42.4	24.1	1.09	1.08	146.6
Orient West	Min	8.9	19.4	13.1	0.47	0.71	77.7
	Max	10.9	23.8	16.1	0.57	0.87	94.9
Orient Project	Min	15.4	25.8	15.9	0.65	0.78	95
	Max	18.8	31.6	19.4	0.79	0.96	117

Orient East Maiden MRE of 19.8 Mt @ 98.0 g/t Ag Eq. (30 g/t Ag Eq. cut-off grade)

Table 5 Orient East JORC Resource Estimate (30 g/t Ag Eq. cut-off grade)

	Resource Parameters						Contained Metal				
	Tonnes	Ag	In	Pb	Zn	Ag Eq.	Ag	In	Pb	Zn	Ag Eq.
Category	Mt	g/t	g/t	%	%	g/t	Moz	t	Kt	Kt	Moz
Indicated	14.2	29	5	0.73	0.78	96.0	13.1	71	104	110	43.9
Inferred	5.6	31	10.6	0.79	0.77	103.0	5.6	60	44	44	18.6
Total	19.8	29	6.6	0.75	0.78	98.0	18.7	131	148	154	62.4

Orient West MRE of 42.7 Mt @ 73.8 g/t Ag Eq. (30 g/t Ag Eq. cut-off grade)

Table 6 Orient West JORC Resource Estimate (30 g/t Ag Eq. cut-off grade)

	Resource Parameters						Contained Metal				
	Tonnes	Ag	In	Pb	Zn	Ag Eq.	Ag	In	Pb	Zn	Ag Eq.
Category	Mt	g/t	g/t	%	%	g/t	Moz	t	Kt	Kt	Moz
Indicated	24.6	19.8	14.2	0.44	0.62	73.4	15.7	349	109	152	58.0
Inferred	18.1	19.6	13.6	0.47	0.63	74.5	11.4	245	85	115	43.3
Total	42.7	19.7	13.9	0.45	0.63	73.8	27.0	594	194	267	101.2

Orient Project MRE of 62.5Mt @ 81.5 g/t Ag Eq. (30 g/t Ag Eq. cut-off grade)

Table 7 Orient Project JORC Resource Estimate (30 g/t Ag Eq. cut-off grade)

	Resource Parameters						Contained Metal				
	Tonnes	Ag	In	Pb	Zn	Ag Eq.	Ag	In	Pb	Zn	Ag Eq.
Category	Mt	g/t	g/t	%	%	g/t	Moz	t	Kt	Kt	Moz
Indicated	38.8	23.2	10.8	0.55	0.68	81.7	28.9	420	212	263	101.9
Inferred	23.7	22.3	12.9	0.55	0.66	81.2	17.0	306	129	157	61.9
Total	62.5	22.8	11.6	0.55	0.67	81.5	45.9	725	341	421	163.8

Orient Project Exploration Target Estimate of 35.9 – 43.3 Mt @ 63.6 – 78.1 g/t Ag Eq. (30 g/t Ag Eq. cut-off grade)

Table 8 Orient Project Exploration Target Estimate (30 g/t Ag Eq. cut-off grade)

		Resource Parameters					
		Tonnes	Ag	In	Pb	Zn	Ag Eq.
		Mt	g/t	g/t	%	%	g/t
Orient East	Min	10.9	25.3	12.5	0.66	0.67	88.0
	Max	13.3	30.9	15.2	0.81	0.81	107.6
Orient West	Min	25.0	12.5	10.4	0.30	0.50	53.0
	Max	30.0	15.5	12.8	0.35	0.62	65.0
Orient Project	Min	35.9	16.4	11.0	0.41	0.55	63.6
	Max	43.3	20.2	13.5	0.49	0.68	78.1

Iltani Managing Director Donald Garner commented:

"We are pleased to announce a maiden Orient East Mineral Resource Estimate (MRE) of 19.8 Mt @ 98 g/t Ag Eq. (30 g/t Ag Eq. cut-off grade) with a higher-grade core of 12.6 Mt @ 128 g/t Ag Eq. (60 g/t Ag Eq. cut-off grade). Orient East is part of our Orient Silver-Indium Project, located near Herberton in Northern Queensland.

This is a fantastic result for Iltani, building on the recently completed Orient West MRE. The overall Orient MRE (Orient West & East) has increased to 62.5Mt @ 81.5 g/t Ag Eq. (30 g/t Ag Eq. cut-off grade) with a higher grade core of 34.2 Mt @ 110.4 g/t Ag Eq. (60 g/t Ag Eq. cut-off grade).

There is still substantial potential to materially increase the Orient MRE by firstly, converting the remaining Orient Exploration Target to JORC Resources with further drilling, continuing to drill out the Orient West & East systems (which remain open along strike and down-dip), and continuing to explore the larger Orient System.

To this end, Iltani has just completed the initial drill program targeting multiple shallow VTEM anomalies at Orient. A total of 10 RC drillholes were completed and samples have been submitted to the lab, with assays pending.

All this activity will be supported by the recently announced \$8 million investment from the Queensland Investment Corporation (QIC), which will enable Iltani to commence the permitting and application work to advance the current Orient MRE (Orient West & East) towards production whilst increasing our level of exploration activity at Orient as we continue to explore the larger Orient System and grow the Orient MRE."

1. Maiden Orient East JORC Resource Estimate

Iltni is pleased to announce a maiden JORC Resource Estimate for the Orient East Silver-Indium deposit, part of the larger Orient Silver-Indium Project (100% owned by Iltni Resources), located near Herberton in Northern Queensland.

Iltni listed on the ASX in June 2023 raising funds to commence exploration activities at Orient. Since listing, Iltni has completed a total of 135 RC holes (ORR001 to ORR137 for 26,741m drilled) and five diamond holes (ORD001 to ORD005 for 1731.2m drilled) at the Orient Project, of which 67 RC holes for 11,492m drilled (including a re-drilled twin hole to duplicate a hole abandoned at 18m) and two diamond holes (ORD004 & ORD005 for 486.5m drilled) have been completed at Orient East.

Iltni engaged an independent third-party consultant (Mining One) to estimate a Mineral Resource Estimate (MRE) for Orient East, and the results of the MRE are detailed below in Table 9 and Table 10.

Table 9 Orient East Maiden JORC Resource Estimate (60 g/t Ag Eq. cut-off grade)

	Resource Parameters						Contained Metal				
	Tonnes	Ag	In	Pb	Zn	Ag Eq.	Ag	In	Pb	Zn	Ag Eq.
Category	Mt	g/t	g/t	%	%	g/t	Moz	t	Kt	Kt	Moz
Indicated	9.4	37	7	0.93	0.96	121	11.2	66	88	90	36.8
Inferred	3.1	45	17.9	1.14	1.09	148	4.6	56	36	34	15.0
Total	12.6	39	9.7	0.98	0.99	128	15.8	122	124	124	51.8

Table 10 Orient East Maiden JORC Resource Estimate (30 g/t Ag Eq. cut-off grade)

	Resource Parameters						Contained Metal				
	Tonnes	Ag	In	Pb	Zn	Ag Eq.	Ag	In	Pb	Zn	Ag Eq.
Category	Mt	g/t	g/t	%	%	g/t	Moz	t	Kt	Kt	Moz
Indicated	14.2	29	5	0.73	0.78	96.0	13.1	71	104	110	43.9
Inferred	5.6	31	10.6	0.79	0.77	103.0	5.6	60	44	44	18.6
Total	19.8	29	6.6	0.75	0.78	98.0	18.7	131	148	154	62.4

The Inferred and Indicated Mineral Resource Estimate (MRE) for Orient East covers a strike extent of 620m to a maximum depth from surface of 180m, averaging around 120m depth. Mineralisation becomes progressively deeper to the southwest.

The previously reported Orient East Exploration Target comprised the Orient East Main Zone, Main Zone Western Extension, Orient North, Orient South and North Vein. The MRE essentially converted to an Indicated and Inferred Resource the full extent of the Orient East Main Zone Exploration Target Area and some of the Western Extension. The remaining Exploration Target zones remain to be tested with drilling. The MRE will be extended by further drilling within the grade shell and testing down dip and along strike where current drilling has not closed off the mineralisation.

Two holes have intersected the North Vein returning results of 2m at 244.1 from 34m (ORR005) and on the same drill section **4m @ 584.3 g/t Ag Eq.** from 219m inc. **2m @ 845.9 g/t Ag Eq.** from 221m (ORR119). This zone, covering a strike extent of 800m, will be a priority target for the next round of drilling.

Some of the VTEM targets currently being drill tested fall within the Orient North Exploration Target area. Results of this drilling, when received, will determine priority for further investigation.

Figure 1 Maiden Orient East JORC Resource Plan

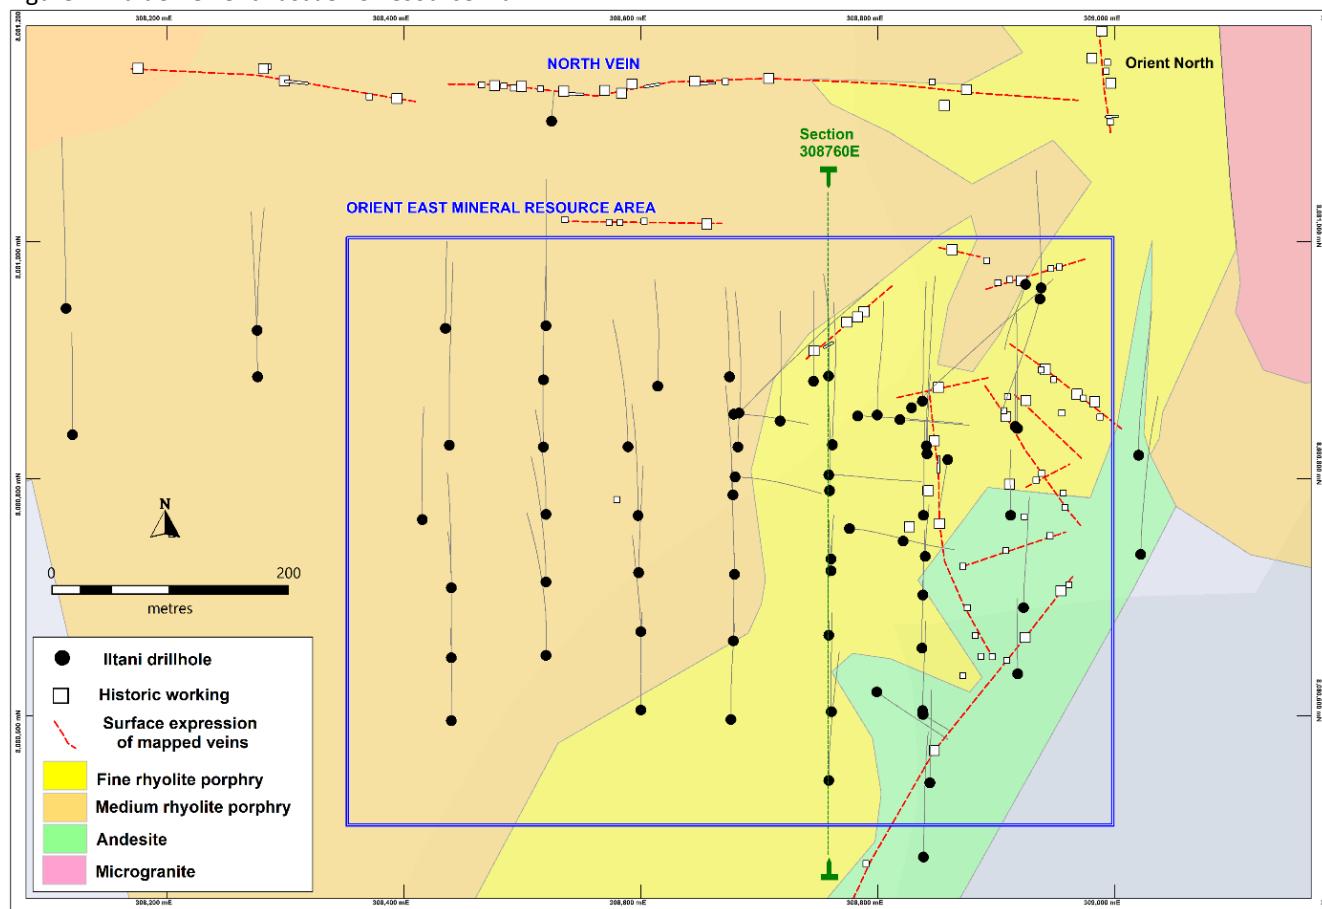


Figure 2 Orient East Block Model Section 308760E


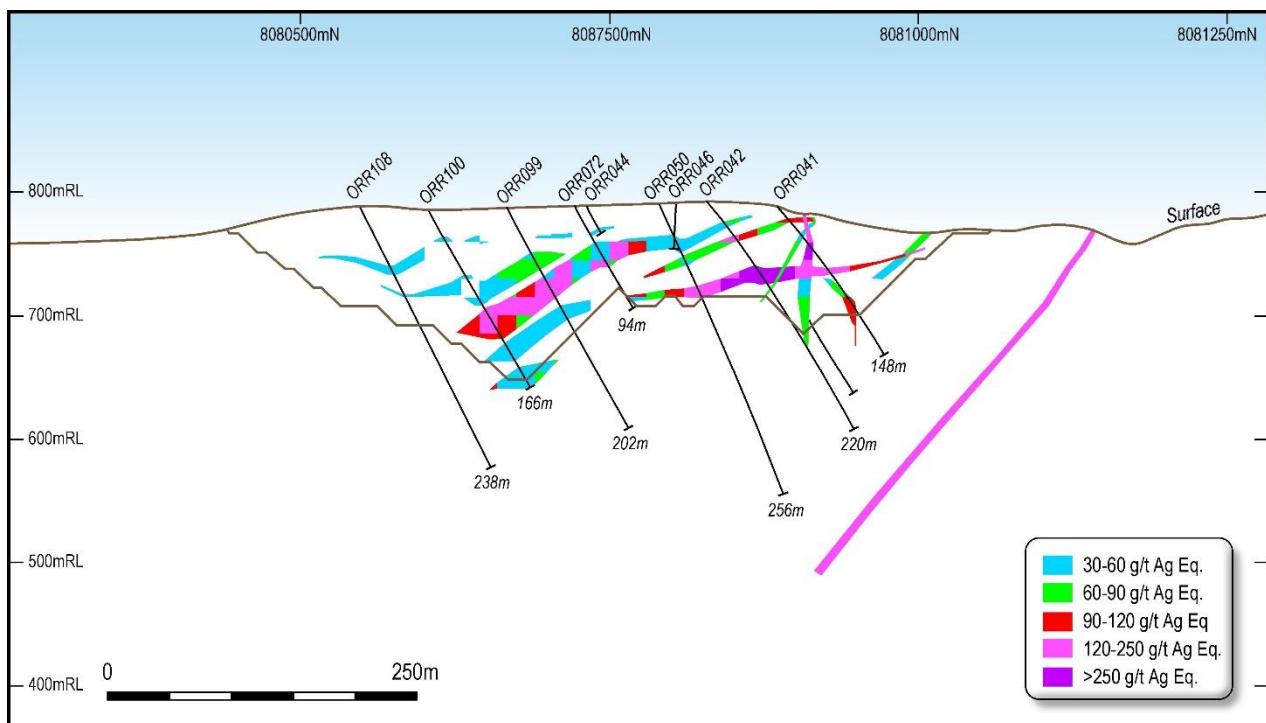


Figure 3 Orient West and East JORC Resource Plan

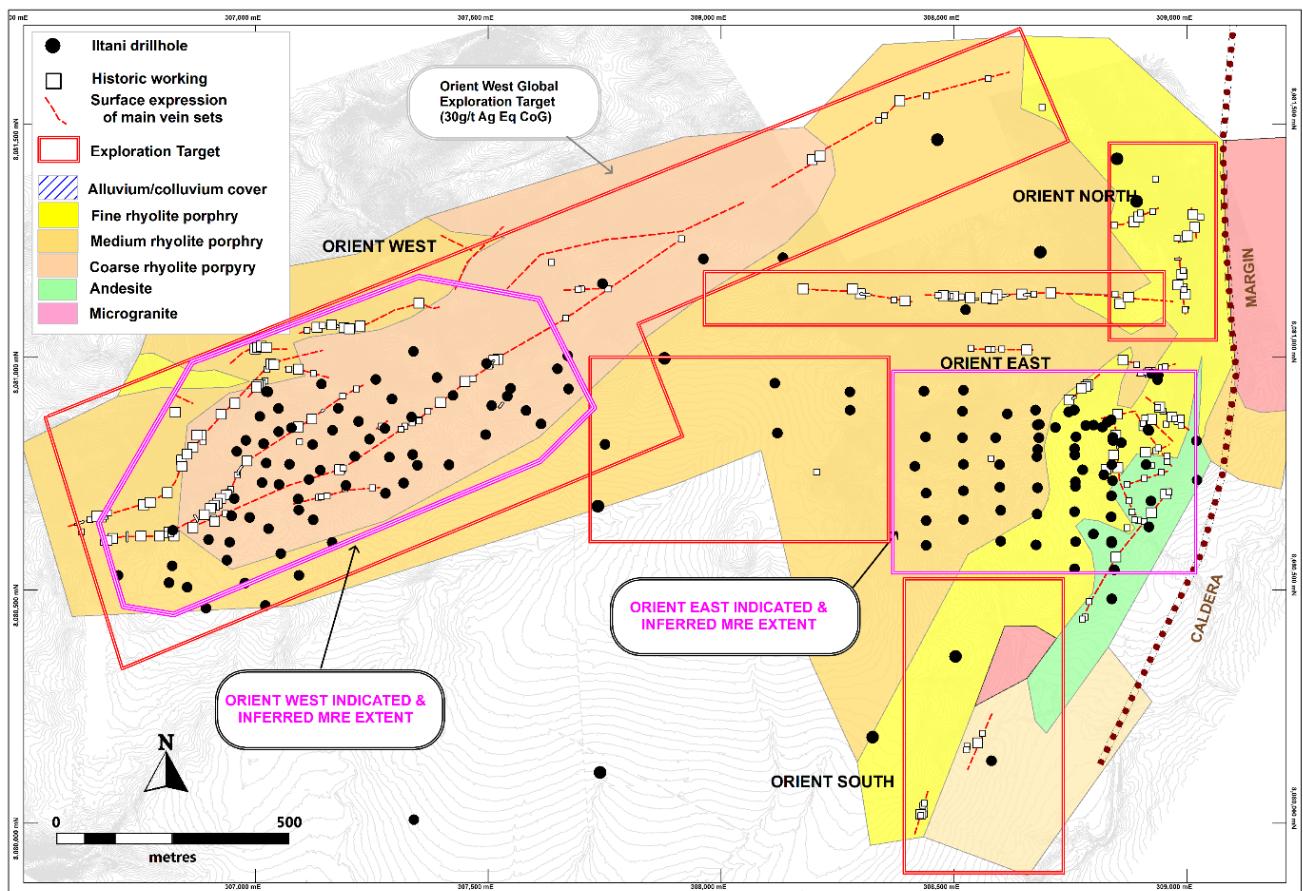

The Orient East Exploration Target (refer to Figure 3 and Table 11) remains to be drill-tested, indicating that substantial potential exists to increase the Orient East MRE.

Table 11 Orient East Exploration Target

		Resource Parameters					
		Tonnes	Ag	In	Pb	Zn	Ag Eq.
		Mt	g/t	g/t	%	%	g/t
Orient East	Min	10.9	25.3	12.5	0.66	0.67	88.0
30 g/t Ag Eq. CoG	Max	13.3	30.9	15.2	0.81	0.81	107.6
Orient East	Min	6.5	34.7	19.7	0.89	0.88	120.0
60 g/t Ag Eq. CoG	Max	7.9	42.4	24.1	1.09	1.08	146.6

The potential quantity and grade of the Exploration Target is conceptual in nature. There has been insufficient exploration to estimate a Mineral Resource and it is uncertain if further exploration will result in the estimation of a Mineral Resource. The Exploration Target has been prepared in accordance with the 2012 Edition of The Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves ('the JORC Code')

All material drillhole information used in the modelling and estimation of the Maiden Orient East MRE has been previously released to the ASX. Please refer to Table 12 for the appropriate ASX releases.

Table 12 Orient East ASX Drilling Releases


Drillholes	Date	Announcement Title
ORR001, ORR003, ORR004 & ORR007	13-Oct-23	Iltani hits wide intersections of silver-lead-zinc-indium-antimony-tin mineralisation at Orient
ORR005, ORR008 & ORR008A	24-Oct-23	Iltani confirms significant new discovery of silver-lead-zinc-indium-antimony-tin system at Orient, QLD
ORR022 to ORR024	19-Feb-24	Drilling results point to major silver-indium discovery at Orient, QLD
ORR036 to ORR041	11-Dec-24	Iltani's drilling returns up to 1,064 g/t Ag Eq. at Orient East
ORR042 to ORR045	16-Dec-24	Orient East delivers highest grades to date: up to 1,707 g/t Ag Eq.
ORR046 to ORR055	20-Dec-24	Orient East returns 2,066 g/t silver equivalent - highest grade to date
ORR056 to ORR060	14-Jan-25	Orient East drilling continues to return wide high-grade intersections of up to 62m @ 110.3 g/t Ag Eq.
ORR096 to ORR107	21-Jul-25	High-grade silver results continue from resource drilling at Orient East, QLD
ORR108 to ORR118	11-Aug-25	Iltani advances towards maiden MRE for Orient East silver-indium deposit
ORD004 to ORD005	1-Sep-25	Diamond drilling intersects highest grades to date at Orient
ORR119 to ORR122	23-Sep-25	Orient East extension drilling delivers more silver-indium intercepts
ORR123 to ORR127	3-Oct-25	Iltani receives final Orient East silver-indium results, commences drilling VTEM targets

2. Information Required by Listing Rule 5.8.1

The Orient Silver-Indium project is located on Iltani's wholly owned tenement EPM 27223, 20km west of the historic mining town of Herberton and 9km north of Irvinebank in North Queensland (Figure 4).

To date, exploration at Orient has defined an extensive epithermal vein system extending over at least 6km² and hosted primarily in a porphyritic rhyolite unit. A broad area of hydrothermal alteration (phyllitic, argillic and propylitic) envelopes the mineralised structures. The implication of epithermal conditions of formation suggests that the system is likely to exhibit vertical zonation from lead-silver dominant in upper parts to zinc rich in deeper parts and possibly to copper and/or tin dominant at greater depths.

Figure 4 Orient Project – Location, Geology & Key Targets

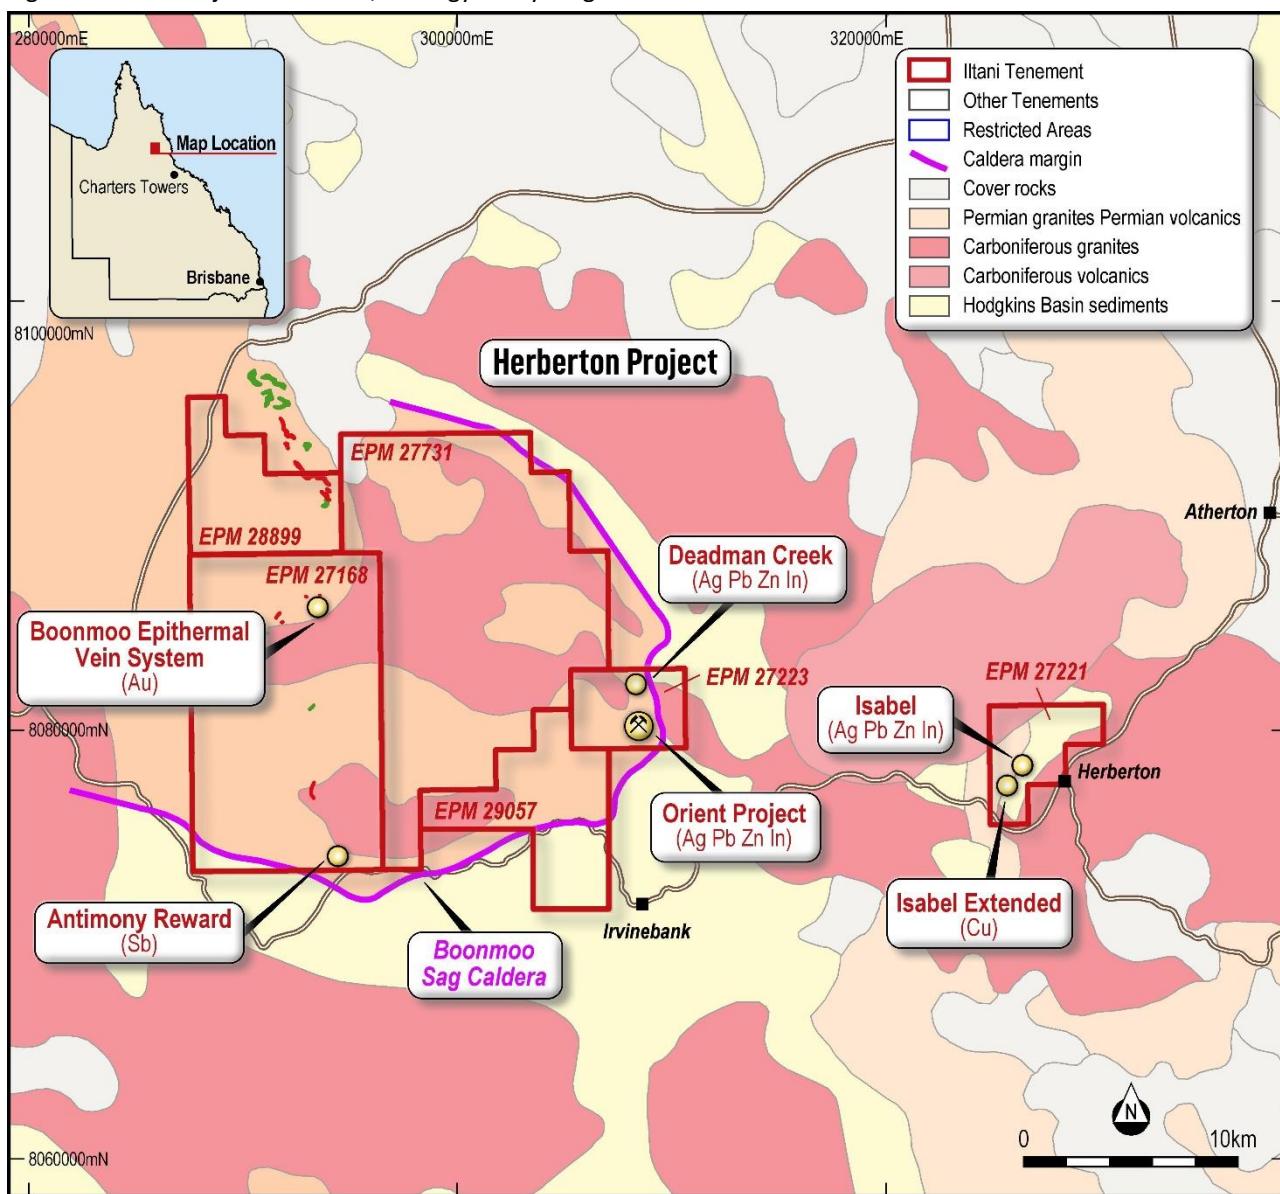

2.1. Geology and Geological Interpretation

The Orient Project lies within the Boonmoo Sag Caldera, which is filled predominantly with Carboniferous rhyolitic ignimbrites of the Featherbed Volcanics. The ignimbrites are intruded by comagmatic granitoids and some rhyolitic porphyries, particularly around the margins of the caldera. The caldera rests on a basement of Siluro-Devonian deep water turbidite sediments of the Hodgkinson Basin that have been metamorphosed to lower greenschist facies. Both the basement and the Carboniferous volcanics have been intruded by Permian granitoids.

The Orient prospect area is dominated by rhyolitic porphyries with phenocrysts of quartz, plagioclase, potassium feldspar and biotite. Fine medium and coarse grained subunits of the porphyry are mappable. The fine grained rhyolite porphyry is characterised by 2-10% phenocrysts up to 5mm in size in an aphanitic groundmass. Flow banding is evident in a few outcrops with steep dips. The margins of the fine-grained rhyolite are difficult to define because it resembles fine grained variants of the medium grained porphyry and it is commonly overprinted by strong argillic alteration. The medium-grained rhyolite porphyry is characterised by 10-40% phenocrysts from 5-8mm diameter in an aphanitic matrix. It is possible that some parts of this unit are crystal tuff since a significant proportion of the phenocrysts are broken. However, other parts show distinct flow banding with steep dips indicating an intrusive origin. The coarse-grained rhyolite porphyry is characterised by 20-50% phenocrysts from 8-20mm diameter in a fine granular matrix. In some outcrops, the texture approaches a megacrystic microgranite and it has been described as a granite porphyry in some previous reports. It occurs as an elongate ovoid body extending ENE between the Orient East and West prospects.

A broad area of hydrothermal alteration envelopes the mineralised structures at the Orient prospect. Much of the coarse grained rhyolite porphyry has been affected by strong phyllitic (sericite-quartz-carbonate) alteration. Argillic alteration, characterised by illitic clays or very fine sericite + quartz replacing feldspars and very fine grained muscovite replacing biotite, is common in the fine and medium grained rhyolite porphyries. The phyllitic and argillic alteration facies may reflect similar hydrothermal fluid conditions with the size of alteration mica grains being restricted in the argillic zone by the fine grainsize of host minerals. Argillic alteration is more intense adjacent to most mineralised structures. All mapped rocks outside the phyllitic/argillic zone are affected by weak to moderate propylitic alteration, characterised by chlorite replacing mafic minerals, epidote partially replacing plagioclase and weak illite alteration of all feldspars.

Mineralisation at Orient East comprises a primary moderately south dipping ($35^\circ - 45^\circ$) main zone of sulphide mineralisation of between 20m to 30m width with lesser parallel subsidiary footwall and hanging wall mineralised zones. A step-dipping east-west zones transects the up dip portion of the shallow zones; at this stage it has not been determined whether this zone cross cuts the shallow zones, or whether the shallow zones are splays off the steep zone. The overall package strikes east-west to ENW-ESE, dipping south to southwest. Mineralisation is similar to Orient West, comprising core galena-sphalerite-pyrrhotite-pyrite massive sulphide zones of 1-2m width surrounded by stockwork and disseminated veining. Unlike Orient West, the massive sulphide veins at Orient East are closer spaced, producing a broad mineralised zone within a far broader enveloping zone of propylitic alteration.

Drilling to date indicates the sulphide veins are continuous along strike and down dip, with some pinching and swelling of the veining occurring. Quartz is generally rare in the mineralized veins. The style of mineralisation appears to be high-sulphidation epithermal.

Host rocks at Orient East generally comprise fine to medium grained porphyritic quartz eye - K-feldspar - hornblende rhyolite with lesser crystal tuffs. The host rocks throughout the Orient East area have been propylitically altered.

2.2. Sampling and Sub-Sampling Techniques

The majority of drilling at Orient East has been undertaken using Reverse Circulation (RC) drilling. The RC rigs have collected each 1m sample via a face-sampling hammer, the sample passing through a cyclone than into a rotary splitter where an approximately 3kg split as collected in a calico bag and the remaining bulk sample in a larger plastic bag. The samples in calico bags are intended for submission to the assay laboratory and the bulk samples in plastic bags are retained on site. The cone splitter also has a facility to collect a second 3kg split for QAQC purposes.

Initial sampling (holes to ORR024) utilised a portable XRF device to determine higher grade samples for analysis; any samples with lead (Pb) and Zinc (Zn) values greater than 2000ppm were despatched to the laboratory. Sampling of later holes (after ORR036) comprised both 4m composite and 1m samples. Throughout the bulk of the drill holes samples were composited at four metre intervals using a sample spear to collect a representative sample for each bulk bag. However, due to the visual nature of the mineralisation and the presence of magnetic pyrrhotite (which can be detected in the sample with a pocket magnet) intimately associated with the sulphide mineralisation, in conjunction with the recognition of increased alteration peripheral to the mineralisation, the rig geologist would switch to 1m samples for laboratory submission. If any 4m composite samples returned elevated values, the corresponding one metre sample splits, which are retained on site, would be collected and despatch to the laboratory to ensure all significant zones of mineralisation were analysed at one metre intervals.

Diamond core drilling completed at Orient East comprised conventional NQ2 core. Once the core had been processed and lithologically and structurally logged, selected mineralised zones were cut along the core long axis and one half of this core was submitted for analysis. Core sample lengths were generally one metre, or to geological intervals.

For QAQC purposes, a Certified Reference Material Standard was inserted at an interval of every 25th sample and duplicate samples were collected when possible as a second 1m sample from the cone splitter.

2.3. Drilling Techniques

Drilling comprised wheel and track mounted RC and track mounted NQ2 diamond. All RC drilling was by 5.5-inch (139.7mm) face sampling hammer. Diamond drilling was by conventional NQ2 diamond drilling (50.6mm diameter core) from surface. Drill hole orientation was recorded utilising a downhole Imdex north-seeking gyro. RC and diamond drill hole collar locations were initially sited by handheld GPS. A licensed surveyor was then contracted to record all collar locations to 5mm accuracy.

2.4. The Criteria used for classification, including drill and data spacing and distribution. This includes separately identifying the drill spacing used to classify each category of mineral resources (inferred, indicated and measured) where estimates for more than once category of mineral resource are reported.

Drill spacing was completed on nominal 100m-spaced sections with down dip spacing of 50m, considered sufficient to demonstrate geological and grade continuity for the determination of an Inferred Mineral Resource Estimate (MRE). In the central area of the drill pattern, where sample spacing decreased to 50m the between holes the sample density was considered appropriate for the determination of an Indicated MRE.

A classification of Indicated was assigned to regions with a regular drill coverage and approximate spacing of less than 50 metres, where all cells were estimated in the first pass using at least 10 samples and the slope of regression was at least 0.5°. A classification of Inferred was assigned to the surrounding areas where there was still reasonably uniform drill coverage and lens continuity comprising more than one hole with spacings of up to approximately 150 metres.

2.5. Sample Analysis Method

Samples were either analysed by ALS Laboratories, Townsville, or Intertek Laboratories, Townsville. Both laboratories utilised the same preparation and analytical procedures.

Sample preparation consisted of drying of the sample and the entire sample being crushed to 70% passing 6mm and pulverised to 85% passing 75 microns in a ring and puck pulveriser. Analysis comprised four acid digest with Inductively Coupled Plasma Mass Spectrometry (ICP-MS) (ME-MS61) analysis for the following elements: Ag, Al, As, Ba, Be, Bi, Ca, Cd, Ce, Co, Cr, Cs, Cu, Fe, Ga, Ge, Hf, In, K, La, Li, Mg, Mn, Mo, Na, Nb, Ni, P, Rb, Re, S, Sb, Sc, Se, Sn, Sr, Ta, Te, Th, Ti, Tl, U, V, W, Y Zn, Zr. For over-limit results, ore grade sample analysis consisted of four acid digest with Inductively Coupled Plasma Atomic Emission Spectroscopy (ICP-AES) finish. This was carried out for Ag, Pb, Zn, As, S, Sb, Sn & In.

2.6. Estimation Methodology

Resource estimation was performed using Leapfrog Edge by Mining One Pty Ltd, Melbourne.

Wireframes were constructed for each individual vein. Mineralised intercepts in downhole drilling align from section to section along structures that can be assumed to be continuous between drilling. Mineralised zones broadly pinch and swell but can confidently be linked together across drilled sections.

Assays were composited in each domain to 1m which is the nominal assay interval. Domains were snapped to assay intervals. Ag, Pb, Zn & In were estimated from the composites in each domain using hard boundaries using ordinary kriging and inverse distance squared (ID2) estimation. Parent cell grades were estimated within each domain, dependent upon data density and if variographic analysis was possible. The domains containing the greatest amount of data were estimated using ordinary kriging (OK), with domains comprising less or sparse data being estimated via inverse distance squared (ID2) or nearest neighbour (NN) methodologies.

A multiple-pass estimation strategy was applied. Quantitative Kriging Neighbourhood Analysis (QKNA) assisted with the selection of search distances and sample number constraints. Extrapolation was limited to approximately half the nominal drill spacing. The relative correlation of metals estimated resulted in similar outcomes from variography and QKNA. Given the higher contribution of Ag to the resource, these values were applied for the other elements (As, In, Pb, Zn).

The Block Model has parent blocks 20m x 20m x 10m. It is sub-blocked using an octree method 8 x 8 x 16 resulting in sub-blocks as small as 2.5 m x 2.5m x 0.625m to honour the vein geometry even as they pinch out or splay against each other.

2.7. Cut-off grade(s), including the basis for the selected cut-off grade(s)

Global top cut analysis charts were produced in Snowden Supervisor to check for outlier values. The impact of these samples on local estimates were limited by implementing a distance restriction limit to the area of influence for silver using the clamping method clipping outlier values from a certain distance from each block on a lens-by- lens basis as per the values in the search parameters table.

The Orient East MRE is reported to a 30 g/t Ag Eq. cut-off grade and a 60 g/t Ag Eq. cut-off grade. These cut-off grades are likely to be economic for the mining method and scale of operation assumed for the Orient Silver-Indium Project.

Bulk density was determined by 55 measurements taken from diamond drill core with no extreme outliers. Values range from 1.98 in strongly weathered rock to 5.67 in massive sulphide veins. Densities were categorised by rock types and according to sulphide content and oxidation.

Densities were applied to the blocks based on average measured values for weathered material (2.2t/m³), barren rock (2.7 t/m³) and mineralised lenses were ascribed density based on the following formula:

$(Po\%)(\rho_{Po})+(Ga\%)(\rho_{Ga})+(Sp\%)(\rho_{Sp})+(1-Po\%-Ga\%-Sp\%)(2.7)$ expressed in the block model as:

$(([Zn_ppm]/10000)*1.43/100)*4.1)+(([Pb_ppm]/10000*1.14/100)*7.6)+(([Fe_pct]-)*1.57/100)*4.69)+(2.7*(1-([Fe_pct]-2)*1.57/100)-([Zn_ppm]/10000)*1.43/100)-([Pb_ppm]/10000*1.14/100)))$

2.8. Mining and metallurgical methods and parameters, and other material modifying factors considered to date.

The Orient East MRE is assumed to be mined using standard open pit methods (truck and shovel) and the ore mined processed through a processing plant using an industry-standard processing flowsheet (crush-grind-float) to produce saleable lead-silver and zinc-indium-silver concentrates.

Great Northern Mining Corporation (GNMC) commissioned Robertson Research Australia Pty Ltd to carry out metallurgical test work on core samples from the Orient West deposit in 1988 (Laboratory Flotation Investigation of West Orient Lead-Zinc Ore Drill Core Composite Sample).

The mineralisation at Orient East is of the same style and part of the same larger Orient system as Orient West.

Test work confirmed that is viable to produce two separate high quality concentrates, a lead-silver concentrate grading approximately 48% Pb and 2,250 g/t Ag and a zinc-indium-silver concentrate grading 47-48% Zn, 2,000 g/t In and 200 g/t Ag.

In the test work carried out, the antimony recovery to the lead concentrate was similar to or slightly higher than the lead recovery and was in accordance with expectation based on the known mineralogy of the antimony which is intimately associated with the lead. The antimony is expected to be present in jamesonite (lead-antimony-iron sulphide, Pb₄FeSb₆S₁₄) and boulangerite (lead-antimony sulphide, Pb₅Sb₄S₁₁). The test work indicated the lead concentrate would contain 2-3% Sb, however Iltani does not expect the antimony in the lead concentrate to be payable, and as such antimony will not currently be part of the metal equivalent calculation.

Tin is likely present as both stannite (copper-iron-tin sulphide, Cu₂FeSnS₄) and cassiterite (tin oxide, SnO₂), with the stannite tending to report mainly to the lead concentrate.

Iltani intends to conduct a comprehensive metallurgical test work program to confirm the results of the historical test work and to review the potential to recover the antimony and tin in a potentially payable concentrate and/or product.

3. Reasonable Prospects for Eventual Economic Extraction (RPEEE)

The Mineral Resources are reported within a reasonable prospect of eventual economic extraction (RPEEE) optimised pit shell above a 30 g/t Ag Eq. cut-off grade and 60 g/t Ag Eq. cut-off grade.

The optimisation was run using Ag Eq. g/t according to the Ag Eq. calculation referenced in the Appendices to this release.

Authorisation

This announcement has been approved for issue by Donald Garner, Iltani Resources Managing Director.

Contact Details

For further information, please contact:

Donald Garner

Managing Director
Iltani Resources Limited
+61 438 338 496
dgarner@iltaniresources.com.au

Nathan Ryan

Investor Relations
NWR Communications
+61 420 582 887
nathan.ryan@nwrcommunications.com.au

Competent Persons Statement**Orient East Mineral Resource Estimate**

The information in this report that relates to the Orient East Mineral Resource Estimate is based on information compiled by Mr Louis Cohalan who is a member of The Australasian Institute of Geologists (AIG), and is a full time employee of Mining One Consultants, and who has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activities being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting Exploration Results, Mineral Resources and Ore Reserves' (JORC Code).

Mr Cohalan consents to the inclusion in this report of the matters based on the information in the form and context in which it appears.

Exploration Results

The information in this report that relates to Exploration Results is based on information compiled by Mr Erik Norum who is a member of The Australasian Institute of Geologists (AIG), and is an employee of Iltani Resources Limited., and who has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activities being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting Exploration Results, Mineral Resources and Ore Reserves' (JORC Code).

Mr Norum consents to the inclusion in this report of the matters based on the information in the form and context in which it appears.

Exploration Target

The Exploration Target estimate has been prepared by Mr Stuart Hutchin, who is a Member of the Australian Institute of Geoscientists. Mr Hutchin is a full-time employee of Mining One Consultants. Mr Hutchin has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity for which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the "Australian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves".


Mr Hutchin consents to the inclusion in the release of the matters based on his information in the form and context in which it appears.

About Iltani Resources

Iltani Resources (ASX: ILT) is an ASX listed company focused exploring for the base metals and critical minerals required to create a low emission future. It has built a portfolio of advanced exploration projects in Queensland and Tasmania with multiple high quality, drill-ready targets. Iltani has completed drilling at the Orient Silver-Indium Project, part of its Herberton Project, in Northern Queensland. The drilling has returned outstanding intercepts of silver-lead-zinc-indium mineralisation, positioning Orient as Australia's most exciting silver-indium discovery.

Other projects include the Northern Base Metal Project in Northern Queensland plus the Mt Read Volcanics Project in Tasmania.

Figure 5 Location of Iltani Resources' projects in Queensland and Tasmania

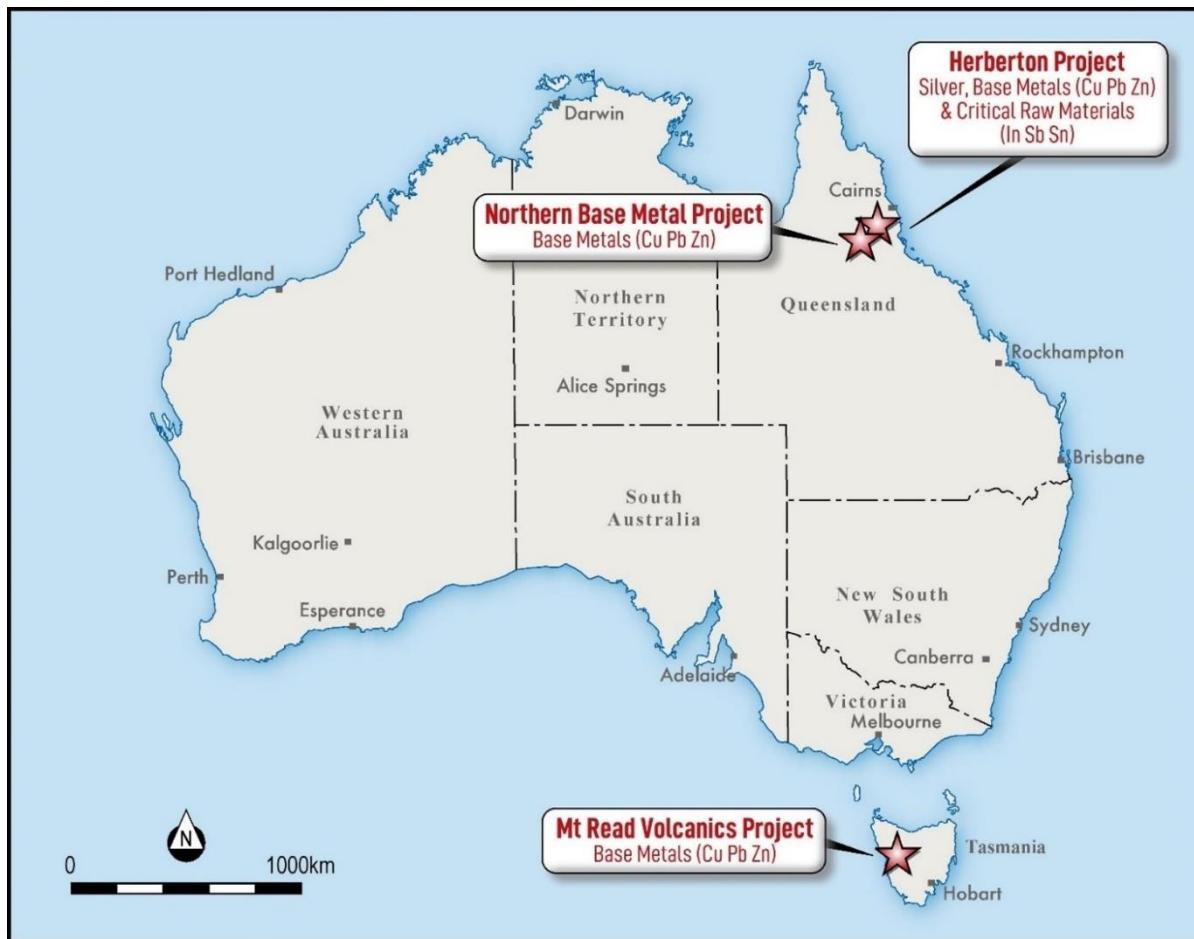

JORC Code, 2012 Edition – Table 1**Section 1 Sampling Techniques and Data****(Criteria in this section apply to all succeeding sections.)**

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> ● Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. ● Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. ● Aspects of the determination of mineralisation that are Material to the Public Report. ● In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant 	<ul style="list-style-type: none"> ● Drilling reported is reverse circulation (RC) drilling and diamond drilling. ● At Orient East, Iltani Resources has completed 67 RC holes for 11,492m (including a re-drilled twin hole to duplicate a hole abandoned at 18m) and two diamond holes for 486.5 drilled. The drilling was completed by Dubbo, NSW based drilling contractors Durock Drilling Pty Ltd (RC) and Charters Towers, Qld based drilling contractors Eagle Drilling Pty Ltd (RC & diamond) ● RC drilling returned samples through a fully enclosed cyclone system, then via a remote-controlled gate into a cone splitter. 1m RC samples were homogenised and collected by a static cone splitter to produce a representative 3-5kg sub sample. ● RC sampling comprises 4m composite samples in unmineralised intervals and 1m samples where visual mineralisation was encountered. These were bagged and sent to ALS (Townsville) and Intertek (Townsville) for preparation and analysis. ● Diamond drilling reported is NQ2 and HQ3 diamond core drilling. ● Diamond core was collected using a 3-metre barrel. ● Diamond core sample intervals were determined on a lithological basis at a nominal 1m interval. Core was cut along the axis with half core bagged and sent to Intertek (Townsville) for preparation and analysis. ● Preparation consisted of drying of the sample and the entire sample being crushed to 70% passing 6mm and pulverised to 85% passing 75 microns in a ring and puck pulveriser. ● Analysis will consist of four acid digest with Inductively Coupled Plasma Mass Spectrometry (ICP-MS) (4A-MS48) analysis for the following elements: Ag, Al, As, Ba, Be, Bi, Ca, Cd, Ce, Co, Cr, Cs, Cu, Fe, Ga, Ge, Hf, In, K, La, Li, Mg, Mn, Mo, Na, Nb, Ni, P, Pb, Rb, Re, S, Sb, Sc, Se, Sn, Sr, Ta, Te, Th, Ti, Tl, U, V, W, Y Zn, Zr. ● Ore grade sample analysis consisted of four-acid digest with Inductively Coupled Plasma Atomic Emission Spectroscopy (ICP-AES) finish. This was carried out for Ag, Pb, Zn, Sn & In.

Criteria	JORC Code explanation	Commentary
	disclosure of detailed information.	
Drilling techniques	<ul style="list-style-type: none"> • Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> • The RC drilling was completed using a truck mounted RC rig utilising 6m rods with reverse circulation capability. • Drilling diameter was 5.5-inch RC hammer using a face sampling bit. • RC hole length drilled up to 298m depth with average hole length of 173m. • The diamond drilling was completed using a track mounted diamond rig utilising 3m rods. • Drilling diameter was either NQ2 or HQ3 and diamond drill hole length ranged from 168.3m to 285.2m. • Downhole surveys were undertaken at nominal 30m intervals during drilling utilising a digitally controlled Imdex Gyroscope instrument. • Downhole surveys were undertaken at nominal 30m intervals during drilling utilising a digitally controlled Imdex Gyroscope instrument
Drill sample recovery	<ul style="list-style-type: none"> • Method of recording and assessing core and chip sample recoveries and results assessed. • Measures taken to maximise sample recovery and ensure representative nature of the samples. • Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> • All samples were weighed and weights recorder in the logging sheet. Samples with no recovery or very low recoveries were recorded also in the logging sheet. A few samples were collected wet due to rig unable to keep the hole dry. Wet samples were noted in the logging sheet. • Iltani personnel and the drilling crew monitor sample recovery, size and moisture, making appropriate adjustments as required to maintain quality. • A cone splitter is mounted beneath the cyclone to ensure representative samples are collected. • The cyclone and cone splitter were cleaned with compressed air necessary to minimise contamination. • No significant contamination or bias has been noted in the current drilling. • Diamond core recovery was calculated during initial core mark up with minimal core loss. • All data was collected on spreadsheets then uploaded to the Iltani drill hole database. • No bias has been noted in the current drilling
Logging	<ul style="list-style-type: none"> • Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. • Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. • The total length and percentage of the 	<ul style="list-style-type: none"> • Geological logging was carried out on RC chips by suitably qualified geologists. Lithology, veining, alteration, mineralisation and weathering are recorded in the geology table of the drill hole database. Final and detailed digital geological logs were forwarded from the field following sampling. • Geological and geotechnical logging was carried out on diamond core by suitably qualified geologists. Lithology, veining, alteration, mineralisation and weathering are recorded in the geology table of the drill hole database. All core was oriented, and structural alpha and beta measurements were recorded for mineralisation, breccia zones, fractures, bedding and any other structures recognised. • Geological logging of the RC samples and diamond drill core is qualitative and descriptive in nature. • Observations were recorded appropriate to the sample type based on visual field estimates of sulphide content and sulphide mineral species. • All drill holes are logged to the end of hole (EoH).

Criteria	JORC Code explanation	Commentary
	relevant intersections logged.	
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representativity of samples. Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> 1m increment samples were collected off the drill rig via cyclone - cone splitter into calico bags with a respective weight between 3-5kg. The onsite geologist selects the mineralised interval from logging of washed RC chips, based on identification of either rock alteration and/or visual sulphides. All core samples comprised half core, cut with a diamond saw by Iltani staff. Industry standard sample preparation is conducted under controlled conditions within the laboratory and is considered appropriate for the sample types. QAQC samples (standards and field duplicates) were submitted at a frequency of nominally 1 in 30 for standards and of approximately 1 in 400 for duplicates. Regular reviews of the sampling were carried out by Iltani geologists to ensure adequate procedures were followed. Sample sizes and preparation techniques are considered appropriate for the nature of mineralisation.
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, 	<ul style="list-style-type: none"> Industry standard assay techniques were used to assay for silver and base metal mineralisation (ICP for multi-elements with a four-acid digest) No geophysical tools, spectrometers or handheld XRF instruments have been used to determine assay results for any elements. Monitoring of results of lab blanks, duplicates and standards is conducted regularly. QAQC data is reviewed for bias prior to uploading results in the database. Although the ratio of duplicates is considered low, they perform well and show good repeatability and precision. No contamination was identified based on laboratory blanks.

Criteria	JORC Code explanation	Commentary
	<p>calibrations factors applied and their derivation, etc.</p> <ul style="list-style-type: none"> • Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established. 	
Verification of sampling and assaying	<ul style="list-style-type: none"> • The verification of significant intersections by either independent or alternative company personnel. • The use of twinned holes. • Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. • Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> • No drill holes were twinned except to make up for an abandoned hole at ORR008/ORR008_A. • Primary data is collected in the field via laptops in a self-validating data entry form; data verification and storage are accomplished by Iltani contractor and staff personnel. • All drillhole data was compiled in Excel worksheets and imported into Micromine in order to query 3D data and generate drill plans and cross sections.
Location of data points	<ul style="list-style-type: none"> • Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. • Specification of the grid system used. • Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> • Drill hole collar locations are initially set out using a hand-held GPS. Hole collars were later surveyed to 0.005m by differential GPS (dGPS) by Twine Surveyors, Atherton. • The professional survey was conducted in June 2025 and include holes up to ORR118. A further nine holes, ODD119 – ORR127, were surveyed only by hand-held GPS. Considering the very small observed difference between GPS and dGPS coordinates, and in light of the relatively small number of holes and the small nominal error in GPS coordinates versus drillhole distance, we do not find this to introduce a material risk to the resource. • Downhole surveys completed at nominal 30m intervals by driller using a digitally controlled Imdex Gyroscope instrument. • All exploration works are conducted in the GDA94 zone 55 datum. • Topographic control is based on a detailed drone lidar survey and is considered adequate.
Data spacing and distribution	<ul style="list-style-type: none"> • Data spacing for reporting of Exploration Results. • Whether the data spacing and distribution is sufficient to establish 	<ul style="list-style-type: none"> • Drilling was targeted on selected veins and areas of potential stockwork mineralisation. • Drill hole spacing of a nominal 50m along N-S fences 80m apart. In conjunction with surface mapping, is considered adequate to report geological and grade continuity. • Sample compositing (RC) has been applied outside the zones of logged mineralisation, where 4m sample composites have been utilised. Iltani

Criteria	JORC Code explanation	Commentary
	<p>the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</p> <ul style="list-style-type: none"> • Whether sample compositing has been applied. 	have analysed the corresponding cone split 1m samples when the 4m composites returned high-grade assay results
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> • Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. • If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> • The drill holes were orientated in order to intersect the interpreted mineralisation zones as perpendicular as possible based on information to date. • Due to locally varying intersection angles between drillholes and lithological units all results will be defined as downhole widths. • No drilling orientation and sampling bias has been recognised, and it is not considered to have introduced a sampling bias.
Sample security	<ul style="list-style-type: none"> • The measures taken to ensure sample security. 	<ul style="list-style-type: none"> • Samples were stored in sealed polyweave bags at the drill rig and transported to Iltani's secure compound in Herberton where they were put on a pallet and transported to ALS Townsville or Intertek Townsville by using a freight carrying company.
Audits or reviews	<ul style="list-style-type: none"> • The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> • No audits or reviews have been carried out at this point

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> Orient is located on EPM 27223. EPM 27223 is wholly owned by Iltani Resources Limited All leases/tenements are in good standing
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> Exploration activities have been carried out (underground mapping, diamond drilling, surface geochemical surveys and surface mapping, pre-feasibility study) by Great Northern Mining Corporation and Mareeba Mining and Exploration over the West and East Orient areas from 1978 to 1989. Exploration activities have been carried out (soils and rock chip sampling) around Orient West and East by Monto Minerals Limited from 2014 to 2017 Red River Resources carried out mapping, sampling and geophysical exploration (drone mag survey and IP survey) in 2020 and 2021.
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> Mineralisation occurs in primary vein systems comprising parallel and stockworks in zones up to 40m thick (controlled by fractures/shears) containing argentiferous galena, cerussite, anglesite, sphalerite, pyrite, marmatite, cassiterite (minor), and stannite (minor) surrounded by a stockwork of lesser veinlets of variable density. The lead-zinc-silver-indium mineralisation at Orient is believed to represent part of an epithermal precious metals system. The Orient vein and stockwork mineralisation are associated with a strongly faulted and deeply fractured zone near the margin of a major caldera subsidence structure.
Drill hole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill 	<ul style="list-style-type: none"> Iltani Resources has completed a total of 125 RC (Reverse Circulation) drill holes for 24,597m drilled and 5 diamond holes for 1734.2m drilled at both Orient East and Orient West.

Criteria	JORC Code explanation	Commentary
	<p>holes, including, easting and northing, elevation or RL, dip and azimuth, down hole length, interception depth and hole length.</p> <ul style="list-style-type: none"> • If the exclusion of this information is justified the Competent Person should clearly explain why this is the case. 	
Data aggregation methods	<ul style="list-style-type: none"> • In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. • Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. • The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> • A 30 g/t Ag Eq. lower cut with no upper cut applied) to report material intersections. • Capping is used in the resource estimation. • Metal equivalents are used (silver equivalent) • The equivalent silver formula is Ag Eq. = Ag + (Pb x 35.5) + (Zn x 50.2) + (In x 0.47) • It is Itani's opinion that all the elements included in the metal equivalents calculation have a reasonable potential to be recovered and sold
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> • These relationships are particularly important in the reporting of Exploration Results. • If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. • If it is not known and only the down hole 	<ul style="list-style-type: none"> • Drilling is generally perpendicular to the structure by angled RC and diamond at 50° to 75° into structures dipping between 20° and 80°.

Criteria	JORC Code explanation	Commentary
	lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').	
Diagrams	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include but not be limited to a plans and sections. 	<ul style="list-style-type: none"> Refer to plans and sections within report
Balanced reporting	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> The accompanying document is considered to represent a balanced report
Other substantive exploration data	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported. 	<ul style="list-style-type: none"> All meaningful and material data is reported
Further work	<ul style="list-style-type: none"> The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling). 	<ul style="list-style-type: none"> Further work at Orient will comprise infill and extension drilling to test along strike and depth extensions. Iltni plans to advance mapping and structural interpretation in the prospects.

Section 3. Estimation and Reporting of Mineral Resources

(Criteria listed in section 1, and where relevant in section 2, also apply to this section.)

Criteria	JORC Code explanation	Commentary
Database integrity	<ul style="list-style-type: none"> Measures taken to ensure that data has not been corrupted by, for example, transcription or keying errors, between its initial collection and its use for Mineral Resource estimation purposes. Data validation procedures used. 	<ul style="list-style-type: none"> Validation of the input database used for estimation was carried out through checks comprising collar mismatching, survey discrepancies, assay records and overlaps in sample intervals. Minimal errors were encountered, with adjustments made as required to ensure the database was suitable for resource estimation.
Site visits	<ul style="list-style-type: none"> Comment on any site visits undertaken by the Competent Person and the outcome of those visits. If no site visits have been undertaken indicate why this is the case. 	<ul style="list-style-type: none"> A site visit was undertaken Louis Cohalan (CP) where inspection of the drilling activities and surface geological exposures was undertaken. The CP was satisfied that all drilling and sampling activities had been undertaken in a professional manner and data generated was of sufficient quality and accuracy for use in the Mineral Resource Estimate.
Geological interpretation	<ul style="list-style-type: none"> Confidence in (or conversely, the uncertainty of) the geological interpretation of the mineral deposit. Nature of the data used and of any assumptions made. The effect, if any, of alternative interpretations on Mineral Resource estimation. The use of geology in guiding and controlling Mineral Resource estimation. The factors affecting continuity both of grade and geology. 	<ul style="list-style-type: none"> The attitude of mineralised structures is based on field measurements, the orientation of historical excavation and downhole assay continuity directions. Mineralised intercepts in downhole drilling align from section to section along structures that can be assumed to be continuous between drilling. Mineralised zones broadly pinch and swell but can confidently be linked together across drilled sections.
Dimensions	<ul style="list-style-type: none"> The extent and variability of the Mineral Resource expressed as length (along strike or otherwise), plan width, and depth below surface to the upper and lower limits of the Mineral Resource. 	<ul style="list-style-type: none"> The Orient East Resource is approximately 950m long in strike from east to west with mineralised lenses stacked over a thickness of 150-200m. Mineralised lenses extend up to 500m in length and reach down to 300m depth.
Estimation and modelling techniques	<ul style="list-style-type: none"> The nature and appropriateness of the estimation technique(s) applied and key assumptions, including treatment of extreme grade values, domaining, interpolation parameters and maximum distance of 	<ul style="list-style-type: none"> Resource estimation was performed using Leapfrog Edge. Assays were composited in each domain to 1m which is the nominal assay interval. Domains were snapped to assay intervals. Ag, Pb, Zn & In were estimated from the composites in each domain using hard boundaries using ordinary kriging and inverse distance squared (ID2) estimation according to the following parameters in the tables below.

	<p>extrapolation from data points. If a computer assisted estimation method was chosen include a description of computer software and parameters used.</p> <ul style="list-style-type: none"> • The availability of check estimates, previous estimates and/or mine production records and whether the Mineral Resource estimate takes appropriate account of such data. • The assumptions made regarding recovery by-products. • Estimation of deleterious elements or other non-grade variables of economic significance (e.g. sulphur for acid mine drainage characterisation). • In the case of block model interpolation, the block size in relation to the average sample spacing and the search employed. • Any assumptions behind modelling of selective mining units. • Any assumptions about correlation between variables. • Description of how the geological interpretation was used to control the resource estimates. • Discussion of basis for using or not using grade cutting or capping. • The process of validation, the checking process used, the comparison of model data to drill hole data, and use 	<ul style="list-style-type: none"> • Arsenic and sulphur were estimated as potential deleterious elements and have an average grade of approximately 0.1% and 2% respectively which is not though to negatively impact the resource. • Parent cell grades were estimated within each domain, dependent upon data density and if variographic analysis was possible. The domains containing the greatest amount of data were estimated using ordinary kriging (OK), with domains comprising less or sparse data being estimated via inverse distance squared (ID2) or nearest neighbour (NN) methodologies. • Dynamic anisotropy was applied for volumetrically significant and geometrically variable domains to reproduce the grade trends more accurately in profile and to enable the search ellipsoids to be more accurately aligned with the local orientations of the domains. • A multiple-pass estimation strategy was applied. QKNA assisted with the selection of search distances and sample number constraints. Extrapolation was limited to approximately half the nominal drill spacing. • The relative correlation of metals estimated resulted in similar outcomes from variography and QKNA. Given the higher contribution of Ag to the resource, these values were applied for the other elements (As, In, Pb, S, Zn). • Ag Eq. was estimated on a block-by-block basis using the formula $\text{Ag Eq.} = \text{Ag (ppm)} + \text{Pb (\%)} \times 35.5 + \text{Zn (\%)} \times 50.2 + \text{In (ppm)} \times 0.47$ • The Block Model has parent blocks 15m x 15m x 15m. It is sub-blocked using an octree method 16 x 16 x 16 resulting in sub-blocks as small as 0.9375 m x 0.9375m x 0.9375m to honour the vein geometry even as they pinch out or splay against each other. • The Block model is in GDA94 UTM zone 55 with the following coordinates <table border="1"> <thead> <tr> <th></th><th>x</th><th>y</th><th>z</th></tr> </thead> <tbody> <tr> <td>Base Point</td><td>307,800</td><td>8,080,300</td><td>850</td></tr> <tr> <td>Boundary size</td><td>1335</td><td>975</td><td>435</td></tr> </tbody> </table> <ul style="list-style-type: none"> • Drilling intersects the mineralised structures at 50m intervals in the area of closest drilling which corresponds approximately to the area of Indicated Resource. • Global top-cut analysis charts were produced in Snowden Supervisor to check for outlier values. The impact of these samples on local estimates were limited by implementing a distance restriction limit to the area of influence for all elements using the clamping method clipping outlier values from a certain distance from each block on a lens-by-lens basis as per the values in the search parameters table. • Model validation comprised visual and statistical comparisons between input sample and model grades, assessment of estimation performance measures including kriging efficiency, slope of regression and percentage of cells estimated in each search pass. • Check estimates were completed using inverse distance squared and nearest neighbour when ordinary kriging was possible 		x	y	z	Base Point	307,800	8,080,300	850	Boundary size	1335	975	435
	x	y	z											
Base Point	307,800	8,080,300	850											
Boundary size	1335	975	435											
Moisture	<ul style="list-style-type: none"> • Whether the tonnages are estimated on a dry basis or with natural moisture, and 	<ul style="list-style-type: none"> • The Mineral Resources are reported on a dry basis. 												

	the method of determination of the moisture content.	
<i>Cut-off parameters</i>	<ul style="list-style-type: none"> The basis of the adopted cut-off grade(s) or quality parameters applied. 	<ul style="list-style-type: none"> The Mineral Resources are reported above a 30 g/t and 60 g/t Ag Eq cut-off grade. They are also reported within a RPEEE pit shell to ensure the reasonable prospects of eventual economic extraction criteria are met.
<i>Mining factors or assumptions</i>	<ul style="list-style-type: none"> Assumptions made regarding possible mining methods, minimum mining dimensions and internal (or, if applicable, external) mining dilution. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential mining methods, but the assumptions made regarding mining methods and parameters when estimating Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the mining assumptions made. 	<ul style="list-style-type: none"> Conventional open pit mining methods are assumed. The RPEEE pit shell optimization assumed an overall slope angle of 45o, mining dilution of 5% and mining recovery of 95%
<i>Metallurgical factors or assumptions</i>	<ul style="list-style-type: none"> The basis for assumptions or predictions regarding metallurgical amenability. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential metallurgical methods, but the assumptions regarding metallurgical treatment processes and parameters made when reporting Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the metallurgical assumptions made. 	<ul style="list-style-type: none"> Historical metallurgical test work indicates that there is a potential method for processing the Orient West and East mineralisation. Refer to the ASX release dated 14 November 2023 or to the section "Metallurgical factors or assumption" in this report for further detail. Iltni intends to complete a comprehensive metallurgical test work program as part of future planned activities
<i>Environmental factors or assumptions</i>	<ul style="list-style-type: none"> Assumptions made regarding possible waste and process residue disposal options. It is always necessary as part 	<ul style="list-style-type: none"> It is proposed that all process residue and waste rock disposal will take place on site in purpose built and licenced facilities. All waste rock and residue disposal will be done in a responsible manner and in accordance with any mining lease conditions

	<p>of the process of determining reasonable prospects for eventual economic extraction to consider the potential environmental impacts of the mining and processing operation. While at this stage the determination of potential environmental impacts, particularly for a greenfields project, may not always be well advanced, the status of early consideration of these potential environmental impacts should be reported.</p> <ul style="list-style-type: none"> Where these aspects have not been considered this should be reported with an explanation of the environmental assumptions made. 	
Bulk density	<ul style="list-style-type: none"> Whether assumed or determined. If assumed, the basis for the assumptions. If determined, the method used, whether wet or dry, the frequency of the measurements, the nature, size and representativeness of the samples. The bulk density for bulk material must have been measured by methods that adequately account for void spaces (vugs, porosity, etc), moisture and differences between rock and alteration zones within the deposit. Discuss assumptions for bulk density estimates used in the evaluation process of the different materials. 	<ul style="list-style-type: none"> 55 measurements were taken from diamond drill core with no extreme outliers. Values range from 1.98 in strongly weathered rock to 5.67 in massive sulphide veins. Densities were applied to the blocks based on average measured values for weathered material (2.2t/m3), barren rock (2.7 t/m3). Mineralised lenses were attributed using a formula that estimates the percentage of sphalerite, pyrrhotite and galena based on the assays for Zn, Fe and Pb and used these proportions to calculate block density according to the formula: $(Po\%)(pPo)+(Ga\%)(pGa)+(Sp\%)(pSp)+(1-Po\%-Ga\%-Sp\%)(2.7)$ expressed in the block model as: $(([Zn_ppm]/10000)*1.43/100)*4.1)+(([Pb_ppm]/10000*1.14/100)*7.6)+(([Fe_pct]-2)*1.57/100)*4.69)+(2.7*(1-([Fe_pct]-2)*1.57/100)-([Zn_ppm]/10000)*1.43/100)-([Pb_ppm]/10000*1.14/100))$
Classification	<ul style="list-style-type: none"> The basis for the classification of the Mineral Resources into varying confidence categories. Whether appropriate account has been taken of all relevant factors (i.e. 	<ul style="list-style-type: none"> A combination of confidence in domain interpretation, data spacing and estimation performance measures were used to identify geologically sound and spatially continuous subregions of Indicated and Inferred Mineral Resources within the model. In terms of grade estimation performance measures, resource classification was primarily based upon the outputs from the silver estimates. This was justified given the similarity between estimate performance measures across all estimated metals, and the

	<p>relative confidence in tonnage/grade estimations, reliability of input data, confidence in continuity of geology and metal values, quality, quantity and distribution of the data).</p> <ul style="list-style-type: none"> • Whether the result appropriately reflects the Competent Person's view of the deposit. 	<p>notably higher silver contribution to total contained resource metal.</p> <ul style="list-style-type: none"> • Classification was applied on a lens-by-lens basis. • A classification of Indicated was assigned to regions with a regular drill coverage and approximate spacing of less than 50 metres across strike, where all cells were estimated mostly in the first pass using at least 10 samples and the slope of regression was at least 0.5. A classification of Inferred was assigned to the surrounding areas hole spacing was less than 150m, with SOR >0.1, a number of sample greater than 4 and generally estimated in Pass 2. • The criteria used for classification and results produced appropriately reflect the Competent Person's view of the deposit.
Audits or reviews.	<ul style="list-style-type: none"> • The results of any audits or reviews of Mineral Resource estimates. 	<ul style="list-style-type: none"> • This is the maiden Mineral Resource for Orient East and no independent reviews have yet been undertaken
Discussion of relative accuracy/confidence	<ul style="list-style-type: none"> • Where appropriate a statement of the relative accuracy and confidence level in the Mineral Resource estimate using an approach or procedure deemed appropriate by the Competent Person. For example, the application of statistical or geostatistical procedures to quantify the relative accuracy of the resource within stated confidence limits, or, if such an approach is not deemed appropriate, a qualitative discussion of the factors that could affect the relative accuracy and confidence of the estimate. • The statement should specify whether it relates to global or local estimates, and, if local, state the relevant tonnages, which should be relevant to technical and economic evaluation. Documentation should include assumptions made and the procedures used. • These statements of relative accuracy and confidence of the estimate should be compared with production data, where available. 	<ul style="list-style-type: none"> • The Mineral Resource is based on validated source drilling and assaying data and is a global resource. • The geological interpretation is assessed as reasonable given the regional geological setting and historical studies of deposits within the region. • The estimate is based on industry accepted geostatistical techniques to composite data, assign top cuts and estimate metal grades. • The resource is classified based on drill spacing, geostatistical and geological confidence in continuity of the interpreted mineralised domains. • Taking these aspects into account the Resource is assessed as having sufficient confidence to report Indicated and Inferred classification.

Metallurgical Equivalent Calculation – Additional Disclosure

The equivalent silver formula is Ag Eq. = Ag + (Pb x 35.5) + (Zn x 50.2) + (In x 0.47)

Table 13 Metal Equivalent Calculation - Recoveries and Commodity Prices

Metal	Price/Unit	Recovery
Silver	US\$20/oz	87%
Lead	US\$1.00/lb	90%
Zinc	US\$1.50/lb	85%
Indium	US\$350/kg	85%

Please refer to the release dated 14 November 2023 (Test Work Confirms Silver-Indium Production Potential) detailing the historical test work which Iltani is using to support the metal equivalent calculation.

The metal equivalent calculation (Ag Eq.) assumes lead and silver will be recovered to a lead concentrate and zinc, silver and indium will be recovered to a zinc concentrate. It is Iltani's opinion that all the elements included in the metal equivalent calculation have a reasonable potential to be recovered and sold.

It should be noted that there are other metals present, notably antimony and tin, that have the potential to be included in the metallurgical equivalent calculation, but at this stage, Iltani has chosen not to do so. These metals will likely also be recovered to the concentrates, notably the lead concentrate, however Iltani is currently assuming that these metals will not be payable, so are excluded from the metallurgical equivalent calculation.

Should this situation change, and the antimony and tin become payable in the lead concentrate and/or metallurgical test work indicates that the antimony or tin can be recovered to a separate concentrate where they are payable, then the metallurgical equivalent calculation could be expanded to include these metals.

Orient West Exploration Target – Additional Disclosure**1. Summary of Relevant Exploration Data**

The Exploration Target is based on the interpretation of the following geology and mineralisation data that has been collated as of the date of this announcement, which includes previously reported exploration results, and information in this report that relates to previously reported exploration results has been cross-referenced in this report to the date it was reported to the ASX. Exploration data is comprised of:

- 22 reverse circulation (RC) drill holes completed for 4,406 metres drilled
- 2,773 assay results from RC drill hole samples
- Detailed surface geological mapping
- Wireframing and 3D block modelling of the Orient West mineralised vein systems.

Historical exploration completed at Orient includes:

- 255 rock chip assay results from Orient East and Orient West
- Geophysical data sets (14km² drone mag survey over the Orient area plus 7.18-line km of a dipole-dipole Induced Polarisation survey)
- Great Northern Mining Corporation (GNMC) completed 16 diamond drill holes at Orient West in the 1970s. Drilling did not delineate the margins of mineralisation, leaving it open to extension in all directions. GNMC undertook limited assay of the drill samples (core and percussion) with a focus on the high-grade vein system. Extensive low-grade mineralisation was logged, usually forming halos around the higher grade veins but this was not assayed. The assay data was not used in the Exploration Target estimation process (due to lack of certainty of the data), and the geological data was used in the wireframing process.

2. Methodology to Determine the Grade and Tonnage Range for the Exploration Target

Resource estimation was performed using Leapfrog Edge by Mining One Pty Ltd, Melbourne.

Wireframes were constructed for each individual vein. Mineralised intercepts in downhole drilling align from section to section along structures that can be assumed to be continuous between drilling. Mineralised zones broadly pinch and swell but can confidently be linked together across drilled sections.

Assays were composited in each domain to 1m which is the nominal assay interval. Domains were snapped to assay intervals. Ag, Pb, Zn & In were estimated from the composites in each domain using hard boundaries using ordinary kriging and inverse distance squared (ID2) estimation. Parent cell grades were estimated within each domain, dependent upon data density and if variographic analysis was possible. The domains containing the greatest amount of data were estimated using ordinary kriging (OK), with domains comprising less or sparse data being estimated via inverse distance squared (ID2) or nearest neighbour (NN) methodologies.

A multiple-pass estimation strategy was applied. Quantitative Kriging Neighbourhood Analysis (QKNA) assisted with the selection of search distances and sample number constraints. Extrapolation was limited to approximately half the nominal drill spacing. The relative correlation of metals estimated resulted in similar outcomes from variography and QKNA. Given the higher contribution of Ag to the resource, these values were applied for the other elements (As, In, Pb, Zn).

The Block Model has parent blocks 20m x 20m x 10m. It is sub-blocked using an octree method 8 x 8 x 16 resulting in sub-blocks as small as 2.5 m x 2.5m x 0.625m to honour the vein geometry even as they pinch out or splay against each other.

The Exploration Target is reported from the same Orient West Resource Block Model. It consists of the remaining blocks that are either “Unclassified” or outside the RPEEE (Reasonable Prospects for Eventual Economic Extraction) optimised pit shell.

3. Progress Towards a Mineral Resource Estimate

Proposed exploration activities designed to progress the Orient West Exploration Target to a Mineral Resource Estimate will consist of an infill drilling program and are planned to take place over the next 6 to 12 months.

Orient East Exploration Target – Additional Disclosure

1. Summary of Relevant Exploration Data

The Orient East Exploration Target is based on the interpretation of the following geology and mineralisation data that has been collated as of the date of this announcement and information in this report that relates to previously reported exploration results has been cross-referenced in this report to the date it was reported to the ASX. Exploration data is comprised of:

- 35 reverse circulation (RC) drill holes completed for 5,154 metres drilled
- 2,522 assay results from RC drill hole samples
- Detailed surface geological mapping
- Wireframing and 3D block modelling of the Orient East mineralised vein systems.

(NB: drill samples comprise 1m cone split samples, 4m composite spear samples, with some samples not submitted for assay as they were first tested with a portable XRF device).

Historical exploration completed at Orient includes:

- 255 rock chip assay results from Orient East and Orient West
- Geophysical data sets (14km² drone mag survey over the Orient area plus 7.18-line km of a dipole-dipole Induced Polarisation survey)
- Great Northern Mining Corporation (GNMC) completed 16 diamond drill holes at Orient West and five diamond drill holes at Orient East in the 1970s. Drilling did not delineate the margins of mineralisation, leaving it open to extension in all directions. GNMC undertook limited assay of the drill core samples with a focus on the massive sulphide high grade veins only. Extensive low-grade mineralisation was logged, usually forming halos around the higher grade veins but this was not assayed. The historic drill data was not used in the Exploration Target estimation process due to lack of certainty of the data.

2. Methodology to Determine the Grade and Tonnage Range for the Exploration Target

Resource estimation was performed using Leapfrog Edge by Mining One Pty Ltd, Melbourne.

Wireframes were constructed for each individual vein. Mineralised intercepts in downhole drilling align from section to section along structures that can be assumed to be continuous between drilling. Mineralised zones broadly pinch and swell but can confidently be linked together across drilled sections.

Assays were composited in each domain to 1m which is the nominal assay interval. Domains were snapped to assay intervals. Ag, Pb, Zn & In were estimated from the composites in each domain using hard boundaries using ordinary kriging and inverse distance squared (ID2) estimation. Parent cell grades were estimated within each domain, dependent upon data density and if variographic analysis was possible. The domains containing the greatest amount of data were estimated using ordinary kriging (OK), with domains comprising less or sparse data being estimated via inverse distance squared (ID2) or nearest neighbour (NN) methodologies.

A multiple-pass estimation strategy was applied. Quantitative Kriging Neighbourhood Analysis (QKNA) assisted with the selection of search distances and sample number constraints. Extrapolation was limited to approximately half the nominal drill spacing. The relative correlation of metals estimated resulted in similar outcomes from variography and QKNA. Given the higher contribution of Ag to the resource, these values were applied for the other elements (As, In, Pb, Zn).

The Block Model has parent blocks 15m x 15m x 15m. It is sub-blocked using an octree method 16 x 16 x 16 resulting in sub-blocks as small as 0.9375m x 20.9375m x 0.9375m to honour the vein geometry even as they pinch out or splay against each other.

The Exploration Target is reported from the same Orient East Resource Block Model. It consists of the remaining blocks that are either “Unclassified” or outside the RPEEE (Reasonable Prospects for Eventual Economic Extraction) optimised pit shell.

3. Progress Towards an Orient East Mineral Resource Estimate

Proposed exploration activities designed to progress the Orient East Exploration Target to a Mineral Resource Estimate will consist of infill drilling and are planned to take place over the next six to twelve months