

Maiden Gold Resource for Seven Leaders Starter Pit Whiteheads Gold Project, Kalgoorlie

Initial MRE provides strategic starting point for MBK's transition from gold explorer to gold producer in 2026

Highlights:

- Maiden JORC 2012 Mineral Resource Estimate (MRE) at Seven Leaders is 138,000t @ 1.4g/t Au for 6,300oz Au (6,200oz Indicated, 100oz Inferred)
- Whiteheads Gold Project covers ~380km² and is located approximately 80km NE of Kalgoorlie
- Notable recent validation drill hole intersections include¹:
 - 5m @ 15.17g/t Au from 27m including 2m @ 35.55g/t Au from 28m (SLRC0014)
 - 35m @ 1.94g/t Au from surface including 1m @ 18.05g/t Au from 33m (SLRC0005)
 - 17m @ 2.17g/t Au from 17m including 3m @ 5.75g/t Au from 28m (SLRC0002)
 - 26m @ 1.77g/t Au from 14m including 15m @ 2.58g/t Au from 23m (SLRC0004)
- MBK remains committed to expediting WA gold production strategy; upcoming work campaigns include pit design, waste dump sterilisation drilling, mining proposal application and toll treatment agreements

Metal Bank Limited ('MBK' or 'the Company') is pleased to report the maiden JORC 2012 Mineral Resource Estimate ('MRE') for the Seven Leaders Prospect, located within the Whiteheads Gold Project 80km NE of Kalgoorlie of 138,000t @ 1.4g/t Au for 6,300oz Au (6,200oz Indicated, 100oz Inferred).

Importantly, the maiden MRE at Seven Leaders provides a foundation and starter pit for MBK's expedited gold production strategy; underpinned by a portfolio of WA gold assets that have the potential for near term production. By utilising nearby third-party processing infrastructure, building on current defined resources, and exploiting significant exploration upside, capital costs to production will be minimised.

¹ HAS ASX Release dated 17 November 2025 "Recent Drilling at Seven Leaders Prospect Confirms High Grade Gold Mineralisation" and MBK ASX Release dated 17 November 2025 "Hastings Drilling at Seven Leaders Confirms High Grade Gold Mineralisation"

Recent confirmatory Reverse Circulation ('RC') drilling¹, combined with historical data, has been utilised by leading Perth-based mining consultants Entech to update the geological model and complete the maiden MRE for Seven Leaders.

Commenting on the MRE, Tim Gilbert MBK's CEO said:

"Metal Bank remains focused on an expedited pathway to gold production and this maiden MRE for the Seven Leaders Gold Prospect further supports this strategy. The size of the deposit and initial Resource will, as expected, allow us to seek streamlined Mining Proposal assessment. Once in production later next year, the Company's plan is, as far as possible, to self-fund targeted exploration campaigns and establish the next operational gold producing site.

The Seven Leaders Resource has been confirmed above expectations. Contained gold is 6,300oz, and the grade is higher than historical data suggested. which makes the economics for the project more robust. The orebody outcrops and we will be establishing an open pit to recover the gold. Additionally recent drilling has identified areas of significantly higher grade such as 2m @ 35.55 g/t (SLRC0014). These results clearly indicate potential additional upside to the overall mined grade.

MBK now has a near term production opportunity at Seven Leaders. We recently applied for the mining lease at Livingstone for the Homestead and Winja deposits, which is our next production focus, and we also have the exciting Lady Betty and Lady Geraldine opportunities at Whiteheads, which we will be drilling in 2026. MBK's strategy to produce gold to self-fund growth is clear to see."

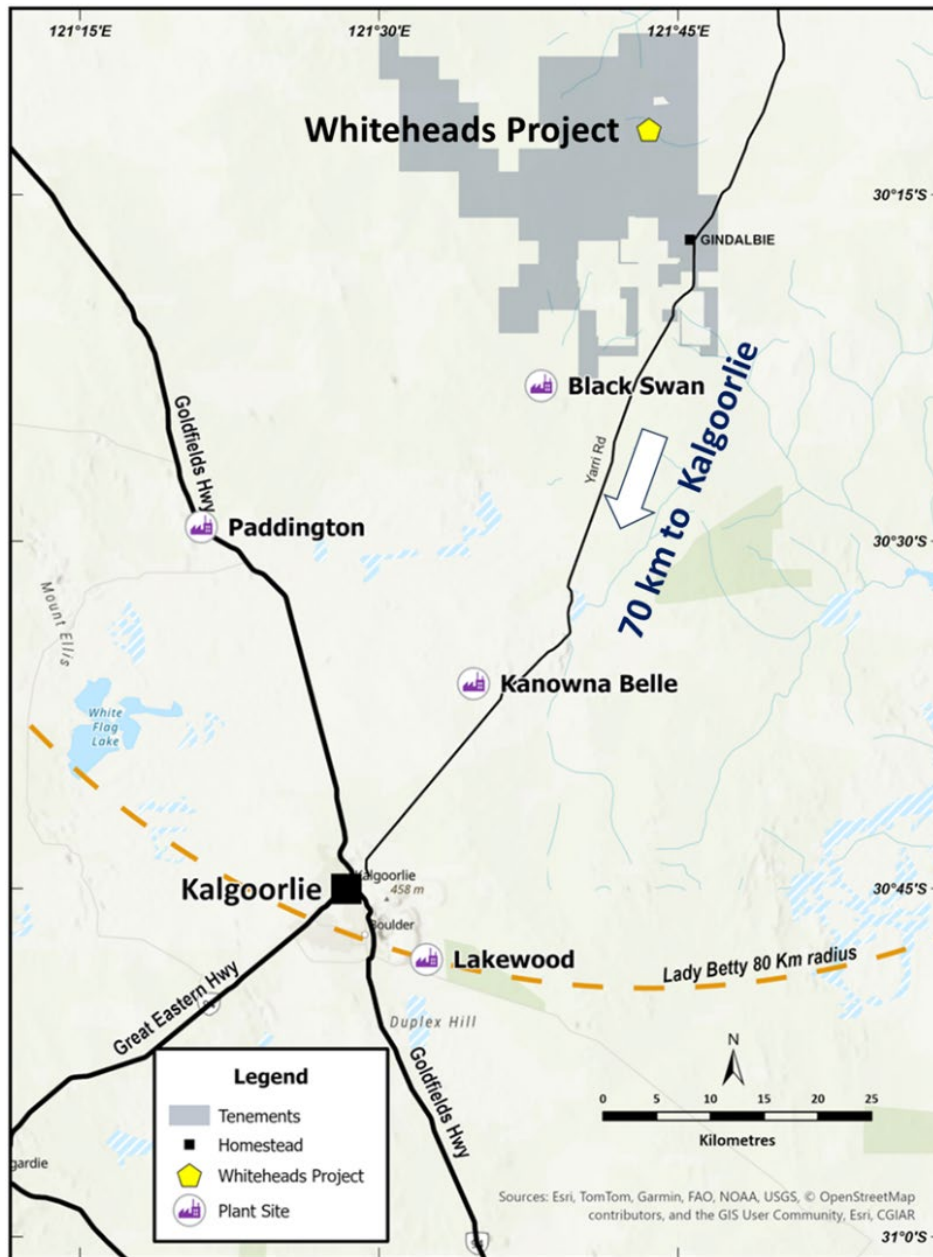


Figure 1: Whiteheads Project Location

Table 1: Seven Leaders Mineral Resource at a 0.5 g/t cut-off

Deposit	Cut-Off Grade	Mineral Resource Category	Tonnes (t)	Grade (g/t Au)	Ounces (oz Au)
Seven Leaders	0.5 g/t	Indicated	135,000	1.4	6,200
		Inferred	3,000	1.4	100
		Total	138,000	1.4	6,300

Notes: Tonnages are dry metric tonnes. Minor discrepancies may occur due to rounding to significant numbers.

Mineral Resource Statement

Data from a total of 7,678.8 metres of drilling from 136 drill holes has been compiled for the Seven Leaders Project. The MRE is primarily supported by 134 reverse circulation (RC) and 2 diamond (DD), of which 134 intersect the defined resource, contributing 7,372.8 metres of drilling data.

The current MRE incorporates 1,161 metres of drilling from 32 RC holes completed in September of 2025 by Hastings Technology Metals Limited². This includes infill drilling as well as twin holes targeting historic holes across the deposit to validate and confirm the historic dataset.

Mineral Resources are reported below the current topographic surface and constrained within an optimised open pit shell. The estimate encompasses oxide, transitional and fresh rock domains. A cut-off grade of 0.50 g/t Au was applied to report Mineral Resource blocks. The classified Mineral Resource Statement is presented in Table 1 above.

A breakdown of the Mineral Resource by weathering domain is provided in Table 2.

Table 2: Seven Leaders Mineral Resource at a 0.5 g/t Au cut-off, breakdown by Weathering Domain

Deposit	Mineral Resource Category	Weathering	Tonnes (t)	Grade (g/t Au)	Ounces (oz Au)
Seven Leaders	Indicated	Transported	2,000	1.3	100
		Oxide	18,000	1.2	700
		Transitional	60,000	1.4	2,600
		Fresh	55,000	1.6	2,800
	Subtotal		135,000	1.4	6,200
	Inferred	Transitional	1,000	2.0	100
		Fresh	2,000	1.1	100
	Subtotal		3,000	1.4	100
	Total		138,000	1.4	6,300

Notes: Tonnages are dry metric tonnes. Minor discrepancies may occur due to rounding to significant numbers.

The Indicated portion of the estimate was outlined where a moderate level of geological confidence in geometry, continuity and grade was demonstrated and was identified as areas where blocks were well supported by drill hole data, with the informing drill holes of a rough spacing of 25 m × 25 m or closer and sit within the optimised pit shell.

² HAS ASX Release dated 17 November 2025 "Recent Drilling at Seven Leaders Prospect Confirms High Grade Gold Mineralisation"

Table 3: Pit optimisation parameters, RPEEE shell.

Parameter	Oxide/ Transported	Transitional	Fresh
Gold price (AUD/oz)	\$4,500		
Pit slope angle (°)	39	45	52
Mining cost (AUD/t)	\$8.00		
Processing cost (AUD/t)	\$60.00		
Re-block size	2.5 mX × 2.5. mY × 2.5 mZ		
Recovery (%)	90		
Royalty (%)	2.5		

Inferred Mineral Resources were outlined where a low to moderate level of geological confidence in geometry, continuity and grade was demonstrated and were identified as areas where blocks were supported by drilling a drill spacing of around 50 m × 50 m.

Indicated and Inferred Mineral Resources are reported under the JORC 2012 Code – refer to Section 3 in Table 1 (Appendix 1) for further details, with additional supporting information in Sections 1-2 of JORC Table 1.

Geology and Geological Interpretation

The Seven Leaders deposit forms part of the Whiteheads Project, located in the northern Gindalbie Greenstone Belt where the sequence meets granite along its northern contact. The project lies between two major NNW-trending terrane-bounding structures: the Emu Fault to the east and the Mt Monger Fault to the west. The Emu Fault is locally disrupted by a granite intrusive at North Ewe Dam. The Hampton Fault also trends NNW-SSE through the project area and terminates in the Carr Boyd Gabbro Complex, with an additional major sub-parallel fault situated between the Hampton and Emu Faults along the eastern margin of the Carr Boyd Rocks before terminating in granite.

Gold mineralisation at Seven Leaders is developed along a sheared, silicified, carbonated and biotite-altered contact between amphibolite to the west and quartz-sericite schist with quartz-feldspar porphyry to the east. Mineralisation is predominantly hosted within this sheared contact, which comprises north-trending, sub-vertical lensoidal quartz veins and strongly silicified zones. Subordinate splays, which are sub-horizontal to gently west-dipping and also lensoidal, branch off these main structures. Together, these features form stacked sets of parallel quartz veins and silicified intervals, collectively up to ~150m thick. Repeat assays of samples from within and adjacent to the historic workings confirm the presence of coarse gold within the mineralised system.

Four steeply dipping main mineralisation domains were constructed, targeting zones of > 0.3 g/t Au following the perceived NW trend of mineralisation at Seven Leaders. These included two main domains (domains 1001 and 1002) and minor lodes (domains 1003 and 1004) that sit in the hanging wall (HW) and foot wall (FW), respectively (Figure 2 and Figure 3).

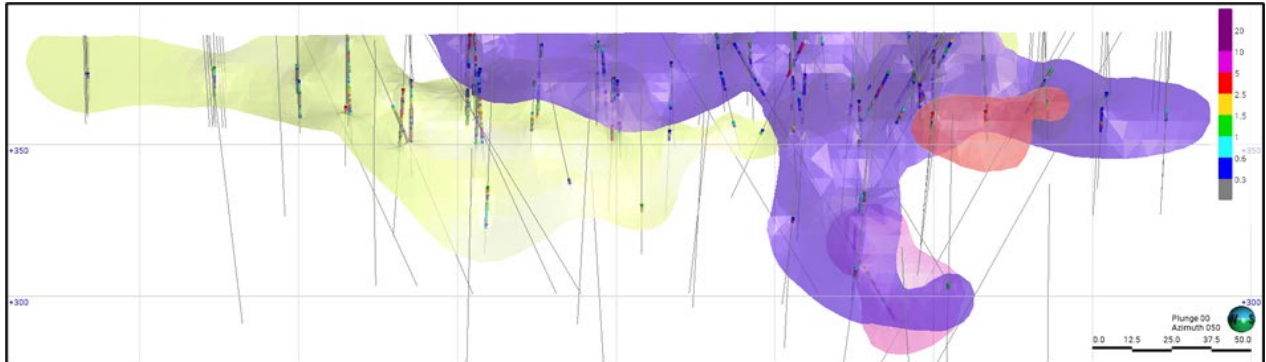


Figure 2: Mineralisation domains with drilling composites coloured by gold grade and drillhole traces
 Note: Mineralised domains (as interpreted) do not represent Mineral Resource classification extents.

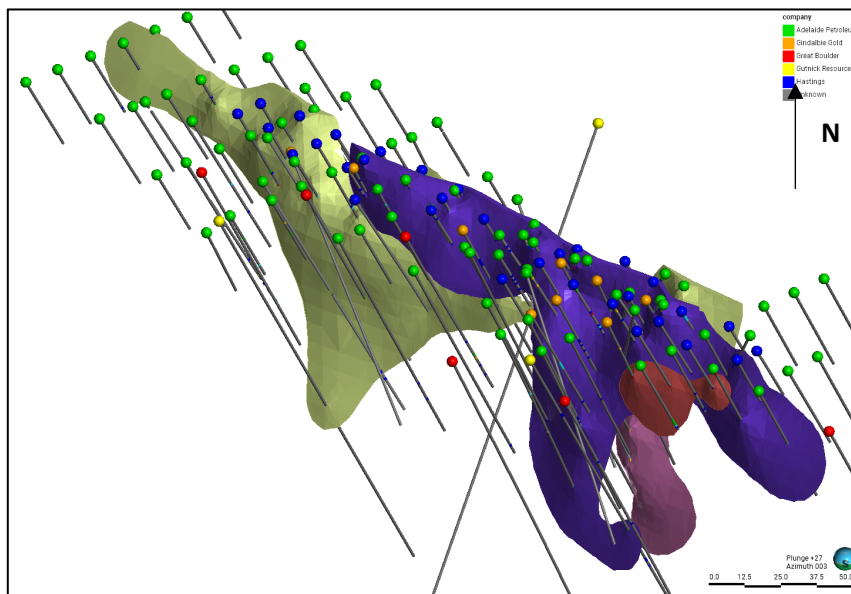


Figure 3: Oblique view looking N, showing drill holes (coloured by the company who drilled them) and mineralised domains

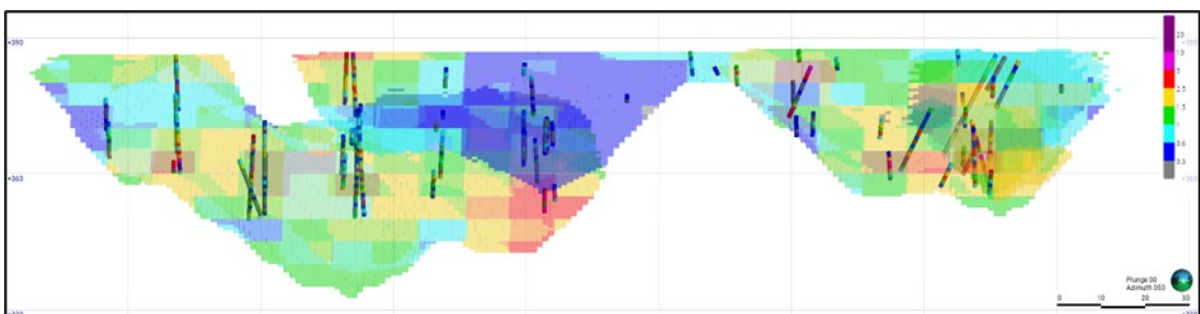


Figure 4: Mineral Resource coloured by gold grade constrained to optimised pit shell with drilling composites

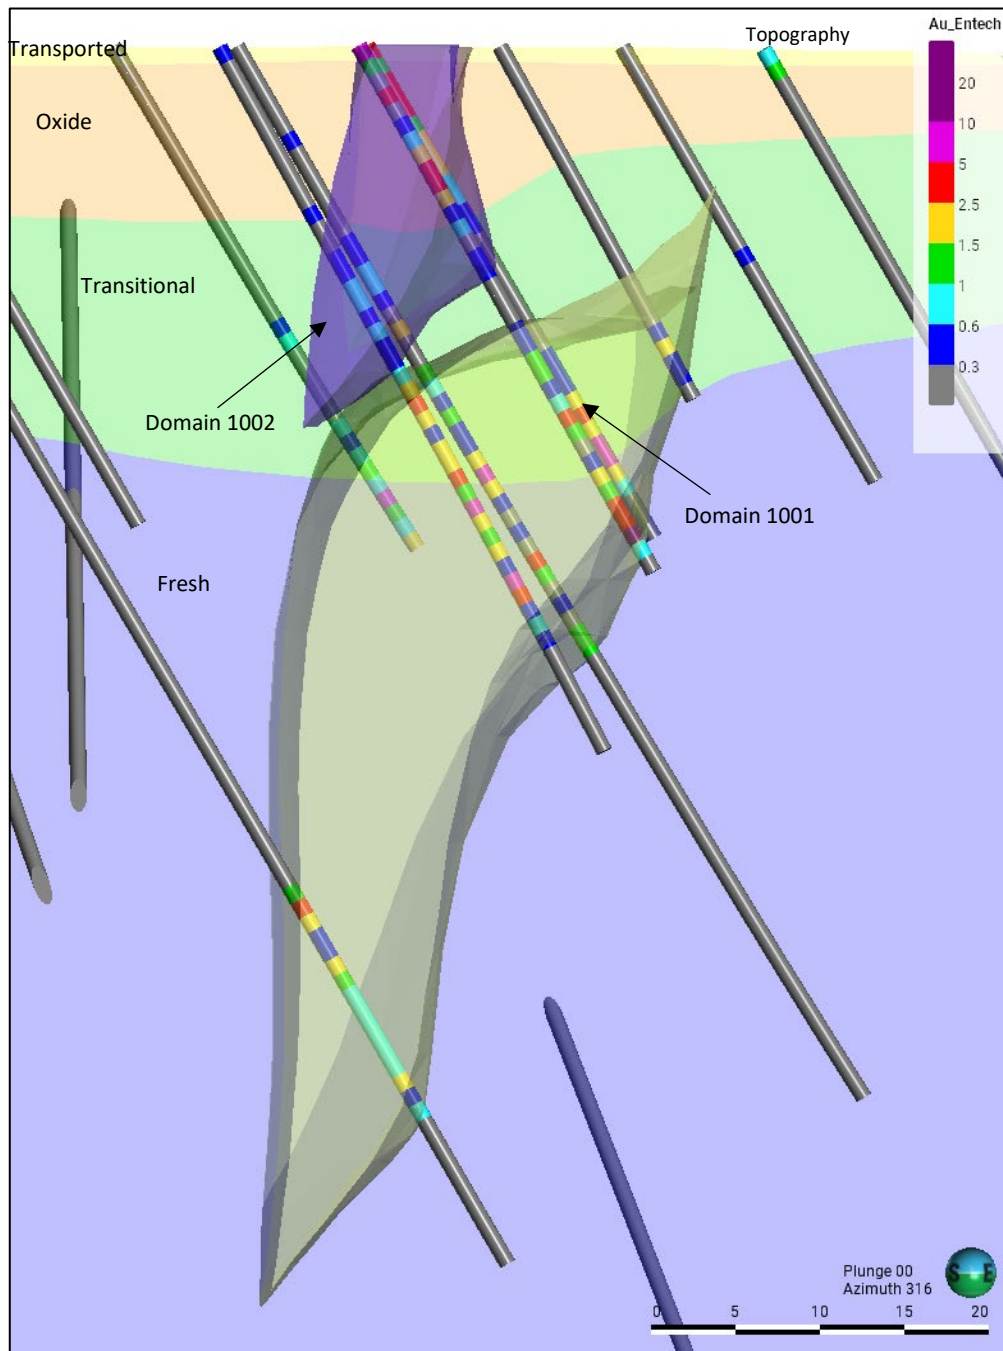


Figure 5: Cross-section centred on 374815E, 6663490N of the Seven Leaders deposit (Azimuth 316° +/-10 m) showing drill hole traces, oxidation, topography and mineralised domains

-ENDS-

Authorised by the Board

For further information contact:

Tim Gilbert, Chief Executive Officer

Email: tim@metalbank.com.au

or

Sue-Ann Higgins, Executive Director and Company Secretary

Email: sue-ann@metalbank.com.au

Media and Investors:

Sam Burns, Six Degrees Investor Relations

Email: sam.burns@sdir.com.au

About Metal Bank

MBK holds a significant portfolio of advanced gold, copper and cobalt exploration projects, with substantial growth upside, including:

- a 75% interest in the advanced Livingstone Gold Project in WA which holds a global JORC 2012 Mineral Resource Estimate of 2.81Mt @ 1.36g/t Au for 122.5koz Au (70% Inferred, 30% Indicated) at three proximal deposits³, with significant upside including Exploration Targets and numerous untested gold targets
- a 75% interest in the Whiteheads Gold Project JV tenements and other tenements 100%, covering ~380sqkm located approximately 80km NE of Kalgoorlie, including the advanced Seven Leaders with JORC2012 Inferred MRE, Blue Pole and Lady Betty prospects
- ownership of the Ark gold project, 250 km northeast of Carnarvon in Western Australia's prospective Gascoyne region, and the Darcys gold project (currently under application) in the East Kimberley region of Western Australia, immediately adjacent to the Nicolson's Gold Mine and within the historical Halls Creek gold mining area
- a 51% interest and the right to earn up to 80% of the Millennium Cobalt-Copper-Gold project which holds a 2012 JORC Inferred Resource⁴ across 5 granted Mining Leases with significant potential for expansion and graphite identified over >2km strike length within and adjacent to existing JORC Resource⁵;
- MENA strategy execution with JV Company formed in Saudi Arabia (MBK 60%) holding the Wadi Al Junah project and exploration license applications; and
- The 8 Mile, Wild Irishman and Eidsvold Gold projects in South East Queensland.

Metal Bank's 2025-2026 exploration programs at these projects will focus on:

- Executing WA Gold Strategy:
 - o Scoping Study for Livingstone's Kinsley and Homestead projects

³ MBK ASX Release 17 March 2025 "MBK Delivers Significant Increase to Livingstone Au Resource"

⁴ MBK ASX Release 21 March 2023 "Millennium delivers substantial Resource increase"

⁵ MBK ASX Release 2 December 2024 "Thick High Grade Graphite at Millennium"

- Preparing mining proposals, securing approvals and toll treatment agreements for these projects
- Defining a maiden JORC MRE and securing mining approvals, mining contractor and toll treatment agreements at Whiteheads and commencing mining⁶
- Millennium & SE Qld Projects:
 - Completing CEI grant work program⁷ at Millennium to assess graphite potential
 - Assessing development potential at Millennium
 - Realizing value from the SE Qld gold projects
- Advancing Saudi strategy:
 - Securing exploration licenses under application in Saudi Arabia
 - Engagement with local private equity to secure funding at the CMC and project level to further exploration of the Wadi Al Junah project.

Competent Person Statements

The information in this release that relates to Exploration Results, Mineral Resource Estimations and Ore Reserves for relevant projects was prepared and reported in accordance with the ASX Announcements and News Releases referenced in this report and the respective Competent Persons. The Company confirms that it is not aware of any new information or data that materially affects the information included in the relevant ASX announcements and News Releases. In the case of Mineral Resource estimates and Ore Reserve estimates, all material assumptions and technical parameters underpinning the estimates continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Persons' findings are presented have not been materially modified from the original ASX announcements or News Releases.

The information in the report to which this statement is attached that relates to the estimation and reporting of gold Mineral Resources at the Seven Leaders deposit is based on information compiled by Mr Christopher Paton, BSc, a Competent Person and a current Member of the Australian Institute of Geoscientists (MAIG 7717). Mr Paton, Senior Geology Consultant at Entech Pty Ltd, is an independent consultant to Hastings Technology Metals Ltd (Hastings) and has sufficient experience relevant to the style of mineralisation and deposit type under consideration and to the activities being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr Paton consents to the inclusion in the report of matters based on his information in the form and context in which it appears.

⁶ MBK ASX Release dated 29 September 2025 "Binding Agreement Signed with HAS"

⁷ MBK ASX Release dated 14 April 2025 "Millennium Collaborative Exploration Initiative Grant"

1 JORC CODE, 2012 EDITION – TABLE 1 REPORT

Section 1 Sampling Techniques and Data – Seven Leaders for Hastings 2025 drilling

(Note historical drill sampling techniques are not represented by Metal Bank. The 2025 drilling was necessitated to confirm historical data sets as stated by the Competent Person)

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where ‘industry standard’ work has been done this would be relatively simple (e.g. Reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information. 	<p>Reverse Circulation (RC)</p> <ul style="list-style-type: none"> RC drilling used high pressure air and levelled cone splitter or rotary splitter to collect samples. Samples were collected at one-meter intervals and placed in individually numbered calico bags. Duplicate standards and blanks were included and sent for analysis with samples. Sampling was guided by previous Hastings’s sampling protocols and QA/QC procedures. RC drilling samples of 1.5 to 3kg weight were sent to the ALS Laboratory in Perth for assay via fire assay (method FA50/OE04). All samples were pulverised to better than 85% passing 75µm with a 50g aliquot taken for assay. Sampling is considered appropriate for the style of mineralisation.
Drilling techniques	<ul style="list-style-type: none"> Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<p>Reverse Circulation (RC)</p> <ul style="list-style-type: none"> Completed with a face sampling hammer and collected in a rotary splitter). Sample recovery was recorded good, moderate, or poor the expected sample, sample state recorded (dry, moist, wet, or Wet Induced). RC drilling at Seven Leaders totalled 1,222m from thirty-two (32) holes.

Criteria	JORC Code explanation	Commentary
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<p>Reverse Circulation (RC)</p> <ul style="list-style-type: none"> A face sampling hammer was used to reduce contamination. 1m drill chip samples weighing approximately 2.5kg were collected throughout the drill program in sequentially uniquely numbered bags. Sample recovery was monitored by weighing the sample bucket on the drill site. The sample size is appropriate to the style of mineralisation. Split samples were recovered from a cyclone and rig-mounted rotary or cone splitter. Duplicate samples (field duplicates) collected at drill site 1 in every 40 samples. The sample recovery and physical state of the sample was recorded. A separate sample was sieved from the splitter reject material into chip trays and used for geological logging.
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies, and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography. The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> All RC samples were geologically logged (described) in the field by qualified geologists. Lithological and mineralogical data was recorded for all drill holes using a coding system developed specifically for the Project. Primary and secondary lithologies are recorded in addition to texture, structure, colour, grain size, alteration type and intensity, estimates of mineral quantities, graphite intensity, and sample recovery. Weathered, oxidized, transitional and fresh rock zones were defined. Geological logging is qualitative in nature.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc., and whether sampled wet or dry. For all sample types, the nature, quality, and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material sampled. 	<p>Reverse Circulation (RC)</p> <ul style="list-style-type: none"> A face sampling hammer was used to reduce contamination. Split samples were recovered from a cyclone and rig-mounted rotary or cone splitter. Samples were dry. 1m RC drill chip samples, weighing approximately 2.5 to 3.5kg were collected throughout the drill program in sequentially uniquely numbered bags. The sample size is appropriate to the style of mineralisation. Duplicate samples (field duplicates) collected at drill site 1 in every 40 samples. The sample recovery and physical state of the sample was recorded for every sample. The RC sample size was sufficient for the grain-size of the material sampled. A separate sample was sieved from the splitter reject material into chip trays and used for geological logging. <p>RC Sample preparation</p> <ul style="list-style-type: none"> Seven Leaders samples were analysed at ALS in Perth. Samples were dried at approximately 120°C with the sample then crushed using a Boyd crusher which crushes the samples to -2mm. The resulting material was then passed to a series LM5 pulverisers and ground to a nominal 85% passing of 75µm.

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> The milled pulps were weighed out (50g) and underwent analysis by fire assay (method FA50/OE04)
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established. 	<ul style="list-style-type: none"> The assaying and laboratory procedures used are appropriate for the material tested. Sampling was guided by internal protocols and QA/QC procedures. For RC samples, standards, blanks and field duplicates were inserted at an approximate rate of 1 in every 40 samples collected. For RC Field duplicates were taken 1 in every 20 samples collected.
Verification of sampling and assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> No independent data verification procedures were undertaken other than the QA/QC mentioned above. Field data was entered into spreadsheets and shared with the company office daily and imported into the Hastings database. Previous data has been compiled and as provided by external consultants SampleData of Perth using Acquire database software then exported to Access and Excel for use in GIS software. Internal QA/QC has identified no material issues. Several RC drill holes were drilled as twin holes to existing drill data.
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> Drill collar locations are surveyed using a registered surveyor using Trimble RTK GPS with expected accuracies +/- 20mm horizontal and +/- 35mm vertical, relative to the GPS Base Stn:100 survey control. Coordinates are referenced to the Map Grid of Australia (MGA94) zone 51 on the Geographic Datum of Australia (GDA94). Downhole surveys were completed for all holes where possible using a north seeking gyro.
Data spacing and distribution	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	<ul style="list-style-type: none"> Geological interpretation and mineralisation continuity analysis indicates that data spacing is sufficient for definition of a Mineral Resource.

Criteria	JORC Code explanation	Commentary
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> Mineralisation is interpreted to be on northwest-trending structures and sub-vertical The primary orientation for RC drilling was 050° and is appropriate to achieve practical intersection angles. Drilling was oriented as best to be perpendicular to strike intercepts.
Sample security	<ul style="list-style-type: none"> The measures taken to ensure sample security. 	<ul style="list-style-type: none"> Chain of custody was managed by Hastings's operators at the Project. Three sample submissions were checked and packed into bulk bags (batches of approximately 450 samples each). The Bulk bags were transported by the exploration team and submitted to ALS in Kalgoorlie. Internal ALS transfers of all fire-assay samples were made to Perth as part of the official ALS logistical procedures. Communication between the exploration team and ALS documented all logistics, sample preparation and analytical processes. No issues were reported.
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> No audits have been undertaken, and internal QA/QC reviews and those of resource consultants have not identified any material issues.

Section 2 Reporting of Exploration Results – Seven Leaders

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> GWG, a subsidiary of Hastings, owns 75% interest in the tenure comprising the Whiteheads Gold Project in an unincorporated JV with Zebina Minerals Pty Ltd. The Seven Leaders deposit is located on E27/544 The project is located ~80km NE of Kalgoorlie, Western Australia The deposit is located on E27/544, which is covered by Kakarra part A Determined Area. There are no known impediments to obtaining a licence to operate in the area.
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> The project has been subject to exploration by several companies over the past 30 years. This work has been built upon by successive explorers, culminating most recently in the work done by Great Boulder Resources pursuant to the ongoing exploration at Seven Leaders prospect at the Whiteheads Project.
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> The Whiteheads Gold Project deposits are classified as orogenic gold deposits, similar in style to many other gold deposits in the Eastern Goldfields region of Western Australia, and in other Archean Greenstone Belts globally. The Project straddles the boundary between the Boorara Domain of the Kalgoorlie Terrane and the Gindalbie Domain of the Kurnalpi Terrane, which is separated by the major regional-scale Mt Monger Fault; the Whiteheads Gold Project is situated within the Gindalbie Domain. The Project's key exploration targets occur within the Gindalbie Domain, whereas historically the Boorara Domain portion has seen less exploration. Several interesting geochemical anomalies are known to exist, and the terrane-bounding Mt Monger Fault itself is an attractive exploration element (Swager, 1995; Cassidy et. al., 2006).
Drill hole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the 	<ul style="list-style-type: none"> See details in the body of this announcement / report.

Criteria	JORC Code explanation	Commentary
	information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	
Data aggregation methods	<ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> Previous exploration results have been reported by respective companies and understood to be in compliance with the JORC code at the time. No metal equivalents have been assumed or calculated.
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. ‘down hole length, true width not known’). 	<ul style="list-style-type: none"> Mineralisation at Seven Leaders is interpreted to be on west-northwest-trending structures steeply dipping to the south or north, and as such, 2025 RC drilling was orientated perpendicular to the strike. The primary orientation for the Diamond drilling and RC drilling was 045-075° and is appropriate to achieve practical intersection angles. Drilling angle was -60°. Only down hole lengths are reported.
Diagrams	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> See body of announcement / report.
Balanced reporting	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced avoiding misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> See body of announcement / report.
Other substantive exploration data	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> The Whiteheads project area has been the focus of exploration efforts dating back to the 1960’s. The bulk of the earlier exploration efforts were focussed on the nickel potential of the region following discoveries at the Black Swan, Silver Swan, and Carr Boyd deposits. Various exploration campaigns by multiple companies utilising differing methods have been undertaken for nickel, VMS, and gold targets. The differing exploration and analysis techniques has resulted in a patchwork of exploration datasets that are not easily comparable. Small-scale historical gold workings are present within the tenure that have a protracted history of mining. Publicly available data for these deposits indicate selective mining of high-grade gold veins.



Criteria	JORC Code explanation	Commentary
Further work	<ul style="list-style-type: none">• The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).• Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	<ul style="list-style-type: none">• Further drilling may be required to increase the confidence of the Mineral Resources

SECTION 3 ESTIMATION AND REPORTING OF MINERAL RESOURCES

(Criteria listed in Section 1, and where relevant in Section 2, also apply to this section.)

Criteria	JORC Code explanation	Commentary
Database integrity	<i>Measures taken to ensure that data has not been corrupted by, for example, transcription or keying errors, between its initial collection and its use for Mineral Resource estimation purposes.</i>	<ul style="list-style-type: none"> The drilling database for the Seven Leaders deposit is based on the validated dataset created and collated by Entech Mining in 2025 for Hastings Technology Metals. Entech was provided with raw drilling data for new holes drilled by Hastings to update the validated database for use in the MRE. The raw data inputs were logged electronically at the drill site. Collar metrics, assays, lithology and downhole survey interval tables were uploaded manually and subsequently checked and validated by Entech.
	<i>Data validation procedures used.</i>	<ul style="list-style-type: none"> Entech's database checks included the following: <ul style="list-style-type: none"> Checking for duplicate drill hole names and duplicate coordinates in the collar table. Checking for missing drill holes in the collar, survey, assay and geology tables based on drill hole names. Checking for survey inconsistencies including dips and azimuths <0°, dips >90°, azimuths >360°, and negative depth values. Checking for inconsistencies in the 'From' and 'To' fields of the assay and geology tables. The inconsistency checks included the identification of negative values, overlapping intervals, duplicate intervals, gaps and intervals where the 'From' value is greater than the 'To' value. Adding an end of hole (EOH) survey by copying the last known survey downhole to the EOH. Database checks were conducted in MS Excel, MS Access, Leapfrog and Surpac™ Mining software. Entech considers Hastings's processes and due diligence sufficient to ensure the integrity of the drill hole data. The supplied data were suitable for Mineral Resource estimation as of 18 November 2025.
Site visits	<i>Comment on any site visits undertaken by the Competent Person and the outcome of those visits.</i>	<ul style="list-style-type: none"> Entech visited the Seven Leaders project on 29 September 2025 to review drilling and sampling processes for reverse circulation (RC) drilling and inspect drill hole chips in relation to the upcoming MRE. No material issues or risks pertaining to the MRE were observed during the site visit.
	<i>If no site visits have been undertaken indicate why this is the case.</i>	<ul style="list-style-type: none"> N/A
Geological interpretation	<i>Confidence in (or conversely, the uncertainty of) the geological interpretation of the mineral deposit.</i>	<ul style="list-style-type: none"> Entech created the MS Access database 'sevenleaders_entech_db_251118.accdb' comprising 136 collar records in table 'Collar'. Of this total, 134 validated Collar records intersect the Seven Leaders deposit, which has the following defined extents: <ul style="list-style-type: none"> Seven Leaders MGA94 Zone 51: 6,663,275mN – 6,663,615mN Seven Leaders Local Grid Easting: 374,700mE – 375,030mE.

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> • This data, together with input from Hastings personnel, guided the initial approach to the interpretation of mineralisation at the Seven Leaders deposit. • Only data from RC and DD drilling were used for estimation. • Lithology and structures are considered the predominant controls on mineralisation at the Seven Leaders deposit. The structural understanding of the project is an ongoing process, with the continued collection of structural data from oriented drill core and structural modelling recommended. • Entech relied on Hastings’s historical geological documentation, database-derived lithological and assay data, historical mineralisation wireframes and site-based observations to evaluate geological, structural and mineralisation continuity. • Weathering surfaces were created by interpreting the existing drill logging for oxidation state and were extended laterally beyond the limits of the Mineral Resource model. Entech reviewed the weathering contacts in relation to mineralisation controls. No correlation could be found between oxidation and gold grade. • Mineralisation domains were interpreted primarily on grade distribution. Entech’s interpretations of the mineralisation was carried out in Leapfrog Geo implicit modelling software, intercepts correlating to individual domains manually selected prior to creating vein models. • Confidence in the mineralisation continuity was based on drill hole spacing and assay data. • Factors that limited the confidence of the geological interpretation include: <ul style="list-style-type: none"> ○ High reliance on RC data for definition of discrete mineralisation boundaries. ○ Limited number of structural readings as a result of RC drilling. ○ Reliance on historical drilling with no QAQC data available for validation. • Factors which aided the confidence of the geological interpretation included: <ul style="list-style-type: none"> ○ Grid drilled and perpendicular 10 m × 20 m drill data within the majority of the deposit. • In Entech’s opinion, the available drilling density supports the continuity implied by the interpreted mineralisation domains, both along strike and down dip.
	<p><i>Nature of the data used and of any assumptions made.</i></p>	<ul style="list-style-type: none"> • Mineralisation interpretation was informed by 134 RC and DD holes. • A nominal cut-off grade of 0.3 g/t Au was used to guide the geological continuity of the interpreted mineralisation. Within the mineralised wireframe, if an intercept fell below the nominal cut-off but continuity was supported by host lithologies, the intercept was retained for continuity purposes due to the commodity and the style of deposit. • A total of 4 mineralisation domains were interpreted at Seven Leaders. • Assumptions with respect to mineralisation continuity (plunge, strike and dip) within the Mineral Resource were drawn directly from:

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> ○ Structural orientations (where available) ○ Resource definition drilling, nominally 10 m × 20 m centres. ○ Historical documentation.
	<i>The effect, if any, of alternative interpretations on Mineral Resource estimation.</i>	<ul style="list-style-type: none"> ● Alternative mineralisation geometries were compared against indicator-based numerical modelling (Leapfrog Indicator RBF Interpolants) at varying cut-offs and probability outcomes. All modelling was underpinned by statistical and spatial (variogram) analysis. These alternative models supported the metal distribution within the interpreted mineralised wireframes.
	<i>The use of geology in guiding and controlling Mineral Resource estimation.</i>	<ul style="list-style-type: none"> ● The interpretation of the mineralisation domains was informed by geological logging and mapping from the open pit. These observations guided the development of the mineralisation model, which highlighted a strong relationship between mineralisation geometry and lithological contacts, consistent with Hastings's current understanding of mineralisation controls and supported by indicator-based numerical modelling. ● Weathering surfaces were created by interpreting existing drill logging for regolith and oxidation state and were extended laterally beyond the limits of the Mineral Resource model. Entech reviewed the weathering contacts in relation to mineralisation controls but found no clear evidence of a relationship between weathering contacts and grade distribution.
	<i>The factors affecting continuity both of grade and geology.</i>	<ul style="list-style-type: none"> ● Local structural complexities have not been identified, based on position of the main lodes there may be offsetting faults; however, the resolution of drilling and lack of diamond drilling prevents this being investigated. The exact controls on high grade mineralisation are not fully understood structurally or geologically.
Dimensions	<i>The extent and variability of the Mineral Resource expressed as length (along strike or otherwise), plan width, and depth below surface to the upper and lower limits of the Mineral Resource.</i>	<ul style="list-style-type: none"> ● Mineralised domains at Seven Leaders (4 domains in total) extend over a 370 m strike length. Lode widths are highly variable and range from 1 m to 12 m. Main lode domains (1001 and 1002) extend most of the length of the deposit in a northwest–southeast direction. Mineralisation was modelled to a depth of 105 m below surface; however, the MRE is constrained within an optimised pit shell.
Estimation and modeling techniques	<i>The nature and appropriateness of the estimation technique(s) applied and key assumptions, including treatment of extreme grade values, domaining, interpolation parameters and maximum distance of extrapolation from data points. If a computer assisted estimation method was chosen include a description of computer software and parameters used.</i>	<ul style="list-style-type: none"> ● Interpretations of domain continuity were undertaken in Leapfrog Geo™ software, with mineralisation intercepts correlating to individual domains manually selected prior to the creation of a vein model using Leapfrog Geo implicit modelling software. Domain interpretations used all available validated RC and DD data. ● Sample data was composited to a 1 m downhole length, intervals of less than 1.0 m were equally distributed across the other composites within the same intercepts. Top-caps were applied to 3 of the 4 domains prior to block grade estimation, with the maximum distance of possible extrapolation within each domain being based on variogram analysis. ● Exploratory Data Analysis (EDA) and variography analysis of the capped and declustered (5 mE × 10 mN ×

Criteria	JORC Code explanation	Commentary
		<p>5 mZ) composited gold variable within domain groups whose relation similarities were underpinned by observed spatial and statistical analysis. All EDA was completed in Supervisor™ software and exported for further visual and graphical review.</p> <ul style="list-style-type: none"> • An Ordinary Kriging (OK) interpolation approach in Leapfrog Geo™ was selected for all interpreted domains. All estimates used domain boundaries as hard boundaries for grade estimation where only composite samples within that domain are used to estimate blocks coded as falling within that domain. • Estimation parameters, including estimate block size and search neighbourhoods, were derived through Kriging Neighbourhood Analysis (KNA). • Variography was attempted on each domain individually; however, due to the small dataset there were not enough composites within each domain to provide robust variography. Therefore, variography was undertaken on the capped, declustered gold variable for all the domain combined. • Variography analysis identified a nugget value of 0.45 and a continuity range of 68 m across. Normal scores variogram models with spherical, anisotropic structures were applied accordingly, supporting the interpolation strategy and domain groupings used in the estimation.
	<i>The availability of check estimates, previous estimates and/or mine production records and whether the Mineral Resource estimate takes appropriate account of such data.</i>	<ul style="list-style-type: none"> • A check estimate was undertaken for all domains using inverse distance squared and gold parts per million (ppm). The check estimate results were, on average, 3% higher in metal content, likely due to the inverse distance algorithms inability to account for data clustering • Previous unreleased estimates did not include infill and extensional drilling carried out by Hastings.
	<i>The assumptions made regarding recovery of by-products.</i>	<ul style="list-style-type: none"> • No assumptions with respect to by-products were made.
	<i>Estimation of deleterious elements or other non-grade variables of economic significance (e.g. sulphur for acid mine drainage characterisation).</i>	<ul style="list-style-type: none"> • No estimation for deleterious elements or other non-grade variables was carried out.
	<i>In the case of block model interpolation, the block size in relation to the average sample spacing and the search employed.</i>	<ul style="list-style-type: none"> • Interpolation was undertaken using Ordinary Kriging (OK) in Leapfrog Geo™ within parent cell blocks. Dimensions for the interpolation were Y: 10 mN, X: 5 mE, Z: 5 mRL, with sub-celling of Y: 1.25 mN, X: 0.625 mE, Z: 0.625 mRL. The block model was rotated -35° around the Z axis to adequately define the domain volumes. Considerations relating to appropriate block size include drill hole data spacing, conceptual mining method, variogram continuity ranges were selected through search neighbourhood optimisations (QKNA). • RC and DD data were used in the MRE. The average drill spacing throughout the bulk of the deposit is 10 m × 20 m. • A two or three-pass estimation search strategy was employed for all reported domains; the first pass

Criteria	JORC Code explanation	Commentary										
		<p>employed a maximum distance of 30 m and the neighbourhood composites ranging from a minimum of 6 to a maximum of 18 samples. The second pass increased the search distance by a factor of 2 with the same minimum and maximum samples. The third pass retained the same search distance as the second pass but dropped the minimum samples required to 2.</p> <ul style="list-style-type: none"> A maximum of 5 samples per drill hole was applied during all estimation passes to allow each block to be informed by more than one drill hole. 										
	<i>Any assumptions behind modelling of selective mining units.</i>	<ul style="list-style-type: none"> No selective mining units were assumed. 										
	<i>Any assumptions about correlation between variables.</i>	<ul style="list-style-type: none"> No correlated variables have been investigated or estimated. 										
	<i>Description of how the geological interpretation was used to control the resource estimates.</i>	<ul style="list-style-type: none"> All domain estimates were based on mineralisation domains created using a nominal cut-off grade of 0.3 g/t Au. The mineralisation constraints have been used as hard boundaries for grade estimation wherein only composite samples within that domain are used to estimate blocks coded as falling within that domain. 										
	<i>Discussion of basis for using or not using grade cutting or capping.</i>	<ul style="list-style-type: none"> Assessment and application of top-capping for the estimate were undertaken on the gold variable within individual domains. Where appropriate, top-caps were applied on a domain basis: <table border="1" data-bbox="965 890 1240 1051"> <thead> <tr> <th>Domain</th> <th>Top Cap</th> </tr> </thead> <tbody> <tr> <td>1001</td> <td>9</td> </tr> <tr> <td>1002</td> <td>8</td> </tr> <tr> <td>1003</td> <td>N/A</td> </tr> <tr> <td>1004</td> <td>8</td> </tr> </tbody> </table> 	Domain	Top Cap	1001	9	1002	8	1003	N/A	1004	8
Domain	Top Cap											
1001	9											
1002	8											
1003	N/A											
1004	8											
	<i>The process of validation, the checking process used, the comparison of model data to drill hole data, and use of reconciliation data if available.</i>	<ul style="list-style-type: none"> Validation of the estimation outcomes was completed by global and local bias analysis (swath plots), and statistical and visual comparison (cross and long sections) with input data. 										
Moisture	<i>Whether the tonnages are estimated on a dry basis or with natural moisture, and the method of determination of the moisture content.</i>	<ul style="list-style-type: none"> The tonnages were estimated on a dry basis. 										
Cut-off parameters	<i>The basis of the adopted cut-off grade(s) or quality parameters applied.</i>	<ul style="list-style-type: none"> The MRE cut-off grade for reporting of open pit global gold resources at Seven Leaders was 0.5 g/t Au. This was based on consideration of grade-tonnage data and selectivity. 										

Criteria	JORC Code explanation	Commentary
Mining factors or assumptions	<i>Assumptions made regarding possible mining methods, minimum mining dimensions and internal (or, if applicable, external) mining dilution. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential mining methods, but the assumptions made regarding mining methods and parameters when estimating Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the mining assumptions made.</i>	<ul style="list-style-type: none"> • Open pit mining methods are assumed. • The Seven Leaders MRE was constrained within a pit shell optimised at A\$4,500/oz gold price (RPEEE Shell). Pit optimisation inputs were chosen for the purpose of assessing RPEEE an open pit mining methodology and gold price was chosen based on the current market price with a view to where it may be in the near term. Entech used parameters provided by Hastings based on their cost's forecasts for mining at Seven Leaders and other projects in the surrounding area. The full set of parameters used in the pit optimisation are as follows: <ul style="list-style-type: none"> ○ Gold price (AUD/oz) - \$4,500 ○ Pit slope angle (°) – 39 (oxide/transported), 45 (transitional), 52 (fresh) ○ Mining cost (AUD/t)- \$8.00 ○ Processing cost (AUD/t) - \$60.00 ○ Re-block size - 2.5 mX × 2.5. mY × 2.5 mZ ○ Recovery (%) - 90 ○ Royalty (%) - 2.5 • Considering available drill hole spacing and pit optimisation outcomes, the vertical depth of Mineral Resources, constrained within RPEEE Shell, is nominally 50 m below natural surface within Hastings' tenement boundary. Entech considers that material at this depth would fall under the definition of RPEEE within an open pit mining framework. • It is the Competent Person's opinion that the proposed mining methods, pit constraints and cut-off grades applied satisfy the requirements for RPEEE.
Metallurgical factors or assumptions	<i>The basis for assumptions or predictions regarding metallurgical amenability. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential metallurgical methods, but the assumptions regarding metallurgical treatment processes and parameters made when reporting Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the metallurgical assumptions made.</i>	<ul style="list-style-type: none"> • Evidence of metallurgical testing for the Seven Leaders deposit has been uncovered in historic reporting for the deposit (Gindalbie Gold Combined Annual Report 1996 A49821). In 1995 Gindalbie gold sent a single composite sample from diamond hole SLD088 to Micron Research for Bottle Roll testing. The sample was stage crushed and milled to a grind size of approximately 98% passing 75 µm. Bottle-roll cyanidation tests were then conducted under controlled conditions with samples taken over a 33-hour period to assess dissolution kinetics. Residue samples were fire assayed and further screened and assayed by size fraction to understand gold distribution in the ore post-leach. The test work resulted in recoveries 92% from a 10-hour extraction time and 96.9% from 33-hours. • There is no record of how the composited sample was constructed, and it is difficult to characterise the whole orebody from a single sample. Hastings therefore is currently forecasting a more conservative average recovery rate of 90% until further test work can be carried out. • No deleterious elements or potential by-products were noted in the historical test work. Based on discussions with Hastings staff, Entech understands there are no metallurgical amenability risks which

Criteria	JORC Code explanation	Commentary										
		would pose a material risk to the eventual economic extraction of the Mineral Resources. No metallurgical recovery factors were applied to the Mineral Resources or Mineral Resource tabulations.										
Environmental factors or assumptions	<i>Assumptions made regarding possible waste and process residue disposal options. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider the potential environmental impacts of the mining and processing operation. While at this stage the determination of potential environmental impacts, particularly for a greenfields project, may not always be well advanced, the status of early consideration of these potential environmental impacts should be reported. Where these aspects have not been considered this should be reported with an explanation of the environmental assumptions made.</i>	<ul style="list-style-type: none"> No environmental factors were applied to the Mineral Resources or Mineral Resource tabulations. The deposit is located on a mining licence. 										
Bulk density	<i>Whether assumed or determined. If assumed, the basis for the assumptions. If determined, the method used, whether wet or dry, the frequency of the measurements, the nature, size and representativeness of the samples.</i>	<ul style="list-style-type: none"> Seven bulk density measurements were taken by Hastings on a recent DD hole drilled at Seven Leaders. This hole was drilled for geotechnical test work and therefore did not target mineralisation and does not form a part of this MRE. In 1995, 49 bulk density measurements were also taken from historic DD hole SLD088 which were from primarily taken at depth, representing only the transitional and fresh rock profiles. Due to the low number of bulk density measurement available, all available data was used to in calculating mean values to assign to the weathering profile. The following bulk density mean values were applied in the block model: <table border="1" data-bbox="981 1075 1249 1251"> <thead> <tr> <th>Weathering</th> <th>Bulk Density</th> </tr> </thead> <tbody> <tr> <td>Transported</td> <td>1.91 g/cm³</td> </tr> <tr> <td>Oxide</td> <td>1.91 g/cm³</td> </tr> <tr> <td>Transitional</td> <td>2.78 g/cm³</td> </tr> <tr> <td>Fresh</td> <td>2.78 g/cm³</td> </tr> </tbody> </table> 	Weathering	Bulk Density	Transported	1.91 g/cm ³	Oxide	1.91 g/cm ³	Transitional	2.78 g/cm ³	Fresh	2.78 g/cm ³
Weathering	Bulk Density											
Transported	1.91 g/cm ³											
Oxide	1.91 g/cm ³											
Transitional	2.78 g/cm ³											
Fresh	2.78 g/cm ³											
	<i>The bulk density for bulk material must have been measured by methods that adequately account for void spaces (vugs, porosity, etc), moisture and differences between rock and alteration zones within the deposit.</i>	<ul style="list-style-type: none"> Bulk density was determined using the Archimedes method, whereby drill core samples were weighed both dry and while submerged in water to calculate density based on water displacement. 										

Criteria	JORC Code explanation	Commentary
	<i>Discuss assumptions for bulk density estimates used in the evaluation process of the different materials.</i>	<ul style="list-style-type: none"> An average bulk density based on weathering coding has been assigned for tonnage reporting.
Classification	<i>The basis for the classification of the Mineral Resources into varying confidence categories.</i>	<ul style="list-style-type: none"> The Seven Leaders MRE was classified as Indicated and Inferred to appropriately represent confidence and risk with respect to data quality, drill hole spacing, geological and grade continuity and mineralisation volumes. In Entech's opinion, the Hastings drilling, surveying and sampling undertaken, and analytical methods and quality controls used, are appropriate for the style of deposit under consideration. The Indicated portion of the estimate was outlined where a moderate level of geological confidence in geometry, continuity and grade was demonstrated and were identified as areas where blocks were well supported by drill hole data, with the informing drill holes of a spacing of 25 m × 25 m or closer and sit within the optimised pit shell. Inferred Mineral Resources were outlined where a low to moderate level of geological confidence in geometry, continuity and grade was demonstrated and were identified as areas where blocks were supported by drilling a drill spacing of around 50 m × 50 m. All blocks that did not fall within the parameters outlined above remain unclassified reflecting the low confidence and lack of data supporting these blocks. Unclassified blocks should not be used for reporting or mine planning purposes. Mineral Resources that are not Ore Reserves do not have demonstrated economic viability. The MREs do not account for selectivity, mining loss and dilution. This MRE update includes Inferred Mineral Resources which are unable to have economic considerations applied to them, nor is there certainty that further sampling will enable them to be converted to Measured or Indicated Mineral Resources. In the opinion of Entech, the supplied topography survey and pit void appropriately represent the extent of pit excavation. No estimation or assumptions with respect to deleterious elements, non-grade variables or by-products were made.
	<i>Whether appropriate account has been taken of all relevant factors (i.e. relative confidence in tonnage/grade estimations, reliability of input data, confidence in continuity of geology and metal values, quality, quantity and distribution of the data).</i>	<ul style="list-style-type: none"> Consideration has been given to all factors that are material to the Mineral Resource outcomes, including but not limited to confidence in volume and grade delineation, quality of data underpinning Mineral Resources, mineralisation continuity and variability of alternate volume interpretations and grade interpolations (sensitivity analysis). In addition to the above factors, the classification process considered nominal drill hole spacing, estimation quality and reliability of input data, specifically.

Criteria	JORC Code explanation	Commentary
	<i>Whether the result appropriately reflects the Competent Person's view of the deposit.</i>	<ul style="list-style-type: none"> The delineation of Indicated and Inferred Mineral Resources appropriately reflects the Competent Person's view on continuity and risk at the deposit.
Audits or reviews	<i>The results of any audits or reviews of Mineral Resource estimates.</i>	<ul style="list-style-type: none"> Internal audits and peer review were undertaken by Entech with a focus on independent resource tabulation, block model validation, verification of technical inputs, and peer review of approaches to domaining, interpolation and classification.
Discussion of relative accuracy/confidence	<i>Where appropriate a statement of the relative accuracy and confidence level in the Mineral Resource estimate using an approach or procedure deemed appropriate by the Competent Person. For example, the application of statistical or geostatistical procedures to quantify the relative accuracy of the resource within stated confidence limits, or, if such an approach is not deemed appropriate, a qualitative discussion of the factors that could affect the relative accuracy and confidence of the estimate.</i>	<ul style="list-style-type: none"> Variances to the tonnage, grade, and metal tonnes of the MRE are expected with further definition drilling. It is the opinion of the Competent Person that the classification criteria for Indicated and Inferred Mineral Resources appropriately capture and communicate these variances and risks to all downstream users. The MRE is considered fit for the purpose of underpinning mining studies.
	<i>The statement should specify whether it relates to global or local estimates, and, if local, state the relevant tonnages, which should be relevant to technical and economic evaluation. Documentation should include assumptions made and the procedures used.</i>	<ul style="list-style-type: none"> The Mineral Resource Statement relates to global tonnage and grade estimates. No formal confidence intervals nor recoverable resources were undertaken or derived.
	<i>These statements of relative accuracy and confidence of the estimate should be compared with production data, where available.</i>	<ul style="list-style-type: none"> The Seven Leaders area has been mined sometime prior to the 1980s with small scale workings being found in the vicinity. Reports from the 1980s state that no records were kept from these workings as all ore was hand dollied. These workings, however, do not appear to target the orebody that this MRE is focussed on.

END

Appendix 1

Seven Leaders Mineral Resource Estimate

MATERIAL SUMMARY

SEVEN LEADERS MINERAL RESOURCE ESTIMATE

Material information summary as required under ASX Listing Rule 5.8 and JORC Code (2012) reporting guidelines.

Mineral Resource Statement

The Mineral Resource Statement for the Seven Leaders Gold Mineral Resource estimate (MRE) was prepared during November of 2025 and is reported according to the *Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves* (the 'JORC Code') 2012 edition.

Data from a total of 7,678.8 metres of drilling from 136 drill holes has been compiled for the Seven Leaders Project. The MRE is primarily supported by 134 reverse circulation (RC) and 2 diamond (DD), of which 134 intersect the defined resource, contributing 7,372.8 metres of drilling data.

The current MRE incorporates 1,161 metres of drilling from 32 RC holes completed in September of 2025 by Hastings Technology Metals Limited. This includes infill drilling as well as twin holes targeting historic holes across the deposit to validate and confirm the historic dataset.

In the opinion of Entech, the Mineral Resource evaluation presented herein represents a fair and reasonable reflection of the gold mineralisation within the Seven Leaders deposit. The estimate is considered appropriate for open pit assessment and is based on all available sampling data as of 18 November 2025.

Mineral Resources are reported below the current topographic surface and constrained within an optimised open pit shell. The estimate encompasses oxide, transitional and fresh rock domains. A cut-off grade of 0.50 g/t Au was applied to report Mineral Resource blocks, consistent with assumed open pit mining parameters. The classified Mineral Resource Statement is presented in Table 1.

Table 1: Seven Leaders Mineral Resource at a 0.5 g/t cut-off

Deposit	Cut-Off Grade	Mineral Resource Category	Tonnes (t)	Grade (g/t Au)	Ounces (oz Au)
Seven Leaders	0.5 g/t	Indicated	135,000	1.4	6,200
		Inferred	3,000	1.4	100
		Total	138,000	1.4	6,300

Notes: Tonnages are dry metric tonnes. Minor discrepancies may occur due to rounding to significant numbers.

A breakdown of the Mineral Resource by weathering domain is provided in Table 2.

Table 2: Seven Leaders Mineral Resource at a 0.5 g/t cut-off, breakdown by Weathering Domain

Deposit	Mineral Resource Category	Weathering	Tonnes (t)	Grade (g/t Au)	Ounces (oz Au)
Seven Leaders	Indicated	Transported	2,000	1.3	100
		Oxide	18,000	1.2	700
		Transitional	60,000	1.4	2,600
		Fresh	55,000	1.6	2,800
	Subtotal		135,000	1.4	6,200
	Inferred	Transitional	1,000	2.0	100
		Fresh	2,000	1.1	100
	Subtotal		3,000	1.4	100
	Total		138,000	1.4	6,300

Notes: Tonnages are dry metric tonnes. Minor discrepancies may occur due to rounding to significant numbers.

This MRE includes Inferred Mineral Resources which are unable to have economic considerations applied to them, nor is there certainty that further sampling will enable them to be converted to Measured or Indicated Mineral Resources.

Competent Person's Statement

The information in the report to which this statement is attached that relates to the estimation and reporting of gold Mineral Resources at the Seven Leaders deposit is based on information compiled by Mr Christopher Paton, BSc, a Competent Person and a current Member of the Australian Institute of Geoscientists (MAIG 7717). Mr Paton, Senior Geology Consultant at Entech Pty Ltd, is an independent consultant to Hastings Technology Metals Ltd (Hastings) and has sufficient experience relevant to the style of mineralisation and deposit type under consideration and to the activities being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the *Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves*. Mr Paton consents to the inclusion in the report of matters based on his information in the form and context in which it appears.

Drilling Techniques

Drilling completed by Hastings in 2025 comprised 32 RC holes for 1,161 m. The drilling was carried out by Castle Drilling Company using a Hyundai Everdigm D800RC, with a 30 bar 1050 cfm compressor, 4.5" rods drilling a 132 mm hole with face sampling RC bit. All collar locations were picked up using DGPS. Downhole surveying was carried out by gyroscope, with recordings taken at the start and the end of each hole with measurements taken at ~15 m intervals down hole.

Historical Drilling

Historical drilling at Seven Leaders comprises RC and DD holes drilled from the 1980s to 2010s by Adelaide Petroleum, Gindalbie Gold, Gutnik Resources and Great Boulder Resources Ltd.

Drilling records for the historic dataset were reviewed to confirm locations and orientations of for drill

holes. Additionally, all historic collar locations are still accessible and were re-picked up in 2019 by Lone Star Surveying using DGPS, including initial hole directions for further validation of drill hole orientations.

A selection of historic assay records was also compared to the original assay reports to ensure there were no systemic errors in the historic dataset.

Sampling and Sub-Sampling Techniques

Hastings samples were taken using a levelled cone splitter or rotary splitter. Samples were collected at one-metre intervals and placed into individually numbered calico bags, with duplicate, standard and blank samples routinely inserted in accordance with Hastings' established sampling protocols and QA/QC procedures.

Historical Sampling

There are no specific records of the sampling procedures for the historic dataset other than all drilling was done using RC rigs other than 2 diamond holes drilled by Gindalbie Gold in 1995.

Quality assurance and quality control

Quality assurance and quality control (QAQC) protocols were reviewed for drilling completed by Hastings in 2025. The results from all QAQC sample types were reviewed in detail and found to be within industry-accepted tolerance limits. No material bias, contamination or analytical inconsistencies were identified. The assay data generated from these drilling programs are therefore considered reliable and of sufficient quality to underpin the Mineral Resource estimation.

No QAQC data is available for the historic dataset; however, the recent drilling by Hastings has provided strong support for the validity of the historic dataset. Comparative assessments using QQ plots and box-and-whisker distributions shows the new and historic assay populations to be statistically very similar, with no material bias evident between the two datasets. The new drilling also confirms the continuity of mineralisation indicated by the historic holes, with mineralised intervals occurring in the same positions and exhibiting comparable thicknesses and grades. Minor differences observed in 6 twinned holes are consistent with the known nuggety nature of the gold mineralisation and are not considered material. Overall, the new drilling validates the historic dataset and provides confidence in its use for this MRE.

Sample Analysis Method

Hastings samples typically ranged between 1.5 kg and 3 kg and were submitted to ALS Laboratory in Perth for analysis by fire assay (method FA50/OE04). All samples were pulverised to better than 85% passing 75 µm, with a 50 g aliquot taken for assay.

Historical Analysis

The assay data that comprises the majority of the historic dataset comes from Adelaide Petroleum and Gindalbie Gold. Adelaide Petroleum samples were sent to the Australia Assay Laboratories group, Kalgoorlie in 1987, for 50 g sample fire assay. Gindalbie Gold samples were sent to Minlab Laboratories, Kalgoorlie in 1995.

Geology and Geological Interpretation

The Seven Leaders deposit forms part of the Whiteheads Project, located in the northern Gindalbie Greenstone Belt where the sequence meets granite along its northern contact. The project lies between two major NNW-trending terrane-bounding structures: the Emu Fault to the east and the Mt Monger Fault to the west. The Emu Fault is locally disrupted by a granite intrusive at North Ewe Dam. The Hampton Fault also trends NNW–SSE through the project area and terminates in the Carr Boyd Gabbro Complex, with an additional major sub-parallel fault situated between the Hampton and Emu Faults along the eastern margin of the Carr Boyd Rocks before terminating in granite.

Gold mineralisation at Seven Leaders is developed along a sheared, silicified, carbonated and biotite-altered contact between amphibolite to the west and quartz–sericite schist with quartz–feldspar porphyry to the east. Mineralisation is predominantly hosted within this sheared contact, which comprises north-trending, sub-vertical lensoidal quartz veins and strongly silicified zones. Subordinate splays, which are sub-horizontal to gently west-dipping and also lensoidal, branch off these main structures. Together, these features form stacked sets of parallel quartz veins and silicified intervals, collectively up to ~150 m thick. Repeat assays of samples from within and adjacent to the historic workings confirm the presence of coarse gold within the mineralised system.

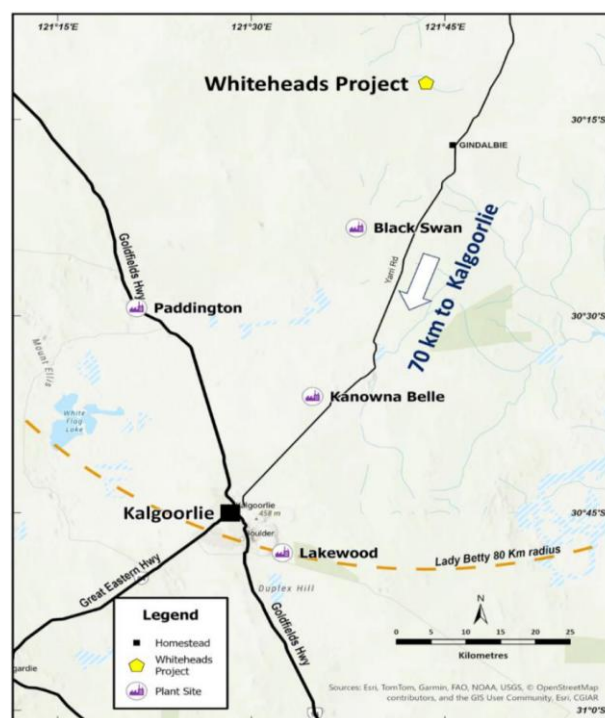


Figure 1: Map showing the location of Hastings' Whiteheads Project.

Interpretations of domain continuity were initially undertaken in Leapfrog 3D software, with mineralisation intercepts correlating to individual domains manually selected prior to creation of a vein model. Four steeply dipping main mineralisation domains were constructed, targeting zones of >0.3 g/t Au following the perceived NW trend of mineralisation at Seven Leaders. These included two main domains (domains 1001 and 1002) and minor lodes (domains 1003 and 1004) that sit in the hanging wall (HW) and foot wall (FW), respectively (Figure 2 and Figure 3). Domaining was primarily based on grade continuity with little geological input due to the lack of solid geological data at the project; however, the density of drilling has supported the Competent Persons confidence in the continuity of gold grades.

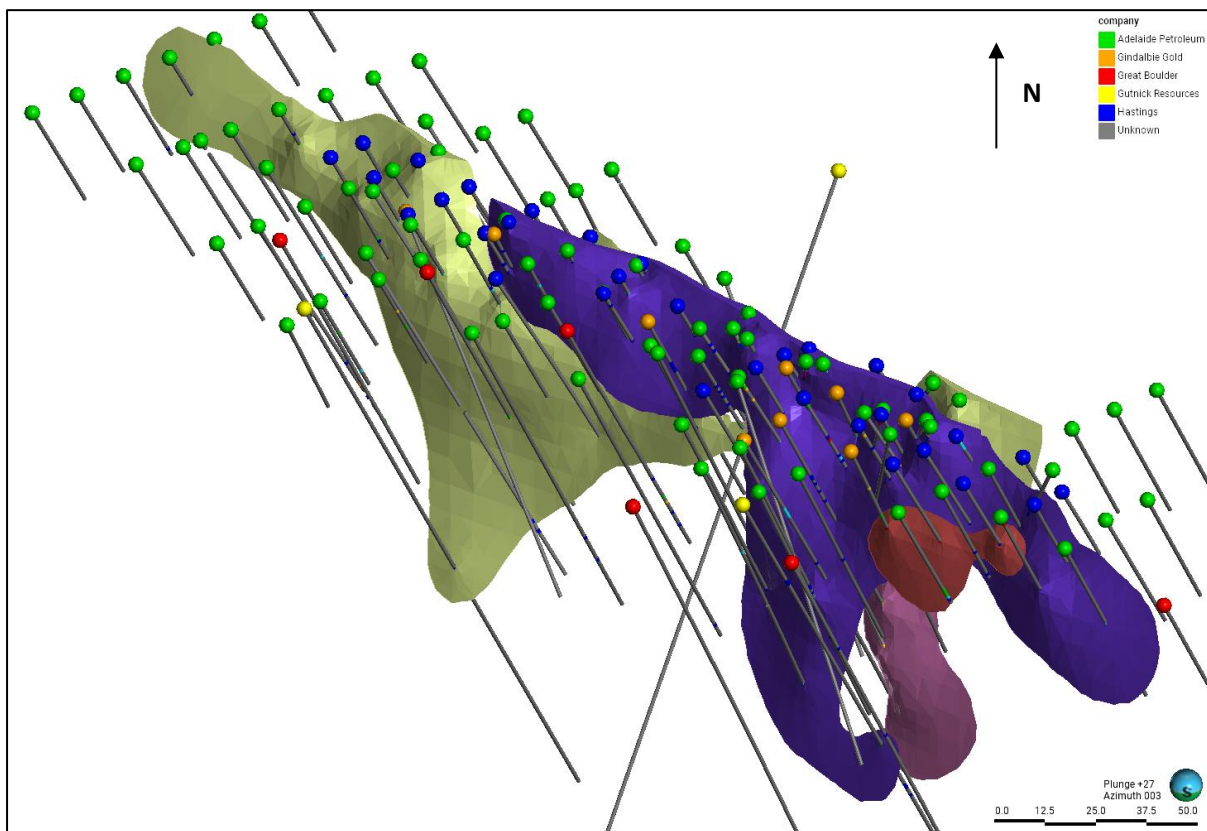


Figure 2: Oblique view looking N, showing drill holes (coloured by the company who drilled them) and mineralised domains.

Note: Mineralised domains (as interpreted) do not represent Mineral Resource classification extents.

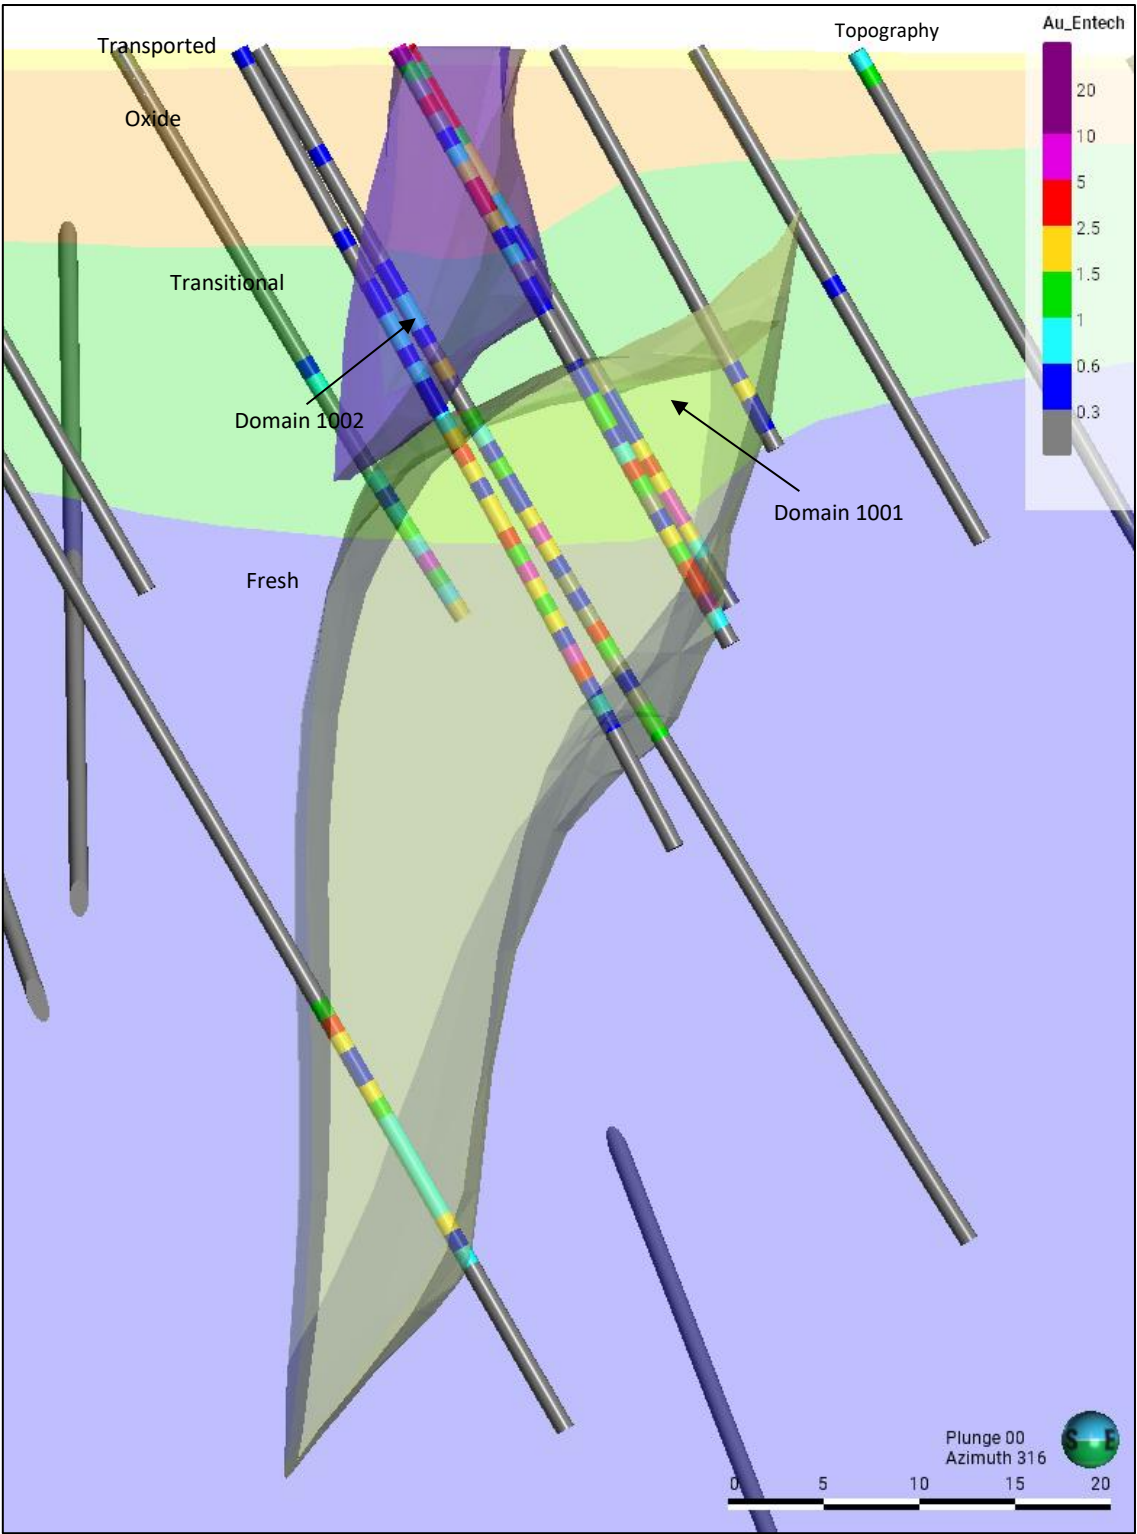


Figure 3: Cross-section centred on 374815E, 6663490N of the Seven Leaders deposit (Azimuth 316° +/-10 m) showing drill hole traces, oxidation, topography and mineralised domains.

Note: Mineralised domains (as interpreted) do not represent Mineral Resource classification extents.

Domains

The domain volumes and the contribution of each to the total volume are listed in Table 3.

Table 3: Seven Leaders domains with volume contribution

Domain	Volume contribution
1001	60%
1002	34%
1003	2%
1004	4%

Estimation Methodology

Sample data within mineralisation domains were composited to 1.0 m downhole lengths in Leapfrog Geo, intervals of less than 1.0 m were equally distributed across the other composites within the same intercepts.

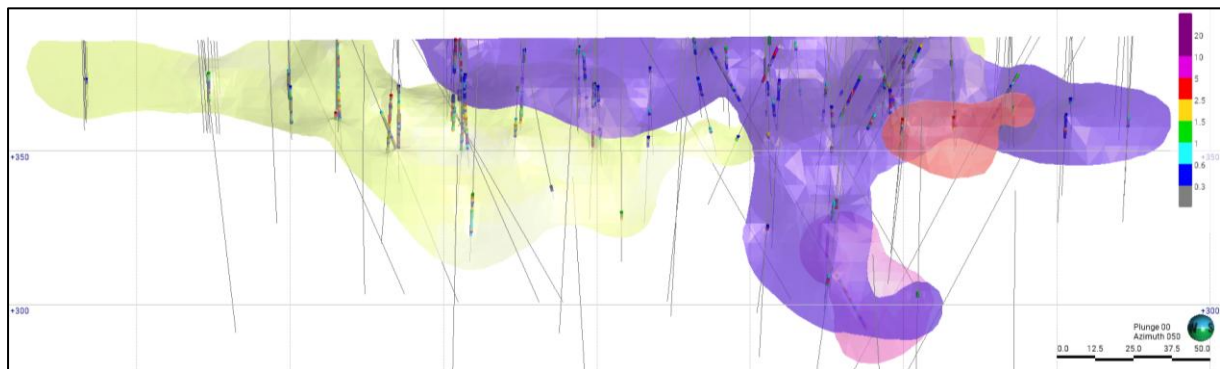


Figure 4: Mineralisation domains with drilling composites coloured by gold grade and drillhole traces.

Note: Mineralised domains (as interpreted) do not represent Mineral Resource classification extents.

Exploratory Data Analysis (EDA) of the declustered (5 mN, 10 mE, 5 mZ) composited gold variable within the mineralised domain volumes was undertaken using Supervisor™ software. Analysis for sample bias, domain homogeneity and top capping was undertaken. Evidence for further sub-domaining of composite data by weathering or lithology boundaries, for the purposes of interpolation, was not supported by statistical and spatial analysis.

Initial assessment and application of top-capping for the estimate was undertaken on the gold variable within individual domains. Top-caps were applied as shown in Table 4.

Table 4: Seven Leaders top-caps applied by domain

Domain	Top-Cap	Top-Cap Count	Top-Cap Percentile	% Metal Cut
1001	9.00	4	99.9%	3.3%
1002	8.00	7	97.9%	16.7%
1003	N/A	-	-	-
1004	8.00	4	87.5%	22.5%

Variography was undertaken on the capped, declustered gold variable for all the domains combined. The variogram model was used in Qualitative Kriging Neighbourhood Analysis (QKNA) to determine parent cell estimation size and optimise search neighbourhoods.

Interpolation was undertaken using Ordinary Kriging (OK) in Leapfrog Geo™ within parent cell blocks. Dimensions for the interpolation were Y: 10 mN, X: 5 mE, Z: 5 mRL, with sub-celling of Y: 1.25 mN, X: 0.625 mE, Z: 0.625 mRL. The block model was rotated -35° around the Z axis to adequately define the domain volumes. Considerations relating to appropriate block size include drill hole data spacing, conceptual mining method, variogram continuity ranges and search neighbourhood optimisations were based on qualitative kriging neighbourhood analysis (QKNA) carried out in Snowden's Supervisor.

A two-pass estimation search strategy was employed for all reported domains. The first pass employed the maximum variogram ranges with major/semi-major and major/minor ratios of 2 and 3, respectively. The number of composites selected ranged from a minimum of 6 to a maximum of 18 samples for the first pass. The second-pass estimation search ellipse was increased by a factor of two from the first pass, with the minimum and maximum composites maintained.

A maximum of five samples per drill hole was applied during all estimation passes to allow each block to be informed by more than one drill hole.

The 3D block model was coded with density, weathering and Mineral Resource classification prior to evaluation for Mineral Resource reporting. Domain boundaries represented hard boundaries, whereby composite samples in that domain were used to estimate blocks within the domain. Waste material was not estimated.

Classification Criteria

The Seven Leaders Mineral Resource was classified as Indicated and Inferred to appropriately represent confidence and risk with respect to data quality, drill hole spacing, and grade continuity and mineralisation volumes.

In Entech's opinion, the Hastings drilling, surveying and sampling undertaken, and analytical methods and quality controls used, are appropriate for the style of deposit under consideration.

The Indicated portion of the estimate was outlined where a moderate level of geological confidence

in geometry, continuity and grade was demonstrated and was identified as areas where blocks were well supported by drill hole data, with the informing drill holes of a rough spacing of 25 m × 25 m or closer and sit within the optimised pit shell.

Inferred Mineral Resources were outlined where a low to moderate level of geological confidence in geometry, continuity and grade was demonstrated and were identified as areas where blocks were supported by drilling a drill spacing of around 50 m × 50 m.

All blocks that did not fall within the parameters outlined above remain unclassified reflecting the low confidence and lack of data supporting these blocks. Unclassified blocks should not be used for reporting or mine planning purposes.

Mineral Resources that are not Ore Reserves do not have demonstrated economic viability. The MREs do not account for selectivity, mining loss and dilution. This MRE update includes Inferred Mineral Resources which are unable to have economic considerations applied to them, nor is there certainty that further sampling will enable them to be converted to Measured or Indicated Mineral Resources.

In the opinion of Entech, the supplied topography survey and pit void appropriately represent the extent of pit excavation.

No estimation or assumptions with respect to deleterious elements, non-grade variables or by-products were made.

Cut-off Grade

The cut-off grade for reporting of global gold Mineral Resources at Seven Leaders was 0.5 g/t Au. This was based on consideration of the global grade-tonnage data (Figure 5 and Table 5), mining selectivity, prevailing gold price and benchmarking against peers. Tonnes were estimated on a dry basis.

No factors or assumptions were made within the MRE with respect to deleterious variables or by-products. Entech was not aware of deleterious variables which would materially affect the eventual economic extraction of Mineral Resources. No factors or assumptions were made within the MRE with respect to environmental considerations.

Variances to the tonnage, grade and metal of the Mineral Resources are expected with further definition drilling. The Mineral Resources may also be affected by subsequent assessment of mining, environmental, processing, permitting, taxation, socio-economic and other factors.

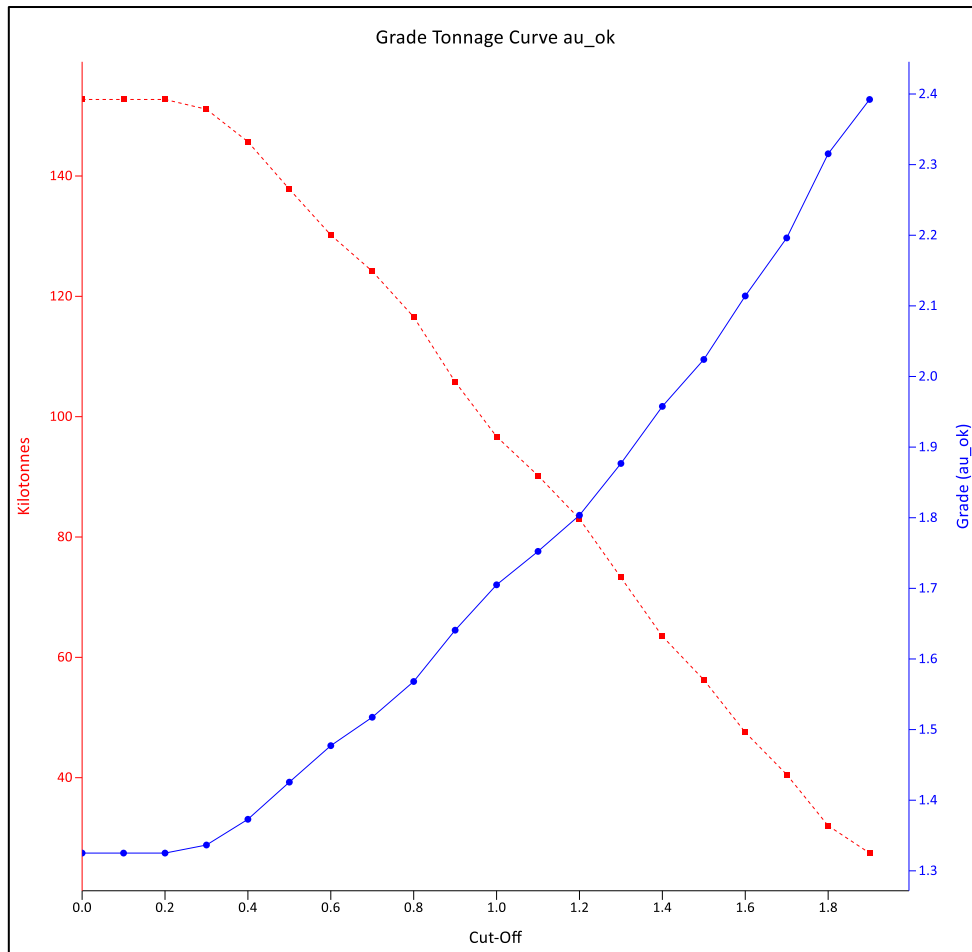


Figure 5: Grade-tonnage curve for Seven Leaders – Indicated and Inferred Mineral Resources.

Table 5: Grade-tonnage tabulation for Seven Leaders – Indicated and Inferred Mineral Resources.

Cut-off	Tonnes	Au	Ounces
0.2	152,719	1.33	6,506
0.3	151,091	1.34	6,495
0.4	145,696	1.37	6,431
0.5	137,818	1.43	6,319
0.6	130,198	1.48	6,183
0.7	124,174	1.52	6,056
0.8	116,578	1.57	5,877
0.9	105,796	1.64	5,582
1.0	96,689	1.71	5,300
1.1	90,212	1.75	5,081
1.2	83,019	1.80	4,812
1.3	73,276	1.88	4,422
1.4	63,509	1.96	3,998
1.5	56,265	2.02	3,661
1.6	47,540	2.11	3,231
1.7	40,522	2.20	2,861
1.8	32,018	2.32	2,383
1.9	27,470	2.39	2,113

Depletion

No depletion has been applied to the Seven Leaders MRE, as no mining of the modelled mineralisation is known to have occurred. While historic workings are present in the area (most likely from the early 1900s in which ore was hand dollied), they do not appear to have targeted the mineralisation captured in this estimate as evidenced by the shallow workings sitting to the NE of the orebody and no drill holes having intersected voids within the mineralisation.

Bulk Density

Hastings took seven bulk density measurements on a recent DD hole drilled at Seven Leaders. This hole was drilled for geotechnical test work and therefore did not target mineralisation and does not form a part of this MRE. In 1995, 49 bulk density measurements were also taken from historic DD hole SLD088 which were from primarily taken at depth, representing only the transitional and fresh rock profiles.

Due to the low number of bulk density measurement available, all available data were used to in calculating mean values to assign to the weathering profile. The bulk density mean values (g/cm³) were applied in the block model as shown in Table 6.

Table 6: Bulk density assignment by oxidation.

Oxidation	Bulk Density g/cm ³
Transported	1.91
Oxide	1.91
Transitional	2.78
Fresh	2.78

Project History and Historical Mineral Resources

There are no previous publicly reported resources for the Seven Leaders deposit.

Mining

The Seven Leaders area was mined sometime prior to the 1980s with small scale workings being found in the vicinity. Reports from the 1980s state that no records were kept from these workings as all ore was hand dollied. These workings, however, do not appear to target the orebody that this MRE is focussed on.

Metallurgy

Evidence of metallurgical testing for the Seven Leaders deposit has been uncovered in historic reporting for the deposit (Gindalbie Gold Combined Annual Report 1996 A49821). In 1995, Gindalbie Gold sent a single composite sample from diamond hole SLD088 to Micron Research for Bottle Roll testing.

The sample was stage crushed and milled to a grind size of approximately 98% passing 75 µm. Bottle-roll cyanidation tests were then conducted under controlled conditions with samples taken over a 33-hour period to assess dissolution kinetics. Residue samples were fire assayed and further screened and assayed by size fraction to understand gold distribution in the ore post-leach. The test work resulted in average recoveries of 92% from a 10-hour extraction time and 96.9% from 33-hours.

There is no record of how the composited sample was constructed, and it is difficult to characterise the whole orebody from a single sample. Hastings therefore is currently forecasting a more conservative average recovery rate of 90% until further test work can be carried out.

No deleterious elements or potential by-products were noted in the historical test work. Based on discussions with Hastings staff, Entech understands there are no metallurgical amenability risks which would pose a material risk to the eventual economic extraction of the Mineral Resources. No metallurgical recovery factors were applied to the Mineral Resources or Mineral Resource tabulations.

Assessment of Reasonable Prospects for Eventual Economic Extraction

The Seven Leaders Mineral Resource was constrained within a pit shell optimised at AU\$4,500/oz gold price (RPEEE Shell). Pit optimisation inputs were chosen for the purpose of assessing RPEEE within an open pit mining environment and gold price was chosen based on the current market price with a view to where it may be in the near term. Entech used parameters provided by Hastings based on their cost forecasts for mining at Seven Leaders. The full list of parameters used in the pit optimisation is shown below in Table 7.

Table 7: Pit optimisation parameters, RPEEE shell.

Parameter	Oxide/ Transported	Transitional	Fresh
Gold price (AUD/oz)	\$4,500		
Pit slope angle (°)	39	45	52
Mining cost (AUD/t)	\$8.00		
Processing cost (AUD/t)	\$60.00		
Re-block size	2.5 mX × 2.5. mY × 2.5 mZ		
Recovery (%)	90		
Royalty (%)	2.5		

Considering available drill hole spacing and pit optimisation outcomes, the vertical depth of Mineral Resources, constrained within RPEEE Shell, is nominally 50 m below natural surface within Hastings's tenement boundary. Entech considers that material at this depth would fall under the definition of RPEEE within an open pit mining framework.

Variances to the tonnage, grade and metal of the Mineral Resources are expected with further definition drilling. The Mineral Resources may also be affected by subsequent assessment of mining, environmental, processing, permitting, taxation, socio-economic and other factors.

It is the Competent Person’s opinion that the proposed mining methods, pit constraints and cut-off grades applied satisfy the requirements for RPEEE.

In relation to the Seven Leaders MRE, there is a moderate risk of volume and grade variations with further extensional and infill drilling. Updates to the geological modelling (interpretation revisions) will be required prior to undertaking detailed mine planning studies. The geological and structural controls on high grade mineralisation orientations and continuity are not well understood at the time of preparing the MRE.

Entech considers the current uncertainty regarding volume and grade is reflected in the Mineral Resource classification.

Entech considers this MRE suitable for:

- Mining Feasibility Studies, Ore Reserve Evaluation, Life of Mine design and planning
- Public reporting to Australian Securities Exchange (ASX) regulations and in accordance with guidelines of the JORC Code (2012).

Figure 6 shows the MRE reporting area of the block model above an outline of the optimised pit shell.

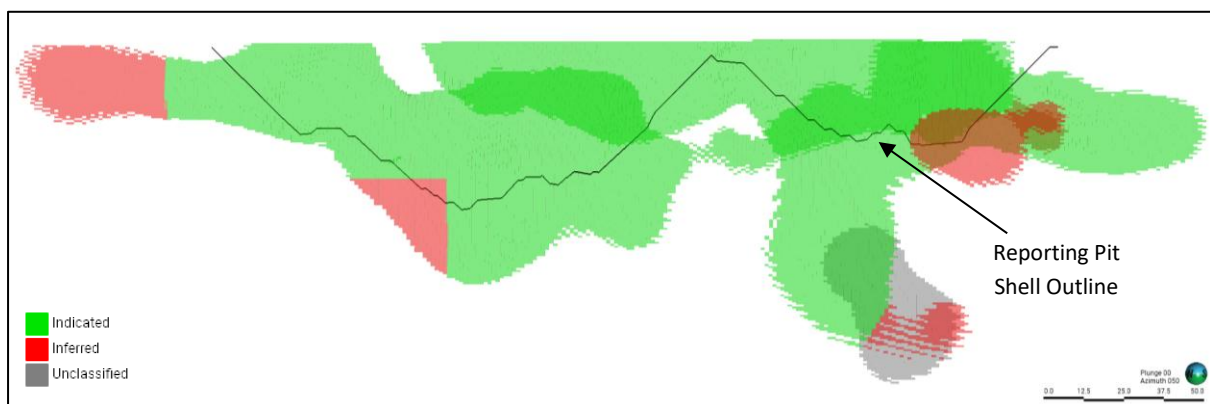


Figure 6: Mineral Resource coloured by classification with optimised pit shell outline, showing MRE reporting area.

Figure 7 shows the block model constrained to the optimised pit shell and coloured by gold grade along with the informing drillhole composites.

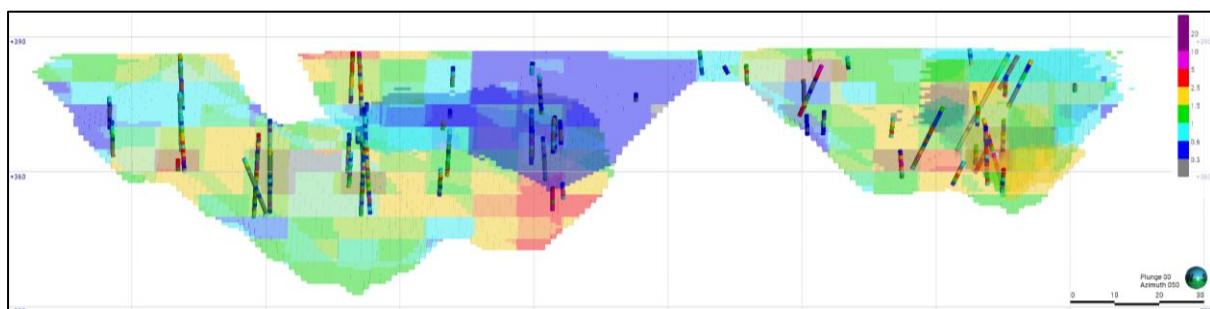


Figure 7: Mineral Resource coloured by gold grade constrained to optimised pit shell with drilling composites.

END