

24 September 2025

Exploration Commences at Bobija

Middle Island Resources commences field activities at the Bobija Polymetallic Project, Western Serbia

HIGHLIGHTS:

- The initial target is the historic Bobija mine - a polymetallic deposit located 12km southeast of the Veliki Majdan lead-zinc-silver mine, previously operated by Mineco Limited.
- Bobija was originally explored by the Yugoslav State for barite, lead and zinc and has many similarities to the former Adriatic Metals' Vares project in Bosnia and Herzegovina (20.9Mt @ 1.1g/t Au, 153g/t Ag, 0.4% Cu, 2.8% Pb & 4.3% Zn).⁽¹⁾
- Recent work has highlighted the potential of the area to not just host significant, shallow base metal mineralisation but also significant gold mineralisation.
 - Rock chips have reported up to 5.24g/t Au, 120 g/t Ag, 4.66% Zn and 4.36% Pb.
- Extensive massive sulphide mineralisation is exposed in the floor of the historic open pit mine. MDI is initially undertaking rock chip / channel sampling to assess grade and distribution of outcropping sulphide-barite mineralisation in the pit.

Middle Island Resources Limited (ASX:MDI, "Middle Island" or "the Company") is pleased to advise that it has commenced exploration activities within Konstantin Resources' highly prospective portfolio of Serbian exploration projects. MDI recently announced that it has entered into a binding share sale and purchase agreement to seek to acquire 100% of Konstantin Resources Limited ("Konstantin").

Daniel Raihani, Non-Executive Director, commented:

*"We are very pleased to begin work on the Serbian projects within a world-class mineral belt. The Bobija Project is an under-explored, high-grade, polymetallic deposit with promising near-surface drilling and rock chip results, **located within a granted mining lease, and surrounded by substantial poorly tested exploration tenure.** Recent work by Konstantin has revealed significant gold associated with the base metal mineralisation historically targeted in the area.*

This work program represents the first step in this exciting new chapter for the Company. We look forward to accelerating exploration programs and applying modern exploration techniques across the combined project portfolio of copper and gold focussed exploration assets in Australia and Serbia"

¹ Adriatic Metals corporate presentation (19 May 2025) – Rupice Indicated plus Inferred Mineral Resources.

BOBIJA PROJECT

The Bobija Project is located in central-western Serbia about 100 km southwest of Belgrade. The project comprises six mineral licences with a total area of 208km². Three exploration licences are already granted (Bobija, Bobija East and Kamenita Kosa), and an application has been submitted for a fourth licence (Orovica). Konstantin also holds a 10-year option to acquire two granted mining licences (Bobija and Tisovik ML's) from a local company, Bobija doo Ljubovija (Figure1).⁽²⁾

MDI's initial focus in the project area is the Bobija mine area (Bobija ML), where barite-sulphide mineralisation is exposed in the floor of the historic open pit mine. Historic exploration in the Bobija Mine area has included exploratory underground development by the former Government of Yugoslavia, as well as several phases of exploration drilling completed between the 1960's and 1980's which targeted barium, lead, zinc +/- silver.

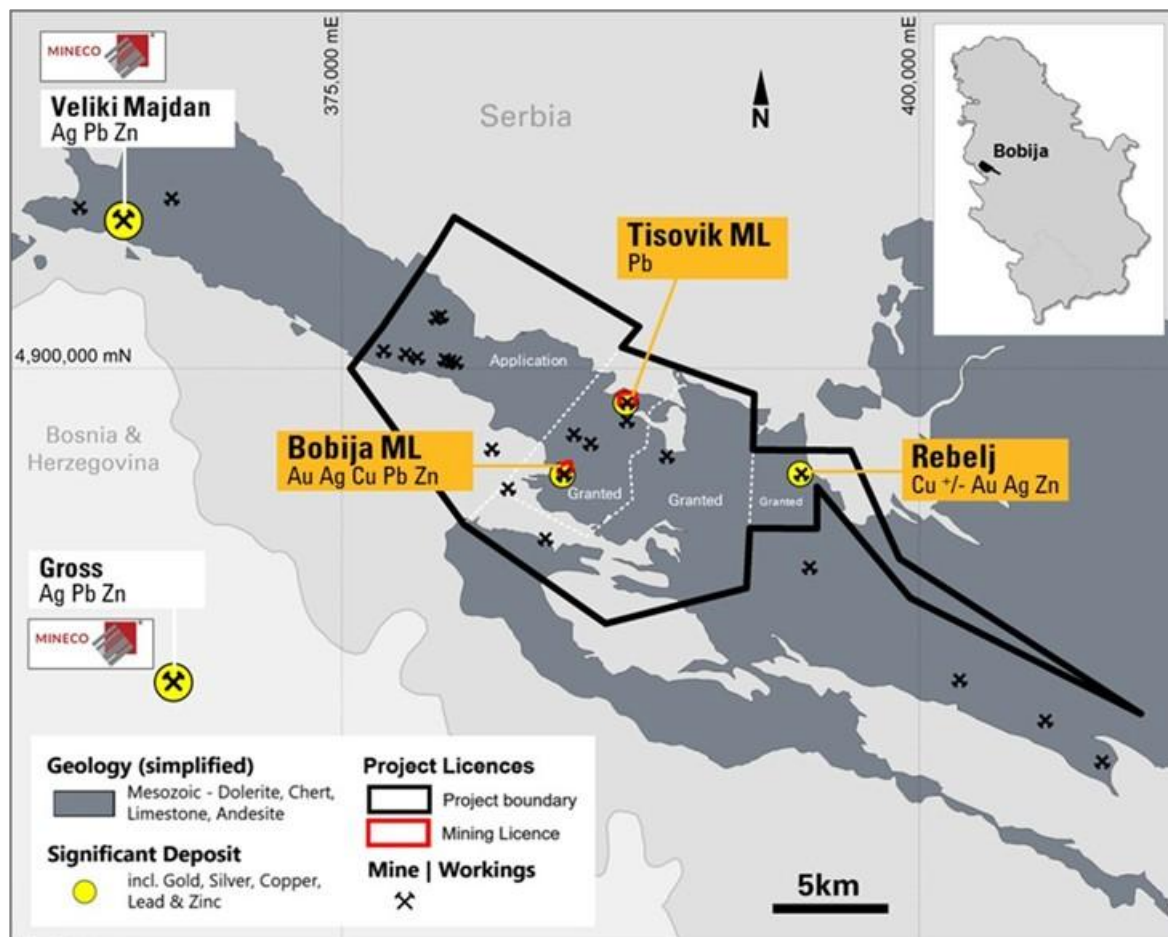


Figure 1 – Location of Bobija project licences.

In 2014 – 2017 Reservoir Minerals and Nevsun Resources completed minor drilling in the Bobija Mine area and were the first groups to assay for gold. Drilling results recorded significant flat-lying near-surface polymetallic (barite-sulphide) mineralisation hosted in Triassic sediments and

² Refer to Appendix 1 for Tenement Schedule.

demonstrated the potential for significant gold and silver associated with the base metal mineralisation (Table 1).

The Bobija deposit and surrounding region remains inadequately explored and offers potential for the delineation of significant polymetallic (gold-silver-copper-lead-zinc) mineralisation through the application of a comprehensive and systematic exploration program. Furthermore, the full extent of the gold mineralisation within the deposit is yet to be fully quantified with gold potentially representing a very significant component of this polymetallic deposit.

Hole ID	From (m)	To (m)	Interval (m)	Au (g/t)	Ag (g/t)	Pb (%)	Zn (%)
BB-02	19.50	64.70	45.20	1.71	25.52	0.87	2.26
incl.	20.60	41.80	21.20	2.31	42.75	1.08	3.08
BB-03	47.00	66.00	19.00	1.64	41.21	1.00	3.47
incl.	53.10	62.50	9.40	1.82	46.78	1.31	4.37
BB-04	36.50	52.50	16.00	1.58	83.41	1.98	2.29
BB-06	22.60	34.30	11.70	1.56	81.76	2.71	3.01
“	24.60	32.50	7.90	1.89	108.96	3.67	3.93
BB-07	2.00	17.10	15.10	1.91	122.14	4.23	4.73
BB-09	59.20	61.20	2.00	1.19	29.00	0.48	0.39
“	64.10	69.10	5.00	0.02	0.50	0.20	4.92
BB-10	50.00	52.50	2.50	0.47	16.56	0.24	0.40

Table 1 – Summary of significant Bobija drill intersections (after Reservoir Minerals).⁽³⁾

Bobija In-pit Channel Sampling

MDI has commenced a detailed channel (+/- rock chip) sampling program across areas of barite-sulphide mineralisation exposed in the Bobija open pit, including both on bench faces and where accessible, on the pit floor.

Konstantin has only completed limited in-pit rock chip sampling to date, however, samples taken have recorded significant polymetallic mineralisation including assay results up to **5.24g/t Au, 120 g/t Ag, 4.66% Zn and 4.36% Pb** (Figure 2).⁽⁴⁾

In addition to determining the grade and distribution of the exposed mineralisation, the channel sampling program will also allow the technical team to develop a greater understanding of the lithological controls on mineralisation, and the relationship between alteration and metal assemblages.

Assay results for the expanded channel sampling program are awaited.

³ Source: Reservoir Minerals Inc. News Release – “Reservoir Minerals completes drilling program at Bobija Lead-Zinc-Silver-Gold Project” (dated 24 Nov. 2014). Refer Appendix 2.

⁴ Refer MDI ASX release “Transformational Acquisition of Serbian Copper Gold Assets” dated 02 September 2025.



Figure 2: View of Bobija open pit mine with rock chip samples from the massive sulphide zone shown.

Bobija Soil Sampling

The greater Bobija Project area is also considered to be highly prospective for the discovery of polymetallic gold and base metal mineral deposits. The project area includes a number of historic mine sites where massive sulphide mineralisation has been recorded (ie: Tisovik Mine – lead, Rebelj Mine – copper). Multiple barite and sulphide workings have also been reported across the project area in historical (Government era) reports (Figure 1).

In 2024, Konstantin completed a stream sediment sampling program across all granted licences. This program identified a number of drainage basins anomalous in gold and base metals.

In recent weeks, Konstantin commenced a series of soil sampling programs across all granted licences within the Bobija Project area. This sampling (shown in Figure 3) is targeting areas of anomalous stream sediment assay results and areas where anomalous rock chip and grab samples were recorded from reconnaissance exploration activities.

Soil sampling is ongoing and assay results are awaited for this work.

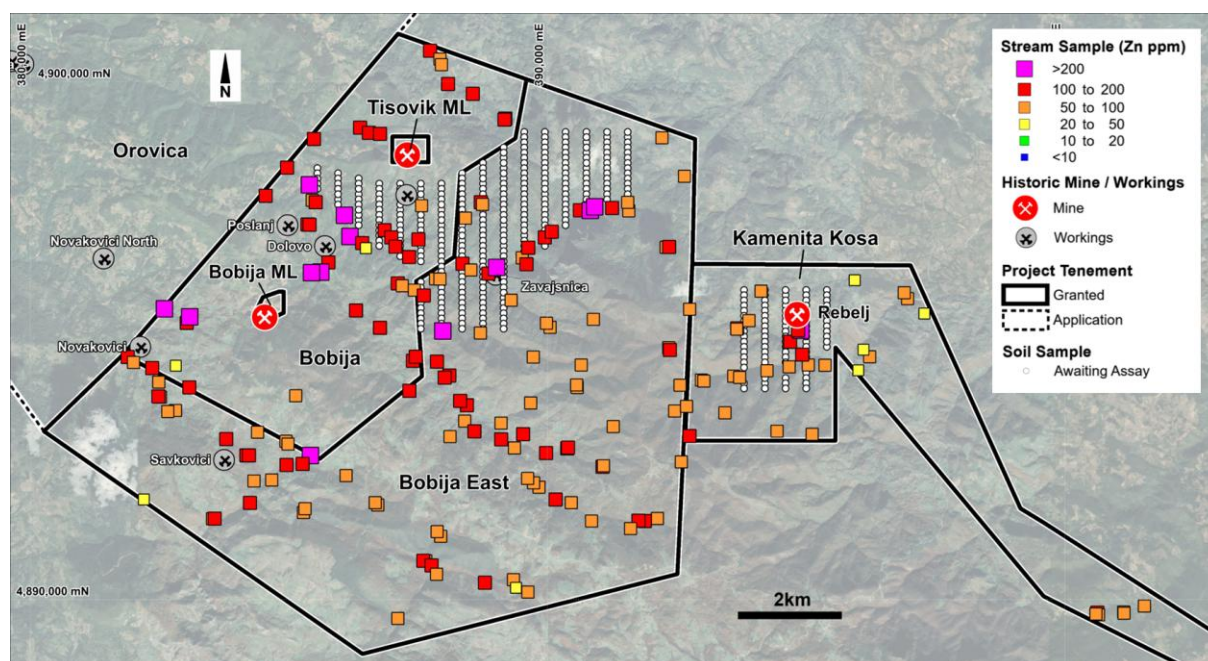


Figure 3: Stream sediment sample results across the Bobija Project area (showing Zn ppm) and location of current soil sampling programs.

Shareholders' General Meeting

MDI anticipates that it will hold a shareholders' General Meeting in late October to seek approval for the acquisition of Konstantin. The Notice of Meeting (NoM) is presently with ASX and ASIC for review and it is anticipated that the General Meeting will be held in late October to early November.

RELEASE AUTHORISED BY THE MDI BOARD:

Daniel Raihan
Non-Executive Director

Alex Cowie
Investor & Media Relations

Forward Looking Statements

Statements contained in this release, particularly those regarding possible or assumed future performance, costs, dividends, production levels or rates, prices, resources, reserves or potential growth of Middle Island, industry growth or other trend projections are, or may be, forward looking statements. Such statements relate to future events and expectations and, as such, involve known and unknown risks and uncertainties. Actual results and developments may differ materially from those expressed or implied by these forward-looking statements depending on a variety of factors.

Competent Persons Statement

The information in this announcement that relates to Exploration Results, Mineral Resources or Ore Reserves (as applicable) is based on, and fairly represents, information compiled by Mr Peter Spiers, a Competent Person who is a Member of the Australian Institute of Geoscientists and a full-time employee of Konstantin Resources Limited and consultant to the Company. Mr Spiers has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'.

Mr Spiers consents to the inclusion in the presentation of the matters based on his information in the form and context in which it appears.

Mr Spiers has disclosed to the Company the full nature of the relationship between himself and the Company and Konstantin Resources, including any issue that could be perceived by investors as a conflict of interest. Mr Spiers is a Director and an employee of Konstantin Resources Limited, as a security holder in Konstantin Resources Limited (either directly or indirectly), Mr Spiers will receive approximately 46,549,026 Consideration Shares and 7,839,836 Consideration Options on completion of the Acquisition.

About Konstantin's Projects

Konstantin Resources has assembled a portfolio of exploration projects located in the Western Tethyan Mineral Province, Serbia, that are highly prospective for the discovery of gold and base metal deposits.

The Western Tethyan Mineral Province is a world class geological setting containing giant copper, gold and silver deposits, including, Zijin Mining's Cukaru Peki project (22.6Mt Cu and 17.1 Moz Au) and recent Malka Golaja discovery (~150Mt @ 1.9% Cu and 0.6g/t Au), Adriatic Metals' (recently acquired by Dundee Precious Metals) Vares project (20.9Mt @ 1.1g/t Au, 153g/t Ag, 0.4% Cu, 2.8% Pb & 4.3% Zn), Dundee Precious Metals' Coka Rakita project (6.6Mt @ 6.38g/t for 1.4Moz Au) and Rio Tinto's Jadar project (139Mt @ 14.7% B₂O₃ & 1.8% Li₂O). BHP is also active in the country under an earn-in agreement with Mundoro Capital Inc.⁽⁵⁾

The Konstantin exploration portfolio, comprising 14 licences either 100%-owned or held under agreements with a path to 100% ownership, cover approximately 620km², and encompasses the Bobija, Timok and Priboj project areas (refer Figure 1 and Appendix 1 - Tenement Schedule).

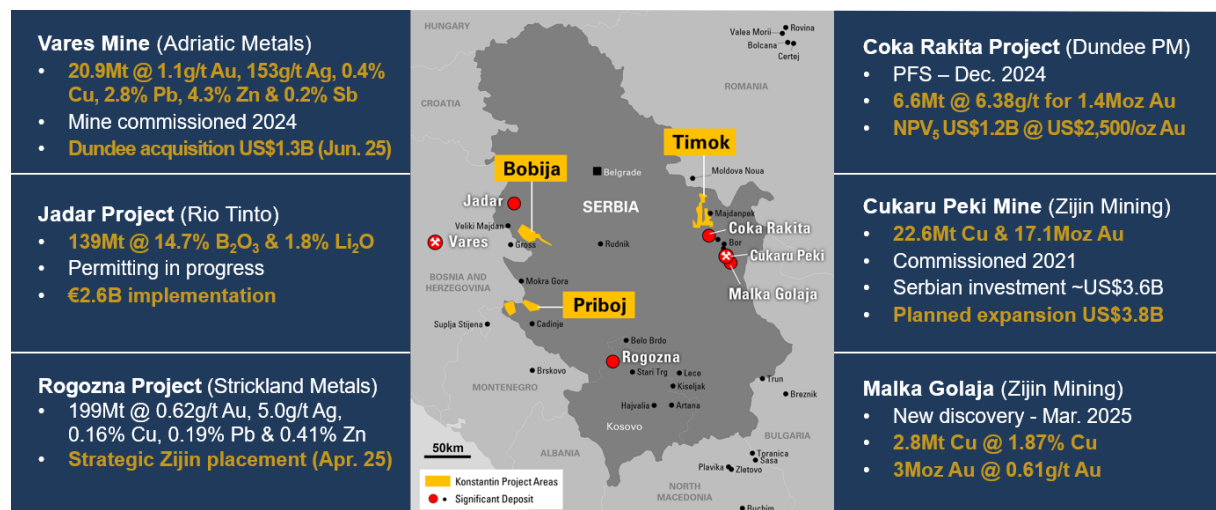


Figure 4 – Location of Konstantin projects within world class mineral province.

⁵ Source documents:

- Adriatic Metals plc corporate presentation (19 May 2025) – Rupice Indicated plus Inferred Mineral Resources.
- RioTinto announcement - “Rio declares maiden Ore Reserve at Jadar” (10 Dec. 2020) - Jadar total Indicated and Inferred Mineral Resource.
- Strickland Metals presentation – “Rogozna Exploration Update” (26 Aug 2025) – Rogozna Inferred Mineral Resource, ASX Announcement – “Completion of Zijin Mining Strategic Placement” (23 April 2025).
- Dundee Precious Metals company announcement – “Dundee Precious Metals Announces Pre-Feasibility Study Results for the Coka Rakita Project” - Coka Rakita total material processed.
- Zijin Mining 2024 Annual Report (23 Mar 2025) – Cukaru Peki total Measured, Indicated and Inferred Mineral Resource. Zijin Mining presentation (21 Aug. 2023), Zijin Mining press release (13 Sept. 2023)– “US\$3.8B expansion of Cukaru Peki mine”.
- Zijin Mining 2024 Annual Report (23 Mar 2025) - Malka Golaja – JORC compliant resource, no category specified.

Appendix 1 – Konstantin Tenement Schedule

Project Area	Tenement	Area (km ²)	Interest	Tenement Status
Bobija	Bobija	29.8	100%	Granted
	Kamenita Kosa	25.7	100%	Granted
	Orovica	84.1	100%	Application
	Bobija East	67.7	100%	Granted
	Bobija ML	0.2	0%	Granted ⁽⁶⁾
	Tisovik ML	0.4	0%	Granted ⁽⁵⁾
Timok	Brodica	53.2	100%	Granted
	Coka Fantina	41.0	100%	Application
	Majdanpek West	70.4	100%	Application ⁽⁷⁾
	Majdanpek Pojas	7.3	0%	Application ⁽⁶⁾
	Brodica West	45.8	100%	Application
Priboj	Jermovac	5.7	100%	Granted ⁽⁸⁾
	Priboj	89.5	100%	Granted
	Ober	99.5	100%	Granted
TOTAL		620.2		

Table2: Konstantin Resources tenement schedule (31 August 2025).

⁶ Subject of the Bobija Agreement (a joint venture / option agreement) with a Serbian-registered entity (Bobija doo Ljubovija) dated 11 December 2023 providing a pathway to potential 100% ownership. A 0.5% NSR royalty applies. The Bobija and Tisovik mining licences, issued on 05 March 1963 and 10 October 1975 respectively, are valid licences but currently not considered to be in good standing.

⁷ Subject of a Sale and Purchase Agreement with Raiden Resources (ASX:RDN) dated 12 April 2023 providing pathway to potential 100% ownership (1.0% NSR royalty applies).

⁸ Subject to an application for licence renewal lodged with the Ministry of Mines and Energy.

Appendix 2 – JORC Code, 2012 Edition Table 1 – BOBIJA PROJECT

Section 1 Sampling Techniques and Data (Criteria in this section apply to all succeeding sections)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where ‘industry standard’ work has been done this would be relatively simple (eg ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	<p>This table relates to all reported exploration work complete to date within the Bobija Project area including historical exploration and exploration completed by Konstantin Resources Ltd (the “Company”).</p> <p><i>Historical:</i></p> <ul style="list-style-type: none"> Historical exploration work reported from the Bobija Project has included mapping, soil sampling, rock chip sampling, geophysical surveys (gravity), underground development, underground face sampling and diamond drilling. Historical exploration has been completed by former Government-owned entities including RMHK Trepca and Geozavod (Government), Mineco Limited (Mineco), and by Balkan Exploration and Mining doo, a Serbian-registered company that was held under the successive ownership of Reservoir Minerals (Reservoir), Nevsun Resources (Nevsun) and Zijin Mining Group (Zijin). The sampling methodology applied to historic samples is generally unknown other than as described in subsequent sections of this table. <i>Soil sampling:</i> Historic soil sampling was reported by Nevsun in 2017, however no results are available. <i>Rock chip (channel) sampling:</i> a single historical rock chip sample is reported from the Bobija Project area: Reservoir: 1x 6m channel sample (2012) <i>Geophysics:</i> historical geophysical surveys recorded from the Bobija Project area include: Gravity: 0.45km² area (Reservoir, 2014) <i>Underground development:</i> More than 9km of historical underground development is recorded from the Bobija Project area from the Bobija, Tisovik and Rebelj mines. <i>Underground channel sampling:</i> 546 historical underground channel/face samples are recorded from historic mines and workings in the Bobija Project area including the Bobija, Tisovik and Rebelj mines. <i>Drilling:</i> 77 historical diamond drill holes are recorded from the Bobija Project area including: Government: 54 holes for 4,036.50m (1964-88) Reservoir: 8 holes for 622.90m (2014) Nevsun: 15 holes for 1,632.00m (2016/17) <p><i>Konstantin:</i></p> <ul style="list-style-type: none"> <i>Stream sediment sampling:</i> 198 samples were collected in 2024 on a typical 1km² drainage area basis. A nominal 3kg sample was collected from active drainage system and sieved on site to -1mm prior to submission to the laboratory. The entire laboratory sample is sieved to -80# mesh to produce a 250g subsample and 30g charge for fire assay and ICP-MS finish (FAM303) and multi-element analysis by 4-acid digestion with ICP-MS finish (IMS40B). <i>Soil sampling:</i> Soil sampling programs are planned for implementation in late 2025 totalling approximately 420 samples from the Bobija, Bobija East and Kamenita Kosa exploration licences. Typically, the top 10 cm of cover material will be removed and regolith and a 2-3kg sample collected from the B/C horizon for submission to the laboratory. The entire sample will be pulverized to produce a 250g sub-sample and a 50g charge for fire assay and ICP-MS finish (FAM505) and multi-element analysis by 4-acid digestion with ICP-MS finish (IMS40B).

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> • <i>Rock chip sampling</i>: 68 samples were collected between 2023-25 from outcrop, sub-crop, float material and stockpiles. Sample weight was typically 2-3kg and samples were submitted to the laboratory in whole. Laboratory samples were crushed and pulverised to produce 250g pulps and a 50g charge for fire assay with atomic absorption finish (FAA505) and multi-element analysis by four-acid digestion with ICP-MS finish (IMS40B). • No other sample types, including drilling, have been completed by the Company in the Bobija Project area.
Drilling techniques	<ul style="list-style-type: none"> • Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.). 	<p><i>Historical:</i></p> <ul style="list-style-type: none"> • Diamond drilling completed in the Bobija Project area between 1964 and 2017 comprised 69 surface diamond drill holes and 8 underground diamond drill holes for more than 6,200m of drilling. Details of the drilling techniques are unknown other than as described below. <ul style="list-style-type: none"> - <i>Government</i>: completed 46 surface and 8 underground diamond drill holes between 1964 and 1988 focussed on the Bobija and Rebelj deposits for more than 4,000m of drilling. Core size ranged from 116mm (at the collar) reducing to 101mm, 86mm, 76mm, 66mm and 56mm diameters. - <i>Reservoir</i>: completed 8 surface diamond drill holes in 2014 focussed on the Bobija deposit for 622.90m. - <i>Nevsun</i>: completed 15 surface diamond drill holes between 2016 and 2017, focussed on the Bobija deposit, for 1,632.00m. <p><i>Konstantin:</i></p> <ul style="list-style-type: none"> • The Company has not completed any drilling within the Bobija Project area to date.
Drill sample recovery	<ul style="list-style-type: none"> • Method of recording and assessing core and chip sample recoveries and results assessed. 	<p><i>Historical:</i></p> <ul style="list-style-type: none"> • No methods are recorded for historical drilling other than as described below. <ul style="list-style-type: none"> - <i>Government</i>: drill core recoveries were recorded for each drill hole. Recoveries were poor and averaged 78% for available drill holes. - <i>Reservoir Minerals</i>: Core recovery through the reported mineralised intervals was generally 100%. <p><i>Konstantin:</i></p> <ul style="list-style-type: none"> • The Company has not completed any drilling within the Bobija Project area to date.
	<ul style="list-style-type: none"> • Measures taken to maximise sample recovery and ensure representative nature of the samples. 	<p><i>Historical:</i></p> <ul style="list-style-type: none"> • No measures are recorded for historical drilling. <p><i>Konstantin:</i></p> <ul style="list-style-type: none"> • The Company has not completed any drilling within the Bobija Project area to date.
	<ul style="list-style-type: none"> • Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<p><i>Historical:</i></p> <ul style="list-style-type: none"> • No assessment of a relationship has been recorded for historical drill samples. <p><i>Konstantin:</i></p> <ul style="list-style-type: none"> • The Company has not completed any drilling within the Bobija Project area to date.
Logging	<ul style="list-style-type: none"> • Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. 	<p><i>Historical:</i></p> <ul style="list-style-type: none"> • Logging of drilling completed before 2014 is not considered suitable for Mineral Resource estimation. • Geological logging of diamond drill core completed after 2014 (Reservoir and Nevsun) is considered suitable for Mineral Resource estimation. • No geotechnical or metallurgical logging of historic diamond drill core is recorded.

Criteria	JORC Code explanation	Commentary
		<i>Konstantin:</i> <ul style="list-style-type: none"> The Company has not completed any drilling within the Bobija Project area.
	<ul style="list-style-type: none"> Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography. 	<i>Historical:</i> <ul style="list-style-type: none"> No description of logging methodology is recorded for historical drilling other than as described below. Logging by the Government and Reservoir was based on qualitative identification of geological characteristics including lithology, alteration, weathering, and structural features. <i>Konstantin:</i> <ul style="list-style-type: none"> The Company has not completed any drilling within the Bobija Project area.
	<ul style="list-style-type: none"> The total length and percentage of the relevant intersections logged. 	<i>Historical:</i> <ul style="list-style-type: none"> Historic drill logs reported by the Government and Reservoir, indicate that drill holes were logged along the entire length of the hole. <i>Konstantin:</i> <ul style="list-style-type: none"> The Company has not completed any drilling within the Bobija Project area.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. 	<i>Historical:</i> <ul style="list-style-type: none"> No information has been located regarding sampling methodology used for historical diamond drill core. <i>Konstantin:</i> <ul style="list-style-type: none"> The Company has not completed any drilling within the Bobija Project area.
	<ul style="list-style-type: none"> If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry. 	<i>Historical:</i> <ul style="list-style-type: none"> No historical non-core drill holes are recorded. <i>Konstantin:</i> <ul style="list-style-type: none"> The Company has not completed any drilling with the Bobija Project area to date.
	<ul style="list-style-type: none"> For all sample types, the nature, quality and appropriateness of the sample preparation technique. 	<i>Historical:</i> <ul style="list-style-type: none"> No historical sample preparation techniques are recorded for historical diamond drill core samples. <i>Konstantin:</i> <ul style="list-style-type: none"> The Company has not completed any drilling with the Bobija Project area. All primary stream sediment, soil and rock chip samples collected by the Company are submitted in whole to the analytical laboratory for analysis. The laboratory uses industry standard techniques, as described below, to prepare samples for analysis.
	<ul style="list-style-type: none"> Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. 	<i>Historical:</i> <ul style="list-style-type: none"> No procedures are recorded for historical core sampling. <i>Konstantin:</i> <ul style="list-style-type: none"> The Company has not completed any drilling with the Bobija Project area to date. No other sample types collected by the Company are subject to sub-sampling or sample preparation prior to submission to the laboratory.
	<ul style="list-style-type: none"> Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. 	<i>Historical:</i> <ul style="list-style-type: none"> No measures are recorded for historical samples. <i>Konstantin:</i> <ul style="list-style-type: none"> Soil sample field duplicates are submitted to the laboratory at a frequency of approximately 1 in 20 samples. The Company has not used duplicates in the analysis of rock chip samples.

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> Whether sample sizes are appropriate to the grain size of the material being sampled. 	<p><i>Historical:</i></p> <ul style="list-style-type: none"> No assessment is recorded for historical sample data. <p><i>Konstantin:</i></p> <ul style="list-style-type: none"> The Company has not completed a formal assessment to define the optimal sample size required to determine representative assay results for rock chip samples. The sample methods used by the Company are considered industry standard techniques for the type of sampling being undertaken.
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. 	<p><i>Historical:</i></p> <ul style="list-style-type: none"> No information has been recorded on historical assay or laboratory procedures other than as described below. <i>Rock chip (channel) samples:</i> channel sample assay results reported by Reservoir included assays for Au, Ag, Cu, Pb and Zn. Laboratory protocols are unknown. <i>Underground channel samples:</i> assay results from underground face sampling are recorded as follows: No methods are recorded for historical drilling other than as described below. <ul style="list-style-type: none"> Bobija Mine: 448 samples (46 Ag, 109 Cu, 427 Pb, 428 Zn and 262 BaSO₄ assay results) Tisovik Mine: 61 Pb assay results. Rebelj Mine: 37 Cu assay results. Drill core samples: <i>Reservoir:</i> Drill core samples were crushed to less than 2mm at the Company's sample preparation facility in Belgrade. The crushed samples were submitted to ALS Minerals facilities in Bor, Serbia, for pulverising and analysis for gold by fire assay at the ALS Minerals laboratory in Rosia Montana, Romania, and by multi-element ICP at the ALS Minerals laboratory in Loughrea, Ireland. <p><i>Konstantin:</i></p> <ul style="list-style-type: none"> <i>Stream sediment samples:</i> The entire sample was sieved to -80# mesh to produce a 250g subsample and 30g charge for gold analysis by fire assay with ICP-MS finish (FAM303). An additional 0.25g charge was analysed for 49 elements (Ag, Al, As, Ba, Be, Bi, Ca, Cd, Ce, Co, Cr, Cs, Cu, Fe, Ga, Hf, In, K, La, Li, Lu, Mg, Mn, Mo, Na, Nb, Ni, P, Pb, Rb, S, Sb, Sc, Se, Sn, Sr, Ta, Tb, Te, Th, Ti, Tl, U, V, W, Y, Yb, Zn, Zr) by four-acid digestion with ICP-MS finish (IMS40B). <i>Soil samples:</i> Assay results are awaited for 2025 soil sampling in the Bobija Project area. The entire sample will be pulverized to produce a 250g sub-sample and a 50g charge for Au analysis by fire assay with ICP-MS finish (FAM505). An additional 0.25g charge was analysed for 51 elements (Ag, Al, As, Ba, Be, Bi, Ca, Cd, Ce, Co, Cr, Cs, Cu, Fe, Ga, Hf, In, K, La, Li, Lu, Mg, Mn, Mo, Na, Nb, Ni, P, Pb, Pd, Pt, Rb, S, Sb, Sc, Se, Sn, Sr, Ta, Tb, Te, Th, Ti, Tl, U, V, W, Y, Yb, Zn, Zr) by four-acid digestion with ICP-MS finish (IMS40B). <i>Rock chip samples:</i> The entire sample is dried at 105°C for a minimum of 12 hours, jaw crushed (P80% 4mm), riffle split as required, then pulverized (P90% 75µm) to produce 250g pulps and a 50g charge for gold analysis by fire assay with an AAS finish (FAA505). Over range Au samples (>10ppm) are re-analysed from pulps by fire assay and gravimetric finish. An additional 0.25g charge is analysed for 49 elements (Ag, Al, As, Ba, Be, Bi, Ca, Cd, Ce, Co, Cr, Cs, Cu, Fe, Ga, Hf, In, K, La, Li, Lu, Mg, Mn, Mo, Na, Nb, Ni, P, Pb, Rb, S, Sb, Sc, Se, Sn, Sr, Ta, Tb, Te, Th, Ti, Tl, U, V, W, Y, Yb, Zn, Zr) by 4-acid digestion with ICP-MS finish (IMS40B). Sulphur is analysed using an Eltra Analyzer with

Criteria	JORC Code explanation	Commentary
		induction furnace. Over range Cu, Pb and Zn (>10,000ppm) and Ag (>10ppm) is re-analysed using a standard ore grade method utilising a four-acid digest with ICP-AES finish (AAS42S).
	<ul style="list-style-type: none"> For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. 	<p><i>Historical:</i></p> <ul style="list-style-type: none"> No use of handheld geophysical tools, spectrometers, XRF instruments or similar devices is recorded for historical exploration. <p><i>Konstantin:</i></p> <ul style="list-style-type: none"> The Company has not used any handheld geophysical tools, spectrometers, XRF instruments or similar devices to determine chemical composition at a semi-quantitative level of accuracy.
	<ul style="list-style-type: none"> Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established. 	<p><i>Historical:</i></p> <ul style="list-style-type: none"> No quality control procedures have been recorded for historical exploration other as described below. <i>Reservoir (diamond drilling):</i> In addition to the laboratory's internal QAQC procedures, Reservoir conducted its own QAQC with the systematic inclusion of certified reference materials, blanks, and field duplicate samples. Reservoir reported that analytical results from the quality control samples were evaluated and conformed to best practice standards. <p><i>Konstantin:</i></p> <ul style="list-style-type: none"> All field samples are submitted for assay to an independent and accredited analytical laboratory (SGS Bor, Serbia). Duplicate samples are submitted for soil sampling at a frequency of 1 in 20 samples. The Company does not use duplicate samples for rock chip sampling. Internal review is undertaken for all assay results. Sample batches are submitted for re-analysis when statistical or spatial inconsistencies are identified. The laboratory applies internal quality control measures including the use of certified reference materials and blanks, and it inserts pulp duplicates on a 1-in-20 basis. Given the early-stage nature of exploration activity, and the nature of the material being sampled, the Company does not currently use sample blanks or standards. No umpire samples are submitted to third party laboratories.
Verification of sampling and assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. 	<p><i>Historical:</i></p> <ul style="list-style-type: none"> No information is recorded on the verification of significant historical intersections. <p><i>Konstantin:</i></p> <ul style="list-style-type: none"> The Company has not completed any drilling with the Bobija Project area.
	<ul style="list-style-type: none"> The use of twinned holes. 	<ul style="list-style-type: none"> There has been no known use of twinned holes.
	<ul style="list-style-type: none"> Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. 	<p><i>Historical:</i></p> <ul style="list-style-type: none"> Data handling and storage procedures are not reported for historical data other than as described below. Drill hole data recorded from diamond drilling by the Government and Reservoir is reported as graphic drill logs. <p><i>Konstantin:</i></p> <ul style="list-style-type: none"> Primary field data is collected on field sampling sheets and then compiled on standard Excel templates for validation and data transfer. Primary analytical data is received electronically from the laboratory and imported into an electronic assay register spread sheet for validation and data transfer. Data

Criteria	JORC Code explanation	Commentary
		<p>validation is conducted by comparing the spreadsheet data against the Certificate of Analysis supplied as a secured pdf file by the laboratory.</p> <ul style="list-style-type: none"> Primary data is stored and further validated in an ODCB database maintained by an external database provider.
	<ul style="list-style-type: none"> Discuss any adjustment to assay data. 	<p><i>Historical:</i></p> <ul style="list-style-type: none"> No adjustments are reported for historical assay data. <p><i>Konstantin:</i></p> <ul style="list-style-type: none"> No adjustments to assay data have been made.
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. 	<p><i>Historical:</i></p> <ul style="list-style-type: none"> No information is available on the methodology used to locate historical data other than as described below. <i>Reservoir:</i> Down hole survey measurements were collected at approximately 50m intervals. <p><i>Konstantin:</i></p> <ul style="list-style-type: none"> Rock chip, stream sediment and soil samples collected were located by handheld GPS in UTM WGS84 34 North co-ordinates. The location of historical underground mine workings was obtained by digitising registered historical mine plans with level (RL) values assigned from available data points. No re-survey of historical underground workings has been undertaken.
	<ul style="list-style-type: none"> Specification of the grid system used. 	<ul style="list-style-type: none"> Exploration results reported by the Government, Reservoir and Nevsun used the Yugoslavian Gauss-Kruger MGI Balkans Zone 7 grid system with Hermannskogel datum. The Company uses the UTM Zone 34 North co-ordinate system with WGS 84 datum.
	<ul style="list-style-type: none"> Quality and adequacy of topographic control. 	<p><i>Historical:</i></p> <ul style="list-style-type: none"> No information is available on historical topographic control. <p><i>Konstantin:</i></p> <ul style="list-style-type: none"> A high-resolution drone survey has been flown across the entire Bobija mining licence and parts of the surrounding Bobija exploration licence producing 1m topographic contours and a photographic mosaic image with 6cm pixel resolution. The quality of the surface topographic control across the balance of the Bobija Project area is poor, and is reliant on public domain 1:25,000 scale topographic maps.
Data spacing and distribution	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. 	<p><i>Historical:</i></p> <ul style="list-style-type: none"> <i>Soil sampling:</i> historical soil samples was reported by Nevsun in 2017, however no results are available for this sampling. <i>Rock chip (channel) sampling:</i> selected rock chip sample results are reported by Reservoir and Nevsun from the Bobija Mine area, however, precise sample locations are not known. <i>Underground channel sampling:</i> Underground face samples recorded on historic mine plans indicate sampling was completed either: <ul style="list-style-type: none"> from successive development faces in conjunction with underground development, or as contiguous wall samples after development was completed. Drilling: <i>Bobija Mine:</i> Historical surface diamond drill holes in the Bobija Mine area have been completed on multiple cross section orientations. As such, there is no consistent grid spacing.

Criteria	JORC Code explanation	Commentary
		<i>Konstantin:</i> <ul style="list-style-type: none"> <i>Stream sediment sampling:</i> point samples are collected from secondary streams on a notional 1km² drainage basin area per sample. <i>Soil sampling:</i> samples are collected on a rectangular grid with a 100m - 400m line spacing and 50m - 100m sample spacing. <i>Rock chip sampling:</i> samples are collected, as required, when mineralised or altered material is identified. Rock chip sampling is completed either as point samples or a contiguous series of "channel" samples.
	<ul style="list-style-type: none"> Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. 	<i>Historical:</i> <ul style="list-style-type: none"> Historical data are not utilised for Mineral Resource or Ore Reserve estimation purposes. <i>Bobija deposit:</i> The spacing of current drill holes within the Bobija deposit is not considered adequate to establish a Mineral Resource or Ore Reserve estimate. <i>Konstantin:</i> <ul style="list-style-type: none"> Geochemical sampling data (stream, soil and rock chip) is not utilised for Mineral Resource or Ore Reserve estimation purposes.
	<ul style="list-style-type: none"> Whether sample compositing has been applied. 	<i>Historical:</i> <ul style="list-style-type: none"> No compositing of historical samples has been reported. <i>Konstantin:</i> <ul style="list-style-type: none"> The Company has not applied sample compositing.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. 	<i>Historical:</i> <ul style="list-style-type: none"> The orientation of historical sampling is unknown other than as described below. <i>Underground face sampling:</i> historic plans indicate that rock chip face samples collected during mine development were predominantly horizontal samples oriented perpendicular to the strike of mineralised structures. This orientation is considered unbiased. <i>Konstantin:</i> <ul style="list-style-type: none"> Stream sediment samples are point samples and are considered unbiased. Soil samples were collected on notional rectangular grids with soil lines oriented at a high angle to the interpreted strike of mineralised structures. This sample orientation is considered unbiased. Rock chip channel samples were collected orthogonally to the orientation of observed geological structures to minimise potential for sample orientation bias. The Company has not completed any other sampling within the Bobija Project area to date.
	<ul style="list-style-type: none"> If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<i>Historical:</i> <ul style="list-style-type: none"> <i>Tisovik Mine:</i> None of the 4 historical surface diamond drill holes reported from Tisovik Mine area intersected mineralisation. <i>Bobija Mine:</i> The Bobija deposit is interpreted as a generally flat-lying stratigraphically controlled VMS deposit. Of the 44 historical surface diamond drill holes reported within the immediate mine area (for which co-ordinate data is available) 84% are drilled with a dip equal to or greater than 60°, and 80% are drilled with a dip equal to or greater than 75°. The orientation of historical drilling is therefore considered unbiased. <i>Konstantin:</i> <ul style="list-style-type: none"> The Company has not completed any drilling within the Bobija Project area.

Criteria	JORC Code explanation	Commentary
Sample security	<ul style="list-style-type: none"> The measures taken to ensure sample security. 	<p><i>Historical:</i></p> <ul style="list-style-type: none"> The chain of custody for historical exploration samples is not recorded or known. <p><i>Konstantin:</i></p> <ul style="list-style-type: none"> The Company maintains a secure direct chain of custody from site to the laboratory for all samples. All samples are double bagged and transported to the laboratory by Company personnel.
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	<p><i>Historical:</i></p> <ul style="list-style-type: none"> The use of historical audits and reviews is not recorded or known. <p><i>Konstantin:</i></p> <ul style="list-style-type: none"> Internal review of sampling techniques and standard operating procedures are periodically undertaken by the Company resulting, where relevant, in enhanced operating procedures. The Company routinely completes internal peer review of all exploration results.

Section 2 Reporting of Exploration Results (Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. 	<ul style="list-style-type: none"> The Bobija Project comprises three granted exploration licences (Bobija, Bobija East and Kamenita Kosa) and one exploration licence application (Orovica) all held 100% by the Company. In addition, the Bobija Project includes two granted mining licences (Bobija ML and Tisovik ML) accessed under a 10-year agreement with a Serbian-registered company Bobija doo Ljubovija. Subject to mine development by Konstantin, the vendor is entitled to an 0.5% NSR royalty capped at a cumulative total of €0.5m. The Bobija Project licences include 52 sites of cultural significance that restrict or prohibit exploration activities in the immediate vicinity of such sites. The Bobija Project licences do not include any areas where environmental protection zones have been formally designated or where designation has been initiated. However, the Nature Protection Institute of Serbia, under the Ministry of Environmental Protection, has applied environmental protection conditions to three areas within the Project area (totalling 48km²) that either prohibit certain exploration activities without additional specific approval (including invasive activities such as trenching and drilling) or apply seasonal restrictions to activities during the period 15 May to 31 July. Approximately 44% of the Project area (92.3km²) is included within the boundaries of the Ecological Network of Serbia (Valjevo Mountains area) which includes: <ul style="list-style-type: none"> an Important Bird Area (RS025IBA) (92.3km²), and a Prime Butterfly Area (Povlen 15) (7.8km²). In the future, the Government may impose additional licence conditions, or designate new areas of cultural or environmental significance, that may impact on the Company's exploration and development activities.
	<ul style="list-style-type: none"> The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> The Company's 100%-held exploration licences and exploration licence application are in good standing. The Company holds all necessary licences to undertake exploration activities. The third-party mining licences, accessed via a 10-year agreement, are valid but are not in good standing due to the failure of the licence holder to meet various licence holder obligations associated with historic mining

Criteria	JORC Code explanation	Commentary
		<p>activities. The Company, in collaboration with the licence owner (Bobija doo Ljubovija) and in consultation with the Ministry of Mines, has commenced a series of actions that seek to re-establish the standing of the licences over an approximate 2-year timeframe.</p> <ul style="list-style-type: none"> Landowner permission is required to undertake invasive exploration activities (including trenching and drilling). The Company anticipates that it will require additional access agreements dependent on the location and type of future exploration activities. A landowner may, by verbal or written notification, deny the right of access for exploration activities. However, companies retain the right to expropriate land for exploration or mining purposes subject to statutory approval.
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> Western Serbia has a long history of mining. Numerous copper deposits hosted within the regional diabase-chert formations were exploited by Roman and Sasa miners. There has also been mining in and around the Veliki Majdan site since the 14th Century. Exploration of largest known deposit in the district, Veliki Majdan, started in the 1930's. Development of other deposits in the region followed including Tisovik (1935) and Bobija (1948). Exploration in the second half of the 20th century was mainly advanced by the Government and related entities including Geozavod and RMHK Trepca with the most intensive activity occurring during 1964-65, 1974-75 and 1986-88. Modern-era exploration within the Bobija Project area has been undertaken by two companies including Mineco (~2015) and Balkan Exploration and Mining doo (BEM). BEM was held under the successive ownership of three different companies including Reservoir (2007-14), NevSun (2016-17) and Zijin (from 2018). Historical exploration drilling has substantially focussed on known deposits.
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> The Bobija Project licences and occur within the Ljubovija and Valjevo 1: 100,000 map sheets. The Bobija Project area is centred on the western edge of the Vardar geo-tectonic zone. The project licences are comprised of three geo-tectonic units: <ul style="list-style-type: none"> <i>Drina-Ivanjica Terrain</i>: forms the southern part of the project licences and consists of Palaeozoic schists and sandstones, Lower Triassic conglomerates, sandstones and marls (host of Pb-Zn-Au-Ag-barite mineralisation), Middle Triassic limestones and volcano-sedimentary formation, Jurassic volcano-sedimentary formation and Cretaceous limestones. <i>Western Vardar Ophiolite</i>: forms the central part of the project licences consists of Jurassic ophiolite melange including diabase, chert, sandstone-conglomerate and claystone. <i>Jadar-Kopaonik Terrain</i>: forms the northern part of the project licences and is characterised by presence of Devonian limestone, Carboniferous sandstone and limestone, Permian sandstone-claystone and limestone, and Triassic limestone. Several styles of mineralisation have been recognised in the region, including: <ul style="list-style-type: none"> volcanogenic massive sulphide (VMS) Zn-Pb-Cu-Ag-Au mineralisation skarn and stratiform manto Pb, Zn, Ag, (Au) mineralisation, and carbonate-hosted, replacement style Cu-Au mineralisation.

Criteria	JORC Code explanation	Commentary
Drill hole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> - easting and northing of the drill hole collar - elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar - dip and azimuth of the hole - down hole length and interception depth - hole length. 	<p><i>Historical:</i></p> <ul style="list-style-type: none"> Multiple phases of historical exploration drilling have been completed in the Bobija Project area, including by: <ul style="list-style-type: none"> - Government: 54 holes for 4,036.50m (1964-88) - Reservoir: 8 holes for 622.90m (2014) - Nevsun: 15 holes for 1,632.00m (2016/17) Refer to Appendix 2. <p><i>Konstantin:</i></p> <ul style="list-style-type: none"> The Company has not completed any drilling the Bobija Project area.
	<ul style="list-style-type: none"> If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<ul style="list-style-type: none"> Refer to Appendix 2.
Data aggregation methods	<ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. 	<ul style="list-style-type: none"> No weighted averages, grade truncations or cut-off grades have been used in the reporting of rock chip, soil or stream sediment sample results. Length-weighted drill assay results are reported above nominated cut-off grades where the selected cut-off grade is considered appropriate to the exploration stage and style of mineralisation recorded.
	<ul style="list-style-type: none"> Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. 	<ul style="list-style-type: none"> Higher grade intervals within longer lengths of lower grade zones, where present, and where data is available, are identified in the reporting of drill hole assay results.
	<ul style="list-style-type: none"> The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> No metal equivalent values are reported.
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known') 	<p><i>Historical:</i></p> <ul style="list-style-type: none"> <i>Tisovik Mine:</i> None of the 4 historical surface diamond drill holes reported from Tisovik Mine area intersected mineralisation. <i>Bobija Mine:</i> The Bobija deposit is interpreted as a generally flat-lying stratigraphically controlled VMS deposit. Of the 44 historical surface diamond drill holes completed within the Bobija Mine area, 84% are drilled with a dip equal to or greater than 60°, and 80% are drilled with a dip equal to or greater than 75°. All reported drill hole intercepts are reported as down-hole lengths. <p><i>Konstantin:</i></p> <ul style="list-style-type: none"> The Company has not completed any drilling the Bobija Project area.
Diagrams	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> Refer to figures contained within this announcement.
Balanced reporting	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> Balanced reporting of Exploration Results is presented within this announcement.
Other substantive exploration data	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and 	<p><i>Geophysics:</i></p> <ul style="list-style-type: none"> One historical geophysical survey is recorded from the Bobija Project area: <ul style="list-style-type: none"> - Reservoir (2014) completed a gravity survey over the Bobija deposit (25m x 25m grid / 0.45km² area). The

Criteria	JORC Code explanation	Commentary														
	method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	<p>survey demonstrated a good response from areas with known sulphide-barite mineralisation, and identified new targets for drill testing in the proximity of the mine.</p> <p><i>Metallurgical Testwork:</i></p> <ul style="list-style-type: none">Reported mineralogical and metallurgical studies reported for the Bobija deposit are limited.<i>Vracar R., et al (2003):</i> Undertook three-stage testwork involving reduction roasting, magnetic separation and autoclave leaching of a barite-sulphide bulk sample assaying:<table><tr><td>Cu (%)</td><td>Zn (%)</td><td>Pb (%)</td><td>Au (g/t)</td><td>Ag (g/t)</td><td>Ba (%)</td><td>Fe (%)</td></tr><tr><td>0.84</td><td>3.75</td><td>3.92</td><td>n/a</td><td>87</td><td>28.3</td><td>12.2</td></tr></table>Metallurgical sample composition. <p>The study reported 93.5% to 96.7% reduction of BaSO⁴ by reduction roasting at 850° to 900°C for 120-180 minutes. The study also reported high autoclave leach recoveries including 97.85% Zn, 95.36% Cu and 96.25% Fe, from autoclave leaching (at 210°C) sulphide concentrates produced by reduction roasting whole rock samples at 900°C. However, no mass balances or total metal recoveries were reported. No consideration was given to the recovery of gold.</p> <i>Reservoir (2015):</i> Reservoir initiated research into the metallurgical properties of sulphide mineralisation from the Bobija deposit, however no results are reported. No other exploration data that is considered meaningful and material has been omitted from this announcement.	Cu (%)	Zn (%)	Pb (%)	Au (g/t)	Ag (g/t)	Ba (%)	Fe (%)	0.84	3.75	3.92	n/a	87	28.3	12.2
Cu (%)	Zn (%)	Pb (%)	Au (g/t)	Ag (g/t)	Ba (%)	Fe (%)										
0.84	3.75	3.92	n/a	87	28.3	12.2										
Further work	<ul style="list-style-type: none">The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).	<ul style="list-style-type: none">Further work planned in the Bobija Project area will include mapping, stream sediment sampling, soil sampling, rock chip sampling, trenching, geophysical surveys and exploration drilling.Planned exploration activities are sequential and may change subject to exploration results obtained including assessment of historical exploration data.														
	<ul style="list-style-type: none">Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	<ul style="list-style-type: none">Refer to figures contained within this announcement.														

BOBIJA PROJECT – HISTORIC DRILLING

Company	Hole ID	Hole Type	East (WGA84)	North (WGA84)	RL	Depth (m)	Dip (deg.)	Azimuth (deg.)	Licence	Year
Government	BR-1	Diamond	384,647	4,895,428	1,120	120.20	-90	0	Bobija EL	1964
Government	BR-2	Diamond	384,551	4,895,490	1,106	193.20	-90	0	Bobija ML	1964
Government	BR-3U	DDH-UG	384,372	4,895,657	1,044	140.60	-90	0	Bobija EL	1964
Government	BR-4U	DDH-UG	384,375	4,895,624	1,043	54.00	0	72	Bobija EL	1964
Government	BR-5	Diamond	384,532	4,895,393	1,118	148.20	-90	0	Bobija EL	1965
Government	BR-6	Diamond	384,499	4,895,457	1,101	135.00	-90	0	Bobija ML	1965
Government	BR-7	Diamond	384,671	4,895,698	1,060	92.10	-90	0	Bobija ML	1965
Government	BR-8	Diamond	384,635	4,895,568	1,092	184.90	-90	0	Bobija ML	1965
Government	BR-9	Diamond	384,733	4,895,713	1,043	261.80	-90	0	Bobija ML	1964
Government	BR-10	Diamond	384,474	4,895,523	1,088	192.70	-90	0	Bobija ML	1965
Government	BR-11	Diamond	384,644	4,895,498	1,103	221.20	-90	0	Bobija ML	1965
Government	BR-12U	DDH-UG	384,473	4,895,613	1,034	130.60	-90	0	Bobija ML	1965
Government	BR-13	Diamond	384,554	4,895,563	N/A	N/A	-90	0	Bobija ML	N/A
Government	BR-14	Diamond	384,529	4,895,588	N/A	N/A	-90	0	Bobija ML	N/A
Government	BR-15	Diamond	384,579	4,895,432	N/A	N/A	-90	0	Bobija EL	N/A
Government	BR-16	Diamond	384,544	4,895,425	N/A	N/A	-90	0	Bobija EL	N/A
Government	BR-17	Diamond	384,512	4,895,425	N/A	N/A	-90	0	Bobija EL	N/A
Government	BR-18	Diamond	384,473	4,895,406	N/A	N/A	-90	0	Bobija EL	N/A
Government	BR-19	Diamond	384,495	4,895,384	N/A	N/A	-90	0	Bobija EL	N/A
Government	BR-20	Diamond	384,655	4,895,460	N/A	N/A	-90	0	Bobija ML	N/A
Government	BR-21	Diamond	384,498	4,895,697	N/A	N/A	-90	0	Bobija ML	N/A
Government	BR-22	Diamond	384,707	4,895,525	N/A	N/A	-90	0	Bobija ML	N/A
Government	BR-23	Diamond	384,377	4,895,449	N/A	N/A	-90	0	Bobija EL	N/A
Government	BR-24	Diamond	384,612	4,895,460	1,115	60.40	-90	0	Bobija ML	1974
Government	BR-25	Diamond	384,593	4,895,460	1,112	76.00	-90	0	Bobija ML	1974
Government	BR-26	Diamond	384,565	4,895,461	1,111	70.50	-90	0	Bobija ML	1974
Government	BR-27	Diamond	384,529	4,895,460	1,108	69.50	-90	0	Bobija ML	1974
Government	BR-28	Diamond	384,735	4,895,209	1,179	131.00	-90	0	Bobija EL	1974
Government	BR-29	Diamond	384,854	4,895,075	1,196	79.00	-90	0	Bobija EL	1975
Government	BR-30	Diamond	384,954	4,895,023	1,196	144.00	-90	0	Bobija EL	1975
Government	BR-31	Diamond	384,725	4,895,057	1,208	151.30	-90	0	Bobija EL	1975
Government	BR-35	Diamond	384,478	4,895,806	1,098	75.50	-90	0	Bobija EL	1986
Government	BR-36	Diamond	384,570	4,895,738	1,082	52.60	-90	0	Bobija ML	1986
Government	BR-37	Diamond	384,573	4,895,864	1,070	106.00	-90	0	Bobija ML	1986
Government	BR-38	Diamond	384,498	4,895,940	1,078	55.00	-90	0	Bobija EL	1986
Government	BR-39	Diamond	384,725	4,895,454	1,110	12.00	-90	0	Bobija ML	1986
Government	BR-40	Diamond	384,508	4,895,529	1,096	57.00	-90	0	Bobija ML	1988
Government	BR-41	Diamond	384,544	4,895,537	1,102	47.80	-90	0	Bobija ML	1988
Government	BR-42	Diamond	384,600	4,895,536	1,097	50.00	-90	0	Bobija ML	1988
Government	BR-43	Diamond	384,446	4,895,709	1,113	62.00	-90	0	Bobija ML	1988
Government	B-1	Diamond	394,896	4,895,398	654	N/A	-90	0	Kamenita Kosa	N/A
Government	B-2	Diamond	394,923	4,895,382	640	N/A	-90	0	Kamenita Kosa	N/A
Government	B-3	Diamond	394,909	4,895,418	646	N/A	-90	0	Kamenita Kosa	N/A
Government	B-4	Diamond	394,819	4,895,550	712	N/A	-90	0	Kamenita Kosa	N/A
Government	B-5	Diamond	394,942	4,895,355	641	N/A	-90	0	Kamenita Kosa	N/A
Government	B-6	UG-DDH	N/A	N/A	N/A	N/A	-45	341	Kamenita Kosa	N/A
Government	B-7	UG-DDH	N/A	N/A	N/A	N/A	-70	341	Kamenita Kosa	N/A
Government	B-8	UG-DDH	N/A	N/A	N/A	N/A	-90	141	Kamenita Kosa	N/A
Government	B-9	UG-DDH	N/A	N/A	N/A	N/A	-75	150	Kamenita Kosa	N/A
Government	B-10	UG-DDH	N/A	N/A	N/A	N/A	-45	141	Kamenita Kosa	N/A
Government	TB-1	Diamond	387,242	4,898,652	907	57.30	-50	130	Tisovik ML	1974
Government	TB-2	Diamond	387,242	4,898,652	907	56.50	-50	220	Tisovik ML	1974
Government	TB-3	Diamond	387,242	4,898,652	907	53.00	-90	0	Tisovik ML	1974
Government	TB-4	Diamond	387,289	4,898,669	906	52.80	-90	0	Tisovik ML	1974
Reservoir	BB-02	Diamond	384,430	4,895,557	1,078	89.90	-57	306	Bobija ML	2014
Reservoir	BB-03	Diamond	384,473	4,895,582	1,094	105.00	-55	269	Bobija ML	2014
Reservoir	BB-04	Diamond	384,568	4,895,428	1,107	80.00	-54	264	Bobija EL	2014
Reservoir	BB-06	Diamond	384,571	4,895,428	1,107	70.00	-73	86	Bobija EL	2014
Reservoir	BB-07	Diamond	384,654	4,895,447	1,100	41.00	-50	213	Bobija ML	2014

Company	Hole ID	Hole Type	East (WGA84)	North (WGA84)	RL	Depth (m)	Dip (deg.)	Azimuth (deg.)	Licence	Year
Reservoir	BB-08	Diamond	384,513	4,895,370	1,119	71.60	-55	40	Bobija EL	2014
Reservoir	BB-09	Diamond	384,513	4,895,370	1,119	79.30	-55	340	Bobija EL	2014
Reservoir	BB-10	Diamond	384,572	4,895,402	1,118	86.10	-60	60	Bobija EL	2014

1. Collar co-ordinates converted from Gauss-Kruger MGI Balkans Zone 7 grid to UTM Zone 34N grid.
2. Collar co-ordinates for drill holes BR-13 to BR-23 digitised from surface drill collar plan.
3. N/A – data not available.
4. Collar co-ordinates for 15 diamond drill holes (1,632m) completed by Nevsun Resources Ltd in 2016/17 are not available.

BOBIJA AREA DRILL INTERCEPTS

Hole ID	From (m)	To (m)	Interval (m)	Au (g/t)	Ag (g/t)	Cu (%)	Pb (%)	Zn (%)	BaSO ₄ (%)
BR-1	30.00	37.40	5.60	N/A	90.3	N/A	0.93	2.80	45.8
BR-4U	0.00	20.00	20.00	N/A	N/A	N/A	N/A	N/A	84.1
BR-6	21.00	40.00	19.00	N/A	N/A	N/A	0.85	2.12	48.7
"	48.00	53.00	5.00	N/A	N/A	N/A	0.27	0.49	60.2
BR-10	32.80	39.00	6.20	N/A	N/A	N/A	0.45	2.53	N/A
BR-11	31.90	40.00	8.10	N/A	N/A	N/A	0.30	14.50	N/A
BR-24	21.80	33.80	12.00	N/A	N/A	N/A	1.57	0.30	49.1
BR-25	17.00	55.00	38.00	N/A	N/A	N/A	0.17	0.17	47.4
BR-26	20.00	27.60	7.60	N/A	N/A	N/A	N/A	N/A	46.7
"	38.00	52.20	14.20	N/A	N/A	N/A	N/A	N/A	40.5
BR-27	18.80	25.70	6.90	N/A	N/A	N/A	N/A	N/A	82.3
"	25.70	32.00	6.30	N/A	N/A	N/A	5.22	5.52	N/A
"	44.50	48.50	4.00	N/A	N/A	N/A	1.19	1.53	3.98
BB-02	19.50	64.70	45.20	1.71	25.52	N/A	0.87	2.26	N/A
incl.	20.60	41.80	21.20	2.31	42.75	N/A	1.08	3.08	N/A
BB-03	47.00	66.00	19.00	1.64	41.21	N/A	1.00	3.47	N/A
incl.	53.10	62.50	9.40	1.82	46.78	N/A	1.31	4.37	N/A
BB-04	36.50	52.50	16.00	1.58	83.41	N/A	1.98	2.29	N/A
BB-06	22.60	34.30	11.70	1.56	81.76	N/A	2.71	3.01	N/A
"	24.60	32.50	7.90	1.89	108.96	N/A	3.67	3.93	N/A
BB-07	2.00	17.10	15.10	1.91	122.14	N/A	4.23	4.73	N/A
BB-09	59.20	61.20	2.00	1.19	29.00	N/A	0.48	0.39	N/A
"	64.10	69.10	5.00	0.02	0.50	N/A	0.20	4.92	N/A
BB-10	50.00	52.50	2.50	0.47	16.56	N/A	0.24	0.40	N/A

1. "N/A" indicates no assays were historically reported for these elements.
2. *Government:* Significant intervals are defined using a 4m minimum interval and 5m maximum internal dilution above any of the following cut-offs: 0.5g/t Au, 50g/t Ag, 0.5% Cu, 1.0% Pb, 1.0% Zn or 20% BaSO₄. *Reservoir:* the basis of definition of significant intervals is not reported.
3. *Government:* No high-grade assay cuts have been applied. *Reservoir:* No high-grade cuts are reported.