

20 June 2022

RIEDEL RETURNS MORE HIGH-GRADE GOLD & SILVER ASSAYS AT TINTIC

Highlights:

- High-grade assays continue from Tintic zone at Riedel's Kingman Gold Project, USA
- Highlights of latest drill results include:
 - 3.8m @ 18.1 g/t Au and 201 g/t Ag from 85.3m (2022-CHL-075D)
 incl 1.5m @ 38 g/t Au and 482g/t Ag from 85.3m
 - 1.5m @ 17.6 g/t Au and 17 g/t Ag from 26.7m (2022-CHL-098)
 <u>incl</u> 0.8m @ 25.8 g/t Au and 26 g/t Ag from 26.7m
 - 1.5m @ 5.75 g/t Au and 12 g/t Ag from 106.7m (2022-CHL-103)
 incl 0.8m @ 9.27 g/t Au from 26.7m
 - 2.3m @ 2.80 g/t Au and 70 g/t Ag from 31.2m (2022-CHL-104)
- Results continue to grow Tintic's large and shallow, high-grade zone
- Results from remaining 16 holes expected in coming weeks.

Riedel Resources Limited (ASX:RIE, "Riedel" or "the Company") is pleased to announce continued high-grade gold and silver assay results from recent RC drilling at its Kingman Project in Arizona, USA.

Results continue to confirm the shallow, high-grade nature of gold and silver mineralisation at Tintic.

Riedel Chairman Michael Bohm stated:

"Tintic continues to deliver for us. Another batch of results, another batch of high-grade gold and silver assays. Clearly, there is a blanket of high-grade gold and silver sitting just below the surface at Tintic. The questions are, how big is it and - just as important – is there a source close by?

"Our drilling has demonstrated it's not just a couple of high-grade hits. There are now some 16 holes at Tintic that have returned assay grades of plus 10 g/t gold and many with very high silver grades.

"The latest example is hole 075D, with 3.8 m (downhole width) grading 18.1 g/t gold and 201 g/t silver. It is located approximately 75m south-east of hole 071D which we reported on 6 June 2022 and which had a high grade zone of mineralisation of 1.5m grading 16.1g/t gold and 191 g/t silver. This new highgrade result reported in hole 075D sits on the south-west boundary of our mineralised envelope, so it potentially opens up that area for further extensions to the already large zone of mineralisation at Tintic.

"I am looking forward to the assay results from the remaining 16 holes, anticipated to be available in the coming weeks."

Results from the latest batch of assays received include:

- 3.8m @ 18.1 g/t Au and 201 g/t Ag from 85.3m (2022-CHL-075D)
 <u>incl</u> 1.5m @ 38 g/t Au and 482g//t Ag from 85.3m
 <u>incl</u> 0.8m @ 62 g/t Au and 401g//t Ag from 86.1m
- 1.5m @ 17.6 g/t Au and 17 g/t Ag from 26.7m (2022-CHL-098)
 <u>incl</u> 0.8m @ 25.8 g/t Au and 26 g/t Ag from 26.7m

- 1.5m @ 5.75 g/t Au and 12 g/t Ag from 106.7m (2022-CHL-103)
 <u>incl</u> 0.8m @ 9.27 g/t Au from 26.7m
- 2.3m @ 2.80 g/t Au and 70 g/t Ag from 31.2m (2022-CHL-104)
- 1.5m @ 2.34 g/t Au, 150 g/t Ag, 5.2% Pb and 4.4% Zn from 35.8m (2022-CHL-106)
- 0.8m @ 1.65 g/t Au and 435 g/t Ag from 96m (2022-CHL-084B)

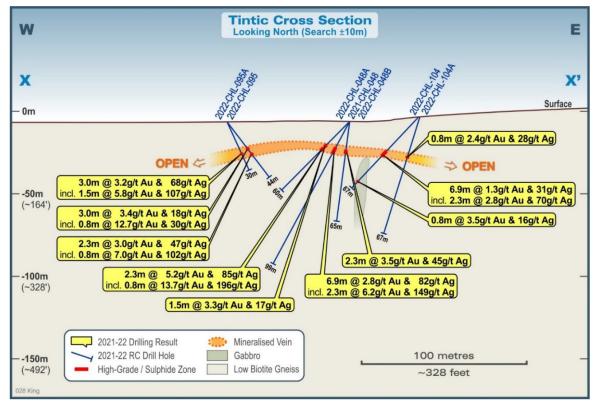


Figure 1 – Tintic RC Interpreted Drill Cross Section X-X' over ~100m width

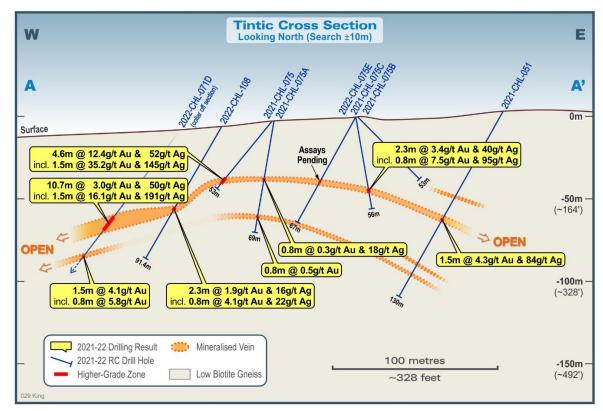


Figure 2 – Tintic RC Interpreted Drill Cross Section A-A' over ~250m width

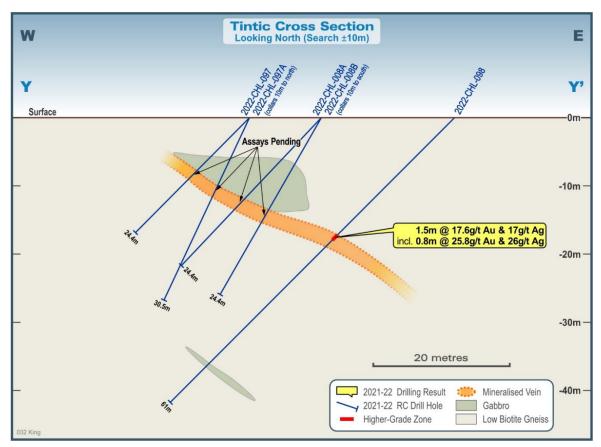


Figure 3 – Tintic RC Interpreted Drill Cross Section Y-Y'

As previously reported, the mineralisation at Tintic appears to be contained within shallow, flat-dipping veins which comprise of varying amounts of quartz, clay and sulphide mineralisation. There are also indications of a stacked lode/sill complex in the drilling and assay results. The shallow depth of the intersected mineralisation, including the significant gold and silver grades seen in drilling, lends itself to the future potential for open-pit mining methods.



Plate 1 - RC Drilling at Tintic - March 2022 (i.e. winter)

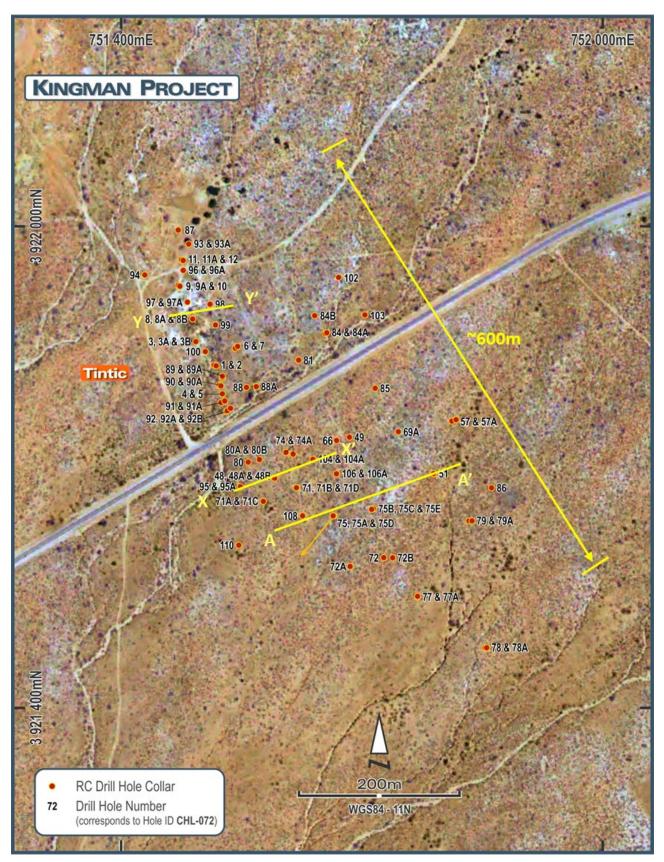


Figure 4 – RC hole collar locations over the Tintic area showing section lines & drill trace of hole CHL-075D which intersected 3.8m (downhole width) grading 18.1 g/t Au & 201 g/t Ag from 85.3m (approx. 60m below surface)

Kingman Project Background

The Kingman Project is located in north-west Arizona, USA, approximately 90 minutes' drive from downtown Las Vegas and within 5km of a major highway (refer Map 1).



Map 1 – Location of Riedel's Kingman Project in Arizona, USA

The project was mined predominantly for high-grade gold and silver from the 1880s until the early 1940s - which coincided with the outbreak of WWII. Following limited drilling near Tintic in the 1990s, 11 diamond holes were drilled on the property in late 2019 which intersected multiple zones of high-grade gold, silver and lead from shallow depths, confirming the extensive mineralisation potential of the area (refer Riedel ASX announcement dated 23 October 2020).

During 2021, Riedel completed 9,420m of RC drilling (104 holes) over several historic mine areas on the property, including at Tintic, Merrimac, Arizona Magma and Jim's. This drilling returned numerous high-grade gold and silver assay results including **3.8m at 98.9g/t gold and 151g/t silver from 20.6m at Tintic** (refer ASX announcement dated 23 March 2021). In addition, it confirmed a 1.8km long exploration target associated with the historic Jim's mine to host significant gold, silver, zinc and lead mineralisation as shallow as 1.5m below surface (refer Riedel's ASX announcement dated 19 April 2021).

The Kingman Project has seen minimal modern exploration. Riedel's recent RC drill program completed in April 2022 was its third at Kingman, where it is looking to acquire up to an 80% interest in via its December 2020 Agreement with Flagstaff Minerals Limited and Flagstaff Minerals (USA) Inc (refer Riedel's ASX announcement dated 23 October 2020).

This announcement was approved for release by the Board of Directors of Riedel.

-ENDS-

Competent Person Statement

Information in this release that relates to Exploration Results is based on information compiled by Mr Sean Whiteford, who is a qualified geologist, a member of the Australian Institute of Mining and Metallurgy, and a consultant to Riedel Resources Limited. Mr Whiteford has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Whiteford consents to the inclusion in this release of the matters based on his information in the form and context in which it appears. Mr Whiteford is not a shareholder of the Company.

Forward Looking Statements

This release includes forward looking statements. Often, but not always, forward looking statements can generally be identified by the use of forward looking words such as "may", "will", "expect", "intend", "plan", "estimate", "anticipate", "continue", and "guidance", or other similar words and may include, without limitation statements regarding plans, strategies and objectives of management, anticipated production or construction commencement dates and expected costs or production output.

Forward looking statements inherently involve known and unknown risks, uncertainties and other factors that may cause the company's actual results, performance and achievements to differ materially from any future results, performance or achievements. Relevant factors may include, but are not limited to, changes in commodity prices, foreign exchange fluctuations and general economic conditions, increased costs and demand for production inputs, the speculative nature of exploration and project development, including the risks of obtaining necessary licences and permits and diminishing quantities or grades of resources or reserves, political and social risks, changes to the regulatory framework within which the company operates or may in the future operate, environmental conditions including extreme weather conditions, recruitment and retention of personnel, industrial relations issues and litigation.

Forward looking statements are based on the company and its management's good faith assumptions relating to the financial, market, regulatory and other relevant environments that will exist and affect the company's business and operations in the future. The company does not give any assurance that the assumptions on which forward looking statements are based will prove to be correct, or that the company's business or operations will not be affected in any material manner by these or other factors not foreseen or foreseeable by the company or management or beyond the company's control.

Although the company attempts to identify factors that would cause actual actions, events or results to differ materially from those disclosed in forward looking statements, there may be other factors that could cause actual results, performance, achievements or events not to be anticipated, estimated or intended, and many events are beyond the reasonable control of the company. Accordingly, readers are cautioned not to place undue reliance on forward looking statements.

Forward looking statements in this release are given as at the date of issue only. Subject to any continuing obligations under applicable law or any relevant stock exchange listing rules, in providing this information the company does not undertake any obligation to publicly update or revise any of the forward looking statements or to advise of any change in events, conditions or circumstances on which any such statement is based.

For further information please contact:

Michael Bohm – Chair Riedel Resources Limited 4/6 Richardson St, West Perth, WA, 6005, Australia Tel: +61 (08) 9226 0866 admin@riedelresources.com.au

About Riedel Resources Limited

Riedel Resources Limited listed on ASX on 31 January 2011 and is an Australian-based exploration company focused on the exploration for gold, silver and base metals in Australia and Arizona, USA.

Further information can be found at the Company's website www.riedelresources.com.au

JORC Code, 2012 Edition – Table 1 report template

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary				
Sampling techniques	Nature and quality of sampling.	The results in this release relate to holes 2022-CHL-084B, 103, 098, 099, 108, 075D,106, 106A, 104, 104A and 074B all of which were drilled from surface by reverse circulation (RC).				
	 Include reference to measures taken to ensure sample representivity 	Samples from RC drilling were collected on 2.5ft (0.8 meters) and 5ft (1.5 meters) intervals at the rig with a cyclone mounted cone splitter and bagged in pre-numbered poly woven bags				
	and the appropriate calibration of any measurement tools or systems used.	Sampling was undertaken using standard QAQC procedures that included, field duplicates and the insertion of blanks or standards at a minimum of 1 blank or standard inserted every 15 samples.				
		All samples were sent to American Assay Laboratories in Sparks, Nevada.				
	 Aspects of the determination of mineralisation that are Material to the Public Report. 	All samples were pulverized at the lab to 85% passing -75µm to produce a 25g charge for Fire Assay with an AA finish. Samples were also digested using a Four Acid digestion with an ICP-AES finish. High grade gold samples were additionally assayed by Fire Assay using a gravimetric finish. High grade silver and base metal samples were additional assayed using a four acid digestion and ICP-AES finish.				
Drilling techniques	Drill type and details.	Drilling was completed using a Foremost MPD 1500 Reverse Circulation drill rig.				
		Drill holes were drilled either vertically or angled perpendicular to the interpreted stratigraphy.				
		The program was supervised by experienced Riedel Resources contractors.				
Drill sample recovery	• Method of recording and assessing core and chip sample recoveries and results assessed.	Samples were collected on 5ft intervals and 2.5ft intervals. Sampling on 2.5ft intervals was done when mineralization was projected to occur. All				

Criteria	JORC Code explanation	Commentary				
	 Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	samples were collected into pre numbered poly woven bags via a cyclone splitter attached to the drill. Sample recovery was measured by Riedel's geologists and generally exceeded 90% recovery. There is no apparent correlation between gold grades and ground conditions. There is no apparent sample bias.				
Logging	 Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate 	Samples were logged in detail including, lithology (where possible), alteration, sulphides and other mineralization.				
	Mineral Resource estimation, mining studies and metallurgical studies.	The entire hole was logged by an experienced geologist employed by Riedel.				
		The level of detail is considered sufficient for early stage exploration of the type being undertaken here.				
	 Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. 	Geological logging is qualitative.				
	• The total length and percentage of the relevant intersections logged.	All holes were logged over the entire length.				
Sub- sampling	 If core, whether cut or sawn and whether quarter, half or all core taken. 	Samples were generally collected wet and collected via a cyclone mounted cone splitter attached to the drill rig.				
Logging Sub- sampling techniques and sample preparation Quality of assay data	 If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. 	All samples were prepared by the American Assay Laboratories lab in Sparks, NV. All samples were dried and pulverized to 85% passing 75µr and a sub sample of 250g retained. A nominal 30g charge was used for Fire Assay analysis. This procedure is industry standard for this type of sample and analysis.				
	 For all sample types, the nature, quality and appropriateness of the sample preparation technique. 					
	 Quality control procedures adopted for all sub-sampling stages to 	Sample sizes are considered appropriate for this stage of the project.				
	maximise representivity of samples.	No compositing was conducted.				
	 Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. 	Field duplicates were collected every 100' (30.48 meters) downhole.				
	• Whether sample sizes are appropriate to the grain size of the material being sampled.					
Quality of assay data and	 The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered 	Samples were analyzed at American Assay Laboratories in Sparks,Nevada. For gold the analytical method used was FA-ICP which is digestion by Fire Assay with an ICP OES finish. Any samples assaying				

Criteria	JORC Code explanation	Commentary				
laboratory tests	partial or total.	greater than 3ppm Au or 100ppm Ag were further analyzed by GAuAg. These methods are considered appropriate for the material and mineralization and measure total gold content.				
	• For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.	Samples were also analyzed by method ICP5A35 which is a five-acid digestion with an ICP-OES finish for base metal determinations. This method is considered appropriate for the material and mineralization.				
	 Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels 	Riedel resources used a mix of Certified Reference Materials and blanks inserted every 15 samples.				
	of accuracy (ie lack of bias) and precision have been established.	Field duplicates were collected every 100ft (30.48 meters).				
		Umpire checks are not considered necessary for this stage of exploration.				
Verification of sampling	 The verification of significant intersections by either independent or alternative company personnel. 	Significant results are checked by the Riedel's geologist and Competent Person.				
and assaying	• The use of twinned holes.	No twinned holes have been completed at this early stage of exploration.				
	 Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. 	All field logging was logged on paper logs and in digital format in an excel spreadsheet. Copies of all logs are stored on a cloud-based storage system as well as at the office in Kingman Arizona.				
	Discuss any adjustment to assay data.	No assay data were adjusted.				
Location of data points	 Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. 	Collar surveys were completed using a Trimble ProXH submeter GPS unit using a differential correction signal and is capable of 20-70 cm X-Y resolution and 2-3m elevation accuracy.				
	Specification of the grid system used.	The grid system used was WGS-84 Zone 11.				
	 Quality and adequacy of topographic control. 	Drill hole directional surveys were taken using a SPT Gyro Master orientation tool providing azimuth and angle. Stated accuracies for the inclinometer is 0.05 degree, and for azimuth 0.5 degree. Collar orientations were obtained using a Brunton Compass.				
Data spacing	Data spacing for reporting of Exploration Results.	RC hole locations were spaced to test historic geologic targets as well as				
and distribution	• Whether the data spacing and distribution is sufficient to establish the	geophysical targets.				
	degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and	The current drill hole spacing is too broad to establish a mineral resource.				

Criteria	JORC Code explanation	Commentary			
	classifications applied.				
	Whether sample compositing has been applied.	No compositing has been applied.			
Orientation of data in relation to geological structure	 Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. 	Drilling is orthogonal to the general trend of the stratigraphy.			
	 If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	Holes were drilled vertically or angled perpendicular to the interpreted stratigraphy using historic data where available.			
Sample security	• The measures taken to ensure sample security.	Core samples were delivered in sealed poly weave bags to the American Assay Laboratory in Sparks, Nevada. Chain of Custody documentation stating, samples, submittal and methods were signed off on. American Assay Labs maintains the chain of custody once the samples are delivered with an audit trail available on the American Assay website.			
Audits or reviews	• The results of any audits or reviews of sampling techniques and data.	Sampling and assaying techniques are considered to be industry standard. No external audits have been undertaken at this stage of exploration.			

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	 Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	The drill holes were all drilled within the IAM Mining LLC claim group property which form part of a claim package subject to an Option Agreement with IAM Mining LLC. Riedel Resources can earn up to an 80% interested in Flagstaff Minerals (USA) Inc ("Flagstaff"). Flagstaff can earn a 100% interest in the property. Refer to Riedel's ASX announcement dated 23/10/2020. The claim package applicable to the Flagstaff Option Agreement is set out below:
		Exhibit A - Claims

it A - Cla

I AM Mining LLC Claims

Claim Name	BLM Serial Number	Claim Name	BLM Serial Numbe
I AM 1	AMC341687	I AM 34	AMC341716
I AM 2	AMC341688	I AM 35	AMC341717
I AM 3	AMC341689	1 AM 36	AMC341718
I AM 4	AMC341690	I AM 37	AMC341719
LAM 5	AMC341691	I AM 38	AMC341720
LAM 6	AMC341692	I AM 39	AMC341721
LAM 7	AMC341753	1 AM 40	AMC341722
LAM 8	AMC341693	1 AM 41	AMC341723
IAM 9	AMC341694	1 AM 42	AMC341724
LAM 10	AMC341754	1 AM 43	AMC341725
I AM 11	AMC341755	1 AM 44	AMC341726
LAM 12	AMC341756	I AM 45	AMC341727
LAM 13	AMC341695	1 AM 46	AMC341728
I AM 14	AMC341696	I AM 47	AMC341729
I AM 15	AMC341697	I AM 48	AMC341730
I AM 16	AMC341698	I AM 49	AMC341731
I AM 17	AMC341699	I AM 50	AMC341732
I AM 18	AMC341700	1 AM 51	AMC341733
J AM 19	AMC341701	1 AM 52	AMC341734
LAM 20	AMC341702	1 AM 53	AMC341735
I AM 21	AMC341703	1 AM 54	AMC341736
I AM 22	AMC341704	1 AM 55	AMC341737
I AM 23	AMC341705	1 AM 56	AMC341738
I AM 24	AMC341706	1 AM 57	AMC341739
I AM 25	AMC341707	I AM 58	AMC341740
1 AM 26	AMC341708	I AM 59	AMC341741
I AM 27	AMC341709	I AM 60	AMC341742
I AM 28	AMC341710	I AM 61	AMC341743
1 AM 29	AMC341711	I AM 62	AMC341744
I AM 30	AMC341712	I AM 63	AMC341745
1 AM 31	AMC341713	I AM 64	AMC341746
I AM 32	AMC341714	TED 65	AMC341747
I AM 33	AMC341715	TED 66	AMC341748
		TED 67	AMC341749
		TED 68	AMC341750
		TED 69	AMC341751
		TED 70	AMC341752

The IAM Mining LLC claims are administered by the Bureau of Land Management and are in good standing. Riedel is unaware of any impediments to obtaining a licence to operate in the area.

Criteria	JORC Code explanation	Commentary				
Exploration	Acknowledgment and appraisal of exploration by other parties.	Historic production and exploration from the property as follows:				
done by other parties		Underground mining at Arizona Magma was conducted from the 1880's to 1942.				
		Drilling by Chandeleur Bay Resources at Tintic was conducted in 1997.				
		The Merrimac mine was mined for Au/Ag/Pg/Zn until 1905.				
		The Tintic mine was mine for Au/Ag/Pb/Zn in 1942.				
		None of the previous work is considered to be of JORC standard.				
Geology	• Deposit type, geological setting and style of mineralisation.	The property is located along the Northwest flank of the Cerbat Mountains of Arizona. The Cerbat Mountains are a typical block-faulted range of the Basin and Range physiographic province of the southwest United States and are underlain by a strongly deformed package of Precambrian rocks including quartz feldspar gneiss, amphibolite schist, and biotite schist intruded by both Precambrian diorite and granite and by Laramide intrusions.				
		The property contains multiple structurally controlled vein-systems. A Low-Sulphidation Epithermal Character has been observed in ore material from historic dumps across the property. As the property is approximately 8km from the Mineral Park Cu porphyry mine, vein mineralization related to a unknown porphyry is also of interest.				
Drill hole Information	• A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:	All drill hole collar information is tabulated in Appendix 1, Table 1. Significant intervals are tabulated in Appendix 1, Table 2.				
	 easting and northing of the drill hole collar 					
	 elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar 					
	$_{\odot}~$ dip and azimuth of the hole					
	 down hole length and interception depth 					
	 hole length. 					
	• If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.					

Criteria	JORC Code explanation	Commentary			
Data aggregation	 In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high 	Intersection lengths and grades for all holes are reported as down-hole length weighted intervals.			
methods	grades) and cut-off grades are usually Material and should be stated.	Intersections are reported based on vein boundaries and no grade capping was applied to the reported intersections.			
	 Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. 	Intersection lengths and grades are reported as down-hole length weighted intervals.			
		Details of all intersections are included in Appendix 1			
	• The assumptions used for any reporting of metal equivalent values	Lower grade intervals are quoted and provide context for significant intervals.			
	should be clearly stated.	No metal equivalent values are reported.			
Relationship between mineralisation	• These relationships are particularly important in the reporting of Exploration Results.	Drill hole intersections are reported down hole. True widths are unknown.			
mineralisation widths and intercept	 If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. 				
lengths	 If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 				
Diagrams	• Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Refer to figures in the body of this announcement for relevant plans including a tabulation of intercepts.			
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades	Intersection lengths and grades are reported as down-hole length weighted averages.			
	and/or widths should be practiced to avoid misleading reporting of Exploration Results.	The number of drill holes and meters are included in the body of the announcement and in Appendix 1.			
Other substantive exploration data	• Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	No other substantive exploration data is available for reporting.			

Criteria	JORC Code explanation	Commentary					
Further work	 The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	Follow up drilling is planned to expand the current understanding of mineralized structures. Drill hole locations will be selected to test for mineralization along strike and at depth.					

Appendix 1

Table 1: Drill Hole Collar Information – Kingman Project

Drill Hole Collar ID	Target Name	Туре	Elevation (ft)	Elevation (m)	Dip	Azimuth	Total Depth (m)	Total Depth (ft)	Collar Easting (wgs84-11N)	Collar Northing (wgs84-11N)
2022-CHL-106	Tintic	RC	3775.9	1151.2	45	260	79.3	260	751651	3921677
2022-CHL-106A	Tintic	RC	3776.0	1151.2	70	260	82.3	270	751653	3921677
2022-CHL-104	Tintic	RC	3779.5	1152.3	45	260	67.1	220	751633	3921695
2022-CHL-104A	Tintic	RC	3779.9	1152.4	70	260	77.7	255	751635	3921696
2022-CHL-074B	Tintic	RC	3779.8	1152.4	45	300	61.0	200	751614	3921720
2022-CHL-084B	Tintic	RC	3791.6	1156.0	65	310	106.7	350	751651	3921871
2022-CHL-103	Tintic	RC	3794.7	1156.9	70	260	117.4	385	751687	3921888
2022-CHL-098	Tintic	RC	3790.2	1155.6	45	260	61.0	200	751506	3921897
2022-CHL-099	Tintic	RC	3785.3	1154.1	45	260	61.0	200	751515	3921874
2022-CHL-100	Tintic	RC	3782.2	1153.1	45	260	33.5	110	751508	3921839
2022-CHL-108	Tintic	RC	3768.3	1148.9	70	260	91.5	300	751638	3921633
2022-CHL-075D	Tintic	RC	3768.7	1149.0	50	220	94.5	310	751665	3921636

RC = Reverse Circulation

Drill Hole Collar ID	Location	From (ft)	To (ft)	Thickness (ft)	From (m)	To (m)	Thickness (m)	Au (g/t)	Ag (g/t)	Pb (%)	Zn (%)
2022-CHL-106	Tintic	117.5	122.5	5.0	35.8	37.3	1.5	2.34	150	5.2	4.4
	Tintic	210.0	212.5	2.5	64.0	64.8	0.8	0.92	5		
2022-CHL-106A	Tintic	187.5	190	2.5	57.2	57.9	0.8	1.78	6		
	Tintic	217.5	220	2.5	66.3	67.1	0.8	1.16	25		
2022-CHL-104	Tintic	90	95	5.0	27.4	29.0	1.5	1.34	12	0.2	0.3
	Tintic	102.5	110	7.5	31.3	33.5	2.3	2.80	70	1.0	1.0
	including	105	107.5	2.5	32.0	32.8	0.8	5.20	116	1.4	1.0
	Tintic	210	212.5	2.5	64.0	64.8	0.8	3.33	16	0.3	
2022-CHL-104A	Tintic	95	97.5	2.5	29.0	29.7	0.8	2.41	28	0.5	0.8
2022-CHL-074B	Tintic	152.5	157.5	5.0	46.5	48.0	1.5	2.93	57	2.9	0.9
2022-CHL-084B	Tintic	307.5	322.5	15.0	93.8	98.3	4.6	0.93	97		
	including	315	317.5	2.5	96.0	96.8	0.8	1.65	435		
2022-CHL-103	Tintic	350	355	5.0	106.7	108.2	1.5	5.75	12		
	including	352.5	355	2.5	107.5	108.2	0.8	9.27	6		
2022-CHL-098	Tintic	87.5	92.5	5.0	26.7	28.2	1.5	17.6	17	0.2	
	including	87.5	90	2.5	26.7	27.4	0.8	25.8	26	0.3	
	Tintic	100	105	5.0	30.5	32.0	1.5	1.18	19		
2022-CHL-099	Tintic	160	162.5	2.5	48.8	49.5	0.8	2.24	6		
2022-CHL-108	Tintic	205	212.5	7.5	62.5	64.8	2.3	1.95	16		
	including	207.5	210	2.5	63.3	64.0	0.8	4.10	22		
2022-CHL-075D	Tintic	280	292.5	12.5	85.4	89.2	3.8	18.1	201	0.8	0.9
	including	280	285	5.0	85.4	86.9	1.5	38.0	482	1.7	2.2
	including	282.5	285	2.5	86.1	86.9	0.8	61.0	401	2.6	2.2

Table 2: Significant Intervals

Significant drill assay results. Intervals calculated with a lower cut-off of 0.1 g/t Au) with up to 0.8m of below cut-off internal dilution allowed. Higher grade intervals reported >2 g/t Au / >100g/t Ag (bolded). No top-cut applied. All widths quoted downhole widths, true widths to be determined.