

15 July 2022

## HIGH-GRADE GOLD & SILVER ASSAYS CONTINUE AT TINTIC FOR RIEDEL

### **Highlights:**

- Riedel receives further high-grade assays from Tintic zone at Kingman Gold Project, USA
- Highlights from latest drill results include:
  - 1.5m @ 27.5 g/t Au and 37 g/t Ag from 13.7m (2022-CHL-008B)
     incl 0.8m @ 53.3 g/t Au and 63 g/t Ag from 13.7m
  - 3.0m @ 5.05 g/t Au and 58 g/t Ag from 27.4m (2022-CHL-096)
     incl 1.5m @ 9.37g/t Au, 112g/t Ag, 2.4% Pb and 2.2% Zn from 27.4m
  - 3.0m @ 2.53 g/t Au and 13 g/t Ag from 12.2m (2022-CHL-097A)
     incl 1.5m @ 4.07 g/t Au and 18 g/t Ag from 12.2m
  - 1.5m @ 6.77 g/t Au and 23 g/t Ag from 11.4m (2022-CHL-097)
     <u>incl</u> 0.8m @ 11.47 g/t Au and 35 g/t Ag from 11.4m
  - 2.3m @ 2.62 g/t Au and 21 g/t Ag from 46.5m (2022-CHL-075E)
     incl 0.8m @ 6.16 g/t Au and 42 g/t Ag from 46.5m
- Tintic's large high-grade zone displays potential for lateral extensions;
- A number of Tintic high-grade results commence at depths within 10m of surface
- Riedel will use results from latest drilling to determine next steps for Tintic.

**Riedel Resources Limited** (ASX:RIE, "Riedel" or "the Company") is pleased to announce the remaining gold & silver assay results from a Q1 RC drill program at its Kingman Project in Arizona.

The high-grade results above (as seen in Figures 1 and 2) further add to the results achieved in numerous holes drilled in the 2022 program and continue to demonstrate the shallow, high-grade nature of gold and silver mineralisation at Tintic.

Riedel Chairman Michael Bohm stated: "This final batch of assay results supports the high-grade mineralisation which has been achieved in every drill program at Tintic. The blanket of high-grade gold and silver sits just below the surface at Tintic, which means that drilling toward a future resource estimation and developing a conceptual mine plan, could be simple, cost effective and quick to achieve.

"Our drilling has delivered more than just a couple of high-grade hits. There are now 18 holes at Tintic that have returned assay grades of plus 10 g/t gold from shallow depths. Very few holes failed to intersect mineralisation.

"Additionally, there are several areas where mineralisation at Tintic has not been closed off. It is very notable that our early 2021 drilling at Jim's, located 1km to the south-east, intersected 2.3m @ 2.3g/t gold, 146g/t silver, 4.3% zinc and 2% lead at shallow depth<sup>1</sup>. If you then step out a further 4km to the

<sup>&</sup>lt;sup>1</sup> Refer ASX announcement dated 19 April 2021 and Figure 4 herein. The Company confirms it is not aware of any new information or data that materially affects the information included in the announcement.

south-east, there are historic workings which returned high-grade gold and silver assays from rockchip surface sampling in mid-2021<sup>2</sup>. These extensive areas have never seen modern exploration.

"We will interpret the results received from the drill program and consider the next steps, which may include a small drill program targeting the shallow high-grade mineralisation at Tintic next quarter."

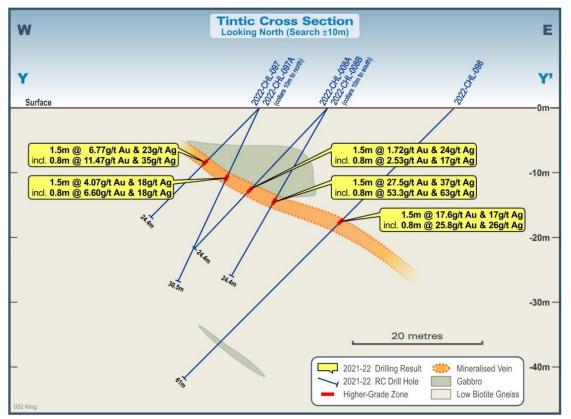


Figure 1 – Tintic RC Interpreted Drill Cross Section Y-Y' (note shallow depth)

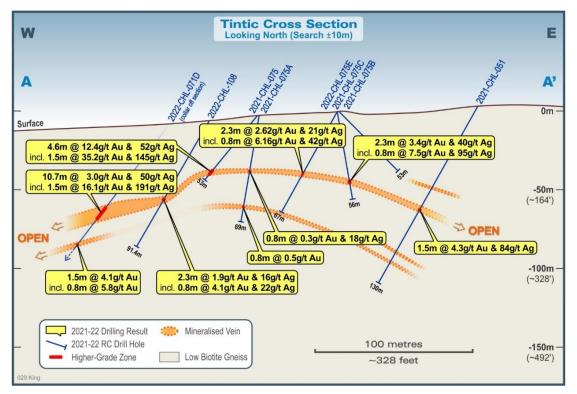


Figure 2 – Tintic RC Interpreted Drill Cross Section A-A'

<sup>&</sup>lt;sup>2</sup> Refer ASX announcement dated 3 August 2021. The Company confirms it is not aware of any new information or data that materially affects the information included in the announcement.

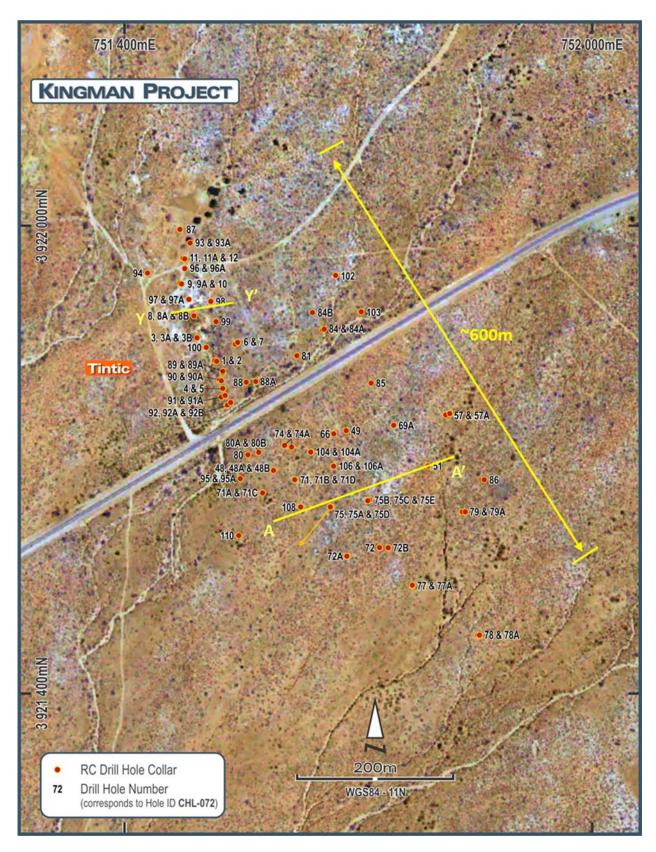


Figure 3 - RC hole collar locations at Tintic area showing location of section lines shown in Figures 1 and 2

Results from Riedel's latest and final batch of assays received from Tintic include:

- 1.5m @ 27.5 g/t Au and 37 g/t Ag from 13.7m (2022-CHL-008B)
   <u>incl</u> 0.8m @ 53.3 g/t Au and 63 g/t Ag from 13.7m
- 1.5m @ 1.72 g/t Au and 24 g/t Ag from 13.7m (2022-CHL-008A)
   incl 0.8m @ 2.53 g/t Au and 17 g/t Ag from 14.5m
- 3.0m @ 5.05 g/t Au and 58 g/t Ag from 27.4m (2022-CHL-096)
   <u>incl</u> 1.5m @ 9.37 g/t Au, 112g/t Ag, 2.4% Pb and 2.2% Zn from 27.4m
- 3.0m @ 2.53 g/t Au and 13 g/t Ag from 12.2m (2022-CHL-097A)
   <u>incl</u> 1.5m @ 4.07 g/t Au and 18 g/t Ag from 12.2m
- 1.5m @ 6.77 g/t Au and 23 g/t Ag from 11.4m (2022-CHL-097)
   incl 0.8m @ 11.47 g/t Au and 35 g/t Ag from 11.4m
- 2.3m @ 2.62 g/t Au and 21 g/t Ag from 46.5m (2022-CHL-075E)
   incl 0.8m @ 6.16 g/t Au and 42 g/t Ag from 46.5.5m
- 1.5m @ 5.79 g/t Au and 11 g/t Ag from 13m (2022-CHL-003B)
   <u>incl</u> 0.8m @ 10.67 g/t Au and 15 g/t Ag from 13m

As previously reported, the mineralisation at Tintic appears to be contained within shallow, flat-dipping veins which comprise of varying amounts of quartz, clay and sulphide mineralisation. There are also indications of a stacked lode/sill complex in the drilling and assay results. The shallow depth of the intersected mineralisation, including the significant gold and silver grades seen in drilling, lends itself to the future potential for open-pit mining methods.



Plate 1 – RC Drilling at Tintic (2022)

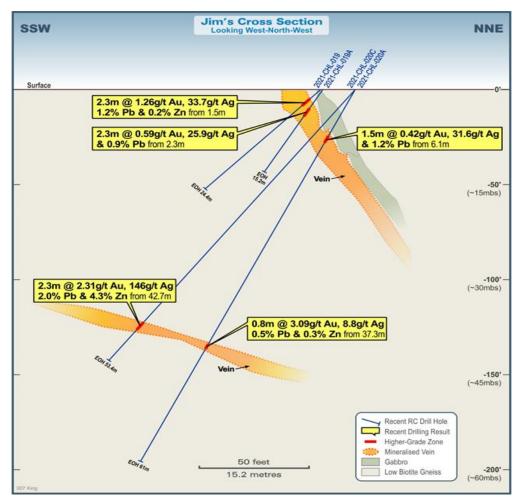


Figure 4 – RC Drill Section at Jim's – holes drilled and reported on in 2021<sup>3</sup>

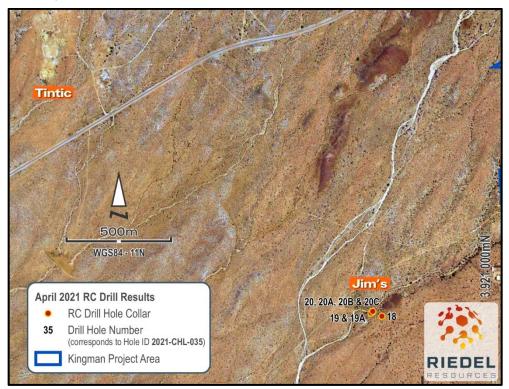


Figure 5 - Jim's - located approximately 1km along strike to the south-east of Tintic

<sup>&</sup>lt;sup>3</sup> Refer ASX announcement dated 19 April 2021. The Company confirms it is not aware of any new information or data that materially affects the information included in the announcement.

### Kingman Project Background

The Kingman Project is located in north-west Arizona, USA, approximately 90 minutes' drive from downtown Las Vegas and within 5km of a major highway (refer Map 1).



Map 1 – Location of Riedel's Kingman Project in Arizona, USA

The project was mined predominantly for high-grade gold and silver from the 1880s until the early 1940s - which coincided with the outbreak of WWII. Following limited drilling near Tintic in the 1990s, 11 diamond holes were drilled on the property in late 2019 which intersected multiple zones of high-grade gold, silver and lead from shallow depths, confirming the extensive mineralisation potential of the area (refer Riedel ASX announcement dated 23 October 2020).



Plate 2 – Arizona-Magma Mine (circa 1937) located approximately 1km north of Tintic

During 2021, Riedel completed 9,420m of RC drilling (104 holes) over several historic mine areas on the property, including at Tintic, Merrimac, Arizona-Magma (Plate 2) and Jim's. This drilling returned high-grade assay results including **3.8m at 98.9g/t gold and 151g/t silver from 20.6m at Tintic** (refer ASX announcement dated 23 March 2021). In addition, it confirmed a 1.8km long exploration target associated with the historic Jim's mine to host significant gold, silver, zinc and lead mineralisation as shallow as 1.5m below surface (refer Riedel's ASX announcement dated 19 April 2021).

The Kingman Project has seen minimal modern exploration. Riedel's recent RC drill program completed in April 2022 was its third at Kingman, where it is looking to acquire up to an 80% interest in via its December 2020 Agreement with Flagstaff Minerals Limited and Flagstaff Minerals (USA) Inc (refer Riedel's ASX announcement dated 23 October 2020).

This announcement was approved for release by the Board of Directors of Riedel.

### -ENDS-

#### **Competent Person Statement**

Information in this release that relates to Exploration Results is based on information compiled by Mr Sean Whiteford, who is a qualified geologist, a member of the Australian Institute of Mining and Metallurgy, and a consultant to Riedel Resources Limited. Mr Whiteford has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Whiteford consents to the inclusion in this release of the matters based on his information in the form and context in which it appears. Mr Whiteford is not a shareholder of the Company.

#### Forward Looking Statements

This release includes forward looking statements. Often, but not always, forward looking statements can generally be identified by the use of forward looking words such as "may", "will", "expect", "intend", "plan", "estimate", "anticipate", "continue", and "guidance", or other similar words and may include, without limitation statements regarding plans, strategies and objectives of management, anticipated production or construction commencement dates and expected costs or production output.

Forward looking statements inherently involve known and unknown risks, uncertainties and other factors that may cause the company's actual results, performance and achievements to differ materially from any future results, performance or achievements. Relevant factors may include, but are not limited to, changes in commodity prices, foreign exchange fluctuations and general economic conditions, increased costs and demand for production inputs, the speculative nature of exploration and project development, including the risks of obtaining necessary licences and permits and diminishing quantities or grades of resources or reserves, political and social risks, changes to the regulatory framework within which the company operates or may in the future operate, environmental conditions including extreme weather conditions, recruitment and retention of personnel, industrial relations issues and litigation.

Forward looking statements are based on the company and its management's good faith assumptions relating to the financial, market, regulatory and other relevant environments that will exist and affect the company's business and operations in the future. The company does not give any assurance that the assumptions on which forward looking statements are based will prove to be correct, or that the company's business or operations will not be affected in any material manner by these or other factors not foreseen or foreseeable by the company or management or beyond the company's control.

Although the company attempts to identify factors that would cause actual actions, events or results to differ materially from those disclosed in forward looking statements, there may be other factors that could cause actual results, performance, achievements or events not to be anticipated, estimated or intended, and many events are beyond the reasonable control of the company. Accordingly, readers are cautioned not to place undue reliance on forward looking statements.

Forward looking statements in this release are given as at the date of issue only. Subject to any continuing obligations under applicable law or any relevant stock exchange listing rules, in providing this information the company does not undertake any obligation to publicly update or revise any of the forward looking statements or to advise of any change in events, conditions or circumstances on which any such statement is based.

#### For further information please contact:

Michael Bohm – Chair Riedel Resources Limited 4/6 Richardson St, West Perth, WA, 6005, Australia Tel: +61 (08) 9226 0866 admin@riedelresources.com.au

#### **About Riedel Resources Limited**

Riedel Resources Limited listed on ASX on 31 January 2011 and is an Australian-based exploration company focused on the exploration for gold, silver and base metals in Australia and Arizona, USA.

Further information can be found at the Company's website www.riedelresources.com.au

# JORC Code, 2012 Edition – Table 1 report template

## **Section 1 Sampling Techniques and Data**

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary				
Sampling techniques	Nature and quality of sampling.	The results in this release relate to holes 2022-CHL-093, 093A, 011A, 096, 096A, 009A, 097, 097A, 008A, 008B, 003A, 003B, 102, 075E, 111 & 112 all of which were drilled from surface by reverse circulation (RC).				
	<ul> <li>Include reference to measures taken to ensure sample representivity</li> </ul>	Samples from RC drilling were collected on 2.5ft (0.8 meters) and 5ft (1. meters) intervals at the rig with a cyclone mounted cone splitter and bagged in pre-numbered poly woven bags				
	and the appropriate calibration of any measurement tools or systems used.	Sampling was undertaken using standard QAQC procedures that included, field duplicates and the insertion of blanks or standards at a minimum of 1 blank or standard inserted every 15 samples.				
		All samples were sent to American Assay Laboratories in Sparks, Nevada.				
	Aspects of the determination of mineralisation that are Material to the Public Report.	All samples were pulverized at the lab to 85% passing -75µm to produce a 25g charge for Fire Assay with an AA finish. Samples were also digested using a Four Acid digestion with an ICP-AES finish. High grade gold samples were additionally assayed by Fire Assay using a gravimetric finish. High grade silver and base metal samples were additional assayed using a four acid digestion and ICP-AES finish.				
Drilling techniques	• Drill type and details.	Drilling was completed using a Foremost MPD 1500 Reverse Circulation drill rig.				
		Drill holes were drilled either vertically or angled perpendicular to the interpreted stratigraphy.				
		The program was supervised by experienced Riedel Resources contractors.				
Drill sample recovery	• Method of recording and assessing core and chip sample recoveries and results assessed.	Samples were collected on 5ft intervals and 2.5ft intervals. Sampling on 2.5ft intervals was done when mineralization was projected to occur. All				

Criteria	JORC Code explanation	Commentary			
	<ul> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential</li> </ul>	samples were collected into pre numbered poly woven bags via a cyclone splitter attached to the drill. Sample recovery was measured by Riedel's geologists and generally exceeded 90% recovery. There is no apparent correlation between gold grades and ground			
<u> </u>	loss/gain of fine/coarse material.	conditions. There is no apparent sample bias.			
Logging	<ul> <li>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate</li> </ul>	Samples were logged in detail including, lithology (where possible), alteration, sulphides and other mineralization.			
	Mineral Resource estimation, mining studies and metallurgical studies.	The entire hole was logged by an experienced geologist employed by Riedel.			
		The level of detail is considered sufficient for early stage exploration of the type being undertaken here.			
	<ul> <li>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</li> </ul>	Geological logging is qualitative.			
	• The total length and percentage of the relevant intersections logged.	All holes were logged over the entire length.			
Sub- sampling	<ul> <li>If core, whether cut or sawn and whether quarter, half or all core taken.</li> </ul>	Samples were generally collected wet and collected via a cyclone mounted cone splitter attached to the drill rig.			
techniques and sample preparation	<ul> <li>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</li> </ul>	All samples were prepared by the American Assay Laboratories lab in Sparks, NV. All samples were dried and pulverized to 85% passing 75µm and a sub sample of 250g retained. A nominal 30g charge was used for Fire Assay analysis. This procedure is industry standard for this type of			
	<ul> <li>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> </ul>	sample and analysis.			
	<ul> <li>Quality control procedures adopted for all sub-sampling stages to</li> </ul>	Sample sizes are considered appropriate for this stage of the project.			
	maximise representivity of samples.	No compositing was conducted.			
	<ul> <li>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</li> </ul>	Field duplicates were collected every 100' (30.48 meters) downhole.			
	<ul> <li>Whether sample sizes are appropriate to the grain size of the material being sampled.</li> </ul>				
Quality of assay data and	• The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered	Samples were analyzed at American Assay Laboratories in Sparks,Nevada. For gold the analytical method used was FA-ICP which is digestion by Fire Assay with an ICP OES finish. Any samples assaying			

Criteria	JORC Code explanation	Commentary			
laboratory tests	partial or total.	greater than 3ppm Au or 100ppm Ag were further analyzed by GAuAg. These methods are considered appropriate for the material and mineralization and measure total gold content.			
	• For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.	Samples were also analyzed by method ICP5A35 which is a five-acid digestion with an ICP-OES finish for base metal determinations. This method is considered appropriate for the material and mineralization.			
	<ul> <li>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels</li> </ul>	Riedel resources used a mix of Certified Reference Materials and blanks inserted every 15 samples.			
	of accuracy (ie lack of bias) and precision have been established.	Field duplicates were collected every 100ft (30.48 meters).			
		Umpire checks are not considered necessary for this stage of exploration.			
Verification of sampling	• The verification of significant intersections by either independent or alternative company personnel.	Significant results are checked by the Riedel's geologist and Competent Person.			
and assaying	• The use of twinned holes.	No twinned holes have been completed at this early stage of exploration.			
, ,	• Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.	All field logging was logged on paper logs and in digital format in an excel spreadsheet. Copies of all logs are stored on a cloud-based storage system as well as at the office in Kingman Arizona.			
	Discuss any adjustment to assay data.	No assay data were adjusted.			
Location of data points	<ul> <li>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> </ul>	Collar surveys were completed using a Trimble ProXH submeter GPS unit using a differential correction signal and is capable of 20-70 cm X-Y resolution and 2-3m elevation accuracy.			
	Specification of the grid system used.	The grid system used was WGS-84 Zone 11.			
	<ul> <li>Quality and adequacy of topographic control.</li> </ul>	Drill hole directional surveys were taken using a SPT Gyro Master orientation tool providing azimuth and angle. Stated accuracies for the inclinometer is 0.05 degree, and for azimuth 0.5 degree. Collar orientations were obtained using a Brunton Compass.			
Data spacing	Data spacing for reporting of Exploration Results.	RC hole locations were spaced to test historic geologic targets as well as			
and distribution	• Whether the data spacing and distribution is sufficient to establish the	geophysical targets.			
	degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and	The current drill hole spacing is too broad to establish a mineral resource.			

Criteria	JORC Code explanation	Commentary
	classifications applied.	
	Whether sample compositing has been applied.	No compositing has been applied.
Orientation of data in relation to	• Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.	Drilling is orthogonal to the general trend of the stratigraphy.
geological structure	<ul> <li>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</li> </ul>	Holes were drilled vertically or angled perpendicular to the interpreted stratigraphy using historic data where available.
Sample security	• The measures taken to ensure sample security.	Core samples were delivered in sealed poly weave bags to the American Assay Laboratory in Sparks, Nevada. Chain of Custody documentation stating, samples, submittal and methods were signed off on. American Assay Labs maintains the chain of custody once the samples are delivered with an audit trail available on the American Assay website.
Audits or reviews	• The results of any audits or reviews of sampling techniques and data.	Sampling and assaying techniques are considered to be industry standard. No external audits have been undertaken at this stage of exploration.

## **Section 2 Reporting of Exploration Results**

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</li> </ul>	The drill holes were all drilled within the IAM Mining LLC claim group property which form part of a claim package subject to an Option Agreement with IAM Mining LLC. Riedel Resources can earn up to an 80% interested in Flagstaff Minerals (USA) Inc ("Flagstaff"). Flagstaff can earn a 100% interest in the property. Refer to Riedel's ASX announcement dated 23/10/2020. The claim package applicable to the Flagstaff Option Agreement is set out below:
		Exhibit A - Claims

I AM Mining LLC Claims

Claim Name	BLM Serial Number	Claim Name	BLM Serial Number
I AM 1	AMC341687	I AM 34	AMC341716
I AM 2	AMC341688	I AM 35	AMC341717
LAM 3	AMC341689	1 AM 36	AMC341718
I AM 4	AMC341690	I AM 37	AMC341719
LAM 5	AMC341691	I AM 38	AMC341720
LAM 6	AMC341692	I AM 39	AMC341721
LAM 7	AMC341753	1 AM 40	AMC341722
LAM 8	AMC341693	1 AM 41	AMC341723
IAM 9	AMC341694	1 AM 42	AMC341724
LAM 10	AMC341754	1 AM 43	AMC341725
LAM 11	AMC341755	1 AM 44	AMC341726
LAM 12	AMC341756	1 AM 45	AMC341727
I AM 13	AMC341695	1 AM 46	AMC341728
I AM 14	AMC341696	I AM 47	AMC341729
1 AM 15	AMC341697	I AM 48	AMC341730
I AM 16	AMC341698	I AM 49	AMC341731
I AM 17	AMC341699	I AM 50	AMC341732
I AM 18	AMC341700	LAM 51	AMC341733
J AM 19	AMC341701	1 AM 52	AMC341734
LAM 20	AMC341702	1 AM 53	AMC341735
I AM 21	AMC341703	1 AM 54	AMC341736
I AM 22	AMC341704	1 AM 55	AMC341737
I AM 23	AMC341705	1 AM 56	AMC341738
I AM 24	AMC341706	1 AM 57	AMC341739
I AM 25	AMC341707	I AM 58	AMC341740
I AM 26	AMC341708	LAM 59	AMC341741
LAM 27	AMC341709	I AM 60	AMC341742
I AM 28	AMC341710	I AM 61	AMC341743
I AM 29	AMC341711	I AM 62	AMC341744
1 AM 30	AMC341712	I AM 63	AMC341745
1 AM 31	AMC341713	I AM 64	AMC341746
I AM 32	AMC341714	TED 65	AMC341747
I AM 33	AMC341715	TED 66	AMC341748
		TED 67	AMC341749
		TED 68	AMC341750
		TED 69	AMC341751
		TED 70	AMC341752

The IAM Mining LLC claims are administered by the Bureau of Land Management and are in good standing. Riedel is unaware of any impediments to obtaining a licence to operate in the area.

Criteria	JC	DRC Code explanation	Commentary				
Exploration	٠	Acknowledgment and appraisal of exploration by other parties.	Historic production and exploration from the property as follows:				
done by other parties			Underground mining at Arizona Magma was conducted from the 1880's to 1942.				
			Drilling by Chandeleur Bay Resources at Tintic was conducted in 1997.				
			The Merrimac mine was mined for Au/Ag/Pg/Zn until 1905.				
			The Tintic mine was mine for Au/Ag/Pb/Zn in 1942.				
			None of the previous work is considered to be of JORC standard.				
Geology	•	Deposit type, geological setting and style of mineralisation.	The property is located along the Northwest flank of the Cerbat Mountains of Arizona. The Cerbat Mountains are a typical block-faulted range of the Basin and Range physiographic province of the southwest United States and are underlain by a strongly deformed package of Precambrian rocks including quartz feldspar gneiss, amphibolite schist, and biotite schist intruded by both Precambrian diorite and granite and by Laramide intrusions.				
			The property contains multiple structurally controlled vein-systems. A Low-Sulphidation Epithermal Character has been observed in ore material from historic dumps across the property. As the property is approximately 8km from the Mineral Park Cu porphyry mine, vein mineralization related to a unknown porphyry is also of interest.				
Drill hole Information	•	A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:	All drill hole collar information is tabulated in Appendix 1, Table 1.				
		$\circ$ easting and northing of the drill hole collar	Significant intervals are tabulated in Appendix 1, Table 2.				
		<ul> <li>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> </ul>					
		$\circ$ dip and azimuth of the hole					
		$\circ$ down hole length and interception depth					
		$\circ$ hole length.					
	•	If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.					

Criteria	JORC Code explanation	Commentary
Data aggregation	<ul> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high</li> </ul>	Intersection lengths and grades for all holes are reported as down-hole length weighted intervals.
methods	grades) and cut-off grades are usually Material and should be stated.	Intersections are reported based on vein boundaries and no grade capping was applied to the reported intersections.
	<ul> <li>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> </ul>	Intersection lengths and grades are reported as down-hole length weighted intervals.
	such aggregations should be shown in detail.	Details of all intersections are included in Appendix 1
	• The assumptions used for any reporting of metal equivalent values	Lower grade intervals are quoted and provide context for significant intervals.
	should be clearly stated.	No metal equivalent values are reported.
Relationship between	These relationships are particularly important in the reporting of Exploration Results.	Drill hole intersections are reported down hole. True widths are unknown.
mineralisation widths and intercept	<ul> <li>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</li> </ul>	
lengths	<ul> <li>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</li> </ul>	
Diagrams	• Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Refer to figures in the body of this announcement for relevant plans including a tabulation of intercepts.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades	Intersection lengths and grades are reported as down-hole length weighted averages.
	and/or widths should be practiced to avoid misleading reporting of Exploration Results.	The number of drill holes and meters are included in the body of the announcement and in Appendix 1.
Other substantive exploration data	• Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	No other substantive exploration data is available for reporting.

Criteria	JORC Code explanation	Commentary				
Further work		Follow up drilling is planned to expand the current understanding of mineralized structures. Drill hole locations will be selected to test for mineralization along strike and at depth.				

# **Appendix 1**

# Table 1: Drill Hole Collar Information – Kingman Project

Drill Hole Collar ID	Target Name	Туре	Elevation (ft)	Elevation (m)	Dip	Azimuth	Total Depth (m)	Total Depth (ft)	Collar Easting (wgs84-11N)	Collar Northing (wgs84-11N)
2022-CHL-097	Tintic	RC	3793.4	1156.5	45	260	24.4	80	751475	3921903
2022-CHL-097A	Tintic	RC	3796.7	1157.5	65	260	30.5	100	751477	3921904
2022-CHL-008A	Tintic	RC	3800.0	1158.5	60	260	24.4	80	751490	3921885
2022-CHL-008B	Tintic	RC	3803.2	1159.5	45	290	30.5	100	751489	3921888
2022-CHL-009A	Tintic	RC	3806.5	1160.5	85	260	42.7	140	751475	3921925
2022-CHL-096	Tintic	RC	3809.8	1161.5	45	270	42.7	140	751474	3921944
2022-CHL-096A	Tintic	RC	3813.1	1162.5	65	270	48.8	160	751478	3921944
2022-CHL-003A	Tintic	RC	3816.4	1163.5	45	310	27.4	90	751491	3921859
2022-CHL-003B	Tintic	RC	3819.6	1164.5	60	310	36.6	120	751490	3921859
2022-CHL-102	Tintic	RC	3822.9	1165.5	80	260	106.7	350	751657	3921922
2022-CHL-111	GR	RC	3826.2	1166.5	45	320	45.7	150	752952	3922186
2022-CHL-112	GR	RC	3829.5	1167.5	45	240	61.0	200	752943	3922146
2022-CHL-011A	Tintic	RC	3832.8	1168.5	80	260	38.1	125	751479	3921957
2022-CHL-093	Tintic	RC	3836.0	1169.5	45	270	45.7	150	751478	3921976
2022-CHL-093A	Tintic	RC	3839.3	1170.5	65	270	45.7	150	751481	3921976
2022-CHL-075E	Tintic	RC	3842.6	1171.5	60	260	67.1	220	751716	3921650

RC = Reverse Circulation

Drill Hole Collar ID	Location	From (ft)	To (ft)	Thickness (ft)	From (m)	To (m)	Thickness (m)	Au (g/t)	Ag (g/t)	Pb (%)	Zn (%)
2022-CHL-097	Tintic	37.5	42.5	5.0	11.4	13.0	1.5	6.77	23	0.3	0.4
	including	37.5	40	2.5	11.4	12.2	0.8	11.47	35	0.6	0.7
2022-CHL-097A	Tintic	40.0	50	10.0	12.2	15.2	3.0	2.53	13	0.2	0.2
	including	40.0	45	5.0	12.2	13.7	1.5	4.07	18	0.2	0.2
	including	40.0	42.5	2.5	12.2	13.0	0.8	6.60	18	0.3	0.3
2022-CHL-008A	Tintic	45	50	5.0	13.7	15.2	1.5	1.72	24		0.1
	including	47.5	50	2.5	14.5	15.2	0.8	2.53	17		0.2
2022-CHL-008B	Tintic	45	50	5.0	13.7	15.2	1.5	27.54	37	0.6	0.2
	including	45	47.5	2.5	13.7	14.5	0.8	53.33	63	1.1	0.2
2022-CHL-009A	Tintic	70	72.5	2.5	21.3	22.1	0.8	0.21	6		
2022-CHL-096	Tintic	90	100	10.0	27.4	30.5	3.0	5.05	58	1.2	1.2
	including	90	95	5.0	27.4	29.0	1.5	9.37	112	2.4	2.2
2022-CHL-096A	Tintic	90	92.5	2.5	27.4	28.2	0.8	1.59	36	0.1	0.3
2022-CHL-003A	Tintic	45	55	10.0	13.7	16.8	3.0	0.87	6		
2022-CHL-003B	Tintic	42.5	47.5	5.0	13.0	14.5	1.5	5.79	11	1.2	
	including	42.5	45	2.5	13.0	13.7	0.8	10.67	15	2.2	
2022-CHL-102	Tintic	207.5	212.5	5.0	63.3	64.8	1.5	0.43	29	2.6	0.2
2022-CHL-111	GR			•	• • •	No Significa	ant Intercepts	•			
2022-CHL-112	GR		No Significant Intercepts								
2022-CHL-011A	Tintic	105 110 5.0 32.0 33.5 1.5 historic mine work					ne working	gs			
2022-CHL-093	Tintic	127.5	130	2.5	38.9	39.6	0.8	0.98	4		
2022-CHL-093A	Tintic	130	132.5	2.5	39.6	40.4	0.8	0.79	2		
2022-CHL-075E	Tintic	152.5	160	7.5	46.5	48.8	2.3	2.62	21	0.5	1.3
	including	152.5	155	2.5	46.5	47.3	0.8	6.16	42	0.9	1.6

## **Table 2: Significant Intervals**

Significant drill assay results. Intervals calculated with a lower cut-off of 0.2 g/t Au) with up to 0.8m of below cut-off internal dilution allowed. Higher grade intervals reported >2 g/t Au / >100g/t Ag (bolded). No top-cut applied. All widths quoted downhole widths, true widths to be determined.