

ADDITIONAL GOLD & SIGNIFICANT TUNGSTEN MINERALISATION IN DRILLING AT GOLDEN GATE NORTH

BROAD, NEAR-SURFACE GOLD MINERALISATION AND TUNGSTEN IDENTIFIED IN DIAMOND CORE HOLE HH-GG25-006C AND IN THREE REVERSE CIRCULATION HOLES.

HIGHLIGHTS

- ▶ Further gold (Au) mineralisation and significant tungsten (W) mineralisation identified in final assay results of last of the 2025 drill holes, HH-GG25-011R, HH-GG25-012R, HH-GG25-013R HH-GG25-014R, and HH-GG25-006C.
- ▶ Reverse circulation (RC) drill hole HH-GG25-012R:
 - Down hole interval of **8m at 0.14% W from 79.3m within:**
 - Down hole interval of 21m at 0.06% W from 70.1m.
 - Down hole interval of **99m at 0.23g/t Au from surface**; including:
 - 20m at 0.35g/t Au from 0m; and
 - 9.1m at 0.65g/t Au from 89.9m.
 - HH-GG25-012R ended in gold mineralisation, 0.80g/t Au over 1.5m.
- ▶ RC drill hole HH-GG25-013R:
 - Entire hole with down hole interval of 99.1m hosts gold mineralisation at 0.38g/t Au from 0m; including:
 - 9.1m @ 0.54 g/t Au.
 - HH-GG25-013R ended in gold mineralisation.
- ▶ Diamond core hole HH-GG25-006C:
 - Down hole interval of 103.5m at 0.37/t Au from 0m; and
 - **Down hole interval 133.7m at 0.55 g/t Au from 376.5m**; including:
 - 15.6m @ 1.10 g/t Au from 166.7m.
- ▶ **Near-top to bottom mineralisation in core hole HH-GG25-006C.**
- ▶ **Near-top to bottom mineralisation in RC hole HHGG25-011R.**
- ▶ **Near-top to bottom mineralisation in RC hole HHGG25-014R.**
- ▶ Latest drill results at the Golden Gate North confirms gold potential and now identifies gold-tungsten potential.
- ▶ The Company to redouble its efforts in rapidly advancing: the Golden Gate North gold deposit (with associated tungsten); and the Golden Gate South Prospect.

RML's CEO of US Operations, Craig Lindsay, commented on the latest drilling results:

"The drilling accomplished at the Horse Heaven Project in our first season was exceptional. We have encountered gold discoveries at both the north and south ends of the Golden Gate Prospect, which is now emerging as a district-scale discovery. We are very excited about the potential to significantly grow both gold and tungsten mineralization. Golden Gate is only in early days and is emerging into what we feel is a very large gold deposit."

RML's Executive Director, Aharon Zaetz, commented on the significance of all drilling results:

"It is sometimes difficult to comprehend but immensely pleasing to consider the fact that every hole drilled by us at Golden Gate intercepted significant intervals of gold mineralisation. From our first hole HH-GG25-001C to our last hole HH-GG25-014R. It is easy to conclude that the 2025 drilling campaign has resulted in a major gold discovery, currently open ended in all directions.

It is a gold discovery totally in keeping with the intrusive related, shear-hosted gold exploration model we have for the original Golden Gate Fault Zone, and it is a credit to our technical team for recognising such potential. The fast-approaching 2026 drilling campaign will seek to define a maiden resource at Golden Gate."

Resolution Minerals Ltd (ASX: RML; OTCQB: RLMLF) ("Resolution" or "Company") is pleased to announce that its shallow reverse circulation (RC) drilling program at the Golden Gate Fault Zone on its 100%-owned Horse Heaven Gold-Antimony-Tungsten-Silver Project ("Horse Heaven" or the "Project"), Idaho, USA (Figure 1) have encountered broad intervals of near-surface gold mineralisation, ending in mineralisation, and a significant tungsten intercept.

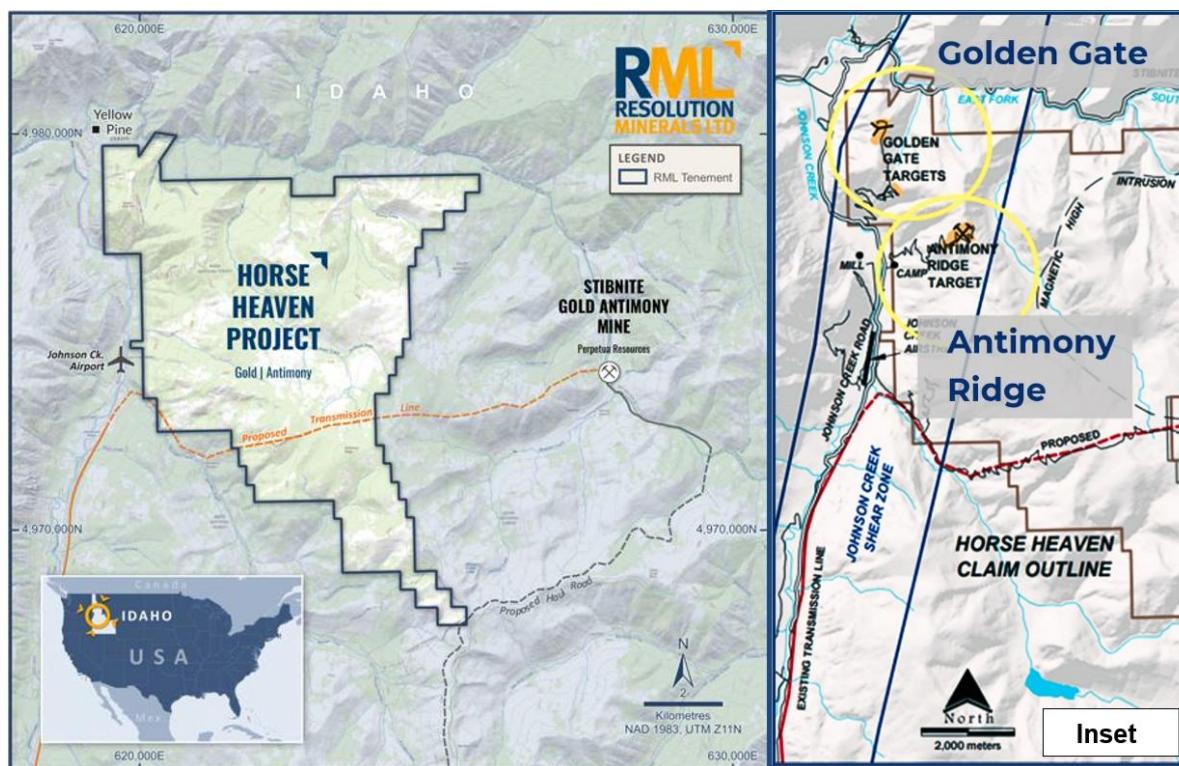


Figure 1: Horse Heaven Project location map, highlighting the location of the two current major antimony-gold-silver-tungsten targets, the Golden Gate Target (where the Phase 1 Core Drilling Program was conducted) and the Antimony Ridge Target. Also highlighted is the fully-permitted Stibnite Gold Project, which is only 16km east of Horse Heaven. Note: Coordinates are UTM metres north and east metric system, not latitude/longitude.

Trial 2025 Reverse Circulation Program

As part of the 2025 Golden Gate drilling program, Resolution undertook a trial RC drilling program with three main objectives: i) To test the occurrence of near surface mineralisation in areas that required immediate validation within the broader Golden Gate Fault Zone (GGFZ); ii) to test the depth and flow strength/rates of the water table (for to initial basic hydrogeological data); and iii) to test the use of RC drilling as a method of quickly obtaining *inter alia*, sub-surface geological and assay data (quicker and less expensively than diamond core drilling).

The RC program completed three holes HH-GG25-011R, HH-GG25-012R, HH-GG25-013R at Golden Gate North, and one hole, HH-GG25-014R, at Golden Gate South (Figure 2). All holes intercepted significant gold mineralisation. Tungsten mineralisation was intercepted in one hole of this RC program.

All holes were stopped at the water table. Important hydrogeological studies at the broader Golden Gate Prospect will assist drill planning and potential mine development at Golden Gate North and Golden Gate South.

Significant drill intercepts (all down hole) include:

- ▶ HH-GG25-011R: The entire down hole interval of the hole (50.3m) at 0.13g/t Au;
- ▶ HH-GG25-012R: The entire down hole interval of the hole (99.1m) at 0.23g/t Au; including:
 - 9m @ 0.63g/t Au and 20m at 0.35g/t Au; and
 - 21m @ 0.06% W including 8m at 0.14% W.
- ▶ HH-GG25-013R: The entire down hole interval of the hole (99.1m) at 0.38g/t Au, including 9.1m at 0.54g/t Au; and
- ▶ HH-GG25-014R: Anomalous gold throughout the hole with low grade intervals including 9.1m at 0.35g/t Au.

Each hole is discussed in further detail below. The complete set of drill hole assay data (gold, silver, antimony and tungsten) for all four holes is provided in assay tables as Appendix A.

2025 Diamond Core Program

Receipt of assay results for diamond core drill hole HH-GG25-006C signifies the completion [and by this announcement, the reporting] of the 2025 diamond core drill program. All ten holes of this program (including nine holes previously reported to the market) have intercepted significant gold mineralisation.

The broad mineralised intersections of these holes include:

- ▶ HH-GG25-001C: 197.5m @ 1.26g/t gold from 34.0m (open ended);
- ▶ HH-GG25-002C: 265.2m @ 0.60g/t gold from surface (open ended);
- ▶ HH-GG25-003C: 253.0m @ 1.50g/t gold from surface (open ended);
- ▶ HH-GG25-004C: 240.8m @ 0.64g/t gold from surface (open ended);
- ▶ HH-GG25-005C: 283.5m @ 0.36g/t gold from surface (open ended);
- ▶ **HH-GG25-006C: 133.7m at 0.55g/t Au from 376.5m (open ended); this announcement**

- HH-GG25-007C: 207.2m @ 0.42g/t gold from surface;
- HH-GG25-008C: 71.6m @ 0.11g/t gold from 275m (open ended);
- HH-GG25-009C: 172.2m @ 0.46g/t Au gold from surface; and
- HH-GG25-010C: 225.5m @ 0.14 g/t Au, from surface (open ended).

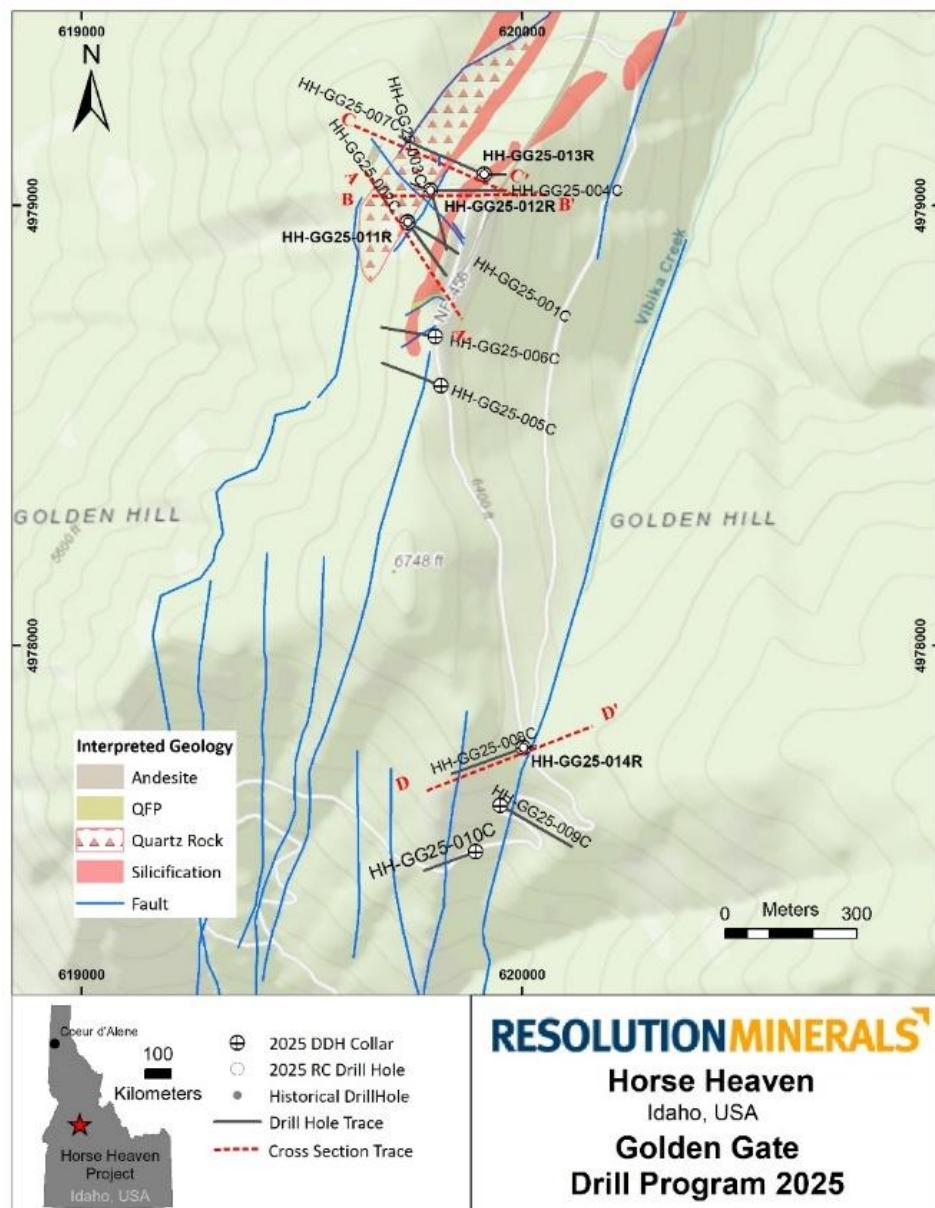


Figure 2: Drill hole location plan for the Golden Gate North and Golden Gate South Prospects, highlighting the five holes with the latest assay results, the subject of this announcement, HH-GG25-011R, HH-GG25-012R, HH-GG25-013R, drilled at Golden Gate North, and HH-GG25-014R, drilled at Golden Gate South, and HH-GG25-006C drilled Golden Gate North. Also showing the location of the drill hole cross sections A-A', B-B', C-C' and D-D'. Golden Gate South is located 600m south of Golden Gate North. The NE-SE orientation of the gold mineralisation at Golden Gate closely parallels the many faults that traverse the greater prospect area.

Hole ID	ASX Announcement Date	Drill Type	Diameter	Drill Hole Location							Dip	Az	Planned (ft)	EOH (ft)	EOH (m)
				Grid	Datum	Zone	Easting	Northing	Elevation (m)						
HH-GG25-001C	28/10/2025 & 2/12/2025	Core	HQ3	UTM	NAD83	11T	619741	4978962	1963	-55	120			760	232
HH-GG25-002C	3/11/2025	Core	HQ3	UTM	NAD83	11T	619740	4978961	1963	-55	145			870	265
HH-GG25-003C	3/11/2025	Core	HQ3	UTM	NAD83	11T	619792	4979034	1992	-55	158			830	253
HH-GG25-004C	2/12/2025	Core	HQ3	UTM	NAD83	11T	619792	4979034	1992	-45	90			790	241
HH-GG25-005C	2/12/2025	Core	HQ3	UTM	NAD83	11T	619816	4978590	1980	-55	290			930	283
HH-GG25-006C	Current Announcement	Core	HQ3	UTM	NAD83	11T	619803	4978702	2067	-60	280			815	248
HH-GG25-007C	2/12/2025	Core	HQ3	UTM	NAD83	11T	619914	4979070	1967	-50	290			1185	361
HH-GG25-008C	9/02/2026	Core	HQ3	UTM	NAD83	11T	620003	4977768	2038	-60	250			1140	347
HH-GG25-009C	9/02/2026	Core	HQ3	UTM	NAD83	11T	619951	4977637	1872	-50	120			950	290
HH-GG25-010C	9/02/2026	Core	HQ3	UTM	NAD83	11T	619895	4977532	1820	-60	250			820	250
HH-GG25-011R	Current Announcement	RC	N/A	UTM	NAD83	11T	619726	4978935	1517579	-90	0			820	165
HH-GG25-012R	Current Announcement	RC	N/A	UTM	NAD83	11T	619797	4979043	1517612	-60	290			984	325
HH-GG25-013R	Current Announcement	RC	N/A	UTM	NAD83	11T	619910	4979075	1517622	-60	90			984	325
HH-GG25-014R	Current Announcement	RC	N/A	UTM	NAD83	11T	619997	4977767	1517223	-60	80			984	195

Table 1: Drill hole parameters of holes subject of this announcement, HH-GG25-008C, HH-GG25-008C, HH-GG25-008C (highlighted), and of drill holes already released to the market.

Drill Hole Descriptions

RC Hole: HH-GG25-011R

HH-GG25-011R was collared adjacent to small historical mine workings and was designed to test a geophysical CSAMT anomaly at depth below the mine workings, as well as test for Au, Ag and W near surface mineralisation.

The hole encountered water at 50.3m which was much shallower than anticipated and well before reaching the target depth of 250m. **The hole stopped at the groundwater contact as our current permit precludes surface discharge of drill produced groundwater.**

Low grade to anomalous gold was encountered throughout the entire hole returning 50.3m @ 0.13 g/t Au (Figure 3 and Appendix A). All the rock observed in recovered chips was both highly altered and oxidised containing no visible sulphides. Silver (Ag) values correlate well with Au returning values indicating a gold-silver association.

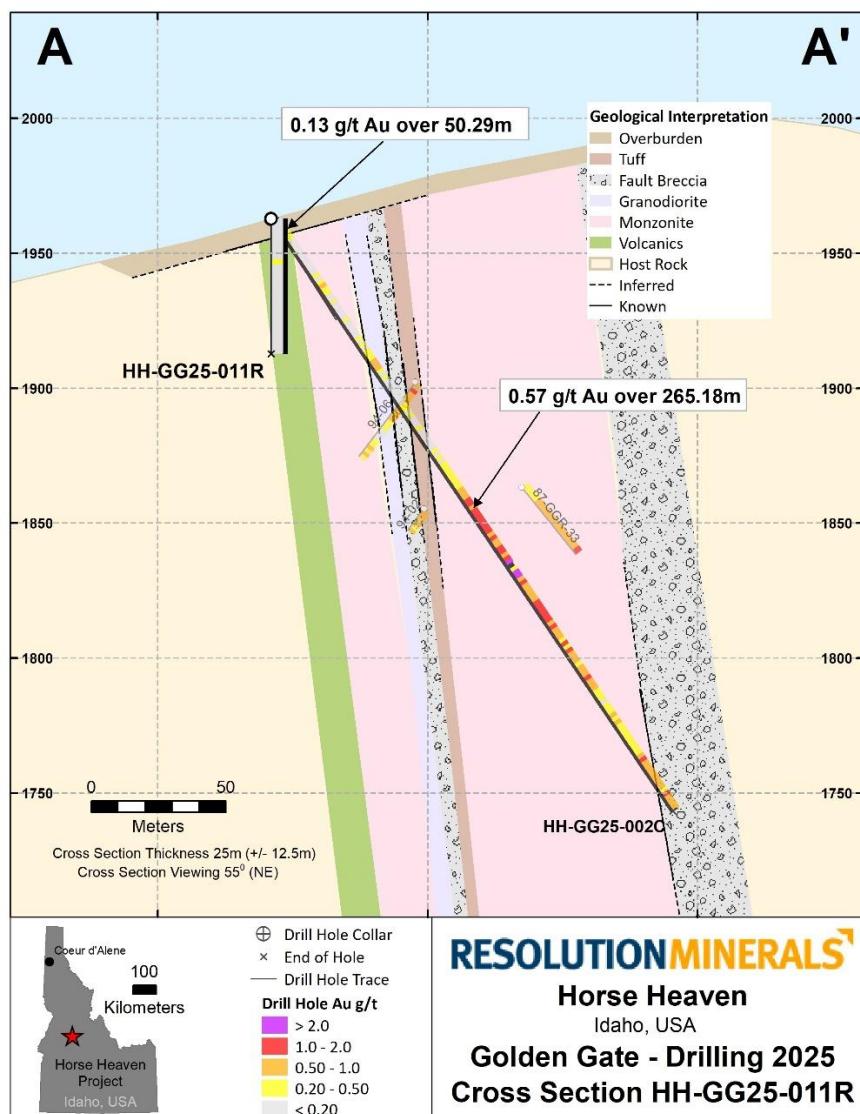


Figure 3: Schematic drill hole cross section HH-GG25-011R (and HH-GG25-002C) showing the local geology, highlighting the significant gold intersections, and pre-RML RC drill hole (87-GGR-33) intersection drawn into the plane of the cross section. HH-GG25-011R was collared into and finished in volcanics.

RC Hole: HH-GG25-012R

Notably, HH-GG25-012R encountered a significant Tungsten (W) intercept returning 21m @ 0.06% W including 8m @ 0.14% W, as well as three further occurrences of anomalous W, 1.5m @ 110ppm, 150ppm and 370ppm respectively. The intercept confirms the extension of high-grade W mineralisation from the historic mine workings immediately to the north, one of the principal goals of the drill hole (Figure 4).

Analysis of the W in this hole was carried out using a 4-acid digestion and Inductively coupled plasma atomic emission spectroscopy (ICP-AES); it has been noted that this method can under-report W values. The company is planning to reanalyse W-bearing samples using a lithium-borate fusion followed by X-ray Fluorescence (XRF) analysis. Results of this re-analysis will be announced to the market when they are available.

HH-GG25-012R also encountered a broad zone of anomalous to low-grade Au-Ag mineralisation throughout the entire hole, grading at 0.23g/t Au including 9.1m at 0.65g/t Au and 20m at 0.35g/t Au; the highest value encountered was 1.5m at 0.8g/t Au, the last sample from the hole (Figure 4).

The Au-Ag mineralised sequence is a strongly oxidised and altered rock, interpreted as monzonite to quartz-monzonite (Figure 4). Arsenic values were low as was sulphide content, due to the intense oxidation in dry rock.

Groundwater was encountered in the hole at a depth of 99m and the hole was stopped.

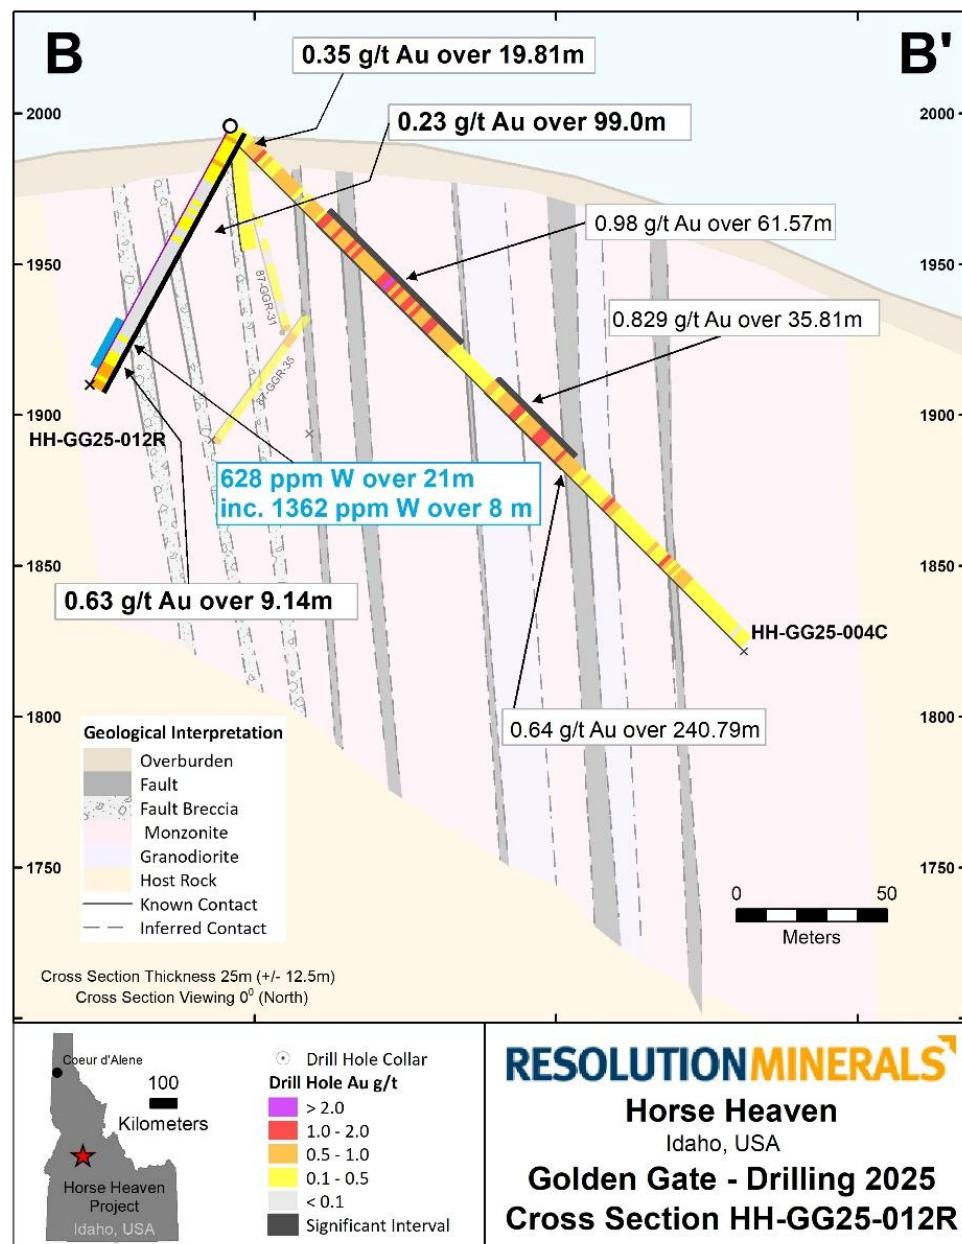


Figure 4: Schematic drill hole cross section HH-GG25-012R (and HH-GG25-004C) showing the local geology, highlighting the significant gold intersections, and pre-RML RC drill hole (87-GGR-31 and 87-GGR-35) intersection drawn into the plane of the cross section. It is interesting to note that the strongest gold grades in HH-GG25-012R are at the bottom of the hole and that they appear associated with tungsten.

RC Hole: HH-GG25-013R

Designed to test for near surface gold mineralisation to the east, drill hole HH-GG25-013R returned a broad zone of low-grade gold mineralisation along its entire length; 99.1m at 0.38g/t Au with values varying from 0.17g/t Au to 0.76g/t Au; the hole ended in mineralisation (Figure 5). Gold correlates well with silver and arsenic though arsenic values are low due to oxidation in dry rock.

Host rock consisted of intensely oxidised, altered and brecciated monzonite to quart-monzonite (Figure 5). The numerous breccia zones are interpreted to be faults running parallel to the GGFZ and are consistent with the shear zone hosted mineralisation model within intrusive rock.

The importance of HH-GG25-013R is that it shows the existence of near surface, oxidised gold mineralisation to the east of the 2025 diamond core drilling, extends the mineralisation on top of Golden Gate Hill, and remains open to the east and at depth.

Groundwater was again encountered at 99.1m, the end of the hole, consistent with groundwater depth observed in HH-GG25-012R.

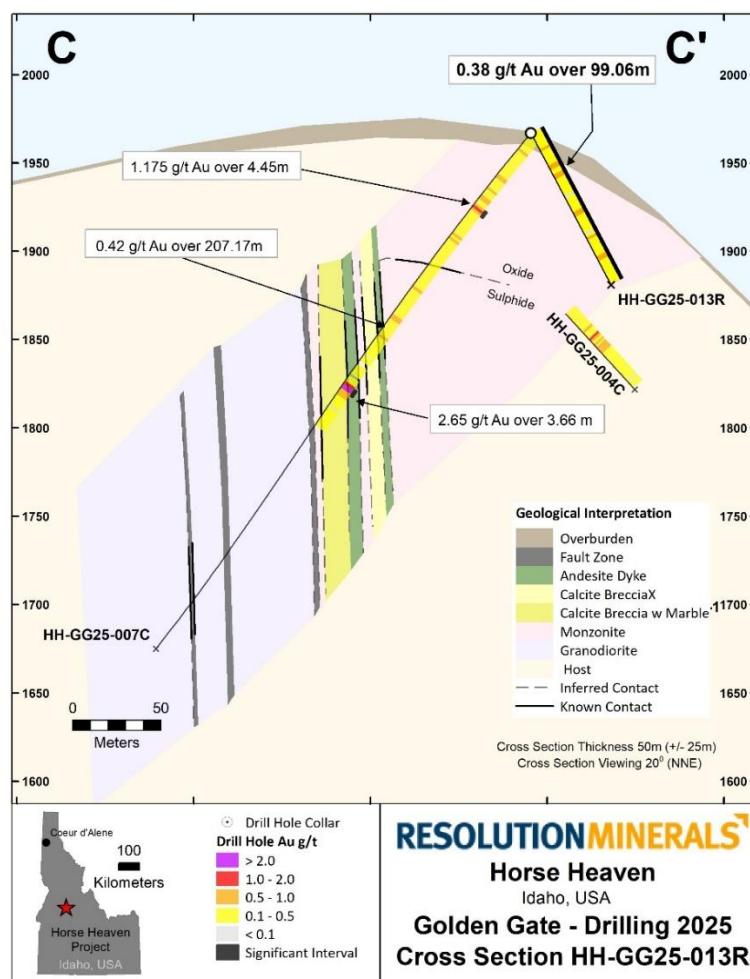


Figure 5: Schematic drill hole cross section HH-GG25-013R (and HH-GG25-007C) showing the local geology, highlighting the significant gold intersections, and RML diamond drill hole (and HH-GG25-004C – Refer also to Figure 4) intersection draw into the plane of the cross section.

RC Hole: HH-GG25-014R

HH-GG25-014R was drilled in the South Golden Gate area as follow-up to the three diamond core holes drilled in the area; the goals being to test near surface and shear zone hosted Au mineralisation as well the potential for W mineralisation, and depth to ground water.

The drill hole returned anomalous to low-grade Au mineralisation along its entire length and includes 9.1m at 0.35g/t Au including a high of 1.5m at 0.47g/t Au. The hole stopped well short of its 300m planned depth at a depth of 59m when groundwater was encountered; this was closer to surface than anticipated. Importantly, the hole ended in mineralisation.

The hole shows that the Vibika Creek Fault Zone that runs parallel to, and is probably part of, the GGFZ host potentially economic near surface gold mineralisation, again the rocks were intensely oxidised and altered and were a mix of monzonite and granodiorite. More importantly, the results back-up results from diamond core hole HH-GG25-009C that mineralisation extends to the east and remains open to the east and at depth.

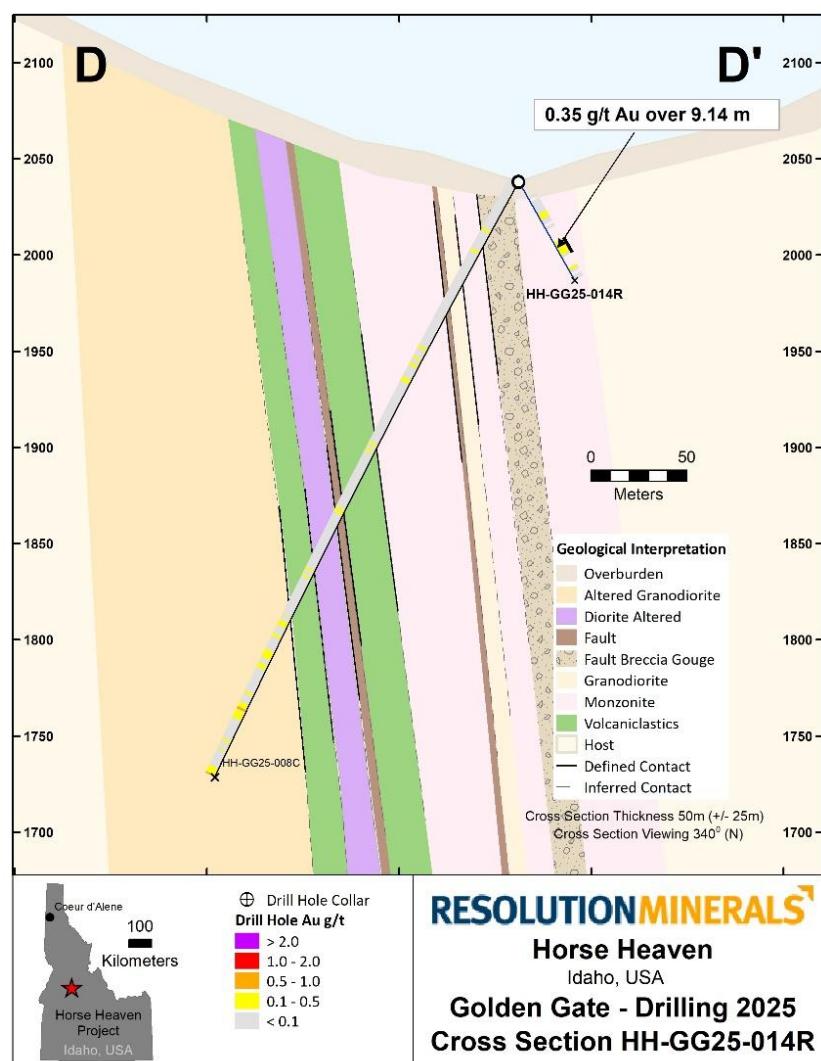


Figure 6: Schematic drill hole cross section HH-GG25-014R (and HH-GG25-008C) showing the local geology, highlighting the significant gold intersections.

Diamond Core Hole: HH-GG25-006C

HH-GG25-006C returned low grade gold mineralisation throughout most its entire length and ended in mineralisation. Mineralised intervals include: 103.5m at 0.27 g/t Au and 133.7m at 0.55 g/t Au including 15.6m at 1.10 g/t Au. The mineralised sequence is intruded by an aplite dyke, which is interpreted to be a late, post-mineralisation, dyke that contains no (below detection) gold.

The results observed in this hole are consistent with the other diamond core holes drilled at North Golden Gate in that there is the same association of pyrite and arsenopyrite with gold and silver. Importantly, the hole fills in a gap in the drilling between hole -005C to the south and the core area further north.

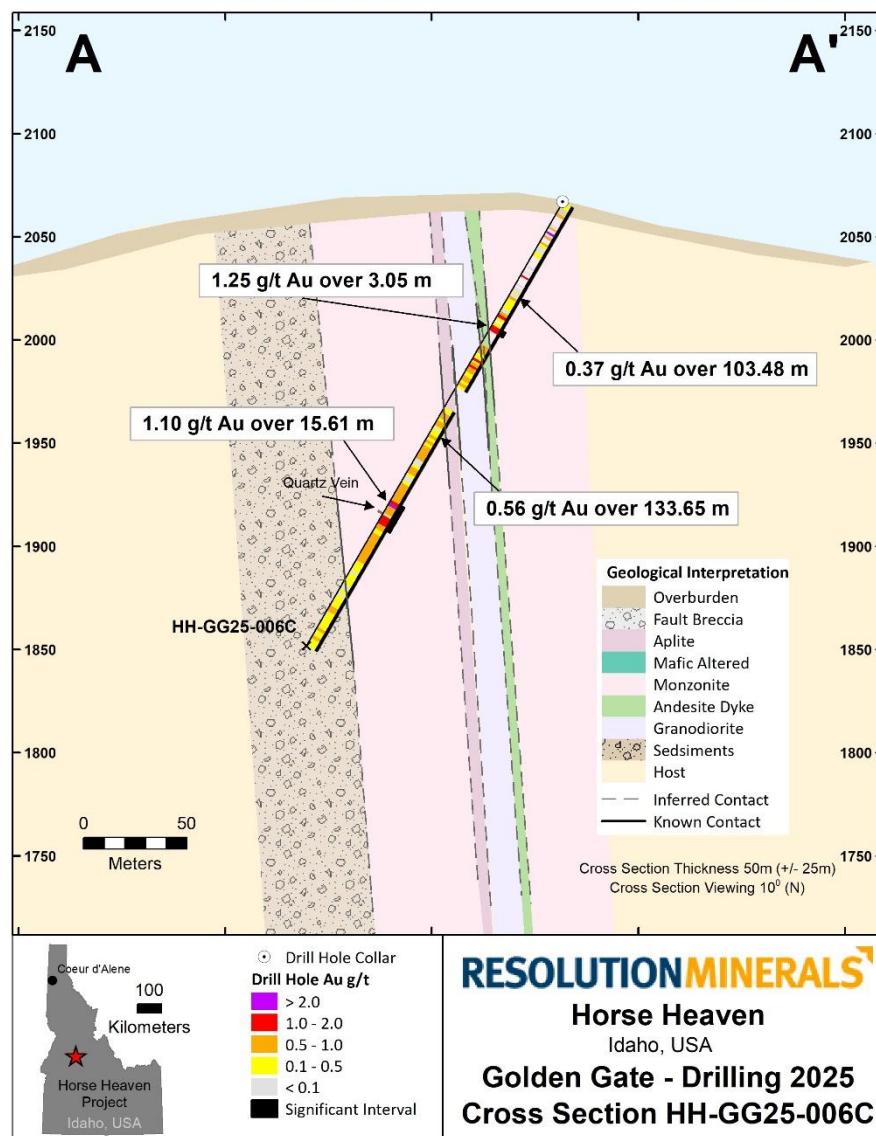


Figure 7: Schematic drill hole cross section HH-GG25-006C showing the local geology, highlighting the significant gold intersections. The aplite dyke is interpreted as a late-intrusion that post-dates mineralisation.

Importance of Results

The exploration results reported in this announcement for RC drill holes HH-GG25-011R, HH-GG25-012R, HH-GG25-013R and HH-GG25-014, and for diamond core drill hole HH-GG25-006C, represent the final reporting of RML's drilling campaign completed in 2025. Pleasingly, all of drill holes HH-GG25-011R, HH-GG25-012R, HH-GG25-013R, HH-GG25-014, and HH-GG25-006C identified broad intervals of gold mineralisation with significant tungsten mineralisation also identified in HH-GG25-012R.


New Gold Discoveries

Two gold deposits have been discovered at the Golden Gate Fault Zone Prospect, Golden Gate North and Golden Gate South. More surface exploration (mapping and sampling) and drilling is required to determine whether Golden Gate North and Golden Gate South join to form a continuous single deposit, or whether the individual deposits are fault-offset or represent two parallel gold deposits (Figure 8).

Open Ended Mineralisation

All RML 2025 drill holes at both Golden Gate North and Golden Gate South either host open ended gold mineralisation at depth or possess gold mineralisation close to the end of the hole. Notwithstanding the unresolved question as to whether Golden Gate North and Golden Gate South form a continuous single deposit, the "combined" gold deposit is open ended in all directions; along strike to the northeast and southwest (the orientation of the controlling shear zone); across strike to the northwest and southeast; and at depth below the current depth of holes).

With significant gold mineralisation in all drilling covering a strike length of 1,500m and a width of 300m, the Golden Gate North and Golden Gate South gold "envelope" is already very large.

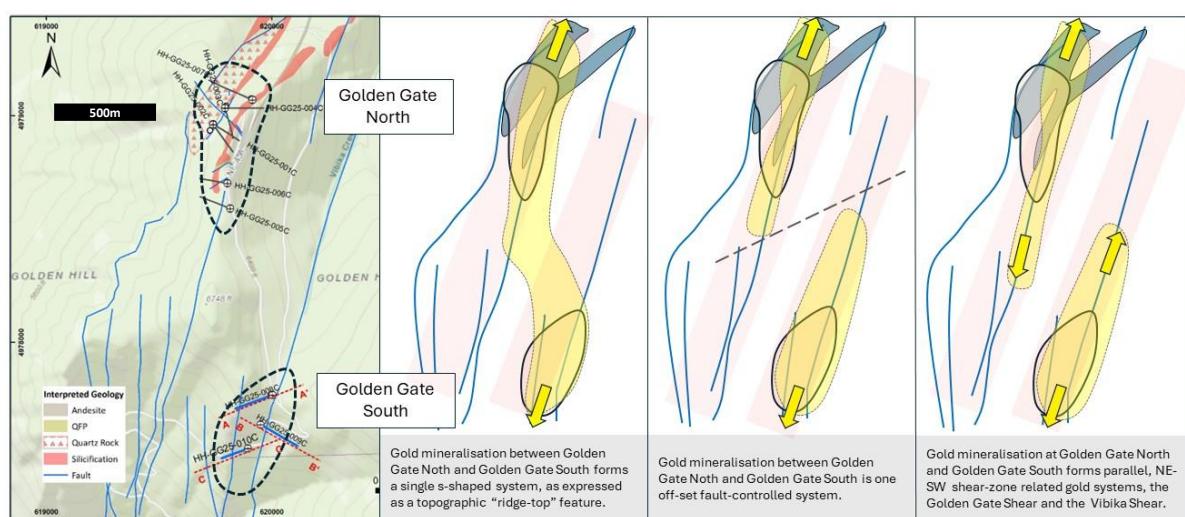

Golden Gate Exploration Model

At prospect-scale, the Golden Gate Fault zone exhibits a very close spatial association between the gold mineralisation at Golden Gate North and Golden Gate South and the northeast-southwest faults (Figure 2 and Figure 8). The largely northeast-southwest oriented faults also appear to control local geology and alteration.

Whilst further drilling is required to determine whether the mineralisation at Golden Gate North and Golden Gate South is continuous or forms two parallel or offset systems (Figure 8), the broader gold “envelope” (as described immediately above) is entirely consistent with the Company’s exploration model for the Golden Gate Fault Zone, an Intrusive-related Gold (IRG) Deposit (Figure 9).

It is concluded that the gold mineralisation at Golden Gate North and Golden Gate South represents a sheared granite-hosted, fault-controlled disseminated Au-[Ag-W] IRG deposit. By extension, it is also concluded that Golden Gate North and Golden Gate South share similarities with Perpetua Resources’ adjacent Stibnite Gold Mine.

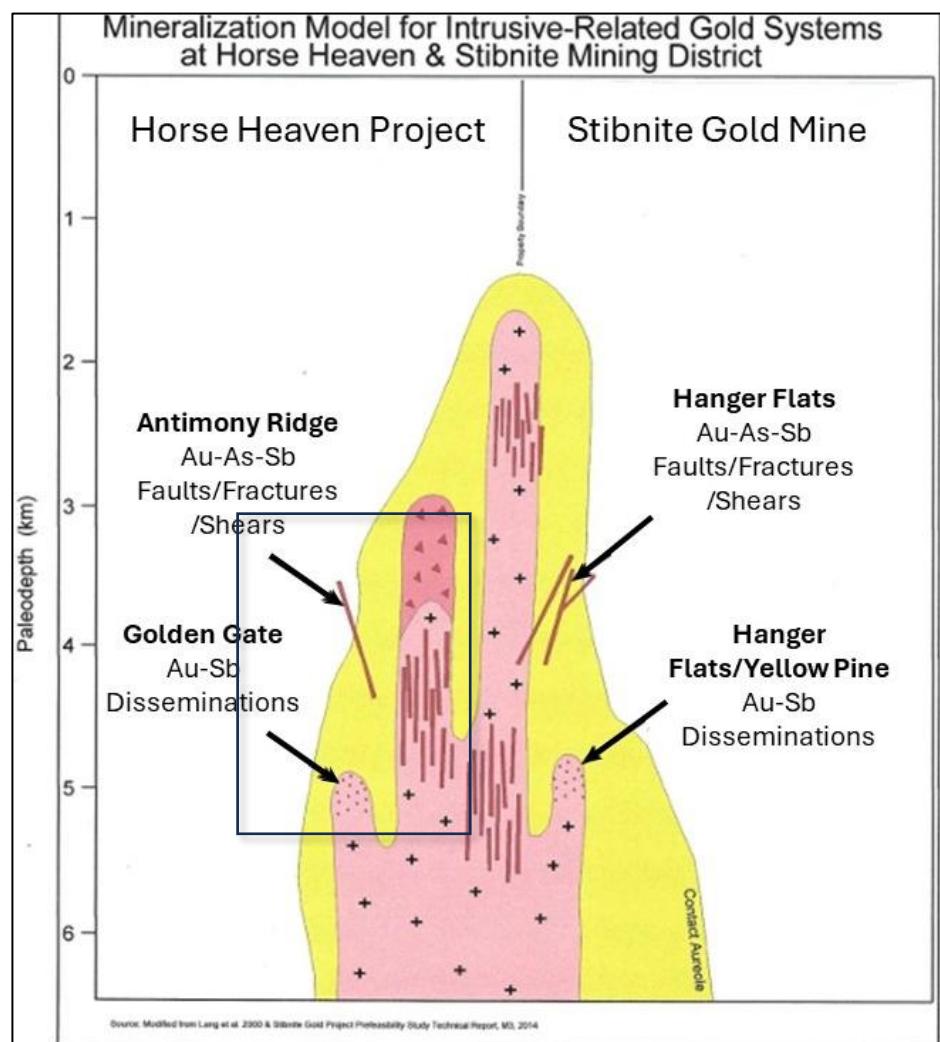


Figure 9: Schematic IRGS cross section showing the relative positions of the Stibnite Mining District Hanger Flats and Yellow Pipe deposits (Right half) and the Antimony Ridge and Golden Gate prospects (Left half). This cross section is modified from Lang et al 2000. This image first appeared in the RML announcement of 11 June 2025.

Next Steps

The Company's 2025 drill program at Golden Gate is complete, with no further assay results and other drill hole related data pending.

The focus for Resolution in the 2026 drilling program at Golden Gate is to continue to define the size and shape of the Golden Gate North and Golden Gate South gold deposits. Under its current drill permit, work will comprise a combination of diamond core and RC holes and will focus as follows:

- ▼ Along strike extensions between Golden Gate North and Golden Gate South;
- ▼ Along strike northeast extensions from Golden Gate North;
- ▼ Along strike southwest extensions from Golden Gate South; and
- ▼ Depth extensions below Golden Gate North and Golden Gate.

Additionally, RML plans to file a new Plan of Operation which will allow for significantly larger drill footprint, including re-opening historic roads and buildings several new roads, to allow for coverage across the entire projected length of the Golden Gate Fault Zone.

The Company is also filing a separate Plan of Operation for work at Antimony Ridge, which will include both drilling and bulk sampling of near-surface high-grade Sb mineralisation.

Metallurgical testing is ongoing and will be ramped up in accordance with drilling milestones.

Authorised for release by the board of Resolution Minerals Ltd.

For further information, please contact:

Aharon Zaetz
Executive Director
Resolution Minerals Ltd
M: +61 424 743 098
ari@resolutionminerals.com

Jane Morgan
Investor Relations
Jane Morgan Management
M: +61 405 555 618
jm@janemorganmanagement.com.au

Competent Person's Statement

The information in this report that relates to exploration results, is based on and fairly represents information reviewed and compiled by Mr Ross Brown BSc (Hons), M AusIMM, Principal Geologist/director of exploration consulting firm, Riviere Minerals Pty. Ltd, who is a Member of the Australasian Institute of Mining and Metallurgy. Mr Brown has sufficient experience, which is relevant to the exploration activities, style of mineralisation and types of deposits under consideration, and to the activity which has been undertaken, to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Riviere Minerals is consulting to Resolutions Minerals Limited and consents to the inclusion in this announcement of the matters based on their information in the form and context in which it appears.

About Riviere Minerals

Riviere Minerals Pty Ltd ("Riviere") is a resource consultancy specialising in project evaluation and portfolio management. Its principal geologist and sole director, Mr Ross Brown, has nearly 40 years of experience in mineral exploration worldwide. Through Riviere, Mr Brown also provides assistance in exploration planning, execution and ASX reporting.

Forward Looking Statements

This announcement may contain forward-looking statements. These statements relate to the Company's expectations, beliefs, intentions or strategies regarding the future. These statements can be identified by the use of words like "anticipate", "believe", "intend", "estimate", "expect", "may", "plan", "project", "will", "should", "seek" and similar words or expressions containing same. These forward-looking statements reflect the Company's views and assumptions with respect to future events as of the date of this release and are subject to a variety of unpredictable risks, uncertainties, and other unknowns. Actual and future results and trends could differ materially from those set forth in such statements due to various factors, many of which are beyond our ability to control or predict. These include, but are not limited to, risks or uncertainties associated with the acquisition and divestment of projects, joint venture and other contractual risks, metal prices, exploration, development and operating risks, competition, production risks, sovereign risks, regulatory risks including environmental regulation and liability and potential title disputes, availability and terms of capital and general economic and business conditions.

Given these uncertainties, no one should place undue reliance on any forward-looking statements attributable to the Company, or any of its affiliates or persons acting on its behalf. Subject to any continuing obligations under applicable law, the Company disclaims any obligation or undertaking to disseminate any updates or revisions to any forward-looking statements in this announcement to reflect any change in expectations in relation to any forward-looking statements or any change in events, conditions or circumstances on which any such statement is based.

The Company confirms it is not aware of any new information or data that materially affects the information cross referenced in this announcement and further to "Agreement to Acquire Major US Antimony Project and Placement" on 11 June 2025, "Exceptional Rock Chip and Soil Results from Antimony Ridge" on 15 September 2025, "Exceptional Rock Chip and Soil Results Update" on 24 September 2025, "Significant Gold Discovery at Horse Heaven Project" on 28 October 2025, "Significant Gold Discoveries Continue at Golden Gate" on 3 November 2025, "Golden Gate Discovery Grows with Multiple Gold Intercepts" on 2 December 2025, "Further Ultra High Grade Antimony and Silver Results" on 14 January 2026 and : New Gold Discovery at Golden Gate South: on 9 February 2026. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original announcements.

Appendix A: Drill Hole Assay Tables (Gold, Silver, Antimony, Tungsten): HH-GG25-011R

Location	Hole ID	Drill Technique	Sample ID	Sample Parameters			Au	Ag	Sb	W
				From (ft)	To (ft)	Length (ft)	Au-AA23 g/t	ME-ICP61 g/t	ME-ICP61 ppm	ME-ICP61 ppm
Golden Gate North	HH-GG-011R	RC	2276556	0.0	5.0	5.0	0.113	0.6	19	10
Golden Gate North	HH-GG-011R	RC	2276557	5.0	10.0	5.0	0.119	0.8	19	10
Golden Gate North	HH-GG-011R	RC	2276558	10.0	15.0	5.0	0.164	<0.5	20	<10
Golden Gate North	HH-GG-011R	RC	2276559	15.0	20.0	5.0	0.101	0.5	21	10
Golden Gate North	HH-GG-011R	RC	2276560	20.0	25.0	5.0	0.187	0.5	20	10
Golden Gate North	HH-GG-011R	RC	2276561	25.0	30.0	5.0	0.119	<0.5	27	<10
Golden Gate North	HH-GG-011R	RC	2276562	30.0	35.0	5.0	0.132	1	22	<10
Golden Gate North	HH-GG-011R	RC	2276563	35.0	40.0	5.0	0.18	1.7	35	<10
Golden Gate North	HH-GG-011R	RC	2276565	40.0	45.0	5.0	0.114	1.3	48	<10
Golden Gate North	HH-GG-011R	RC	2276566	45.0	50.0	5.0	0.147	1.4	30	<10
Golden Gate North	HH-GG-011R	RC	2276567	50.0	55.0	5.0	0.224	1.4	28	10
Golden Gate North	HH-GG-011R	RC	2276568	55.0	60.0	5.0	0.143	0.9	23	10
Golden Gate North	HH-GG-011R	RC	2276569	60.0	65.0	5.0	0.138	0.8	27	10
Golden Gate North	HH-GG-011R	RC	2276570	65.0	70.0	5.0	0.157	2.1	22	10
Golden Gate North	HH-GG-011R	RC	2276571	70.0	75.0	5.0	0.155	1.5	21	<10
Golden Gate North	HH-GG-011R	RC	2276573	75.0	80.0	5.0	0.12	0.9	25	10
Golden Gate North	HH-GG-011R	RC	2276574	80.0	85.0	5.0	0.126	0.8	32	10
Golden Gate North	HH-GG-011R	RC	2276575	85.0	90.0	5.0	0.1	1	31	10
Golden Gate North	HH-GG-011R	RC	2276576	90.0	95.0	5.0	0.097	0.7	21	10
Golden Gate North	HH-GG-011R	RC	2276577	95.0	100.0	5.0	0.103	1	18	10
Golden Gate North	HH-GG-011R	RC	2276578	100.0	105.0	5.0	0.089	1.1	14	10
Golden Gate North	HH-GG-011R	RC	2276579	105.0	110.0	5.0	0.146	0.8	12	10
Golden Gate North	HH-GG-011R	RC	2276580	110.0	115.0	5.0	0.165	1.2	16	10
Golden Gate North	HH-GG-011R	RC	2276581	115.0	120.0	5.0	0.106	0.7	19	10
Golden Gate North	HH-GG-011R	RC	2276582	120.0	125.0	5.0	0.097	<0.5	17	<10
Golden Gate North	HH-GG-011R	RC	2276583	125.0	130.0	5.0	0.087	<0.5	10	<10
Golden Gate North	HH-GG-011R	RC	2276584	130.0	135.0	5.0	0.113	0.5	11	<10
Golden Gate North	HH-GG-011R	RC	2276585	135.0	140.0	5.0	0.13	0.6	9	<10
Golden Gate North	HH-GG-011R	RC	2276586	140.0	145.0	5.0	0.161	0.7	13	10
Golden Gate North	HH-GG-011R	RC	2276587	145.0	150.0	5.0	0.131	0.6	14	10
Golden Gate North	HH-GG-011R	RC	2276588	150.0	155.0	5.0	0.138	0.5	12	<10
Golden Gate North	HH-GG-011R	RC	2276589	155.0	160.0	5.0	0.08	<0.5	11	<10
Golden Gate North	HH-GG-011R	RC	2276590	160.0	165.0	5.0	0.076	<0.5	13	<10

Appendix A: Drill Hole Assay Tables (Gold, Silver, Antimony, Tungsten)

HH-GG25-012R

Location	Hole ID	Drill Technique	Sample ID	Sample Parameters			Au	Ag	Sb	W
				From (ft)	To (ft)	Length (ft)	Au-AA23	ME-ICP61	ME-ICP61	ME-ICP61
							g/t	g/t	ppm	ppm
Golden Gate North	HH-GG-012R	RC	2276747	0.0	5.0	5.0	0.281	1.9	33	150
Golden Gate North	HH-GG-012R	RC	2276748	5.0	10.0	5.0	0.262	1.6	26	<10
Golden Gate North	HH-GG-012R	RC	2276750	10.0	15.0	5.0	0.686	0.9	30	<10
Golden Gate North	HH-GG-012R	RC	2276751	15.0	20.0	5.0	0.303	1.1	29	110
Golden Gate North	HH-GG-012R	RC	2276752	20.0	25.0	5.0	0.25	0.7	27	60
Golden Gate North	HH-GG-012R	RC	2276753	25.0	30.0	5.0	0.356	0.9	24	10
Golden Gate North	HH-GG-012R	RC	2276754	30.0	35.0	5.0	0.288	0.6	27	<10
Golden Gate North	HH-GG-012R	RC	2276755	35.0	40.0	5.0	0.236	0.8	27	<10
Golden Gate North	HH-GG-012R	RC	2276756	40.0	45.0	5.0	0.626	0.7	24	<10
Golden Gate North	HH-GG-012R	RC	2276757	45.0	50.0	5.0	0.338	0.6	25	<10
Golden Gate North	HH-GG-012R	RC	2276758	50.0	55.0	5.0	0.291	0.8	23	<10
Golden Gate North	HH-GG-012R	RC	2276759	55.0	60.0	5.0	0.28	0.7	28	<10
Golden Gate North	HH-GG-012R	RC	2276760	60.0	65.0	5.0	0.414	1.1	33	<10
Golden Gate North	HH-GG-012R	RC	2276761	65.0	70.0	5.0	0.186	1	31	<10
Golden Gate North	HH-GG-012R	RC	2276762	70.0	75.0	5.0	0.17	0.7	41	<10
Golden Gate North	HH-GG-012R	RC	2276764	75.0	80.0	5.0	0.105	1.4	32	<10
Golden Gate North	HH-GG-012R	RC	2276765	80.0	85.0	5.0	0.077	1.2	27	<10
Golden Gate North	HH-GG-012R	RC	2276766	85.0	90.0	5.0	0.115	0.9	29	<10
Golden Gate North	HH-GG-012R	RC	2276767	90.0	95.0	5.0	0.273	1.1	22	<10
Golden Gate North	HH-GG-012R	RC	2276768	95.0	100.0	5.0	0.169	1.1	23	<10
Golden Gate North	HH-GG-012R	RC	2276769	100.0	105.0	5.0	0.248	1.1	16	<10
Golden Gate North	HH-GG-012R	RC	2276770	105.0	110.0	5.0	0.182	1.4	20	<10
Golden Gate North	HH-GG-012R	RC	2276771	110.0	115.0	5.0	0.487	1.6	19	10
Golden Gate North	HH-GG-012R	RC	2276772	115.0	120.0	5.0	0.377	1.1	22	10
Golden Gate North	HH-GG-012R	RC	2276773	120.0	125.0	5.0	0.279	0.6	20	10
Golden Gate North	HH-GG-012R	RC	2276774	125.0	130.0	5.0	0.11	0.7	21	<10
Golden Gate North	HH-GG-012R	RC	2276775	130.0	135.0	5.0	0.125	0.9	22	10
Golden Gate North	HH-GG-012R	RC	2276776	135.0	140.0	5.0	0.204	0.6	16	<10
Golden Gate North	HH-GG-012R	RC	2276777	140.0	145.0	5.0	0.066	0.5	18	<10
Golden Gate North	HH-GG-012R	RC	2276778	145.0	150.0	5.0	0.082	0.5	16	10
Golden Gate North	HH-GG-012R	RC	2276779	150.0	155.0	5.0	0.076	0.8	9	10
Golden Gate North	HH-GG-012R	RC	2276780	155.0	160.0	5.0	0.095	0.8	11	20
Golden Gate North	HH-GG-012R	RC	2276781	160.0	165.0	5.0	0.077	1.4	7	30
Golden Gate North	HH-GG-012R	RC	2276782	165.0	170.0	5.0	0.076	1.1	14	80
Golden Gate North	HH-GG-012R	RC	2276783	170.0	175.0	5.0	0.111	2.2	15	370
Golden Gate North	HH-GG-012R	RC	2276785	175.0	180.0	5.0	0.05	0.8	10	60
Golden Gate North	HH-GG-012R	RC	2276786	180.0	185.0	5.0	0.085	1.8	10	70
Golden Gate North	HH-GG-012R	RC	2276787	185.0	190.0	5.0	0.061	1	11	60
Golden Gate North	HH-GG-012R	RC	2276788	190.0	195.0	5.0	0.102	1.3	8	60
Golden Gate North	HH-GG-012R	RC	2276789	195.0	200.0	5.0	0.104	1.8	10	20
Golden Gate North	HH-GG-012R	RC	2276790	200.0	205.0	5.0	0.146	1.9	9	10
Golden Gate North	HH-GG-012R	RC	2276791	205.0	210.0	5.0	0.117	1.1	11	20
Golden Gate North	HH-GG-012R	RC	2276792	210.0	215.0	5.0	0.16	0.8	13	10
Golden Gate North	HH-GG-012R	RC	2276793	215.0	220.0	5.0	0.168	0.7	13	10
Golden Gate North	HH-GG-012R	RC	2276795	220.0	225.0	5.0	0.128	<0.5	14	10

Appendix A: Drill Hole Assay Tables (Gold, Silver, Antimony, Tungsten)

HH-GG25-012R

Location	Hole ID	Drill Technique	Sample ID	Sample Parameters			Au	Ag	Sb	W
				From (ft)	To (ft)	Length (ft)	Au-AA23	ME-ICP61	ME-ICP61	ME-ICP61
				g/t	g/t	ppm	ppm			
Golden Gate North	HH-GG-012R	RC	2276796	225.0	230.0	5.0	0.101	0.7	16	10
Golden Gate North	HH-GG-012R	RC	2276797	230.0	235.0	5.0	0.12	0.8	15	30
Golden Gate North	HH-GG-012R	RC	2276798	235.0	240.0	5.0	0.109	1.1	17	110
Golden Gate North	HH-GG-012R	RC	2276799	240.0	245.0	5.0	0.12	1.5	15	110
Golden Gate North	HH-GG-012R	RC	2276800	245.0	250.0	5.0	0.105	1.9	20	290
Golden Gate North	HH-GG-012R	RC	2172101	250.0	255.0	5.0	0.061	2	17	350
Golden Gate North	HH-GG-012R	RC	2172102	255.0	260.0	5.0	0.066	1.7	19	250
Golden Gate North	HH-GG-012R	RC	2172103	260.0	265.0	5.0	0.224	4.4	16	930
Golden Gate North	HH-GG-012R	RC	2172104	265.0	270.0	5.0	0.104	8.3	19	1670
Golden Gate North	HH-GG-012R	RC	2172105	270.0	275.0	5.0	0.117	7.4	24	1600
Golden Gate North	HH-GG-012R	RC	2172106	275.0	280.0	5.0	0.161	3.4	16	1950
Golden Gate North	HH-GG-012R	RC	2172107	280.0	285.0	5.0	0.272	1.8	17	660
Golden Gate North	HH-GG-012R	RC	2172108	285.0	290.0	5.0	0.244	1.2	19	430
Golden Gate North	HH-GG-012R	RC	2172109	290.0	295.0	5.0	0.202	1.1	21	190
Golden Gate North	HH-GG-012R	RC	2172110	295.0	300.0	5.0	0.655	0.7	14	150
Golden Gate North	HH-GG-012R	RC	2172111	300.0	305.0	5.0	0.636	0.6	14	100
Golden Gate North	HH-GG-012R	RC	2172112	305.0	310.0	5.0	0.575	0.6	14	70
Golden Gate North	HH-GG-012R	RC	2172114	310.0	315.0	5.0	0.477	0.7	14	20
Golden Gate North	HH-GG-012R	RC	2172115	315.0	320.0	5.0	0.638	0.6	14	10
Golden Gate North	HH-GG-012R	RC	2172116	320.0	325.0	5.0	0.8	0.5	16	<10

Appendix A: Drill Hole Assay Tables (Gold, Silver, Antimony, Tungsten)

HH-GG25-013R

Location	Hole ID	Drill Technique	Sample ID	Sample Parameters			Au	Ag	Sb	W
				From (ft)	To (ft)	Length (ft)	Au-AA23 g/t	ME-ICP61 g/t	ME-ICP61 ppm	ME-ICP61 ppm
Golden Gate North	HH-GG-013R	RC	2172239	0.0	5.0	5.0	0.302	1.2	21	60
Golden Gate North	HH-GG-013R	RC	2172240	5.0	10.0	5.0	0.441	0.9	22	60
Golden Gate North	HH-GG-013R	RC	2172242	10.0	15.0	5.0	0.409	1	24	20
Golden Gate North	HH-GG-013R	RC	2172243	15.0	20.0	5.0	0.401	0.9	28	60
Golden Gate North	HH-GG-013R	RC	2172244	20.0	25.0	5.0	0.388	0.9	27	30
Golden Gate North	HH-GG-013R	RC	2172245	25.0	30.0	5.0	0.375	0.8	22	60
Golden Gate North	HH-GG-013R	RC	2172246	30.0	35.0	5.0	0.382	0.7	22	50
Golden Gate North	HH-GG-013R	RC	2172247	35.0	40.0	5.0	0.523	0.9	25	100
Golden Gate North	HH-GG-013R	RC	2172248	40.0	45.0	5.0	0.437	0.7	20	30
Golden Gate North	HH-GG-013R	RC	2172249	45.0	50.0	5.0	0.303	0.6	21	30
Golden Gate North	HH-GG-013R	RC	2172250	50.0	55.0	5.0	0.208	<0.5	19	10
Golden Gate North	HH-GG-013R	RC	2172251	55.0	60.0	5.0	0.293	0.5	20	40
Golden Gate North	HH-GG-013R	RC	2172252	60.0	65.0	5.0	0.4	1.1	26	40
Golden Gate North	HH-GG-013R	RC	2172253	65.0	70.0	5.0	0.315	0.8	25	50
Golden Gate North	HH-GG-013R	RC	2172254	70.0	75.0	5.0	0.64	2.3	47	40
Golden Gate North	HH-GG-013R	RC	2172255	75.0	80.0	5.0	0.502	1	27	50
Golden Gate North	HH-GG-013R	RC	2172256	80.0	85.0	5.0	0.435	1	29	20
Golden Gate North	HH-GG-013R	RC	2172257	85.0	90.0	5.0	0.383	1.6	27	40
Golden Gate North	HH-GG-013R	RC	2172258	90.0	95.0	5.0	0.763	0.8	23	20
Golden Gate North	HH-GG-013R	RC	2172259	95.0	100.0	5.0	0.506	0.8	22	40
Golden Gate North	HH-GG-013R	RC	2172260	100.0	105.0	5.0	0.417	0.7	23	20
Golden Gate North	HH-GG-013R	RC	2172261	105.0	110.0	5.0	0.314	0.6	17	10
Golden Gate North	HH-GG-013R	RC	2172263	110.0	115.0	5.0	0.234	<0.5	14	10
Golden Gate North	HH-GG-013R	RC	2172264	115.0	120.0	5.0	0.313	0.6	21	10
Golden Gate North	HH-GG-013R	RC	2172265	120.0	125.0	5.0	0.394	0.6	27	10
Golden Gate North	HH-GG-013R	RC	2172266	125.0	130.0	5.0	0.39	<0.5	23	10
Golden Gate North	HH-GG-013R	RC	2172267	130.0	135.0	5.0	0.393	1	42	20
Golden Gate North	HH-GG-013R	RC	2172268	135.0	140.0	5.0	0.171	0.5	24	10
Golden Gate North	HH-GG-013R	RC	2172269	140.0	145.0	5.0	0.389	<0.5	31	30
Golden Gate North	HH-GG-013R	RC	2172270	145.0	150.0	5.0	0.309	<0.5	23	10
Golden Gate North	HH-GG-013R	RC	2172271	150.0	155.0	5.0	0.275	0.5	29	10
Golden Gate North	HH-GG-013R	RC	2172272	155.0	160.0	5.0	0.239	0.6	28	10
Golden Gate North	HH-GG-013R	RC	2172273	160.0	165.0	5.0	0.382	0.6	30	10
Golden Gate North	HH-GG-013R	RC	2172274	165.0	170.0	5.0	0.429	0.5	30	10
Golden Gate North	HH-GG-013R	RC	2172275	170.0	175.0	5.0	0.531	0.7	33	10
Golden Gate North	HH-GG-013R	RC	2172276	175.0	180.0	5.0	0.508	0.5	33	10
Golden Gate North	HH-GG-013R	RC	2172277	180.0	185.0	5.0	0.417	0.6	31	10
Golden Gate North	HH-GG-013R	RC	2172278	185.0	190.0	5.0	0.371	3.2	39	10
Golden Gate North	HH-GG-013R	RC	2172279	190.0	195.0	5.0	0.491	1.9	28	<10
Golden Gate North	HH-GG-013R	RC	2172280	195.0	200.0	5.0	0.483	1	26	20
Golden Gate North	HH-GG-013R	RC	2172281	200.0	205.0	5.0	0.405	0.5	26	10
Golden Gate North	HH-GG-013R	RC	2172283	205.0	210.0	5.0	0.319	0.5	28	10
Golden Gate North	HH-GG-013R	RC	2172284	210.0	215.0	5.0	0.228	1.3	20	10
Golden Gate North	HH-GG-013R	RC	2172285	215.0	220.0	5.0	0.131	<0.5	18	10
Golden Gate North	HH-GG-013R	RC	2172286	220.0	225.0	5.0	0.335	0.5	30	10
Golden Gate North	HH-GG-013R	RC	2172287	225.0	230.0	5.0	0.533	<0.5	34	10
Golden Gate North	HH-GG-013R	RC	2172288	230.0	235.0	5.0	0.45	<0.5	35	10
Golden Gate North	HH-GG-013R	RC	2172289	235.0	240.0	5.0	0.335	<0.5	29	10
Golden Gate North	HH-GG-013R	RC	2172290	240.0	245.0	5.0	0.351	<0.5	29	10

Appendix A: Drill Hole Assay Tables (Gold, Silver, Antimony, Tungsten)

HH-GG25-013R

Location	Hole ID	Drill Technique	Sample ID	Sample Parameters			Au	Ag	Sb	W
				From (ft)	To (ft)	Length (ft)	Au-AA23 g/t	ME-ICP61 g/t	ME-ICP61 ppm	ME-ICP61 ppm
Golden Gate North	HH-GG-013R	RC	2172291	245.0	250.0	5.0	0.479	<0.5	28	20
Golden Gate North	HH-GG-013R	RC	2172292	250.0	255.0	5.0	0.469	1.1	26	10
Golden Gate North	HH-GG-013R	RC	2172293	255.0	260.0	5.0	0.322	<0.5	20	10
Golden Gate North	HH-GG-013R	RC	2172294	260.0	265.0	5.0	0.418	<0.5	20	10
Golden Gate North	HH-GG-013R	RC	2172295	265.0	270.0	5.0	0.53	<0.5	26	10
Golden Gate North	HH-GG-013R	RC	2172296	270.0	275.0	5.0	0.6	0.6	40	<10
Golden Gate North	HH-GG-013R	RC	2172297	275.0	280.0	5.0	0.277	0.6	25	<10
Golden Gate North	HH-GG-013R	RC	2172298	280.0	285.0	5.0	0.281	0.5	27	<10
Golden Gate North	HH-GG-013R	RC	2172300	285.0	290.0	5.0	0.274	0.7	28	10
Golden Gate North	HH-GG-013R	RC	2172301	290.0	295.0	5.0	0.274	0.7	27	10
Golden Gate North	HH-GG-013R	RC	2172302	295.0	300.0	5.0	0.225	0.5	21	10
Golden Gate North	HH-GG-013R	RC	2172303	300.0	305.0	5.0	0.327	0.6	25	10
Golden Gate North	HH-GG-013R	RC	2172304	305.0	310.0	5.0	0.308	0.5	23	<10
Golden Gate North	HH-GG-013R	RC	2172305	310.0	315.0	5.0	0.342	<0.5	22	<10
Golden Gate North	HH-GG-013R	RC	2172306	315.0	320.0	5.0	0.388	0.9	23	<10
Golden Gate North	HH-GG-013R	RC	2172307	320.0	325.0	5.0	0.393	2.8	26	<10

Appendix A: Drill Hole Assay Tables (Gold, Silver, Antimony, Tungsten)

HH-GG25-014R

Location	Hole ID	Drill Technique	Sample ID	Sample Parameters			Au	Ag	Sb	W
				From (ft)	To (ft)	Length (ft)	Au-AA23 g/t	ME-ICP61 g/t	ME-ICP61 ppm	ME-ICP61 ppm
Golden Gate South	HH-GG-014R	RC	2172308	0.0	5.0	5.0	0.125	<0.5	15	10
Golden Gate South	HH-GG-014R	RC	2172309	5.0	10.0	5.0	0.067	<0.5	14	20
Golden Gate South	HH-GG-014R	RC	2172311	10.0	15.0	5.0	0.054	<0.5	20	50
Golden Gate South	HH-GG-014R	RC	2172312	15.0	20.0	5.0	0.053	<0.5	17	30
Golden Gate South	HH-GG-014R	RC	2172313	20.0	25.0	5.0	0.065	<0.5	18	30
Golden Gate South	HH-GG-014R	RC	2172314	25.0	30.0	5.0	0.041	<0.5	15	50
Golden Gate South	HH-GG-014R	RC	2172315	30.0	35.0	5.0	0.121	0.5	20	30
Golden Gate South	HH-GG-014R	RC	2172316	35.0	40.0	5.0	0.069	<0.5	19	30
Golden Gate South	HH-GG-014R	RC	2172317	40.0	45.0	5.0	0.076	0.6	13	10
Golden Gate South	HH-GG-014R	RC	2172318	45.0	50.0	5.0	0.108	0.5	18	20
Golden Gate South	HH-GG-014R	RC	2172319	50.0	55.0	5.0	0.131	<0.5	17	20
Golden Gate South	HH-GG-014R	RC	2172320	55.0	60.0	5.0	0.124	<0.5	18	20
Golden Gate South	HH-GG-014R	RC	2172321	60.0	65.0	5.0	0.139	<0.5	40	10
Golden Gate South	HH-GG-014R	RC	2172322	65.0	70.0	5.0	0.207	<0.5	25	20
Golden Gate South	HH-GG-014R	RC	2172323	70.0	75.0	5.0	0.341	<0.5	21	10
Golden Gate South	HH-GG-014R	RC	2172324	75.0	80.0	5.0	0.152	<0.5	16	10
Golden Gate South	HH-GG-014R	RC	2172325	80.0	85.0	5.0	0.078	<0.5	12	10
Golden Gate South	HH-GG-014R	RC	2172326	85.0	90.0	5.0	0.072	<0.5	13	10
Golden Gate South	HH-GG-014R	RC	2172327	90.0	95.0	5.0	0.077	<0.5	12	10
Golden Gate South	HH-GG-014R	RC	2172328	95.0	100.0	5.0	0.041	<0.5	12	10
Golden Gate South	HH-GG-014R	RC	2172329	100.0	105.0	5.0	0.057	<0.5	28	20
Golden Gate South	HH-GG-014R	RC	2172330	105.0	110.0	5.0	0.053	<0.5	10	10
Golden Gate South	HH-GG-014R	RC	2172331	110.0	115.0	5.0	0.04	<0.5	13	10
Golden Gate South	HH-GG-014R	RC	2172332	115.0	120.0	5.0	0.025	<0.5	20	10
Golden Gate South	HH-GG-014R	RC	2172333	120.0	125.0	5.0	0.386	1.2	42	10
Golden Gate South	HH-GG-014R	RC	2172334	125.0	130.0	5.0	0.255	0.6	39	20
Golden Gate South	HH-GG-014R	RC	2172335	130.0	135.0	5.0	0.37	3.1	37	10
Golden Gate South	HH-GG-014R	RC	2172336	135.0	140.0	5.0	0.364	0.9	37	10
Golden Gate South	HH-GG-014R	RC	2172337	140.0	145.0	5.0	0.473	1.1	153	10
Golden Gate South	HH-GG-014R	RC	2172339	145.0	150.0	5.0	0.224	1.3	101	10
Golden Gate South	HH-GG-014R	RC	2172340	150.0	155.0	5.0	0.015	<0.5	49	20
Golden Gate South	HH-GG-014R	RC	2172341	155.0	160.0	5.0	0.031	<0.5	33	10
Golden Gate South	HH-GG-014R	RC	2172342	160.0	165.0	5.0	0.016	<0.5	38	10
Golden Gate South	HH-GG-014R	RC	2172343	165.0	170.0	5.0	0.048	<0.5	43	10
Golden Gate South	HH-GG-014R	RC	2172344	170.0	175.0	5.0	0.248	<0.5	44	20
Golden Gate South	HH-GG-014R	RC	2172345	175.0	180.0	5.0	0.134	0.6	38	10
Golden Gate South	HH-GG-014R	RC	2172346	180.0	185.0	5.0	0.034	0.5	38	20
Golden Gate South	HH-GG-014R	RC	2172347	185.0	190.0	5.0	0.083	<0.5	33	10
Golden Gate South	HH-GG-014R	RC	2172349	190.0	195.0	5.0	0.083	<0.5	28	<10

Appendix A: Drill Hole Assay Tables (Gold, Silver, Antimony, Tungsten)

HH-GG25-006C

Location	Hole ID	Drill Technique	Sample ID	Sample Parameters			Au	Ag	Sb	W
				From (ft)	To (ft)	Length (ft)	Au-AA23	ME-ICP61	ME-ICP61	ME-ICP61
				g/t	g/t	ppm	ppm	ppm	ppm	ppm
Golden Gate North	HH-GG25-006C	Core	192516	0.0	10.0	10.0	0.428	0.5	21	10
Golden Gate North	HH-GG25-006C	Core	192517	10.0	15.0	5.0	0.017	<0.5	12	<10
Golden Gate North	HH-GG25-006C	Core	192518	15.0	20.0	5.0	0.066	<0.5	12	<10
Golden Gate North	HH-GG25-006C	Core	192519	20.0	24.6	4.6	0.581	0.5	25	<10
Golden Gate North	HH-GG25-006C	Core	192520	24.6	27.6	3.0	0.055	<0.5	12	<10
Golden Gate North	HH-GG25-006C	Core	192521	27.6	31.0	3.4	0.005	<0.5	12	<10
Golden Gate North	HH-GG25-006C	Core	192522	31.0	35.0	4.0	0.043	<0.5	7	<10
Golden Gate North	HH-GG25-006C	Core	192523	35.0	40.0	5.0	0.042	<0.5	10	<10
Golden Gate North	HH-GG25-006C	Core	192524	40.0	45.0	5.0	0.078	<0.5	12	<10
Golden Gate North	HH-GG25-006C	Core	192525	45.0	48.0	3.0	0.682	5.4	18	<10
Golden Gate North	HH-GG25-006C	Core	192526	48.0	52.6	4.6	0.046	<0.5	9	<10
Golden Gate North	HH-GG25-006C	Core	192527	52.6	56.3	3.7	2.11	<0.5	13	<10
Golden Gate North	HH-GG25-006C	Core	192528	56.3	60.0	3.7	0.115	<0.5	7	<10
Golden Gate North	HH-GG25-006C	Core	192529	60.0	64.0	4.0	0.597	<0.5	9	<10
Golden Gate North	HH-GG25-006C	Core	192531	64.0	67.4	3.4	0.022	<0.5	9	10
Golden Gate North	HH-GG25-006C	Core	192532	67.4	72.0	4.6	0.062	<0.5	9	<10
Golden Gate North	HH-GG25-006C	Core	192533	72.0	75.0	3.0	0.56	<0.5	18	<10
Golden Gate North	HH-GG25-006C	Core	192534	75.0	80.0	5.0	0.437	0.6	13	10
Golden Gate North	HH-GG25-006C	Core	192536	80.0	85.0	5.0	0.136	<0.5	9	<10
Golden Gate North	HH-GG25-006C	Core	192537	85.0	90.0	5.0	0.13	0.5	8	<10
Golden Gate North	HH-GG25-006C	Core	192538	90.0	94.2	4.2	0.24	<0.5	24	<10
Golden Gate North	HH-GG25-006C	Core	192539	94.2	98.0	3.8	0.347	<0.5	39	<10
Golden Gate North	HH-GG25-006C	Core	192540	98.0	101.0	3.0	0.032	<0.5	25	<10
Golden Gate North	HH-GG25-006C	Core	192541	101.0	105.0	4.0	0.008	<0.5	5	<10
Golden Gate North	HH-GG25-006C	Core	192543	105.0	110.0	5.0	0.009	<0.5	9	<10
Golden Gate North	HH-GG25-006C	Core	192544	110.0	115.0	5.0	0.017	<0.5	8	<10
Golden Gate North	HH-GG25-006C	Core	192545	115.0	120.0	5.0	0.166	<0.5	10	<10
Golden Gate North	HH-GG25-006C	Core	192546	120.0	124.9	4.9	0.011	<0.5	9	<10
Golden Gate North	HH-GG25-006C	Core	192547	124.9	129.0	4.1	0.11	<0.5	7	<10
Golden Gate North	HH-GG25-006C	Core	192548	129.0	133.0	4.0	0.053	<0.5	7	<10
Golden Gate North	HH-GG25-006C	Core	192549	133.0	136.0	3.0	1.055	<0.5	8	<10
Golden Gate North	HH-GG25-006C	Core	192550	136.0	140.4	4.4	0.012	<0.5	9	<10
Golden Gate North	HH-GG25-006C	Core	192551	140.4	144.2	3.8	0.001	<0.5	6	<10
Golden Gate North	HH-GG25-006C	Core	192552	144.2	148.3	4.1	0.067	<0.5	8	<10
Golden Gate North	HH-GG25-006C	Core	192553	148.3	152.0	3.7	0.106	<0.5	9	<10
Golden Gate North	HH-GG25-006C	Core	192554	152.0	155.0	3.0	0.032	<0.5	13	<10
Golden Gate North	HH-GG25-006C	Core	192555	155.0	159.0	4.0	0.177	<0.5	25	<10
Golden Gate North	HH-GG25-006C	Core	192556	159.0	162.1	3.1	0.132	<0.5	25	<10
Golden Gate North	HH-GG25-006C	Core	192557	162.1	164.4	2.3	0.471	0.7	29	<10
Golden Gate North	HH-GG25-006C	Core	192558	164.4	167.3	2.9	0.132	1.1	50	<10
Golden Gate North	HH-GG25-006C	Core	192559	167.3	171.0	3.7	0.09	<0.5	23	<10
Golden Gate North	HH-GG25-006C	Core	192561	171.0	175.5	4.5	0.912	3.7	30	<10
Golden Gate North	HH-GG25-006C	Core	192562	175.5	180.0	4.5	0.27	4.7	21	<10
Golden Gate North	HH-GG25-006C	Core	192563	180.0	184.2	4.2	0.416	1.1	22	<10

Appendix A: Drill Hole Assay Tables (Gold, Silver, Antimony, Tungsten)

HH-GG25-006C

Location	Hole ID	Drill Technique	Sample ID	Sample Parameters			Au	Ag	Sb	W
				From (ft)	To (ft)	Length (ft)	Au-AA23 g/t	ME-ICP61 g/t	ME-ICP61 ppm	ME-ICP61 ppm
Golden Gate North	HH-GG25-006C	Core	192564	184.2	188.4	4.2	0.329	<0.5	15	<10
Golden Gate North	HH-GG25-006C	Core	192565	188.4	191.2	2.8	0.342	<0.5	12	<10
Golden Gate North	HH-GG25-006C	Core	192566	191.2	194.0	2.8	0.405	<0.5	11	<10
Golden Gate North	HH-GG25-006C	Core	192567	194.0	196.8	2.8	0.195	<0.5	15	<10
Golden Gate North	HH-GG25-006C	Core	192568	196.8	200.0	3.2	0.115	<0.5	9	<10
Golden Gate North	HH-GG25-006C	Core	192569	200.0	205.0	5.0	0.971	1.7	20	<10
Golden Gate North	HH-GG25-006C	Core	192571	205.0	210.0	5.0	1.195	0.8	19	<10
Golden Gate North	HH-GG25-006C	Core	192572	210.0	215.0	5.0	0.325	<0.5	11	<10
Golden Gate North	HH-GG25-006C	Core	192573	215.0	218.9	3.9	0.03	<0.5	<5	<10
Golden Gate North	HH-GG25-006C	Core	192574	218.9	222.2	3.3	0.453	<0.5	13	<10
Golden Gate North	HH-GG25-006C	Core	192575	222.2	225.3	3.1	0.333	0.5	14	<10
Golden Gate North	HH-GG25-006C	Core	192576	225.3	230.5	5.2	1.265	0.7	30	<10
Golden Gate North	HH-GG25-006C	Core	192577	230.5	235.3	4.8	1.23	0.7	26	<10
Golden Gate North	HH-GG25-006C	Core	192578	235.3	240.0	4.7	0.05	<0.5	8	<10
Golden Gate North	HH-GG25-006C	Core	192579	240.0	243.4	3.4	0.006	<0.5	9	<10
Golden Gate North	HH-GG25-006C	Core	192580	243.4	246.0	2.6	0.001	<0.5	6	<10
Golden Gate North	HH-GG25-006C	Core	192581	246.0	250.0	4.0	0.013	<0.5	7	<10
Golden Gate North	HH-GG25-006C	Core	192582	250.0	255.0	5.0	0.049	<0.5	16	<10
Golden Gate North	HH-GG25-006C	Core	192583	255.0	260.0	5.0	0.014	<0.5	8	<10
Golden Gate North	HH-GG25-006C	Core	192584	260.0	265.0	5.0	0.642	7.8	26	270
Golden Gate North	HH-GG25-006C	Core	192585	265.0	270.0	5.0	0.518	0.6	10	10
Golden Gate North	HH-GG25-006C	Core	192586	270.0	275.0	5.0	0.68	<0.5	20	<10
Golden Gate North	HH-GG25-006C	Core	192587	275.0	280.0	5.0	0.24	1.4	26	<10
Golden Gate North	HH-GG25-006C	Core	192588	280.0	285.0	5.0	0.484	1.3	34	<10
Golden Gate North	HH-GG25-006C	Core	192589	285.0	289.2	4.2	1.125	1.1	25	<10
Golden Gate North	HH-GG25-006C	Core	192590	289.2	292.0	2.8	0.253	<0.5	11	<10
Golden Gate North	HH-GG25-006C	Core	192591	292.0	297.3	5.3	0.816	12.2	49	<10
Golden Gate North	HH-GG25-006C	Core	192593	297.3	301.0	3.7	1.31	3.1	32	<10
Golden Gate North	HH-GG25-006C	Core	192594	301.0	305.0	4.0	0.523	0.8	23	10
Golden Gate North	HH-GG25-006C	Core	192595	305.0	310.0	5.0	0.841	0.5	29	<10
Golden Gate North	HH-GG25-006C	Core	192596	310.0	312.4	2.4	0.24	0.6	28	<10
Golden Gate North	HH-GG25-006C	Core	192597	312.4	317.1	4.7	0.477	1	23	<10
Golden Gate North	HH-GG25-006C	Core	192598	317.1	321.5	4.4	0.516	0.7	22	<10
Golden Gate North	HH-GG25-006C	Core	192599	321.5	325.7	4.2	0.657	0.7	19	<10
Golden Gate North	HH-GG25-006C	Core	192600	325.7	330.0	4.3	0.282	<0.5	23	<10
Golden Gate North	HH-GG25-006C	Core	192601	330.0	335.0	5.0	0.653	<0.5	27	<10
Golden Gate North	HH-GG25-006C	Core	192602	335.0	339.5	4.5	0.291	0.6	14	<10
Golden Gate North	HH-GG25-006C	Core	192603	339.5	344.5	5.0	<0.005	<0.5	6	<10
Golden Gate North	HH-GG25-006C	Core	192604	344.5	349.5	5.0	<0.005	<0.5	<5	<10
Golden Gate North	HH-GG25-006C	Core	192605	349.5	354.5	5.0	<0.005	<0.5	<5	10
Golden Gate North	HH-GG25-006C	Core	192606	354.5	359.5	5.0	<0.005	<0.5	6	10
Golden Gate North	HH-GG25-006C	Core	192607	359.5	364.5	5.0	<0.005	<0.5	5	10
Golden Gate North	HH-GG25-006C	Core	192608	364.5	369.5	5.0	<0.005	<0.5	<5	<10
Golden Gate North	HH-GG25-006C	Core	192609	369.5	373.0	3.5	<0.005	<0.5	5	<10
Golden Gate North	HH-GG25-006C	Core	192610	373.0	376.5	3.5	0.005	<0.5	8	<10

Appendix A: Drill Hole Assay Tables (Gold, Silver, Antimony, Tungsten)

HH-GG25-006C

Location	Hole ID	Drill Technique	Sample ID	Sample Parameters			Au	Ag	Sb	W
				From (ft)	To (ft)	Length (ft)	Au-AA23 g/t	ME-ICP61 g/t	ME-ICP61 ppm	ME-ICP61 ppm
Golden Gate North	HH-GG25-006C	Core	192611	376.5	380.1	3.6	0.359	3.4	40	<10
Golden Gate North	HH-GG25-006C	Core	192612	380.1	385.0	4.9	0.466	6	32	<10
Golden Gate North	HH-GG25-006C	Core	192613	385.0	390.0	5.0	0.87	1.6	34	<10
Golden Gate North	HH-GG25-006C	Core	192614	390.0	395.0	5.0	0.656	0.6	41	<10
Golden Gate North	HH-GG25-006C	Core	192615	395.0	400.0	5.0	0.43	1	28	<10
Golden Gate North	HH-GG25-006C	Core	192616	400.0	404.0	4.0	0.532	0.7	16	<10
Golden Gate North	HH-GG25-006C	Core	192617	404.0	408.8	4.8	0.834	2.3	22	<10
Golden Gate North	HH-GG25-006C	Core	192618	408.8	411.6	2.8	0.209	1.6	16	<10
Golden Gate North	HH-GG25-006C	Core	192619	411.6	415.3	3.7	0.127	1	49	<10
Golden Gate North	HH-GG25-006C	Core	192621	415.3	420.0		0.301	<0.5	27	<10
Golden Gate North	HH-GG25-006C	Core	192622	420.0	425.0	5.0	0.3	<0.5	15	<10
Golden Gate North	HH-GG25-006C	Core	192623	425.0	430.0	5.0	0.555	1	39	<10
Golden Gate North	HH-GG25-006C	Core	192624	430.0	435.0	5.0	0.275	0.6	33	<10
Golden Gate North	HH-GG25-006C	Core	192625	435.0	440.0	5.0	0.596	0.6	36	<10
Golden Gate North	HH-GG25-006C	Core	192626	440.0	445.0	5.0	0.462	<0.5	15	<10
Golden Gate North	HH-GG25-006C	Core	192627	445.0	450.0	5.0	0.803	1.1	16	<10
Golden Gate North	HH-GG25-006C	Core	192628	450.0	455.0	5.0	0.574	<0.5	21	10
Golden Gate North	HH-GG25-006C	Core	192629	455.0	460.0	5.0	0.631	0.6	19	<10
Golden Gate North	HH-GG25-006C	Core	192630	460.0	464.5	4.5	0.782	0.8	26	<10
Golden Gate North	HH-GG25-006C	Core	192631	464.5	469.5	5.0	0.532	0.6	16	<10
Golden Gate North	HH-GG25-006C	Core	192632	469.5	474.5	5.0	0.186	<0.5	14	<10
Golden Gate North	HH-GG25-006C	Core	192633	474.5	479.5	5.0	0.163	1.5	16	<10
Golden Gate North	HH-GG25-006C	Core	192635	479.5	484.5	5.0	0.498	0.8	20	<10
Golden Gate North	HH-GG25-006C	Core	192636	484.5	487.3	2.8	0.64	1	25	<10
Golden Gate North	HH-GG25-006C	Core	192637	487.3	492.1	4.8	0.689	0.6	21	<10
Golden Gate North	HH-GG25-006C	Core	192638	492.1	496.1	4.0	0.615	1.4	21	10
Golden Gate North	HH-GG25-006C	Core	192639	496.1	501.0	4.9	0.327	0.6	14	<10
Golden Gate North	HH-GG25-006C	Core	192640	501.0	505.0	4.0	0.181	1	26	<10
Golden Gate North	HH-GG25-006C	Core	192641	505.0	510.0	5.0	0.13	<0.5	12	<10
Golden Gate North	HH-GG25-006C	Core	192642	510.0	515.0	5.0	0.336	0.6	22	<10
Golden Gate North	HH-GG25-006C	Core	192643	515.0	520.0	5.0	0.56	0.5	58	<10
Golden Gate North	HH-GG25-006C	Core	192644	520.0	525.0	5.0	0.644	2.8	45	<10
Golden Gate North	HH-GG25-006C	Core	192646	525.0	530.0	5.0	0.882	<0.5	45	240
Golden Gate North	HH-GG25-006C	Core	192647	530.0	535.0	5.0	0.955	0.6	27	<10
Golden Gate North	HH-GG25-006C	Core	192648	535.0	537.5	2.5	0.686	0.8	25	<10
Golden Gate North	HH-GG25-006C	Core	192649	537.5	542.0	4.5	0.8	4	22	<10
Golden Gate North	HH-GG25-006C	Core	192650	542.0	547.0	5.0	0.849	11.9	67	<10
Golden Gate North	HH-GG25-006C	Core	192651	547.0	552.0	5.0	1.35	2	34	<10
Golden Gate North	HH-GG25-006C	Core	192652	552.0	557.0	5.0	2.13	12.2	56	<10
Golden Gate North	HH-GG25-006C	Core	192653	557.0	560.8	3.8	0.747	0.8	28	<10
Golden Gate North	HH-GG25-006C	Core	192654	560.8	565.1	4.3	0.94	8.7	42	<10
Golden Gate North	HH-GG25-006C	Core	192655	565.1	570.0	4.9	0.851	12.9	34	<10
Golden Gate North	HH-GG25-006C	Core	192656	570.0	571.1	1.1	0.401	0.8	19	10
Golden Gate North	HH-GG25-006C	Core	192657	571.1	574.0	2.9	0.084	49.1	115	<10
Golden Gate North	HH-GG25-006C	Core	192659	574.0	579.0	5.0	1.115	3.2	38	<10

Appendix A: Drill Hole Assay Tables (Gold, Silver, Antimony, Tungsten)

HH-GG25-006C

Location	Hole ID	Drill Technique	Sample ID	Sample Parameters			Au	Ag	Sb	W
				From (ft)	To (ft)	Length (ft)	Au-AA23 g/t	ME-ICP61 g/t	ME-ICP61 ppm	ME-ICP61 ppm
Golden Gate North	HH-GG25-006C	Core	192660	579.0	584.0	5.0	1.11	1.8	40	<10
Golden Gate North	HH-GG25-006C	Core	192661	584.0	588.9	4.9	1.365	1.5	33	<10
Golden Gate North	HH-GG25-006C	Core	192662	588.9	593.8	4.9	0.936	1.1	25	<10
Golden Gate North	HH-GG25-006C	Core	192663	593.8	598.2	4.4	0.663	4.9	25	10
Golden Gate North	HH-GG25-006C	Core	192664	598.2	602.0	3.8	0.474	1.6	24	10
Golden Gate North	HH-GG25-006C	Core	192665	602.0	606.0	4.0	0.388	0.6	14	10
Golden Gate North	HH-GG25-006C	Core	192666	606.0	611.0	5.0	0.573	1.1	25	10
Golden Gate North	HH-GG25-006C	Core	192667	611.0	615.0	4.0	0.734	2.6	31	<10
Golden Gate North	HH-GG25-006C	Core	192668	615.0	620.0	5.0	0.899	0.6	29	10
Golden Gate North	HH-GG25-006C	Core	192669	620.0	625.0	5.0	0.655	0.8	31	<10
Golden Gate North	HH-GG25-006C	Core	192670	625.0	630.0	5.0	0.77	1	25	<10
Golden Gate North	HH-GG25-006C	Core	192671	630.0	635.0	5.0	0.875	0.9	24	<10
Golden Gate North	HH-GG25-006C	Core	192672	635.0	640.0	5.0	0.726	1.3	25	10
Golden Gate North	HH-GG25-006C	Core	192673	640.0	645.0	5.0	0.802	0.9	31	<10
Golden Gate North	HH-GG25-006C	Core	192674	645.0	650.0	5.0	0.899	1.3	45	<10
Golden Gate North	HH-GG25-006C	Core	192675	650.0	654.0	4.0	0.763	0.8	37	<10
Golden Gate North	HH-GG25-006C	Core	192676	654.0	657.3	3.3	0.573	0.8	60	10
Golden Gate North	HH-GG25-006C	Core	192677	657.3	660.3	3.0	0.358	1	45	10
Golden Gate North	HH-GG25-006C	Core	192678	660.3	662.6	2.3	0.463	<0.5	41	10
Golden Gate North	HH-GG25-006C	Core	192679	662.6	665.9	3.3	0.266	0.5	25	<10
Golden Gate North	HH-GG25-006C	Core	192681	665.9	670.0	4.1	0.227	0.6	49	<10
Golden Gate North	HH-GG25-006C	Core	192682	670.0	674.4	4.4	0.264	0.7	25	10
Golden Gate North	HH-GG25-006C	Core	192683	674.4	679.4	5.0	0.172	0.5	39	10
Golden Gate North	HH-GG25-006C	Core	192684	679.4	684.0	4.6	0.378	0.7	52	<10
Golden Gate North	HH-GG25-006C	Core	192685	684.0	687.5	3.5	0.327	2	27	10
Golden Gate North	HH-GG25-006C	Core	192686	687.5	690.4	2.9	0.269	<0.5	25	10
Golden Gate North	HH-GG25-006C	Core	192688	690.4	695.0	4.6	0.342	0.6	26	10
Golden Gate North	HH-GG25-006C	Core	192689	695.0	700.0	5.0	0.251	<0.5	30	10
Golden Gate North	HH-GG25-006C	Core	192690	700.0	705.0	5.0	0.17	0.7	17	<10
Golden Gate North	HH-GG25-006C	Core	192691	705.0	709.0	4.0	0.164	<0.5	22	<10
Golden Gate North	HH-GG25-006C	Core	192692	709.0	712.2	3.2	0.337	1	21	10
Golden Gate North	HH-GG25-006C	Core	192693	712.2	715.0	2.8	0.224	1	14	10
Golden Gate North	HH-GG25-006C	Core	192694	715.0	720.0	5.0	0.18	0.7	22	10
Golden Gate North	HH-GG25-006C	Core	192695	720.0	725.0	5.0	0.471	0.9	29	10
Golden Gate North	HH-GG25-006C	Core	192696	725.0	730.0	5.0	0.223	1.7	489	10
Golden Gate North	HH-GG25-006C	Core	192697	730.0	735.0	5.0	0.253	0.7	840	10
Golden Gate North	HH-GG25-006C	Core	192698	735.0	740.0	5.0	0.311	1.4	104	10
Golden Gate North	HH-GG25-006C	Core	192699	740.0	745.0	5.0	0.52	0.7	35	10
Golden Gate North	HH-GG25-006C	Core	192700	745.0	750.0	5.0	0.635	0.7	37	<10
Golden Gate North	HH-GG25-006C	Core	192701	750.0	755.0	5.0	0.336	1	24	10
Golden Gate North	HH-GG25-006C	Core	192702	755.0	760.0	5.0	0.369	0.8	24	<10
Golden Gate North	HH-GG25-006C	Core	192703	760.0	765.0	5.0	0.305	<0.5	21	<10
Golden Gate North	HH-GG25-006C	Core	192704	765.0	770.0	5.0	0.334	7.06	1	40
Golden Gate North	HH-GG25-006C	Core	192705	770.0	775.0	5.0	0.294	0.7	25	10
Golden Gate North	HH-GG25-006C	Core	192706	775.0	780.0	5.0	0.487	1.3	35	10

Appendix A: Drill Hole Assay Tables (Gold, Silver, Antimony, Tungsten)

HH-GG25-006C

Location	Hole ID	Drill Technique	Sample ID	Sample Parameters			Au	Ag	Sb	W
				From (ft)	To (ft)	Length (ft)	Au-AA23	ME-ICP61	ME-ICP61	ME-ICP61
				g/t	g/t	ppm	ppm	ppm	ppm	ppm
Golden Gate North	HH-GG25-006C	Core	192707	780.0	785.0	5.0	0.647	4.1	41	10
Golden Gate North	HH-GG25-006C	Core	192708	785.0	790.0	5.0	0.36	2.4	30	10
Golden Gate North	HH-GG25-006C	Core	192709	790.0	795.0	5.0	0.336	1.1	37	10
Golden Gate North	HH-GG25-006C	Core	192710	795.0	800.0	5.0	0.55	4.7	36	<10
Golden Gate North	HH-GG25-006C	Core	192711	800.0	805.0	5.0	0.329	1.6	30	10
Golden Gate North	HH-GG25-006C	Core	192712	805.0	810.0	5.0	0.412	0.9	38	10
Golden Gate North	HH-GG25-006C	Core	192713	810.0	815.0	5.0	0.296	0.6	30	<10

Appendix B: JORC Code, 2012 Edition

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> <i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i> <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> <i>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i> 	<ul style="list-style-type: none"> This announcement contains exploration results of five drill holes with the ID reference HH-GG25-006C, HH-GG25-011R, HH-GG25-012R, HH-GG25-013R, and HH-GG25-014R. The data is: drill hole data; sample data; assay data; and geological data. Supporting data includes drill collar locations in UTM metric data, together with dip, azimuth, altitude and end of hole data. Reported assay data is gold, silver, antimony and tungsten. The Company has completed multi-element analysis and has referred to gold and tungsten mineralisation and geochemistry in this announcement. Please note that the primary data of the core samples (start, finish, interval) is in imperial feet. Summarised intervals also include measurements in metric metres. Note that the operating jurisdiction uses imperial measurement system. The assay data is derived independent professional laboratory services company of submitted core and drill chip samples from HH-GG25-006C, HH-GG25-011R, HH-GG25-012R, HH-GG25-013R, and HH-GG25-014R. HH-GG25-006C is a diamond core hole. Sample intervals are contiguous and range in length

Criteria	JORC Code explanation	Commentary
		<p>individually from 10ft to 1.1ft. Note that samples at the upper parts of each hole have broader intervals due to core recovery (Refer below). Samples at middle and lower parts of each hole have narrower intervals (averaging between 4ft and 5ft). The samples are half-cut core prepared by industry standard core cutting saw by qualified personnel.</p> <ul style="list-style-type: none"> • HH-GG25-011R, HH-GG25-012R, HH-GG25-013R, and HH-GG25-014R. are reverse circulation holes. Sample intervals are 5ft Individual drill chips were mixed (cyclone) and bagged at the rig as according to RC best practises by qualified personnel. • Geological data is derived from detailed geological and geotechnical logging by qualified personnel.
Drilling techniques	<ul style="list-style-type: none"> • <i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i> 	<ul style="list-style-type: none"> • HH-GG25-006C is a diamond core drill hole that was drilled by Evolve Exploration Ltd using a Multipower MP500 modular core rig providing HQ diamond drill core. • The drill core is not oriented. • HH-GG25-011R, HH-GG25-012R, HH-GG25-013R, and HH-GG25-014R are reverse circulation drill holes that were drilled by Alloy Drilling LLC using a MP1500 drill rig providing drill chip samples.
Drill sample recovery	<ul style="list-style-type: none"> • <i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> • <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> 	<ul style="list-style-type: none"> • Drill hole core recovery for HH-GG25-006C was generally very good (a function of the solid lithologies) not uncommonly 100%. • Generally, core recoveries in the fresh unoxidised sections of each

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<p>hole oxidised were better than for the oxidised and weathered sections of each hole.</p> <ul style="list-style-type: none"> Core recoveries in weather rocks was as low as 50% over short intervals. Drill hole drill chip recovery for HH-GG25-011R, HH-GG25-012R, HH-GG25-013R, and HH-GG25-014R was generally very good (a function of stable drilling conditions and drill method) not uncommonly 100%.
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> Drill core and drill chips were logged for lithology, alteration, mineralisation, structure (geotechnical) using (for core) oriented core to a level which has enabled preliminary interpretations relating to style of mineralisation, host and thickness. At this stage no Mineral Resource Estimates, mining studies or metallurgical studies are appropriate. Drill core is also logged for RQD and Core recovery. Drill core is then digitized photographed wet and dry while whole after logging. Drill chips were sub-sampled (<100g) into drill chip trays and then digitized photographed wet. The logging, as described above is both quality and quantitative. 100% of the relevant intersections were logged as per above.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc 	<ul style="list-style-type: none"> The HQ core was halved using a diamond core saw and sampled on geological intervals approximating 30 ft to 4.2 ft in length.

Criteria	JORC Code explanation	Commentary
	<p><i>and whether sampled wet or dry.</i></p> <ul style="list-style-type: none"> • <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> • <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> • <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> • <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i> 	<ul style="list-style-type: none"> • Drill core was halved using a gasoline powered core saw by RML contract staff who maintain possession of the core at its Antimony Camp facility. • Half-cut core samples were bagged and tagged using bar-coded sample tags and were securely stored prior to shipment at the Antimony Camp facility. • Half cut core samples were transported by RML contractors under lock and key to ALS prep' lab' facility in Twin Falls, ID. No third-party shippers were involved in the shipping process; chain of custody forms were exchanged at ALS Minerals in Twin Falls and a copy kept on file. The remaining boxed cut core are kept at a secure locked facility in Donnelly, ID. • Drill chips were sub-sampled (<100g) into drill chip trays and then digitized photographed wet. • ALS Minerals Twin Falls prep' lab' logs in the samples using the sample tag bar codes provided. Samples were then crushed to 70% less than 2mm, rotary split off 250g, pulverise split to better than 85% passing 75 microns. • All samples were then shipped to ALS Minerals analytical laboratory in Vancouver, British Columbia.
Quality of assay data and	<ul style="list-style-type: none"> • <i>The nature, quality and appropriateness of the assaying and laboratory procedures used</i> 	<ul style="list-style-type: none"> • Gold was assayed by analytical method Au-AA23: Au by fire assay and AAS 30g nominal sample weight.

Criteria	JORC Code explanation	Commentary
<i>laboratory tests</i>	<p><i>and whether the technique is considered partial or total.</i></p> <ul style="list-style-type: none"> • <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> • <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i> 	<ul style="list-style-type: none"> • Multielement analysis was by analytical method ME-ICP61: 34 elements by HF-HNO₃-HClO₄ acid digestion, HCl leach and ICP-AES. Quantitatively dissolves nearly all elements for the majority of geological materials. Only the most resistive minerals, such as Zircons, are only partially dissolved. • No geophysical tools, spectrometers, handheld XRF instruments, etc. were used in the generation of the assay data. • Certified reference materials (CRM) from an ISO certified supplier were inserted randomly into the sample stream at a ratio of 2%. CRMs were obtained for Meg LLC of Reno, Nevada; two separate CRMs were used for gold: a low grade and high-grade standard. • Blank material was inserted randomly in the sample stream at a ratio of 2%. Blank material is commercially available pebble gravel that has been previously tested for gold concentrations. • Duplicates samples were collected by quarter cutting the core at randomly selected intervals. Two quarter-cut portions of core were sent for analysis; the remaining half is kept at a secure facility. Core intervals of poor recovery were not used for duplicate samples. Duplicate core samples were inserted into the sample stream at a ratio of 2%.
<i>Verification of sampling and assaying</i>	<ul style="list-style-type: none"> • <i>The verification of significant intersections by either</i> 	<ul style="list-style-type: none"> • No verification of the significant intersections by either independent or alternative

Criteria	JORC Code explanation	Commentary
	<p><i>independent or alternative company personnel.</i></p> <ul style="list-style-type: none"> • <i>The use of twinned holes.</i> • <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> • <i>Discuss any adjustment to assay data.</i> 	<p>company personnel has been completed to date. The company acknowledges the material nature of the results and is planning a program of select verification assays. Such were the immediacy of the results; these verifications were not possible prior to the release of the [initial/first] results. The Company is confident that its sample security processes are adequate for the interim period.</p> <ul style="list-style-type: none"> • Sample results, certificates and results were sent via email to RML site contractors in Antimony Camp where results are analysed and interpreted. • Drill hole HH-GG25-011R was drilled on the same platform as HH-GG25-002C, in an opposing direction. As such it is a fanned hole, where only the very upper most intervals are close to HH-GG25-002C. • Drill hole HH-GG25-012R was drilled on the same platform as HH-GG25-004C, in an opposing direction. As such it is a fanned hole, where only the very upper most intervals are close to HH-GG25-004C. • Drill hole HH-GG25-013R was drilled on the same platform as HH-GG25-007C, in an opposing direction. As such it is a fanned hole, where only the very upper most intervals are close to HH-GG25-007C. • Drill hole HH-GG25-014R was drilled on the same platform as HH-GG25-008C, in an opposing direction. As such it is a fanned hole, where only the very upper

Criteria	JORC Code explanation	Commentary
		<p>most intervals are close to HH-GG25-008C.</p> <ul style="list-style-type: none"> • No assay adjustments have been carried out.
Location of data points	<ul style="list-style-type: none"> • <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> • <i>Specification of the grid system used.</i> • <i>Quality and adequacy of topographic control.</i> 	<ul style="list-style-type: none"> • The drill hole locations were achieved using handheld GPS programmed into the local coordinate system. The accuracy of the GPS is in line with best practice standards.
Data spacing and distribution	<ul style="list-style-type: none"> • <i>Data spacing for reporting of Exploration Results.</i> • <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> • <i>Whether sample compositing has been applied.</i> 	<ul style="list-style-type: none"> • The assay data spacing of HH-GG25-006C, HH-GG25-011R, HH-GG25-012R, HH-GG25-013R, and HH-GG25-014R, the length and frequency of each sample and the collective coverage of the drill holes is best practise in terms of hole sample representativeness. • All core/drill chips of these holes were logged. • Drill holes HH-GG25-006C, HH-GG25-011R, HH-GG25-012R, HH-GG25-013R, and HH-GG25-014R are sufficiently close spaced to previously announcement drill results to conclude that such mineralisation is continuous between the holes within the known mineralising parameters described in each of the discussions of each drill hole, and by extension, representations may extrapolate between these holes. • Cautionary Note: Three difference gold distribution models between Golden Gate North and Golden Gate South are provided in Figure 8. Important for exploration planning, there is

Criteria	JORC Code explanation	Commentary
		currently insufficient data to be able to conclude which model is the most applicable. The Company intends testing the area between Golden Gate North and Golden Gate South in the immediate and upcoming field season.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i> 	<ul style="list-style-type: none"> The drill holes HH-GG25-006C, HH-GG25-011R, HH-GG25-012R, HH-GG25-013R, and HH-GG25-014R have different drill hole directions (azimuths) and dips that are approaching perpendicular to sub-parallel to the regional trend (lithologically and structurally). Cautionary Note: There is insufficient data pertaining to sampling orientation and the local-scale orientation of mineralisation at this time to determine the true width of the gold intervals in this hole. Additional holes in all directions are required to determine whether the gold mineralisation is broadly pervasive or (to various degrees) spatially constrained. If for example, if the gold mineralisation is broadly pervasive, then the gold intervals in this announcement are true widths. If the gold mineralisation is spatially constrained, then the gold intervals in this announcement are not true widths.
Sample security	<ul style="list-style-type: none"> <i>The measures taken to ensure sample security.</i> 	<ul style="list-style-type: none"> All drill core and drill chip samples were delivered directly to RML's geologists on site where they remain under direct supervision at a secure site.

Criteria	JORC Code explanation	Commentary
<i>Audits or reviews</i>	<ul style="list-style-type: none"> <i>The results of any audits or reviews of sampling techniques and data.</i> 	<ul style="list-style-type: none"> The competent person is unaware of the undertaking of audits or reviews for sampling technique and data, other than its own review.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, past sites, wilderness or national park and environmental settings.</i> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i> 	<ul style="list-style-type: none"> This announcement refers to the one project, Horse Heaven project in Idaho USA, comprising six hundred and ninety-nine (699) U.S. Federal lode mining claims covering 5,644 hectares and includes six hundred and eighty-nine (689) mining claims and ten lode mining claims referred as the Oberbillig Group. The competent person understands that the mining claims are all in good standing.
Exploration done by other parties	<ul style="list-style-type: none"> <i>Acknowledgment and appraisal of exploration by other parties.</i> 	<ul style="list-style-type: none"> No exploration results reported in this release were performed by other parties.
Geology	<ul style="list-style-type: none"> <i>Deposit type, geological setting and style of mineralisation.</i> 	<ul style="list-style-type: none"> The project area is dominated by Cretaceous-aged granitic rocks relating to intrusive phases associated with the Atlanta Lobe of the Idaho Batholith. These largely granodiorite rocks have intruded Neoproterozoic-aged metasediments, comprising quartzites (which are dominant) calc-silicates, marble and black shale. The area and broader region are affected by broad regional folding and N-S, NNE-SSW, and NE-SW faults. Gold, antimony, tungsten and silver mineralisation is associated with hydrothermally altered and fractured granodiorites.

Criteria	JORC Code explanation	Commentary
Drillhole Information	<ul style="list-style-type: none"> <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drillholes:</i> <ul style="list-style-type: none"> <i>easting and northing of the drillhole collar</i> <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drillhole collar</i> <i>dip and azimuth of the hole</i> <i>down hole length and interception depth</i> <i>hole length.</i> <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i> 	<ul style="list-style-type: none"> The drillhole information for HH-GG25-006C, HH-GG25-011R, HH-GG25-012R, HH-GG25-013R, and HH-GG25-014R is included in an in-text tables (Table 1) with drill collar location data, altitude, dip, azimuth, and end of hole.
Data aggregation methods	<ul style="list-style-type: none"> <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> <i>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such</i> 	<ul style="list-style-type: none"> In reporting downhole gold intersections results of recovery HH-GG25-006C, HH-GG25-011R, HH-GG25-012R, HH-GG25-013R, and HH-GG25-014R, no maximum and minimum truncations were used. In reporting downhole gold intersections/intervals, assay results of HH-GG25-006C weighted averages was

Criteria	JORC Code explanation	Commentary
	<p><i>aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i></p> <ul style="list-style-type: none"> <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i> 	<p>required due to the fact that sample lengths were variant (between 10ft and 1.1ft). The sample interval length was multiplied by the sample assay data then divided by the total length of the interval.</p> <ul style="list-style-type: none"> In reporting downhole gold intersections/intervals, assay results of HH-GG25-011R, HH-GG25-012R, HH-GG25-013R, and HH-GG25-014R no weighted averaging was required as all samples have to same sample interval. No metal equivalents were used in this announcement.
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> <i>These relationships are particularly important in the reporting of Exploration Results.</i> <i>If the geometry of the mineralisation with respect to the drillhole angle is known, its nature should be reported.</i> <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i> 	<ul style="list-style-type: none"> With reference to HH-GG25-006C, HH-GG25-011R, HH-GG25-012R, HH-GG25-013R, and HH-GG25-014R, the holes were drilled close to perpendicular across the prospect-scale orientation of the known mineralisation. There is insufficient data pertaining to the gold mineralisation identified in HH-GG25-006C, HH-GG25-011R, HH-GG25-012R, HH-GG25-013R, and HH-GG25-014R to allow conclusive statements concerning the sampling orientation and the local-scale orientation of mineralisation. Therefore, the true width nature of the reported widths of the mineralisation (in rock chip channel and drilling) is not known.

Criteria	JORC Code explanation	Commentary
Diagrams	<ul style="list-style-type: none"> <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drillhole collar locations and appropriate sectional views.</i> 	<ul style="list-style-type: none"> A map and cross sections are provided with geolocation information (coordinates, northing and scale bar). Legends are included within each figure (where appropriate) and when additional explanation is required, this is given to the figure caption. HH-GG25-006C, HH-GG25-011R, HH-GG25-012R, HH-GG25-013R, and HH-GG25-014R with other drill holes (previously released to the market) are sufficiently close spaced to conclude that such mineralisation is continuous between the three holes within the known mineralising parameters described in each of the discussions of each drill hole, and by extension, representations may extrapolate between these holes (in diagrams). Cautionary Note: Three difference gold distribution models between Golden Gate North and Golden Gate South are provided in Figure 6. Important for exploration planning, there is currently insufficient data to be able to conclude which model is the most applicable. The Company intends testing the area between Golden Gate North and Golden Gate South in the immediate and upcoming field season.
Balanced reporting	<ul style="list-style-type: none"> <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both</i> 	<ul style="list-style-type: none"> This announcement is considered to be fair and balanced with respect to the

Criteria	JORC Code explanation	Commentary
	<p><i>low and high grades and/or widths should be practised to avoid misleading reporting of Exploration Results.</i></p>	<p>exploration results and interpretations based on them.</p>
Other substantive exploration data	<ul style="list-style-type: none"> <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i> 	<ul style="list-style-type: none"> There is no other material data associated with new exploration results in this announcement.
Further work	<ul style="list-style-type: none"> <i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i> 	<ul style="list-style-type: none"> The drill hole HH-GG25-006C is the final hole released to the market of the drilled (2025) 10-hole diamond core program. Further exploration (including but limited to mapping, surface sampling, and drilling) is required to assess the distribution of gold mineralisation between the Golden Gate North and Golden Gate South prospects. Three gold distribution models for the area between Golden Gate North and Golden Gate South have been generated (and provided to the market [Figure 6]) to assist exploration planning. A plan (Figure 2) and a cross sections (Figure 3, 4, 5, 6 and 7) are included in this announcement to provide a sense of location of the hole in

Criteria	JORC Code explanation	Commentary
		relation to i) other drill holes, and ii) intersected mineralisation. The cross section included a geological interpretation.